
EJERCICIOS LDAP+NFS

1-

```
sudo mkdir /moviles
sudo chown nobody:nogroup /moviles
sudo chmod -R 777 /moviles
sudo echo "/moviles *(rw,sync,no_root_squash,no_subtree_check)" >> /etc/exports
sudo systemctl restart nfs-kernel-server.service
 userversml@smlldap: ~
   GNU nano 6.2
   /etc/exports: the access control list for filesystems which may be exported
                 to NFS clients. See exports(5).
 # Example for NFSv2 and NFSv3:
                   hostnamel(rw,sync,no subtree check) hostname2(ro,sync,no su
 # Example for NFSv4:
                    gss/krb5i(rw,sync,fsid=0,crossmnt,no subtree check)
 # /srv/nfs4
   /srv/nfs4/homes gss/krb5i(rw,sync,no subtree check)
 /moviles *(rw,sync,no_root_squash,no_subtree_check)
```



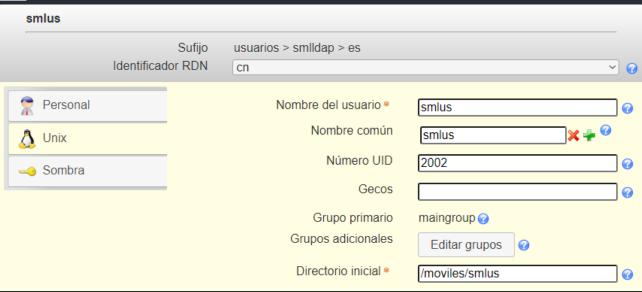

<u>3-</u>

```
ubusergio@ubusergio-VirtualBox:~$ sudo mkdir /moviles
ubusergio@ubusergio-VirtualBox:~$ sudo chown -R nobody:nogroup /moviles/
ubusergio@ubusergio-VirtualBox:~$ sudo chmod -R 777 /moviles/
```