

▼ General	
Request URL	https://api.zippopotam.us/us/90210
Request Method	GET
Status Code	200 OK
Remote Address	104.26.7.90:443
Referrer Policy	strict-origin-when-cross-origin
▼ Response headers	
Access-Control-Allow-Origin	*
Age	3073
Cache-Control	max-age=14400
Cf-Cache-Status	HIT
Cf-Ray	a0ba7faacf0fcd60-KTM
Charset	UTF-8
Content-Encoding	br
Content-Type	application/json
Date	Sun, 14 Jun 2026 15:51:50 GMT
Last-Modified	Sun, 14 Jun 2026 15:47:55 GMT
Nel	{"report_to":"cf-nel","success_fraction":0.0,"max_age":604800}
Report-To	{"group":"cf-nel","max_age":604800,"endpoints":[{"url":"https://a.nel.cloudflare.com/report/v4?s=xVAM%2F%2FvJ3Yqn2tkKgaFbgqkTh8SHF1VhizFNUOvdzXgKaIIZ%2F6GIXvFys%2Fc2Xl%2FhHV6K1lQJNz8R9MdzgTs%2FntudSHKELGBxHXBxSu6nu64lKs2jVQhI6Kb8Fyu0bFc7pZT"}]}
Server	cloudflare
Vary	Accept-Encoding
X-Cache	hit

▼ Request Headers	
:authority	api.zippopotam.us
:method	GET
:path	/us/90210
:scheme	https
Accept	text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.7
Accept-Encoding	gzip, deflate, br, zstd
Accept-Language	en-US,en;q=0.9
Cache-Control	no-cache
Pragma	no-cache
Priority	u=0, i
Sec-Ch-Ua	"Not:A-Brand";v="99", "Google Chrome";v="145", "Chromium";v="145"
Sec-Ch-Ua-Mobile	?1
Sec-Ch-Ua-Platform	"iOS"
Sec-Fetch-Dest	document
Sec-Fetch-Mode	navigate
Sec-Fetch-Site	none
Sec-Fetch-User	?1
Upgrade-Insecure-Requests	1
User-Agent	Mozilla/5.0 (iPhone; CPU iPhone OS 18_5 like Mac OS X) AppleWebKit/605.1.15 (KHTML, like Gecko) Version/18.5 Mobile/15E148 Safari/604.1

❖ Destination Link (Request URL):

- <https://api.zippopotam.us/us/90210> points to the specific server where our machine directs the web request.
- The API belongs to the host domain api.zippopotam.us.
- It targets a specific location directory (/us/90210) to gather postal data for that specific area code.

❖ Operational Action (Request Method):

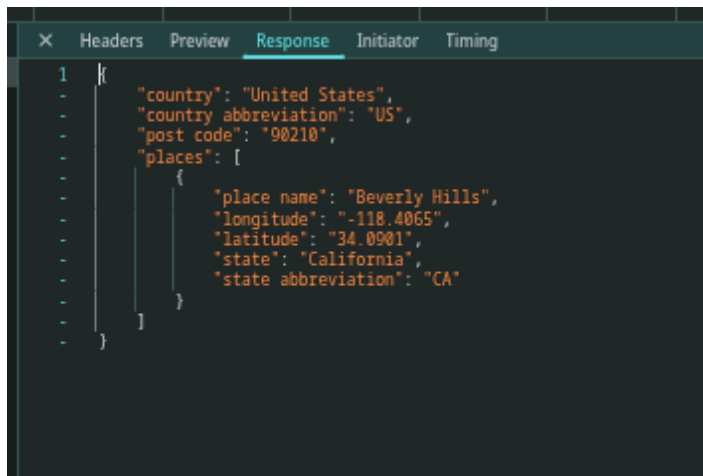
- A **GET** action is applied here, indicating that our application is strictly pulling information from the host machine.
- It does not alter, upload, or delete any remote materials.
- Its sole objective is to fetch the location properties associated with zip code 90210.

❖ Server Feedback (Status Code):

- A return state of **200** or **200 OK** verifies that the server processed the incoming transmission correctly.
- This code guarantees that the server successfully located the data packet and transmitted the JSON records back to our browser without interruptions.

❖ File Specification (Content-Type Header):

- The **content-type: application/json** line acts as a declaration from the server about the payload's design.
- It alerts our browser that the arriving package is formatted as raw data rather than standard visual text or an HTML document.

A screenshot of a network tool's 'Response' tab. The interface has a dark theme with a teal header bar containing tabs: 'X', 'Headers', 'Preview', 'Response' (selected), 'Initiator', and 'Timing'. The 'Response' tab displays a JSON object with the following structure: a root object containing 'country' (United States), 'country abbreviation' (US), 'post code' (90210), and 'places' (an array). The 'places' array contains one object with 'place name' (Beverly Hills), 'longitude' (-118.4065), 'latitude' (34.0901), 'state' (California), and 'state abbreviation' (CA).

```
1 {  
-   "country": "United States",  
-   "country abbreviation": "US",  
-   "post code": "90210",  
-   "places": [  
-       {  
-           "place name": "Beverly Hills",  
-           "longitude": "-118.4065",  
-           "latitude": "34.0901",  
-           "state": "California",  
-           "state abbreviation": "CA"  
-       }  
-   ]  
- }
```

❖ Returned Payload (Response):

- The target server successfully processed the network request and transmitted the requested information back to the client side.
- The delivered dataset is structured as a key-value JSON object containing location details, postal properties, and regional geographic blocks.