


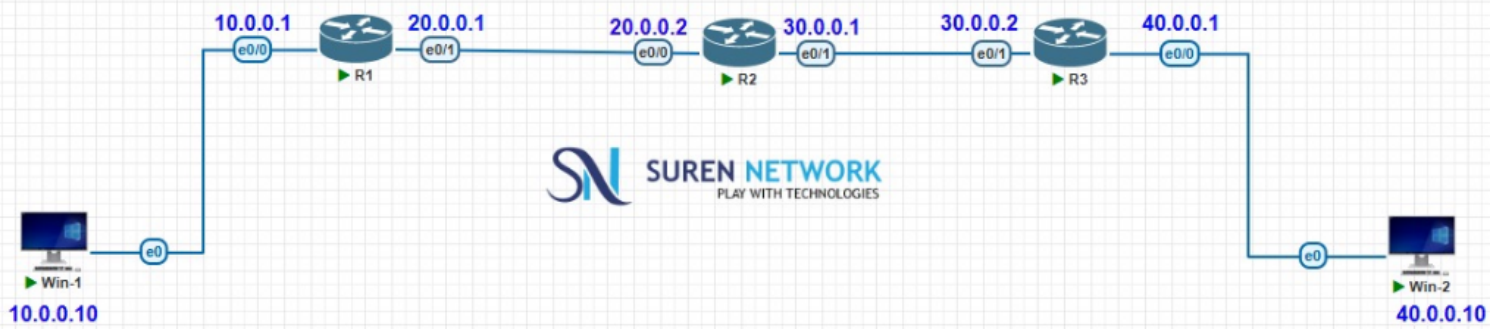

R1

```
Router(config)#interface ethernet0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
*Jul 18 05:19:40.746: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Jul 18 05:19:41.747: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
0, changed state to up
Router(config-if)#exit
Router(config)#interface ethernet0/1
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
*Jul 18 05:20:37.663: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Jul 18 05:20:38.663: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to up
Router(config-if)#exit
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
Router(config)#exit
Router#
*Jul 18 05:22:51.303: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
S       30.0.0.0/8 [1/0] via 20.0.0.2
S       40.0.0.0/8 [1/0] via 20.0.0.2
```

 R2

```
Router(config)#interface ethernet0/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
*Jul 18 05:27:12.364: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Jul 18 05:27:13.364: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
0, changed state to up
Router(config-if)#exit
Router(config)#interface ethernet0/1
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
*Jul 18 05:28:24.913: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Jul 18 05:28:25.913: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to up
Router(config-if)#exit
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
Router(config)#exit
Router#
*Jul 18 05:31:20.193: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
S    40.0.0.0/8 [1/0] via 30.0.0.2
```

R3

```
Router(config-if)#ip address 30.0.0.2 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
*Jul 18 05:35:33.547: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
Router(config-if)#
*Jul 18 05:35:34.547: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to up
Router(config-if)#exit
Router(config)#interface ethernet0/0
Router(config-if)#ip address 40.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
*Jul 18 05:37:12.713: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Jul 18 05:37:13.713: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
0, changed state to up
Router(config-if)#exit
Router(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
Router(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
Router(config)#exit
Router#
*Jul 18 05:39:31.627: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
     40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
```

