
NUESTRA BASE DE DATOS:

```
₩
sql*
            CREATE DATABASE hotel_reservas;
         SHOW DATABASES;
   4 • ⊖ CREATE TABLE reservas (
            id INT AUTO INCREMENT PRIMARY KEY,
            nombre_cliente VARCHAR(255) NOT NULL,
   6
   7
            fecha_inicio DATE NOT NULL,
   8
            fecha_fin DATE NOT NULL,
            tipo_habitacion VARCHAR(50) NOT NULL
   9
        );
  10
  11 •
        INSERT INTO reservas (nombre_cliente, fecha_inicio, fecha_fin, tipo_habitacion)
  12
            ('Juan Pérez', '2024-11-20', '2024-11-25', 'Sencilla'),
         ('María López', '2024-12-01', '2024-12-10', 'Suite');
  14
        SELECT * FROM reservas;
  15 •
  16
```

PASOS PARA EJECUTAR EL PROGRAMA:

ABRIMOS NUESTRO IDE:

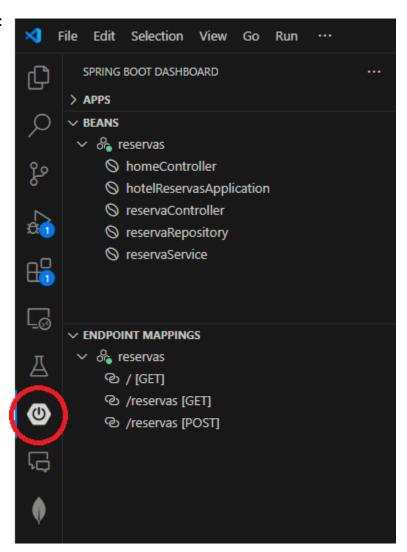

UTILIZAMOS NUESTRA EXTENSION – SPRING BOOT – DASHBORD. PARA CORRER EL BACKEND

UNA VEZ CORRIENDO EL BACKEND ABRIREMOS EL CMD COMO ADMINISTRADOR Y COLOCAREMOS LA RUTA DE NUESTRO FRONTED:

```
Microsoft Windows [Versión 10.0.19045.5011]
(c) Microsoft Corporation. Todos los derechos reservados.
C:\Windows\system32>CD "C:\Users\YANIRA CUBULE\Downloads\Examen-Final-master\hotel-reservas-frontend"
```

CORREREMOS EL SIGUIENTE COMANDO PARA QUE SE INSTALE NUESTRAS DEPENDENCIAS: Npm install:

```
Inpm warn deprecated q@1.5.1: You or someone you depend on is using Q, the JavaScript Promise library that gave Jat developers strong feelings about promises. They can almost certainly migrate to the native JavaScript promise in kyou literally everyone for joining me in this bet against the odds. Be excellent to each other.

**Nome warn deprecated promote for joining me in this bet against the odds. Be excellent to each other.

**Nome warn deprecated (For a CapTP with native promises, see @endo/eventual-send and @endo/captp)

**pm warn deprecated sourcemap-codec@i.4.8: Please use @jridgewell/sourcemap-codec instead

**pm warn deprecated inflight@1.0.6: This module is not supported, and leaks memory. Do not use it. Check out lrufyou want a good and tested way to coalesce async requests by a key value, which is much more comprehensive and in the promise of the promote of the promo
```

CORREREMOS EL SIGUIENTE COMANDO QUE SERIA: Npm run start

```
src\App.js
  Line 4:8: 'Home' is defined but never used no-unused-vars
src\components\Home.js
 Line 4:7: 'Home' is assigned a value but never used no-unused-vars
Search for the keywords to learn more about each warning.
To ignore, add // eslint-disable-next-line to the line before.
WARNING in [eslint]
src\App.js
             'Home' is defined but never used no-unused-vars
  Line 4:8:
src\components\Home.js
  Line 4:7: 'Home' is assigned a value but never used no-unused-vars
webpack compiled with 1 warning
Compiling...
Compiled with warnings.
[eslint]
src\App.js
  Line 4:8: 'Home' is defined but never used no-unused-vars
src\components\Home.js
  Line 4:7: 'Home' is assigned a value but never used no-unused-vars
Search for the <u>keywords</u> to learn more about each warning.
To ignore, add \frac{1}{2} eslint-disable-next-line to the line before.
```

NOS APARECERA ESTO EN LA WEB: http://localhost:3000/

