


Figure 1. Context-aware FOTR-CRISPR + DNABERT-2 workflow

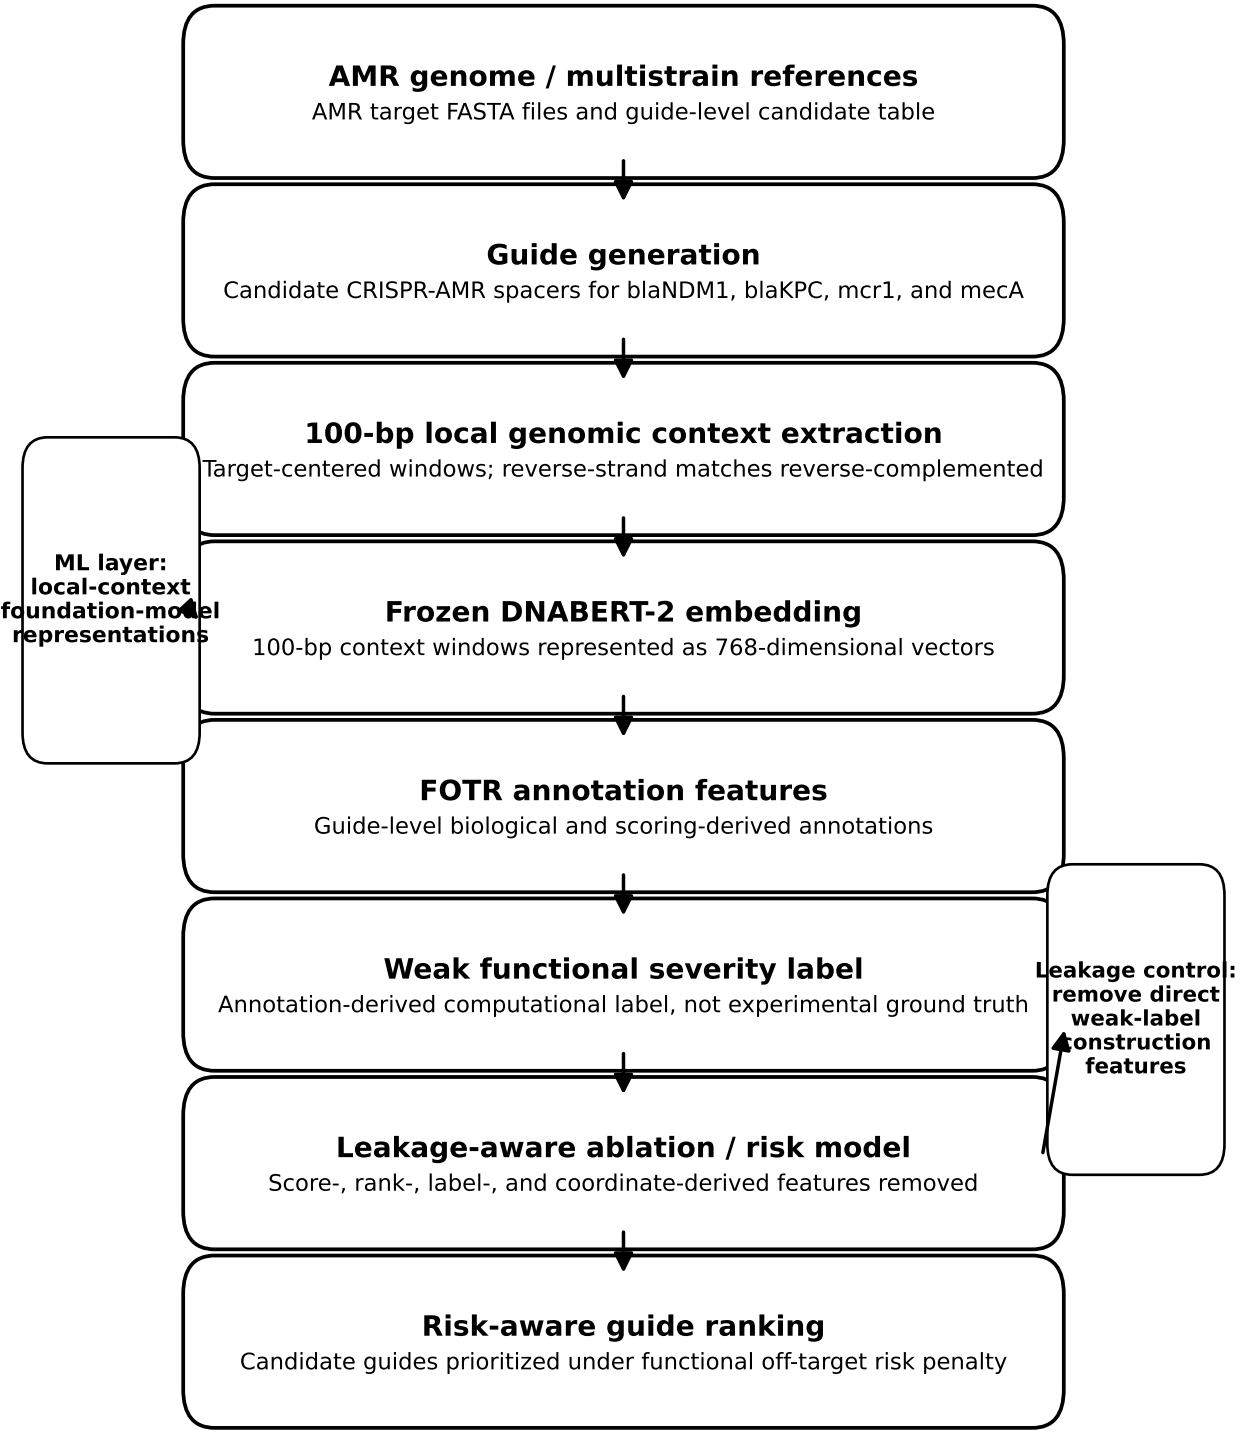

Final manuscript analysis uses 100-bp local-context DNABERT-2 inputs and leakage-aware ablation.