

PUBLIC

Detect and Highlight entities from unstructured text using machine learning

1162

Exercises / Solutions

Speaker / Company

| | |
|----------------------------------------------------------------------------------|-----------|
| 1 GETTING ON-BOARDED TO BER | 3 |
| 1.1 SETTING UP TRIAL ACCOUNT | 3 |
| 1.2 CREATING BER SERVICE INSTANCE | 3 |
| 1.3 GET OAUTH ACCESS TOKEN FOR BER | 3 |
| 1.4 ACCESS AND AUTHORIZE BER | 4 |
| 2 BER TRAINING DATASET | 6 |
| 2.1 CREATE DATASET | 6 |
| 2.2 UNDERSTANDING THE TRAINING DOCUMENT..... | 8 |
| 2.3 UPLOAD DOCUMENTS..... | 9 |
| 3 BER TRAINING | 11 |
| 3.1 TRIGGER TRAINING JOB | 11 |
| 3.2 GET TRAINING JOB STATUS | 13 |
| 3.3 DELETE TRAINING JOB | 14 |
| 4 BER MODELS | 16 |
| 4.1 GET ALL MODELS..... | 16 |
| 4.2 GET MODEL DETAILS BY MODEL NAME..... | 17 |
| 4.3 GET MODEL DETAILS BY MODEL NAME AND MODEL VERSION | 20 |
| 5 BER INFERENCE | 22 |
| 5.1 INFERENCE WITH SAP_EMAIL_BUSINESS_ENTITY..... | 22 |
| 5.1.1 Submit the inference job for sap_email_business_entity model | 22 |
| 5.1.2 Get the inference results for sap_email_business_entity model | 24 |
| 5.2 INFERENCE WITH SAP_INVOICE_HEADER | 26 |
| 5.2.1 Submit the inference job for sap_invoice_header model | 26 |
| 5.2.2 Get the inference results for sap_invoice_header model | 29 |

1 GETTING ON-BOARDED TO BER

Objective

In this exercise you would be able to create a trial account and subscribe to the BER service.

1.1 Setting up trial account

Follow the steps documented here: <https://developers.sap.com/tutorials/hcp-create-trial-account.html>

1.2 Creating BER service instance

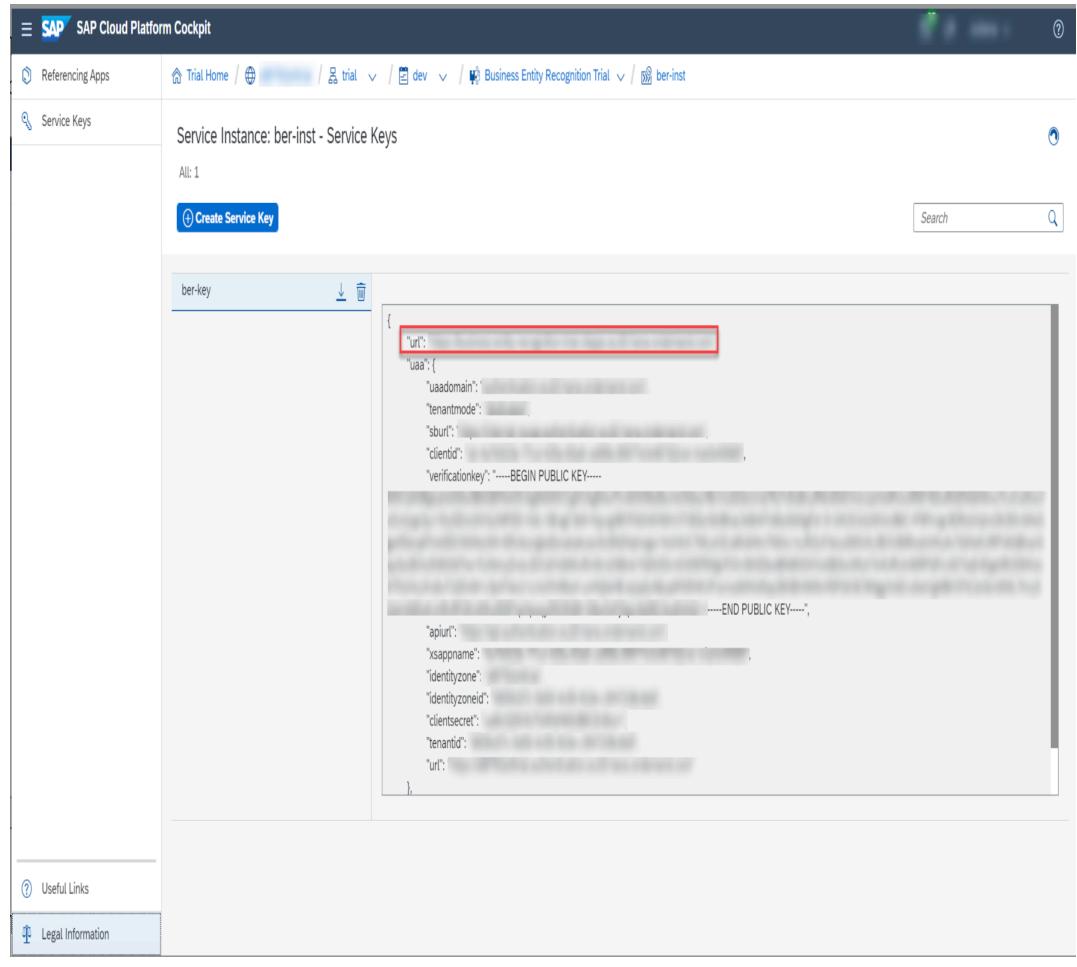
Follow the steps documented here: <https://developers.sap.com/tutorials/cp-aibus-ber-service-instance.html>

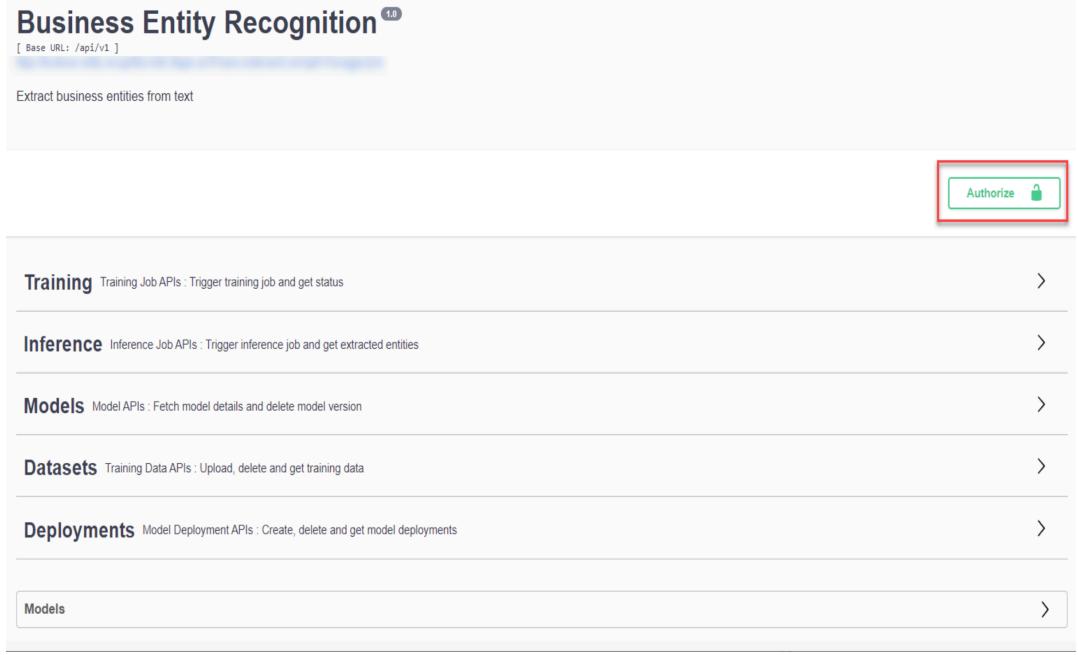
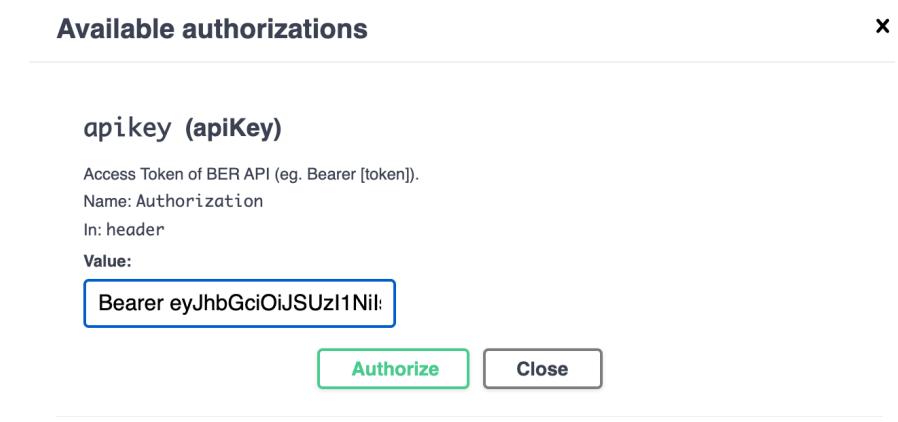
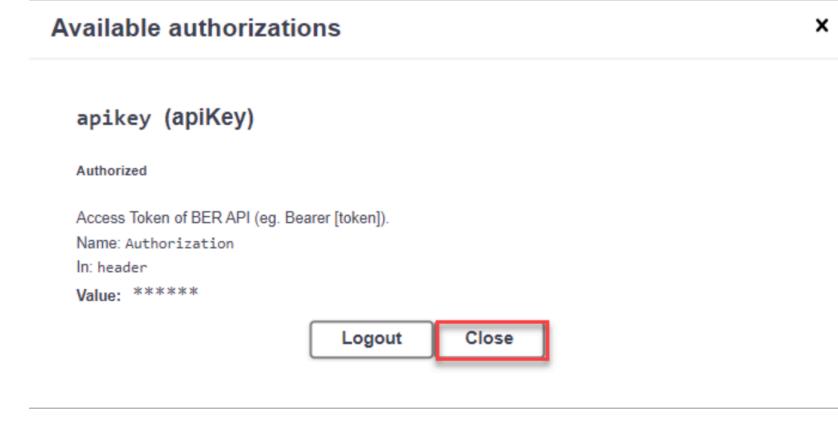
1.3 Get OAuth access token for BER

Follow the steps documented here: <https://developers.sap.com/tutorials/cp-aibus-ber-web-oauth-token.html>

1.4 Access and Authorize BER

In this exercise we would access the Swagger UI of BER service and authorize it for subsequent exercises.

| Explanation | Screenshot |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1. Access the Business Entity Recognition Swagger UI. Add <code>/api/v1</code> to the url value (noted in section 1.2). 2. Paste this into any web browser and press Enter. |  <pre> { "url": "REDACTED", // URL field highlighted with a red box "uaa": { "uaadomain": "REDACTED", "tenantmode": "REDACTED", "sburl": "REDACTED", "clientid": "REDACTED", "verificationkey": "-----BEGIN PUBLIC KEY-----\nREDACTED\n-----END PUBLIC KEY-----", "apiurl": "REDACTED", "xsappname": "REDACTED", "identityzone": "REDACTED", "identityzoneid": "REDACTED", "clientsecret": "REDACTED", "tenantid": "REDACTED", "url": "REDACTED" } } </pre> |

| Explanation | Screenshot |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>3. Click Authorize in the top-right corner of the Swagger UI.</p> |  <p>The screenshot shows the 'Business Entity Recognition' API documentation. At the top right, there is a green 'Authorize' button with a lock icon. Below it, there are several sections: 'Training', 'Inference', 'Models', 'Datasets', and 'Deployments'. Each section has a small description and a right-pointing arrow. The 'Models' section is expanded, showing a 'Models' sub-section with its own right-pointing arrow.</p> |
| <p>4. Get the value of access_token created in step 1.3, then add Bearer in front of it, and enter it in the Value field. The format is: Bearer <access_token></p> |  <p>The screenshot shows a modal dialog titled 'Available authorizations'. It contains one item: 'apikey (apiKey)'. The 'Value' field is filled with 'Bearer eyJhbGciOiJSUzI1NiI...'. Below the table are two buttons: 'Authorize' (highlighted with a red box) and 'Close'.</p> |
| <p>5. Click Authorize and then click Close</p> |  <p>The screenshot shows the same 'Available authorizations' dialog. The 'Value' field now contains '*****'. The 'Logout' and 'Close' buttons are visible at the bottom, with 'Close' highlighted by a red box.</p> |

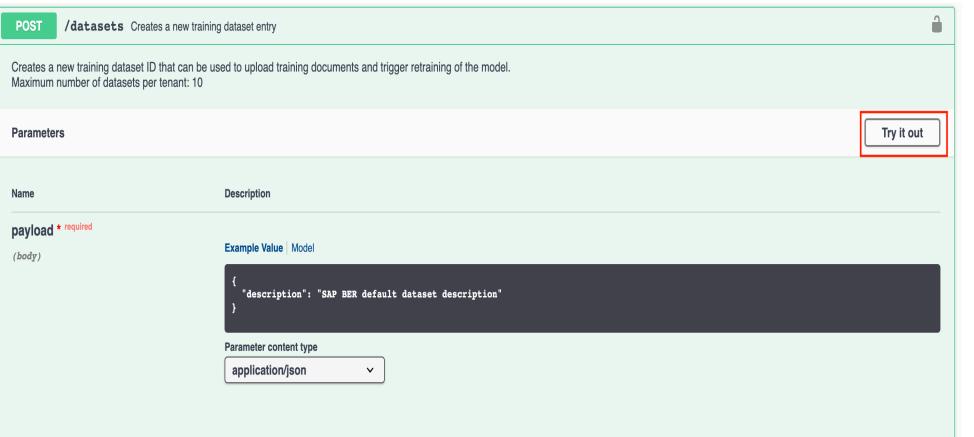
2 BER TRAINING DATASET

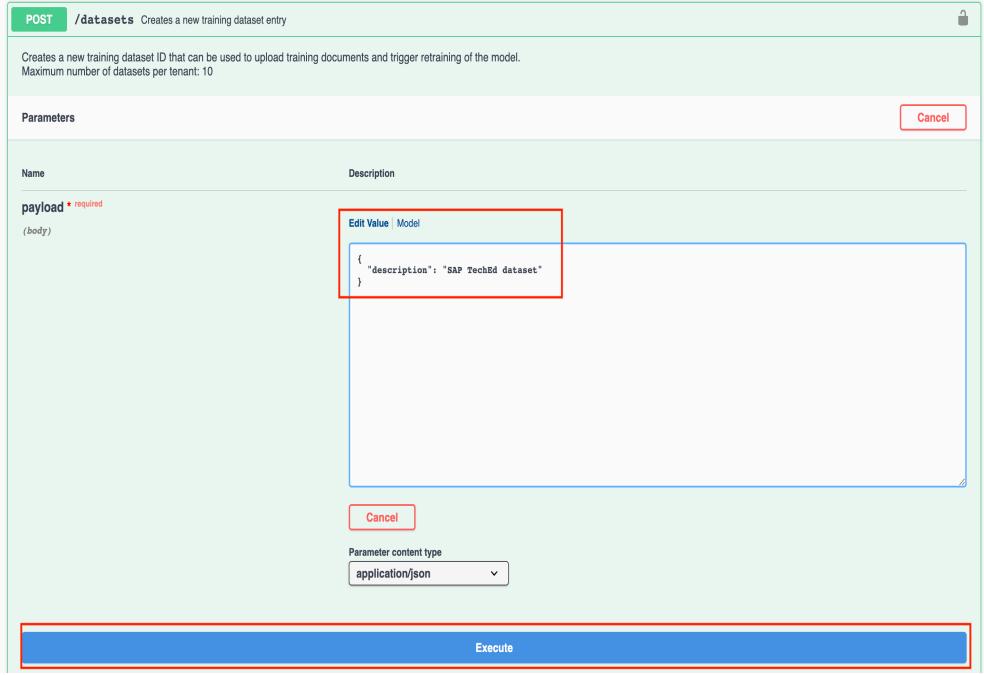
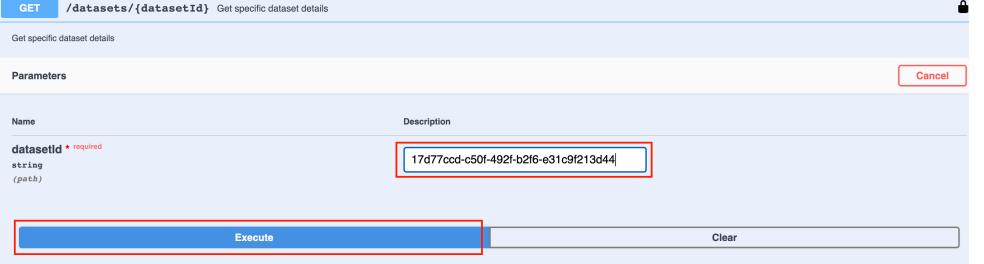
Objective

In this exercise, you will learn how to prepare the dataset for training a custom model.

2.1 Create Dataset

Follow these steps to create a dataset which would be used for the training of a custom model using BER.

| Explanation | Screenshot | | | | |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint POST /datasets, under Datasets to expand it.</p> |  <p>Datasets Training Data APIs : Upload, delete and get training data</p> <ul style="list-style-type: none"> GET /datasets Retrieve all datasets POST /datasets Creates a new training dataset entry DELETE /datasets/{datasetId} Deleting a dataset and its contents GET /datasets/{datasetId} Get specific dataset details GET /datasets/{datasetId}/documents Get documents present in a dataset POST /datasets/{datasetId}/documents Upload a training document DELETE /datasets/{datasetId}/documents/{documentId} Deletes specific training document of the given dataset ID GET /datasets/{datasetId}/documents/{documentId} Retrieve specific training document detail of the given dataset ID | | | | |
| <p>2. Click on Try it out</p> |  <p>POST /datasets Creates a new training dataset entry</p> <p>Creates a new training dataset ID that can be used to upload training documents and trigger retraining of the model. Maximum number of datasets per tenant: 10</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>payload * required (body)</td> <td> Example Value - Model <pre>{ "description": "SAP BER default dataset description" }</pre> Parameter content type <input type="text" value="application/json"/> </td> </tr> </tbody> </table> | Name | Description | payload * required (body) | Example Value - Model <pre>{ "description": "SAP BER default dataset description" }</pre> Parameter content type <input type="text" value="application/json"/> |
| Name | Description | | | | |
| payload * required (body) | Example Value - Model <pre>{ "description": "SAP BER default dataset description" }</pre> Parameter content type <input type="text" value="application/json"/> | | | | |

| Explanation | Screenshot | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>3. In payload, enter the description you want for your dataset. And click on Execute. In this example, you can use the following:</p> <pre data-bbox="62 587 543 713" style="background-color: #e0e0e0; padding: 5px;">JSON { "description": "SAP TechEd dataset" }</pre> |  <p>POST /datasets Creates a new training dataset entry</p> <p>Creates a new training dataset ID that can be used to upload training documents and trigger retraining of the model. Maximum number of datasets per tenant: 10</p> <p>Parameters</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>payload • required (body)</td> <td> <input style="width: 100%;" type="text" value='{"description": "SAP TechEd dataset"}'/> Edit Value Model </td> </tr> </tbody> </table> <p>Cancel</p> <p>Parameter content type application/json</p> <p style="text-align: center;">Execute</p> | Name | Description | payload • required (body) | <input style="width: 100%;" type="text" value='{"description": "SAP TechEd dataset"}'/> Edit Value Model |
| Name | Description | | | | |
| payload • required (body) | <input style="width: 100%;" type="text" value='{"description": "SAP TechEd dataset"}'/> Edit Value Model | | | | |
| <p>4. Copy the datasetId from Response body to upload documents in the next step.</p> | <p>Server response</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Details</th> </tr> </thead> <tbody> <tr> <td>201</td> <td> <p>Response body</p> <pre data-bbox="869 1189 1490 1315" style="background-color: #2e3436; color: #eeeeec; padding: 5px;">{ "data": { "datasetId": "17d77cccd-c50f-492f-b2f6-e31c9f213d44", "message": "Dataset has been created successfully" } }</pre> </td> </tr> </tbody> </table> | Code | Details | 201 | <p>Response body</p> <pre data-bbox="869 1189 1490 1315" style="background-color: #2e3436; color: #eeeeec; padding: 5px;">{ "data": { "datasetId": "17d77cccd-c50f-492f-b2f6-e31c9f213d44", "message": "Dataset has been created successfully" } }</pre> |
| Code | Details | | | | |
| 201 | <p>Response body</p> <pre data-bbox="869 1189 1490 1315" style="background-color: #2e3436; color: #eeeeec; padding: 5px;">{ "data": { "datasetId": "17d77cccd-c50f-492f-b2f6-e31c9f213d44", "message": "Dataset has been created successfully" } }</pre> | | | | |
| <p>5. Verify that dataset is created. Click on the endpoint GET /datasets/{datasetId} and click on Try it Out</p> |  <p>GET /datasets/{datasetId} Get specific dataset details</p> <p>Get specific dataset details</p> <p>Parameters</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>datasetId • required string (path)</td> <td></td> </tr> </tbody> </table> <p>Try it out</p> | Name | Description | datasetId • required string (path) | |
| Name | Description | | | | |
| datasetId • required string (path) | | | | | |
| <p>6. For datasetId field, enter the value copied in step 4 and click on Execute</p> |  <p>GET /datasets/{datasetId} Get specific dataset details</p> <p>Get specific dataset details</p> <p>Parameters</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>datasetId • required string (path)</td> <td>17d77cccd-c50f-492f-b2f6-e31c9f213d44</td> </tr> </tbody> </table> <p>Cancel</p> <p>Execute</p> <p>Clear</p> | Name | Description | datasetId • required string (path) | 17d77cccd-c50f-492f-b2f6-e31c9f213d44 |
| Name | Description | | | | |
| datasetId • required string (path) | 17d77cccd-c50f-492f-b2f6-e31c9f213d44 | | | | |

| Explanation | Screenshot |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>7. Verify that the dataset details are displayed</p> |  <p>The screenshot shows a REST API response. On the left, there is a table with two columns: 'Code' and 'Details'. The 'Code' column contains the value '200'. The 'Details' column contains a JSON object under the heading 'Response body'. A red box highlights this JSON object. The JSON content is:</p> <pre> { "data": { "datasetId": "17d77cccd-c50f-492f-b2f6-e31c9f213d44", "createdAt": "2020-10-06T09:39:08", "description": "SAP TechEd dataset", "documentCount": 0 } } </pre> |

2.2 Understanding the training document

Business Entity Recognition requires a specific data format to train a model. The data format prerequisites are as follows:

- File format: JSONL
- File extension: JSON
- File size: maximum of 10 MB
- File should not contain malicious data
- File should not contain blank lines at the end
- Every line in the file should have one JSON object, which has the following mandatory fields:
 - ID (Number): used to represent the unique record ID and the ID should be unique throughout the dataset
 - Text (String): contains the data on which model must be trained
 - Labels (Array): contain the annotation details, with the text as an array of characters that starts with the index 0. Each label is in the following format:
 - startIndex (Number): starting char index of the phrase
 - endIndex (Number): ending char index of the phrase
 - Annotation (String): annotation (class label) name

Below is an example of how a training document looks:

name of file

Unique id's for every record

Starting index of word

Ending index of word

Class label

```

1 {"id": 1, "text": "Hi John, Please provide the details of invoice AB12345. Regards, Mike", "labels": [[48, 55, "InvoiceID"]]}
2 {"id": 2, "text": "Hi Kay, Vendor DE029876 has requested invoice AB13145 details, kindly process the request ASAP. Regards, John", "labels": [[16, 24, "VendorID"], [47, 54, "InvoiceID"]]}

```

Additional points to note:

- Every JSON object in the file is a record.
- If a record doesn't have any annotations, then that record is discarded.
- There should be a minimum of 50 references per annotation. If the number of references is lower than 50, that annotation is discarded.
- There should be at least one annotation in the dataset to trigger the training.

2.3 Upload documents

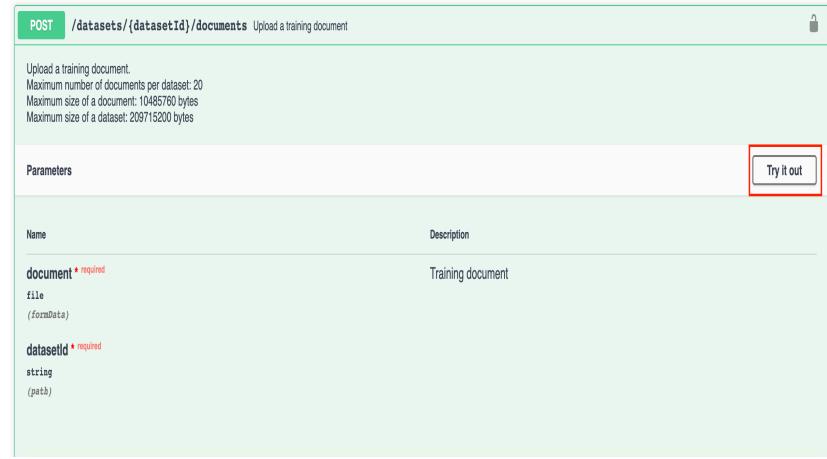
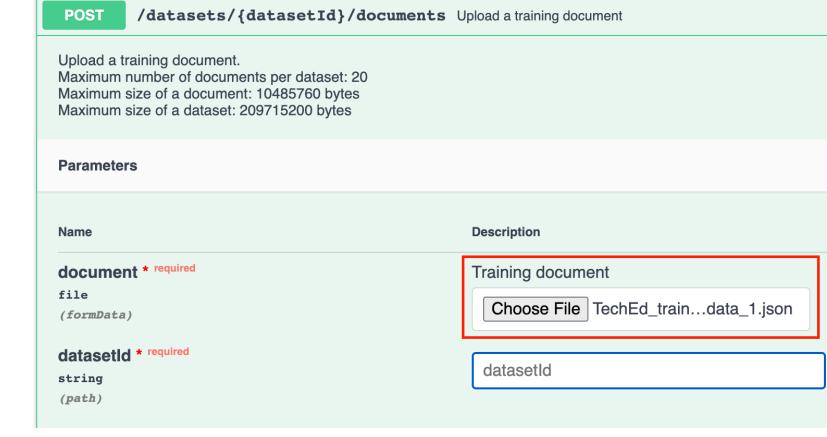
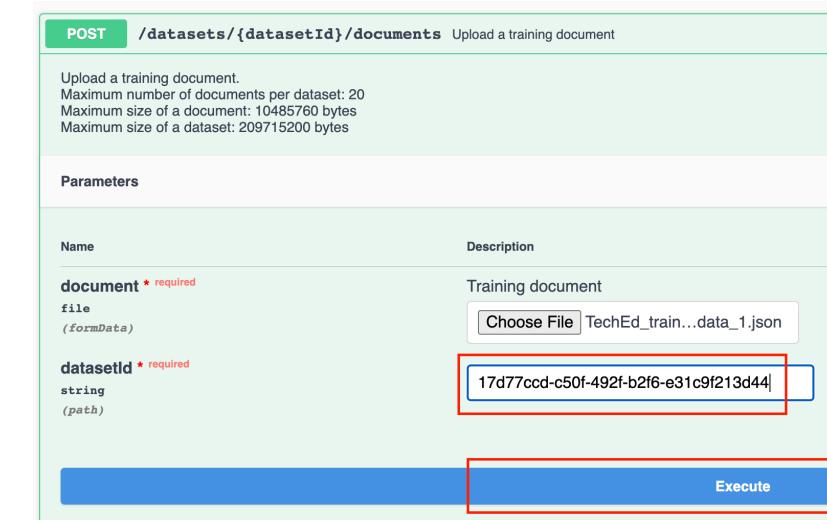
Pre-requisite:

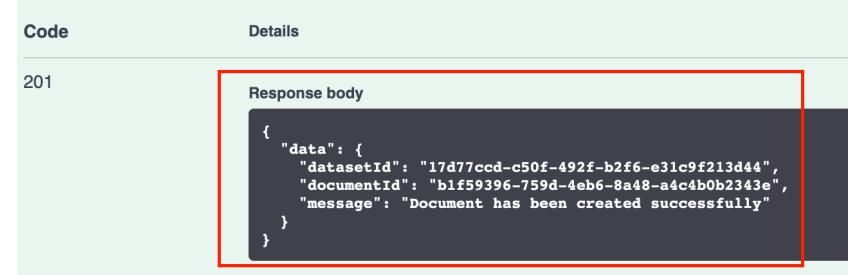
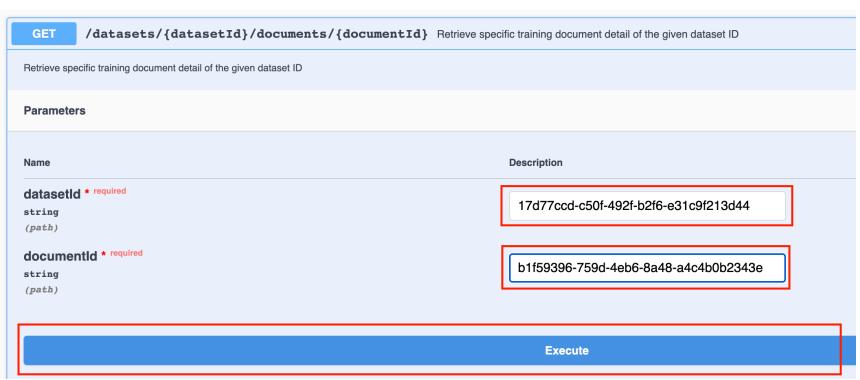
Navigate to the folder – **exercises/training_dataset** and download the documents:

TechEd_training_data_1.json and **TechEd_training_data_2.json**

Please do not upload any other documents here, especially the documents which might contain Personally Identifiable Information.

| Explanation | Screenshot |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint POST /datasets/{datasetId}/documents, under Datasets to expand it.</p> | <p>Datasets Training Data APIs : Upload, delete and get training data</p> <pre> GET /datasets Retrieve all datasets POST /datasets Creates a new training dataset entry DELETE /datasets/{datasetId} Deleting a dataset and its contents GET /datasets/{datasetId} Get specific dataset details GET /datasets/{datasetId}/documents Get documents present in a dataset POST /datasets/{datasetId}/documents Upload a training document DELETE /datasets/{datasetId}/documents/{documentId} Deletes specific training document of the given dataset ID GET /datasets/{datasetId}/documents/{documentId} Retrieve specific training document detail of the given dataset ID </pre> |

| Explanation | Screenshot | | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|---------------------|-------------------|--------------------|-----------------------------------------|----------------------|---------------------------------------|------------------|-----------|
| 2. Click on Try it out |  <p>POST /datasets/{datasetId}/documents Upload a training document</p> <p>Upload a training document. Maximum number of documents per dataset: 20 Maximum size of a document: 10485760 bytes Maximum size of a dataset: 209715200 bytes</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>document * required</td> <td>Training document</td> </tr> <tr> <td>file (formData)</td> <td></td> </tr> <tr> <td>datasetId * required</td> <td></td> </tr> <tr> <td>string (path)</td> <td></td> </tr> </tbody> </table> | Name | Description | document * required | Training document | file (formData) | | datasetId * required | | string (path) | |
| Name | Description | | | | | | | | | | |
| document * required | Training document | | | | | | | | | | |
| file (formData) | | | | | | | | | | | |
| datasetId * required | | | | | | | | | | | |
| string (path) | | | | | | | | | | | |
| 3. Click on Choose File . Navigate to the downloaded documents and choose the file TechEd_training_data_1.json . |  <p>POST /datasets/{datasetId}/documents Upload a training document</p> <p>Upload a training document. Maximum number of documents per dataset: 20 Maximum size of a document: 10485760 bytes Maximum size of a dataset: 209715200 bytes</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>document * required</td> <td>Training document</td> </tr> <tr> <td>file (formData)</td> <td>Choose File TechEd_training_data_1.json</td> </tr> <tr> <td>datasetId * required</td> <td></td> </tr> <tr> <td>string (path)</td> <td>datasetId</td> </tr> </tbody> </table> | Name | Description | document * required | Training document | file (formData) | Choose File TechEd_training_data_1.json | datasetId * required | | string (path) | datasetId |
| Name | Description | | | | | | | | | | |
| document * required | Training document | | | | | | | | | | |
| file (formData) | Choose File TechEd_training_data_1.json | | | | | | | | | | |
| datasetId * required | | | | | | | | | | | |
| string (path) | datasetId | | | | | | | | | | |
| 4. For datasetId field, enter the datasetId created in section 2.2. Click on Execute |  <p>POST /datasets/{datasetId}/documents Upload a training document</p> <p>Upload a training document. Maximum number of documents per dataset: 20 Maximum size of a document: 10485760 bytes Maximum size of a dataset: 209715200 bytes</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>document * required</td> <td>Training document</td> </tr> <tr> <td>file (formData)</td> <td>Choose File TechEd_training_data_1.json</td> </tr> <tr> <td>datasetId * required</td> <td>17d77cccd-c50f-492f-b2f6-e31c9f213d44</td> </tr> <tr> <td>string (path)</td> <td></td> </tr> </tbody> </table> <p>Execute</p> | Name | Description | document * required | Training document | file (formData) | Choose File TechEd_training_data_1.json | datasetId * required | 17d77cccd-c50f-492f-b2f6-e31c9f213d44 | string (path) | |
| Name | Description | | | | | | | | | | |
| document * required | Training document | | | | | | | | | | |
| file (formData) | Choose File TechEd_training_data_1.json | | | | | | | | | | |
| datasetId * required | 17d77cccd-c50f-492f-b2f6-e31c9f213d44 | | | | | | | | | | |
| string (path) | | | | | | | | | | | |

| Explanation | Screenshot |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>5. Verify that you get a response code of 201. Copy the documentId from the response body</p> |  <p>The screenshot shows a REST API response. The 'Code' column displays '201'. The 'Details' column shows the 'Response body' which contains the following JSON:</p> <pre>{ "data": { "datasetId": "17d77cccd-c50f-492f-b2f6-e31c9f213d44", "documentId": "b1f59396-759d-4eb6-8a48-a4c4b0b2343e", "message": "Document has been created successfully" } }</pre> |
| <p>6. You can additionally verify the document details. Click on endpoint GET /datasets/{datasetId}/documents/{documentId}.</p> <p>7. Click on Try it Out and enter the values of datasetId and documentId which you have already copied.</p> <p>8. Click on Execute to get the document details</p> |  <p>The screenshot shows the 'Try it Out' interface for the specified API endpoint. It includes the following details:</p> <ul style="list-style-type: none"> Method: GET Endpoint: /datasets/{datasetId}/documents/{documentId} Description: Retrieve specific training document detail of the given dataset ID Parameters: <ul style="list-style-type: none"> Name: datasetId Description: 17d77cccd-c50f-492f-b2f6-e31c9f213d44 Name: documentId Description: b1f59396-759d-4eb6-8a48-a4c4b0b2343e Execute: A blue button at the bottom. |

Repeat the steps 1 to 6 for all the downloaded document: **TechEd_training_data_2.json**.

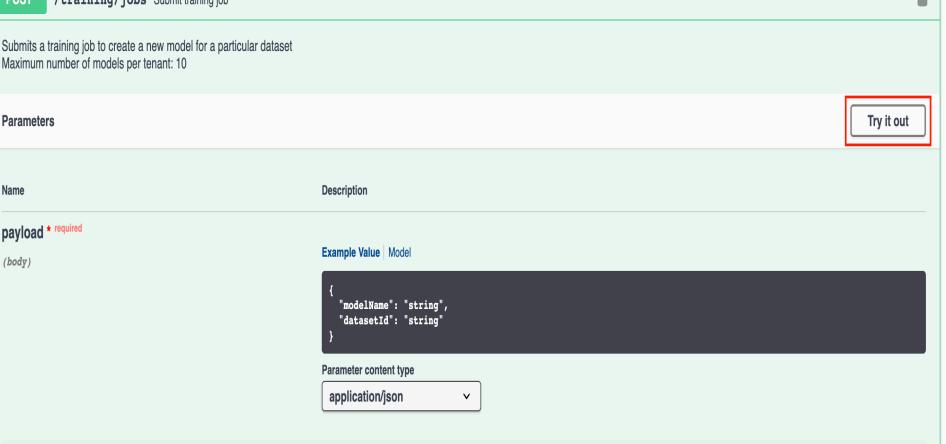
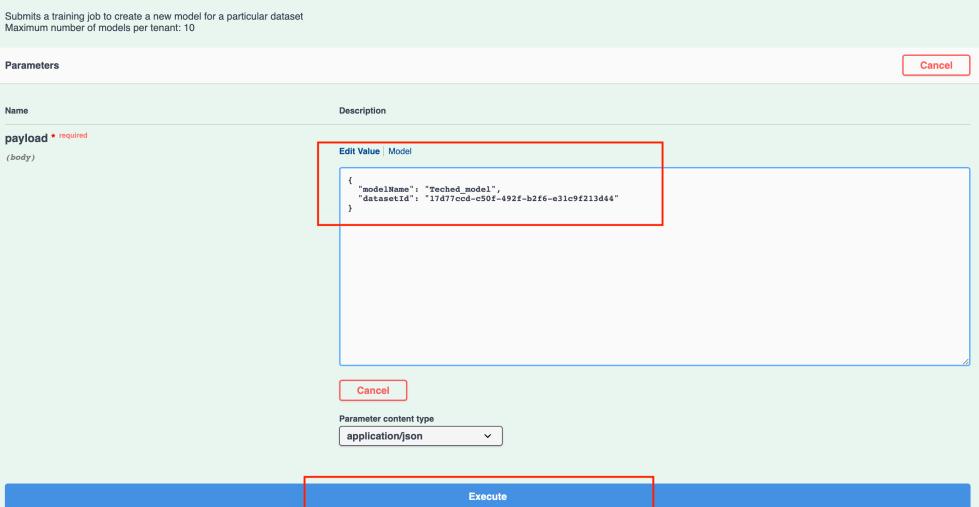
3 BER TRAINING

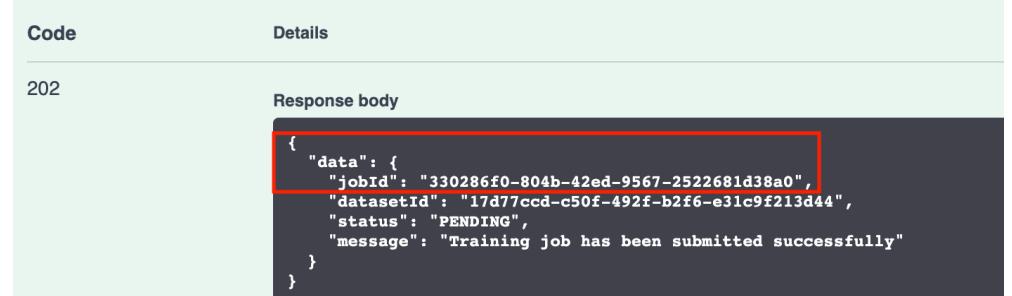
Objective

In this exercise, you would be able to explore training related APIs for BER. Since, BER training takes around 5 hours or more to complete, we would not be able to verify the resulting model in this exercise.

3.1 Trigger training job

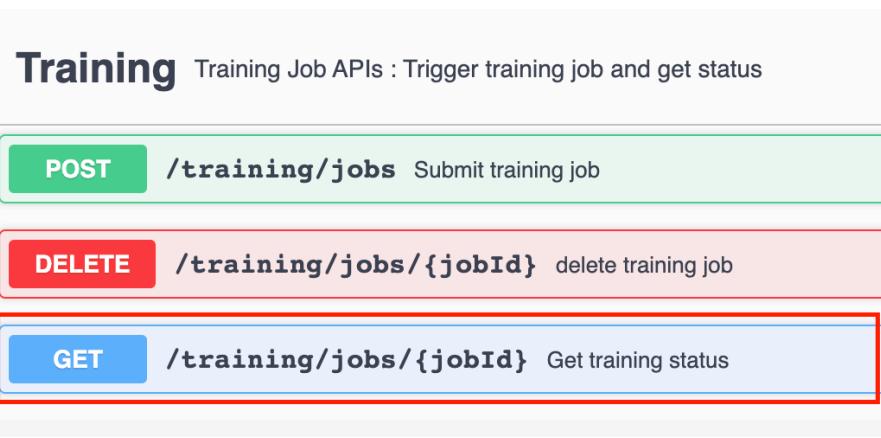
Follow these steps to submit a training job with the created dataset.

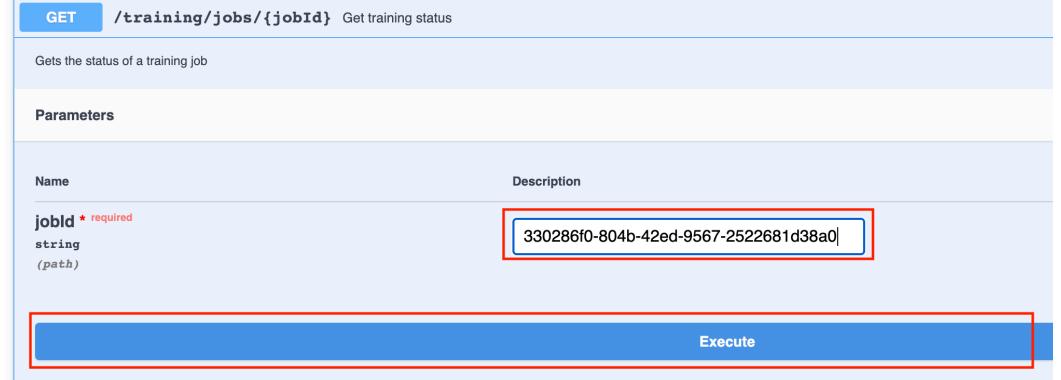
| Explanation | Screenshot |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint POST /training/jobs, under Training to expand it.</p> | <p>Training Training Job APIs : Trigger training job and get status</p>  <p>POST /training/jobs Submit training job</p> <p>DELETE /training/jobs/{jobId} delete training job</p> <p>GET /training/jobs/{jobId} Get training status</p> |
| <p>2. Click on Try it out</p> |  <p>POST /training/jobs Submit training job</p> <p>Submits a training job to create a new model for a particular dataset Maximum number of models per tenant: 10</p> <p>Parameters</p> <p>Name Description</p> <p>payload * required</p> <p>(body)</p> <p>Example Value Model</p> <pre>{ "modelName": "string", "datasetId": "string" }</pre> <p>Parameter content type</p> <p>application/json</p> |
| <p>3. In payload, enter the name of the model you want to train for the modelName field. Also enter the datasetId copied in section 2 for the datasetId field. Click on Execute.</p> <p>JSON</p> <pre>{ "modelName": "Teched_model", "datasetId": <datasetId> }</pre> |  <p>POST /training/jobs Submit training job</p> <p>Submits a training job to create a new model for a particular dataset Maximum number of models per tenant: 10</p> <p>Parameters</p> <p>Name Description</p> <p>payload * required</p> <p>(body)</p> <p>Edit Value Model</p> <pre>{ "modelName": "Teched_model", "datasetId": "1d77cc0-c50f-492f-b2f6-a31c9f211d44" }</pre> <p>Cancel</p> <p>Parameter content type</p> <p>application/json</p> <p>Execute</p> |

| Explanation | Screenshot |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>4. Verify that you get a response code of 202. This indicates that your training job has been successfully submitted. Copy the jobId from the response body</p> |  <p>The screenshot shows a REST API response. The 'Code' column displays '202'. The 'Details' column shows the 'Response body' which contains the following JSON:</p> <pre> { "data": { "jobId": "330286f0-804b-42ed-9567-2522681d38a0", "datasetId": "17d77cccd-c50f-492f-b2f6-e31c9f213d44", "status": "PENDING", "message": "Training job has been submitted successfully" } } </pre> |

3.2 Get training job status

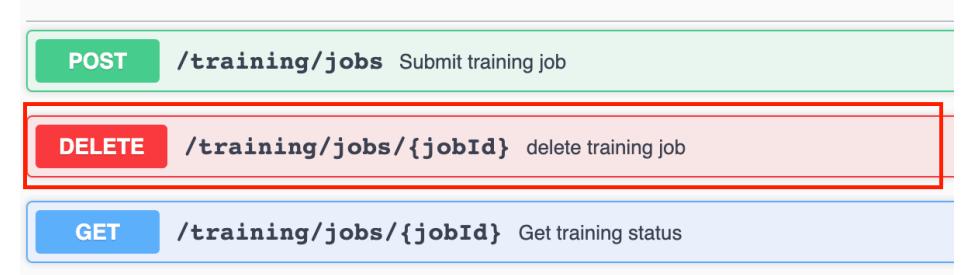
Follow these steps to get the status of your submitted training job

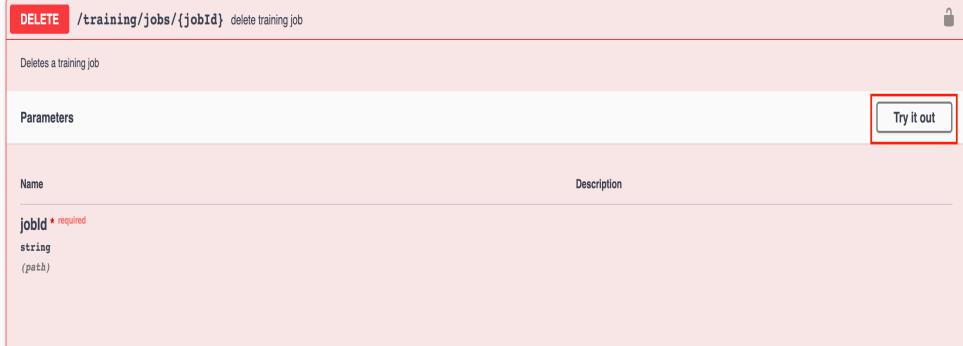
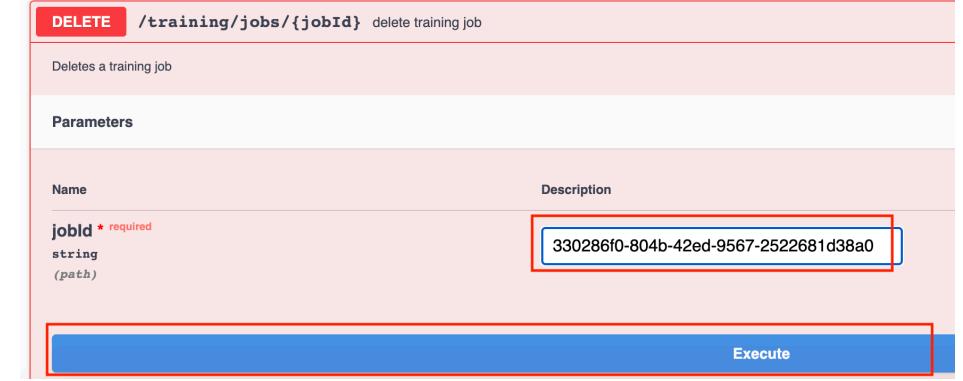
| Explanation | Screenshot |
|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint GET /training/jobs/{jobId}, under Training to expand it.</p> |  <p>The screenshot shows the 'Training' section of the API documentation. It includes the following information:</p> <ul style="list-style-type: none"> POST /training/jobs Submit training job DELETE /training/jobs/{jobId} delete training job GET /training/jobs/{jobId} Get training status (this endpoint is highlighted with a red box) |
| <p>2. Click on Try it out</p> |  <p>The screenshot shows the 'Try it out' interface for the GET /training/jobs/{jobId} endpoint. It includes the following fields:</p> <ul style="list-style-type: none"> Method: GET Endpoint: /training/jobs/{jobId} Get training status Description: Gets the status of a training job Parameters: A table with columns 'Name' and 'Description'. jobId * required string (path) Try it out (button) |

| Explanation | Screenshot | | | | |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>3. For jobId field, enter the jobId copied in the previous exercise. Click on Execute</p> |  | | | | |
| <p>4. Verify that you get a response of 200 which indicates that job status has been retrieved successfully.</p> | <table border="1"> <thead> <tr> <th data-bbox="523 762 784 804">Code</th> <th data-bbox="784 762 1584 804">Details</th> </tr> </thead> <tbody> <tr> <td data-bbox="523 804 784 1089">200</td> <td data-bbox="784 804 1584 1089"> <p>Response body</p> <pre data-bbox="833 889 1503 1047"> { "data": { "jobId": "330286f0-804b-42ed-9567-2522681d38a0", "status": "RUNNING" } }</pre> </td></tr> </tbody> </table> | Code | Details | 200 | <p>Response body</p> <pre data-bbox="833 889 1503 1047"> { "data": { "jobId": "330286f0-804b-42ed-9567-2522681d38a0", "status": "RUNNING" } }</pre> |
| Code | Details | | | | |
| 200 | <p>Response body</p> <pre data-bbox="833 889 1503 1047"> { "data": { "jobId": "330286f0-804b-42ed-9567-2522681d38a0", "status": "RUNNING" } }</pre> | | | | |

3.3 Delete training job

BER permits one concurrent training job per tenant and considering long running jobs for BER, follow these steps to delete an ongoing training job.

| Explanation | Screenshot |
|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint DELETE /training/jobs/{jobId}, under Training to expand it.</p> | <p>Training Training Job APIs : Trigger training job and get status</p>  |

| Explanation | Screenshot | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2. Click on Try it out |  <p>DELETE /training/jobs/{jobId} delete training job</p> <p>Deletes a training job</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>jobId * required</td> <td>string (path)</td> </tr> </tbody> </table> <p>Try it out</p> | Name | Description | jobId * required | string (path) |
| Name | Description | | | | |
| jobId * required | string (path) | | | | |
| 3. For jobId field, enter the jobId copied in the previous exercise. Click on Execute |  <p>DELETE /training/jobs/{jobId} delete training job</p> <p>Deletes a training job</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>jobId * required</td> <td>string (path)</td> </tr> </tbody> </table> <p>330286f0-804b-42ed-9567-2522681d38a0</p> <p>Execute</p> | Name | Description | jobId * required | string (path) |
| Name | Description | | | | |
| jobId * required | string (path) | | | | |
| 4. Verify that you get a response of 202 which indicates that delete request has been submitted successfully. | <table border="1"> <thead> <tr> <th>Code</th> <th>Details</th> </tr> </thead> <tbody> <tr> <td>202</td> <td> <p>Response body</p> <pre>{ "data": { "jobId": "330286f0-804b-42ed-9567-2522681d38a0", "message": "Training job deletion request has been submitted successfully" } }</pre> </td> </tr> </tbody> </table> | Code | Details | 202 | <p>Response body</p> <pre>{ "data": { "jobId": "330286f0-804b-42ed-9567-2522681d38a0", "message": "Training job deletion request has been submitted successfully" } }</pre> |
| Code | Details | | | | |
| 202 | <p>Response body</p> <pre>{ "data": { "jobId": "330286f0-804b-42ed-9567-2522681d38a0", "message": "Training job deletion request has been submitted successfully" } }</pre> | | | | |
| 5. To track the status of the delete request and verify the job has been deleted, follow the steps in exercise 3.3. A response of 404 indicates that the job has been deleted and no longer exists. | <table border="1"> <thead> <tr> <th>Code</th> <th>Details</th> </tr> </thead> <tbody> <tr> <td>404</td> <td> <p>Error: Not Found</p> <p>Response body</p> <pre>{ "errors": ["message": "Training job id not found"] }</pre> </td> </tr> </tbody> </table> | Code | Details | 404 | <p>Error: Not Found</p> <p>Response body</p> <pre>{ "errors": ["message": "Training job id not found"] }</pre> |
| Code | Details | | | | |
| 404 | <p>Error: Not Found</p> <p>Response body</p> <pre>{ "errors": ["message": "Training job id not found"] }</pre> | | | | |

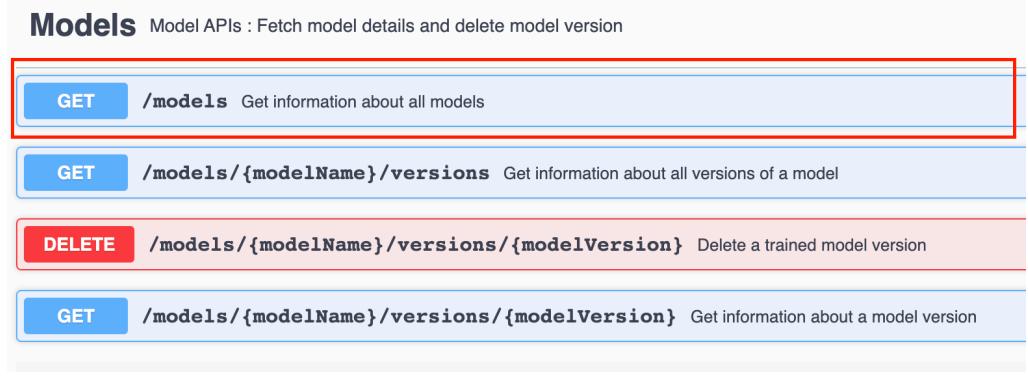
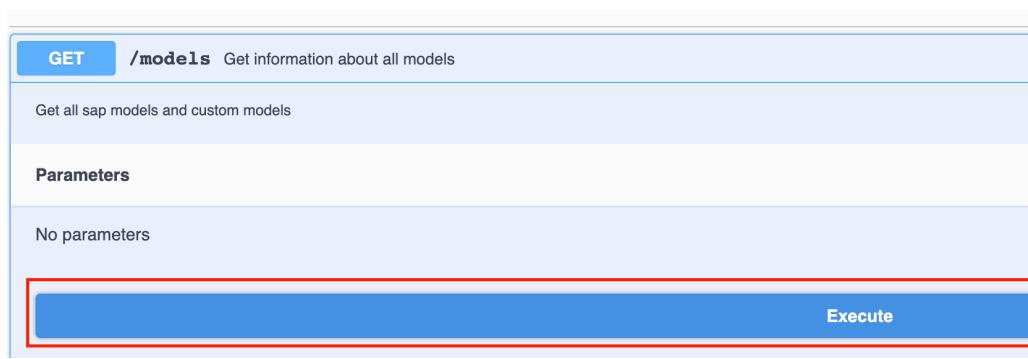
4 BER MODELS

Objective

In this exercise you would be able to explore the APIs related to model management. You would be able to get the details of available models and versions.

4.1 Get all models

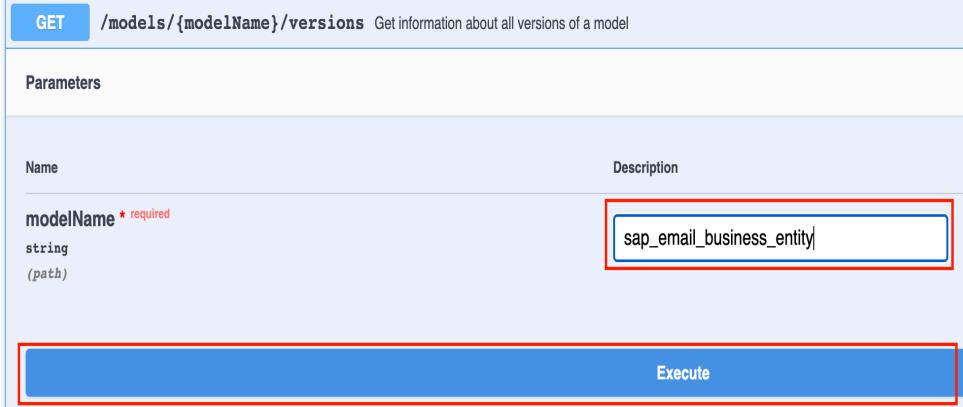
Follow these steps to get all the models available for your tenant.

| Explanation | Screenshot |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint GET /models, under Models to expand it.</p> |  <p>Models Model APIs : Fetch model details and delete model version</p> <ul style="list-style-type: none"> GET <code>/models</code> Get information about all models GET <code>/models/{modelName}/versions</code> Get information about all versions of a model DELETE <code>/models/{modelName}/versions/{modelVersion}</code> Delete a trained model version GET <code>/models/{modelName}/versions/{modelVersion}</code> Get information about a model version |
| <p>2. Click on Try it out</p> |  <p>GET <code>/models</code> Get information about all models</p> <p>Get all sap models and custom models</p> <p>Parameters</p> <p>No parameters</p> <p>Try it out</p> |
| <p>3. Click on Execute</p> |  <p>GET <code>/models</code> Get information about all models</p> <p>Get all sap models and custom models</p> <p>Parameters</p> <p>No parameters</p> <p>Execute</p> |

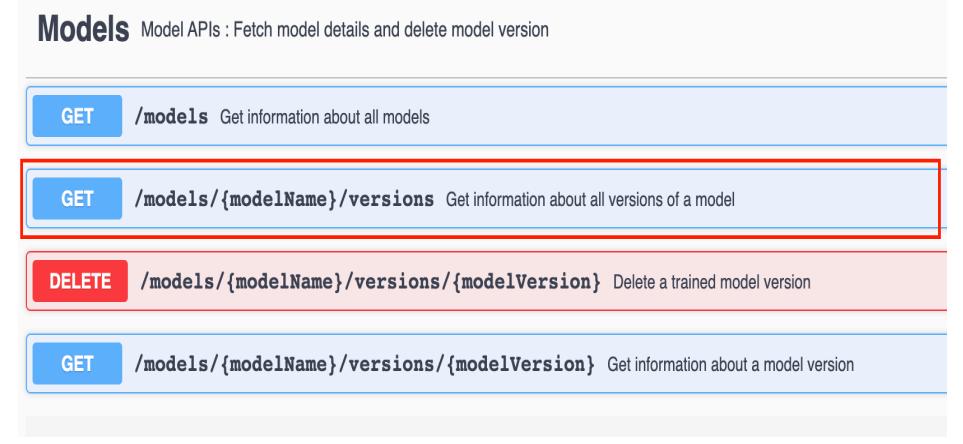
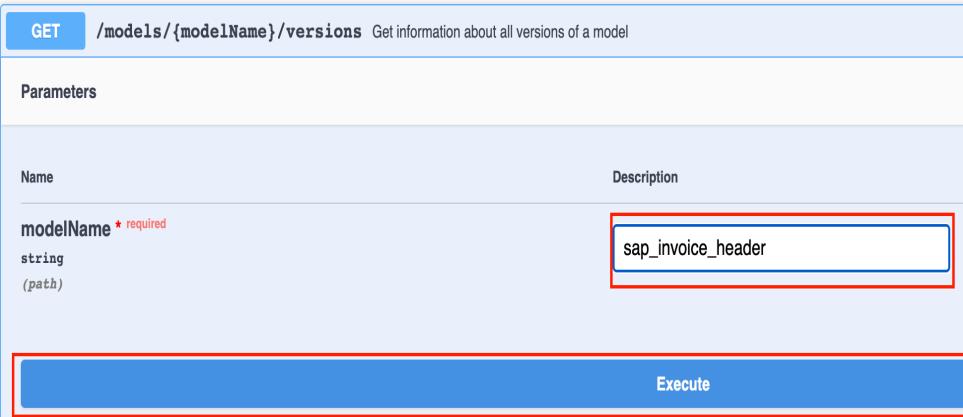
| Explanation | Screenshot | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | | | |
| <p>4. Verify that you get a response of 200. Examine the response to see the models that are available for your tenant.</p> <p>You would see 2 models: sap_email_business_entity and sap_invoice_header. These are the pre-trained models that are immediately productive with the BER service.</p> | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #f2f2f2; padding: 5px;">Code</th> <th style="background-color: #f2f2f2; padding: 5px;">Details</th> </tr> </thead> <tbody> <tr> <td style="padding: 5px; vertical-align: top;">200</td> <td style="padding: 5px; vertical-align: top;"> <p>Response body</p> <pre>{ "data": { "sapModels": { "count": 2, "models": [{ "modelName": "sap_invoice_header", "versions": [{ "modelVersion": 1 }] }, { "modelName": "sap_email_business_entity", "versions": [{ "modelVersion": 1 }, { "modelVersion": 2 }] }] } } }</pre> </td> </tr> </tbody> </table> | Code | Details | 200 | <p>Response body</p> <pre>{ "data": { "sapModels": { "count": 2, "models": [{ "modelName": "sap_invoice_header", "versions": [{ "modelVersion": 1 }] }, { "modelName": "sap_email_business_entity", "versions": [{ "modelVersion": 1 }, { "modelVersion": 2 }] }] } } }</pre> |
| Code | Details | | | | |
| 200 | <p>Response body</p> <pre>{ "data": { "sapModels": { "count": 2, "models": [{ "modelName": "sap_invoice_header", "versions": [{ "modelVersion": 1 }] }, { "modelName": "sap_email_business_entity", "versions": [{ "modelVersion": 1 }, { "modelVersion": 2 }] }] } } }</pre> | | | | |

4.2 Get model details by model name

Follow these steps to get information about different versions of a model.

| Explanation | Screenshot | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint GET /models/{modelName}/versions, under Models to expand it.</p> | <p>Models Model APIs : Fetch model details and delete model version</p>  | | | | |
| <p>2. Click on Try it out. For the modelName field, enter sap_email_business_entity. Click on Execute.</p> |  | | | | |
| <p>3. Verify that you get a response of 200. Examine the response to see the versions of the sap_email_business_entity that are available. You will notice 2 versions of the model.</p> | <table border="1"> <thead> <tr> <th data-bbox="638 1163 817 1197">Code</th><th data-bbox="817 1163 1584 1197">Details</th></tr> </thead> <tbody> <tr> <td data-bbox="638 1197 817 1902">200</td><td data-bbox="817 1197 1584 1902"> <p>Response body</p> <pre data-bbox="915 1269 1552 1881"> { "data": { "modelName": "sap_email_business_entity", "modelType": "sapModel", "count": 2, "supportedLanguages": ["EN", "DE"], "versions": [{ "modelVersion": 1, "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "vendorID" }] }, { "modelVersion": 2, "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "customerID" }] }] } }</pre> </td></tr> </tbody> </table> | Code | Details | 200 | <p>Response body</p> <pre data-bbox="915 1269 1552 1881"> { "data": { "modelName": "sap_email_business_entity", "modelType": "sapModel", "count": 2, "supportedLanguages": ["EN", "DE"], "versions": [{ "modelVersion": 1, "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "vendorID" }] }, { "modelVersion": 2, "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "customerID" }] }] } }</pre> |
| Code | Details | | | | |
| 200 | <p>Response body</p> <pre data-bbox="915 1269 1552 1881"> { "data": { "modelName": "sap_email_business_entity", "modelType": "sapModel", "count": 2, "supportedLanguages": ["EN", "DE"], "versions": [{ "modelVersion": 1, "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "vendorID" }] }, { "modelVersion": 2, "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "customerID" }] }] } }</pre> | | | | |

OPTIONAL: Follow these steps to get the details for sap_invoice_header model

| Explanation | Screenshot | | | | |
|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|------------------------------------------|--------------------|
| <p>1. Click the endpoint GET /models/{modelName}/versions, under Models to expand it.</p> |  <p>Models Model APIs : Fetch model details and delete model version</p> <p>GET /models Get information about all models</p> <p>GET /models/{modelName}/versions Get information about all versions of a model</p> <p>DELETE /models/{modelName}/versions/{modelVersion} Delete a trained model version</p> <p>GET /models/{modelName}/versions/{modelVersion} Get information about a model version</p> | | | | |
| <p>2. Click on Try it out. For the modelName field, enter sap_invoice_header. Click on Execute.</p> |  <p>GET /models/{modelName}/versions Get information about all versions of a model</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>modelName * required string (path)</td> <td>sap_invoice_header</td> </tr> </tbody> </table> <p>Execute</p> | Name | Description | modelName * required string (path) | sap_invoice_header |
| Name | Description | | | | |
| modelName * required string (path) | sap_invoice_header | | | | |

| Explanation | Screenshot | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Code | Details |
| <p>3. Verify that you get a response of 200. Examine the response to see the versions of the <code>sap_invoice_header</code> that are available.</p> | <p>200</p> | <p>Response body</p> <pre>{ "data": { "modelName": "sap_invoice_header", "modelType": "sapModel", "count": 1, "supportedLanguages": ["EN", "DE", "FR"], "versions": [{ "modelVersion": 1, "capabilities": [{ "entity": "vendorName" }, { "entity": "vendorAddress" }, { "entity": "invoiceNo" }, { "entity": "vendorBankAccountNo" }, { "entity": "buyerName" }] }] } }</pre> |

4.3 Get model details by model name and model version

Follow these steps to know the details of a specific version of any model.

| Explanation | Screenshot | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--|-------------------------|---|------------------|--|
| <p>1. Click the endpoint GET /models/{modelName}/versions/{modelVersion}, under Models to expand it.</p> | <p>Models Model APIs : Fetch model details and delete model version</p>  <pre> GET /models Get information about all models GET /models/{modelName}/versions Get information about all versions of a model DELETE /models/{modelName}/versions/{modelVersion} Delete a trained model version GET /models/{modelName}/versions/{modelVersion} Get information about a model version </pre> | | | | | | | | | | |
| <p>2. Click on Try it out. For the modelName field, enter sap_email_business_entity. For the modelVersion field, enter 1. Click on Execute.</p> |  <p>GET /models/{modelName}/versions/{modelVersion} Get information about a model version</p> <p>Get specific version of a model</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>modelName * required</td> <td>sap_email_business_entity</td> </tr> <tr> <td>string (path)</td> <td></td> </tr> <tr> <td>modelVersion * required</td> <td>1</td> </tr> <tr> <td>string (path)</td> <td></td> </tr> </tbody> </table> <p>Execute</p> | Name | Description | modelName * required | sap_email_business_entity | string (path) | | modelVersion * required | 1 | string (path) | |
| Name | Description | | | | | | | | | | |
| modelName * required | sap_email_business_entity | | | | | | | | | | |
| string (path) | | | | | | | | | | | |
| modelVersion * required | 1 | | | | | | | | | | |
| string (path) | | | | | | | | | | | |
| <p>3. Verify that you get a response of 200. Examine the response to see the details of version 1 of sap_email_business_entity.</p> | <table border="1"> <thead> <tr> <th data-bbox="612 1235 660 1256">Code</th> <th data-bbox="889 1235 954 1256">Details</th> </tr> </thead> <tbody> <tr> <td data-bbox="612 1298 660 1320">200</td> <td data-bbox="889 1298 1591 1784"> <p>Response body</p> <pre> { "data": { "modelName": "sap_email_business_entity", "modelVersion": 1, "modelType": "sapModel", "supportedLanguages": ["EN", "DE"], "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "vendorID" }] } } </pre> </td></tr> </tbody> </table> | Code | Details | 200 | <p>Response body</p> <pre> { "data": { "modelName": "sap_email_business_entity", "modelVersion": 1, "modelType": "sapModel", "supportedLanguages": ["EN", "DE"], "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "vendorID" }] } } </pre> | | | | | | |
| Code | Details | | | | | | | | | | |
| 200 | <p>Response body</p> <pre> { "data": { "modelName": "sap_email_business_entity", "modelVersion": 1, "modelType": "sapModel", "supportedLanguages": ["EN", "DE"], "capabilities": [{ "entity": "invoiceReferenceNumber" }, { "entity": "vendorID" }] } } </pre> | | | | | | | | | | |

5 BER INFERENCE



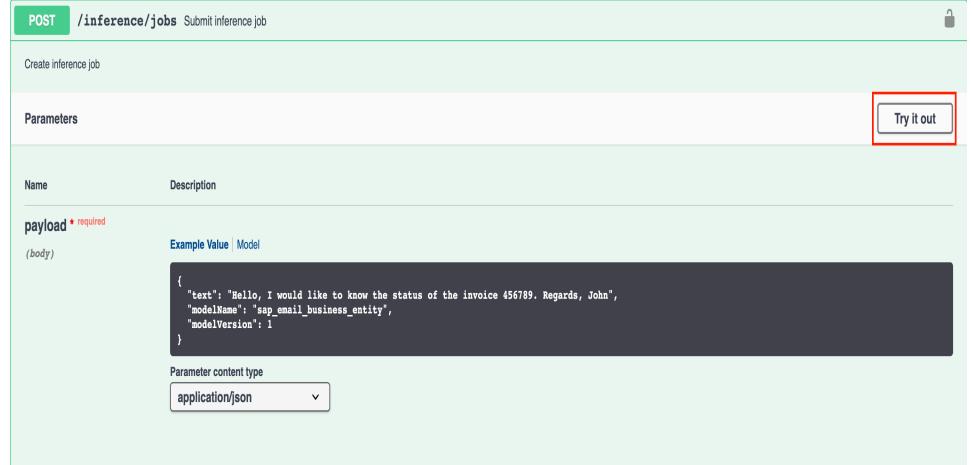
Objective

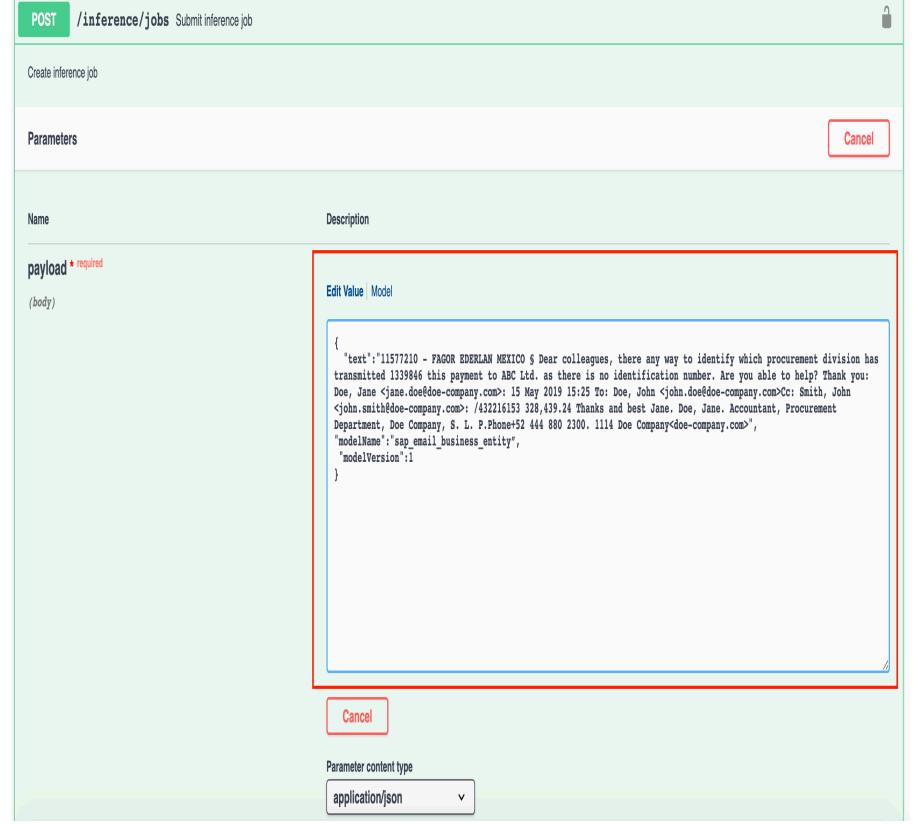
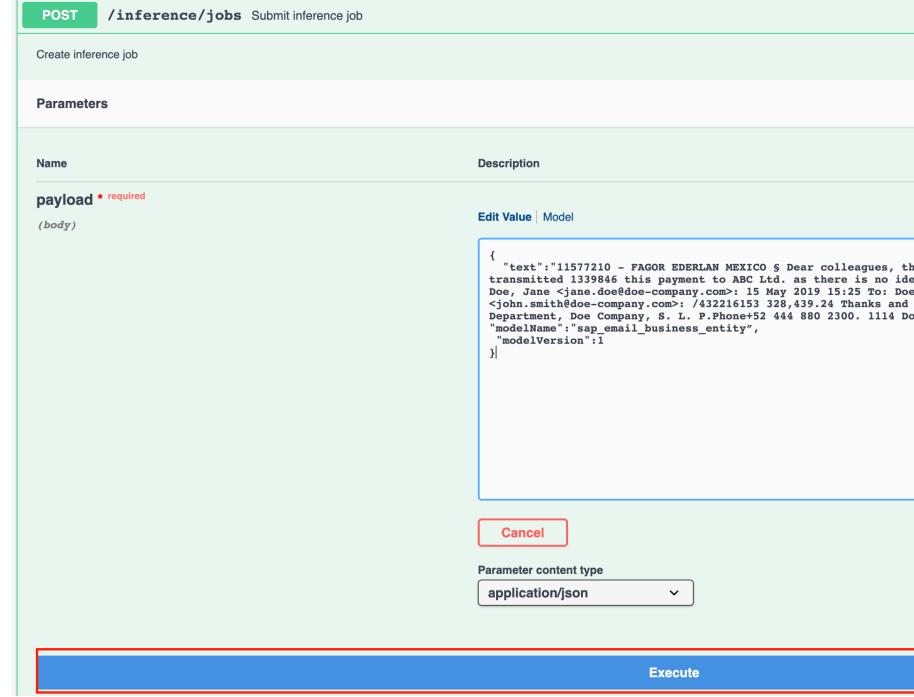
In this exercise, you would be able to see the BER service in action. You can provide a text and the service would extract and highlight the relevant entities with the help of pre-trained models

5.1 Inference with sap_email_business_entity

Follow these steps to extract entities with the sap_email_business_entity model

5.1.1 Submit the inference job for sap_email_business_entity model

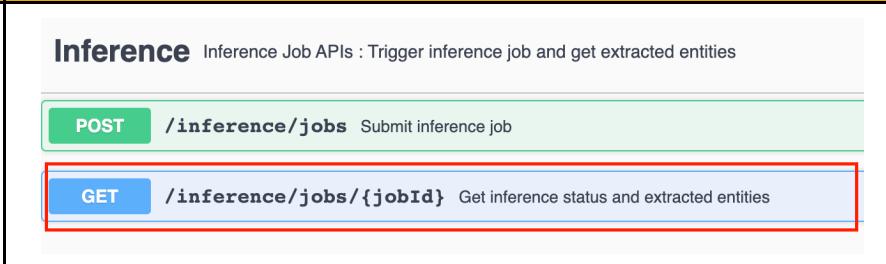
| Explanation | Screenshot | | | | |
|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|-----------------------------------|---------------------------------|
| <p>1. Click the endpoint POST /inference/jobs, under Inference to expand it.</p> | <p>Inference Inference Job APIs : Trigger inference job and get extracted entities</p>  <p>POST /inference/jobs Submit inference job</p>  <p>GET /inference/jobs/{jobId} Get inference status and extracted entities</p> | | | | |
| <p>2. Click on Try it out</p> |  <p>Try it out</p> <p>POST /inference/jobs Submit inference job</p> <p>Create inference job</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>payload <small>* required</small></td> <td>Example Value Model (body)</td> </tr> </tbody> </table> <pre>{ "text": "Hello, I would like to know the status of the invoice 456789. Regards, John", "modelName": "sap_email_business_entity", "modelVersion": 1 }</pre> <p>Parameter content type</p> <p>application/json</p> | Name | Description | payload <small>* required</small> | Example Value Model (body) |
| Name | Description | | | | |
| payload <small>* required</small> | Example Value Model (body) | | | | |

| Explanation | Screenshot |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <p>3. In payload, enter the text you want to extract named entities from, modelName and modelVersion. In this exercise you can use the following:</p> <pre data-bbox="50 502 616 1030" style="background-color: #f0f0f0; padding: 10px;"> JSON { "text": "11577210 - FAGOR EDERLAN MEXICO § Dear colleagues, there any way to identify which procurement division has transmitted 1339846 this payment to ABC Ltd. as there is no identification number. Are you able to help? Thank you: Doe, Jane <jane.doe@doe-company.com>; 15 May 2019 15:25 To: Doe, John <john.doe@doe-company.com>Cc: Smith, John <john.smith@doe-company.com>; /432216153 328,439.24 Thanks and best Jane. Doe, Jane. Accountant, Procurement Department, Doe Company, S. L. P.Phone+52 444 880 2300. 1114 Doe Company<doe-company.com>", "modelName": "sap_email_business_entity", "modelVersion": 1 } </pre> |  |
| <p>4. Click Execute</p> |  |

| Explanation | Screenshot |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>5. Verify that you get a response code of 202. This indicates that your inference job has been successfully submitted. Copy the id from the response body to see result of the extraction in the next step.</p> |  <p>The screenshot shows a REST API response. The 'Code' column displays '202'. The 'Details' column shows the 'Response body' which contains the following JSON:</p> <pre>{ "data": { "id": "18a64808-18d5-48a0-bc3d-f89f2c8b8ab1", "status": "PENDING", "message": "Inference job has been submitted", "modelName": "sap_email_business_entity", "modelVersion": 1 } }</pre> |

5.1.2 Get the inference results for sap_email_business_entity model

Follow these steps to see the text extraction results and the confidence level of the sap_email_business_entity model

| Explanation | Screenshot | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|-----------------------------------------------------|--------------------------------------|
| <p>1. Click the endpoint GET /inference/jobs/{jobId}, under Inference to expand it.</p> |  <p>Inference Inference Job APIs : Trigger inference job and get extracted entities</p> <p>POST /inference/jobs Submit inference job</p> <p>GET /inference/jobs/{jobId} Get inference status and extracted entities</p> | | | | |
| <p>2. Click on Try it out. For the jobId field, enter the id copied in previous step. Click on Execute.</p> |  <p>GET /inference/jobs/{jobId} Get inference status and extracted entities</p> <p>Get the inference result</p> <p>Parameters</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>jobId <small>* required</small> string (path)</td> <td>18a64808-18d5-48a0-bc3d-f89f2c8b8ab1</td> </tr> </tbody> </table> <p>Execute</p> | Name | Description | jobId <small>* required</small> string (path) | 18a64808-18d5-48a0-bc3d-f89f2c8b8ab1 |
| Name | Description | | | | |
| jobId <small>* required</small> string (path) | 18a64808-18d5-48a0-bc3d-f89f2c8b8ab1 | | | | |

| Explanation | Screenshot | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Code | Details |
| <p>3. Verify that you get a response of 200. In the response, you will find the prediction for the extracted entities. The prediction is made with a probability indicated by the confidence field which represents how certain the model is about the value provided. A confidence of 1 means that the model is 100% sure about its prediction.</p> | 200 | <p>Response body</p> <pre>{ "data": { "id": "18a64808-18d5-48a0-bc3d-f89f2c8b8ab1", "status": "SUCCESS", "result": [{ "vendorId": [{ "value": "1339846", "confidence": 1 }], "invoiceReferenceNumber": [{ "value": "11577210", "confidence": 0.71 }] }] } }</pre> |

Optional exercise


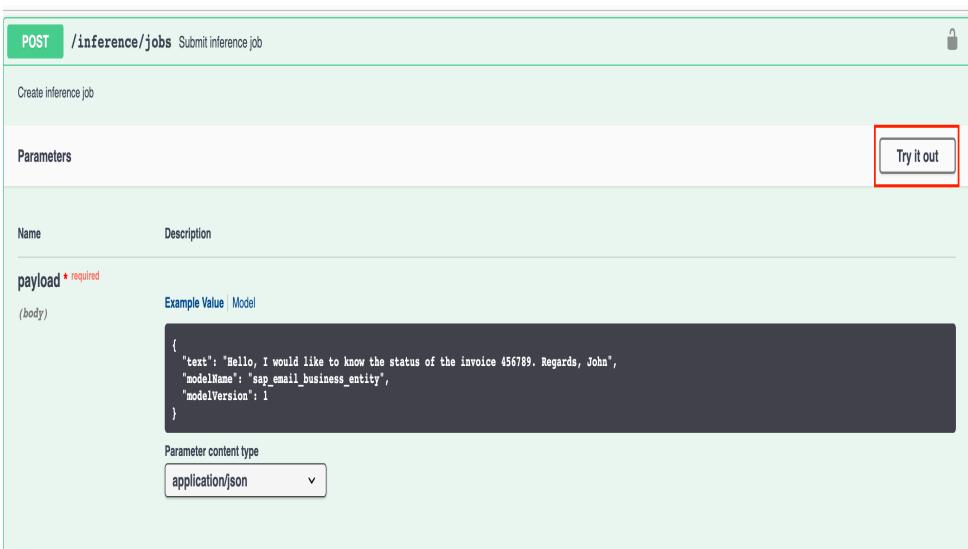
You can also use the following **payload** example with the **sap_email_business_entity** model:

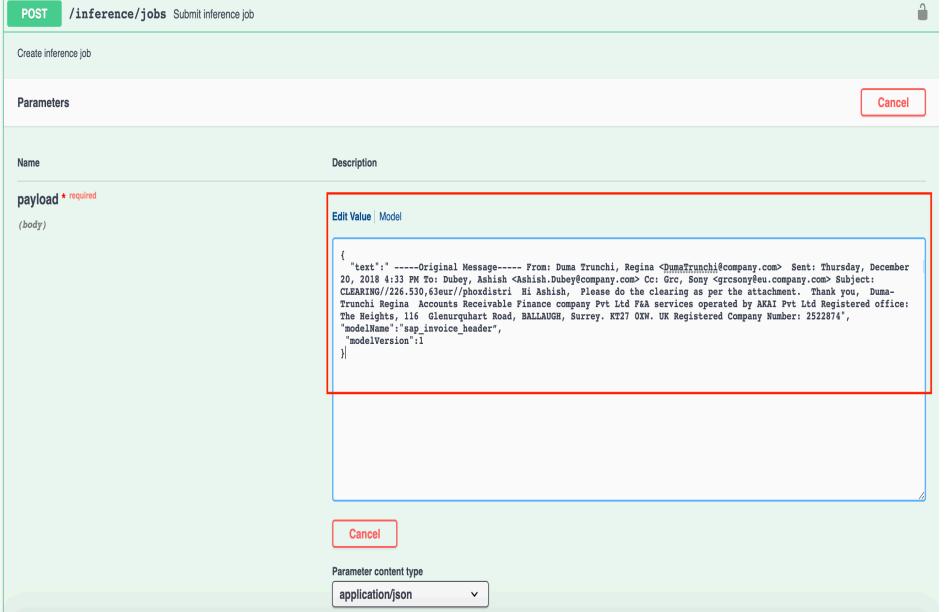
| JSON |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>{ "text": "Von: lena nova <office@scomputercenter.bg> Gesendet: Montag, 21. Januar 2019, 19:13 Uhr An: canu, ana <ana.canu@company.com>; office@computercenter-bg.com Betreff: RE: M & B EOCD 2639710315 Sehr geehrter Kunde, ich sende Ihnen Informationen für unsere Zahlung. Proforma 198305906 ist ein Teil der Rechnung 4830476570 / 11.01.2019. Rechnungsdatum Betrag in EUR 4830473772 14.12.2018 9,28 € 4830474632 21.12.2018 29,16 € 4830475244 28.12.2018 46,19 € 4830475919 4.1.2019 9,28 € 198305906 10.1.2019 9,29 € 103,20 € 4830476570 11.1.2019 37,13 198305906 10.1.2019 -9,29 € 27,84 Einen schönen Tag noch! Mit freundlichen Grüßen, lena lena nova Verkaufsleiterin M & B EOCD-Computer Center 11, Angel Kanchev Str; 1000, Sofia, Bulgarien Tel.: +359 2 981 58 57; Mobil: +359 889 61 13 21 E-Mail: office@scomputercenter.bg Besuchen Sie uns unter: www.computercenter.bg", "modelName": "sap_email_business_entity", "modelVersion": 2 }</pre> |

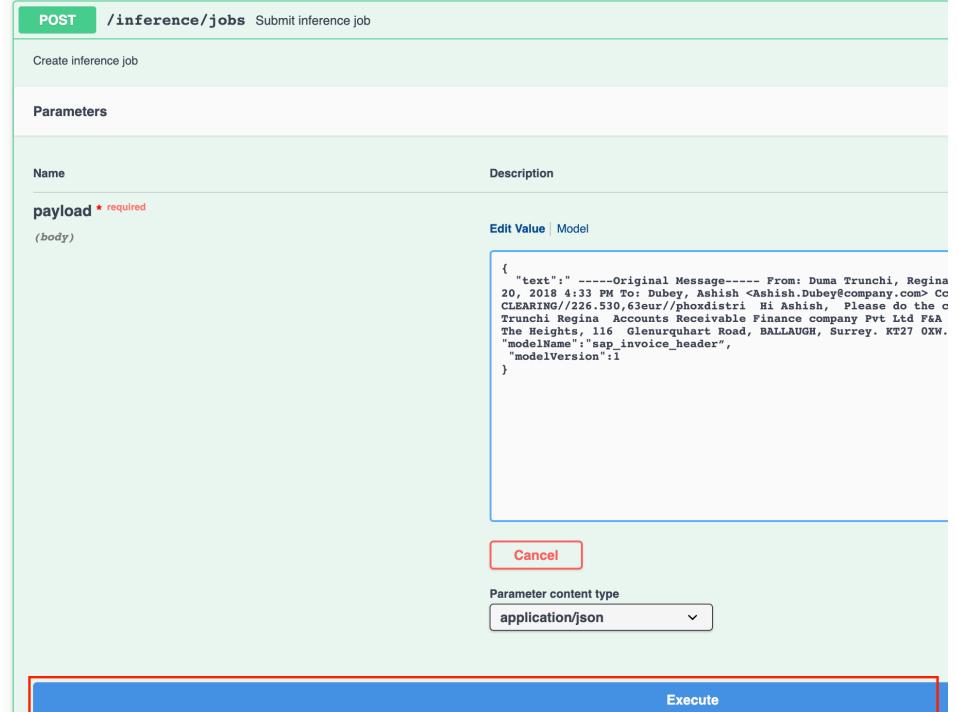
5.2 Inference with sap_invoice_header

Follow these steps to extract entities with the sap_invoice_header model

5.2.1 Submit the inference job for sap_invoice_header model

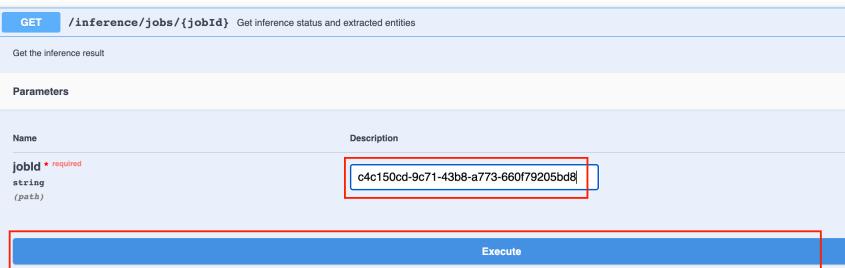
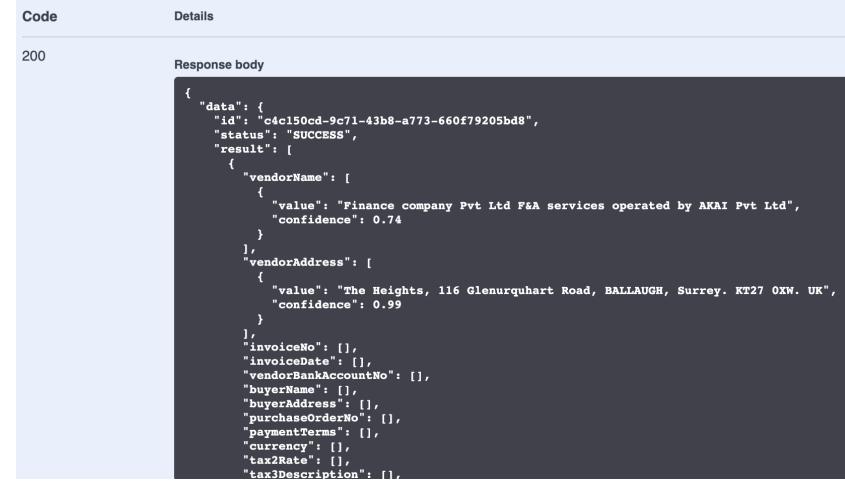
| Explanation | Screenshot |
|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Click the endpoint POST /inference/jobs, under Inference to expand it.</p> | <p>Inference Inference Job APIs : Trigger inference job and get extracted entities</p>  <p>POST /inference/jobs Submit inference job</p> <p>GET /inference/jobs/{jobId} Get inference status and extracted entities</p> |
| <p>2. Click on Try it out</p> |  <p>POST /inference/jobs Submit inference job</p> <p>Create inference job</p> <p>Parameters</p> <p>Name Description</p> <p>payload * required (body)</p> <p>Example Value Model</p> <pre>{ "text": "Hello, I would like to know the status of the invoice 456789. Regards, John", "modelName": "sap_email_business_entity", "modelVersion": 1 }</pre> <p>Parameter content type</p> <p>application/json</p> |

| Explanation | Screenshot |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>3. In payload, enter the text you want to extract named entities from, modelName and modelVersion. In this exercise you can use the following</p> <pre data-bbox="83 566 567 1210" style="background-color: #f0f0f0; padding: 10px;"> JSON { "text": "-----Original Message----- From: Duma Trunchi, Regina <DumaTrunchi@company.com> Sent: Thursday, December 20, 2018 4:33 PM To: Dubey, Ashish <Ashish.Dubey@company.com> Cc: Grc, Sony <grcsony@eu.company.com> Subject: CLEARING//226.530,63eur//phoxdistri Hi Ashish, Please do the clearing as per the attachment. Thank you, Duma-Trunchi Regina Accounts Receivable Finance company Pvt Ltd F&A services operated by AKAI Pvt Ltd Registered office: The Heights, 116 Glenurquhart Road, BALLAUGH, Surrey. KT27 0XW. UK Registered Company Number: 2522874", "modelName": "sap_invoice_header", "modelVersion": 1 } </pre> |  <p>The screenshot shows a POST request to the '/inference/jobs' endpoint. The 'payload' field contains the following JSON:</p> <pre data-bbox="975 650 1563 756"> { "text": "-----Original Message----- From: Duma Trunchi, Regina <DumaTrunchi@company.com> Sent: Thursday, December 20, 2018 4:33 PM To: Dubey, Ashish <Ashish.Dubey@company.com> Cc: Grc, Sony <grcsony@eu.company.com> Subject: CLEARING//226.530,63eur//phoxdistri Hi Ashish, Please do the clearing as per the attachment. Thank you, Duma-Trunchi Regina Accounts Receivable Finance company Pvt Ltd F&A services operated by AKAI Pvt Ltd Registered office: The Heights, 116 Glenurquhart Road, BALLAUGH, Surrey. KT27 0XW. UK Registered Company Number: 2522874", "modelName": "sap_invoice_header", "modelVersion": 1 } </pre> |

| Explanation | Screenshot | | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4. Click Execute |  <pre> POST /inference/jobs Submit inference job Create inference job Parameters Name Description payload * required (body) Edit Value Model { "text": "-----Original Message----- From: Duma Trunchi, Regina 20, 2018 4:33 PM To: Dubey, Ashish <Ashish.Dubey@company.com> Cc CLEARING//226.530.63eur//phoxdistri Hi Ashish, Please do the c Trunchi, Regina Accounts Receivable Finance company Pvt Ltd F&A The Heights, 116 Glenurquhart Road, BALLLAUGH, Surrey. KT27 0XW. "modelName": "sap_invoice_header", "modelVersion": 1 } </pre> <p>Cancel</p> <p>Parameter content type application/json</p> <p>Execute</p> | | | | |
| 5. Verify that you get a response code of 202 . This indicates that your inference job has been successfully submitted. Copy the id from the response body to see result of the extraction in the next step. | <table border="1"> <thead> <tr> <th data-bbox="638 1100 714 1136">Code</th> <th data-bbox="714 1100 1600 1136">Details</th> </tr> </thead> <tbody> <tr> <td data-bbox="638 1136 714 1425">202</td> <td data-bbox="714 1136 1600 1425"> <p>Response body</p> <pre> { "data": { "id": "c4c150cd-9c71-43b8-a773-660f79205bd8", "status": "PENDING", "message": "Inference job has been submitted", "modelName": "sap_invoice_header", "modelVersion": 1 } } </pre> </td></tr> </tbody> </table> | Code | Details | 202 | <p>Response body</p> <pre> { "data": { "id": "c4c150cd-9c71-43b8-a773-660f79205bd8", "status": "PENDING", "message": "Inference job has been submitted", "modelName": "sap_invoice_header", "modelVersion": 1 } } </pre> |
| Code | Details | | | | |
| 202 | <p>Response body</p> <pre> { "data": { "id": "c4c150cd-9c71-43b8-a773-660f79205bd8", "status": "PENDING", "message": "Inference job has been submitted", "modelName": "sap_invoice_header", "modelVersion": 1 } } </pre> | | | | |

5.2.2 Get the inference results for sap_invoice_header model

Follow these steps to see the text extraction results and the confidence level of the sap_invoice_header model

| Explanation | Screenshot | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|---------------------------------------|--------------------------------------|
| <p>1. Click the endpoint GET /inference/jobs/{jobId}, under Inference to expand it.</p> |  <p>Inference Inference Job APIs : Trigger inference job and get extracted entities</p> <p>POST /inference/jobs Submit inference job</p> <p>GET /inference/jobs/{jobId} Get inference status and extracted entities</p> | | | | |
| <p>2. Click on Try it out. For the jobId field, enter the id copied in previous step. Click on Execute.</p> |  <p>Get the inference result</p> <p>Parameters</p> <table border="1"> <tr> <td>Name</td> <td>Description</td> </tr> <tr> <td>jobId * required string (patch)</td> <td>c4c150cd-9c71-43b8-a773-660f79205bd8</td> </tr> </table> <p>Execute</p> | Name | Description | jobId * required string (patch) | c4c150cd-9c71-43b8-a773-660f79205bd8 |
| Name | Description | | | | |
| jobId * required string (patch) | c4c150cd-9c71-43b8-a773-660f79205bd8 | | | | |
| <p>3. Verify that you get a response of 200. In the response, you will find the prediction for the extracted entities. The prediction is made with a probability indicated by the confidence field which represents how certain the model is about the value provided. A confidence of 1 means that the model is 100% sure about its prediction.</p> |  <p>Code: 200</p> <p>Details</p> <p>Response body</p> <pre>{ "data": { "id": "c4c150cd-9c71-43b8-a773-660f79205bd8", "status": "SUCCESS", "result": [{ "vendorName": [{ "value": "Finance company Pvt Ltd F&A services operated by AKAI Pvt Ltd", "confidence": 0.74 }], "vendorAddress": [{ "value": "The Heights, 116 Glenurquhart Road, BALLAUGH, Surrey. KT27 0XW. UK", "confidence": 0.99 }], "invoiceNo": [], "invoiceDate": [], "vendorBankAccountNo": [], "buyerName": [], "buyerAddress": [], "purchaseOrderNo": [], "paymentTerms": [], "currency": [], "taxRate": [], "taxDescription": [] }] } }</pre> | | | | |

Optional exercise

You can also use the following **payload** example with the **sap_invoice_header** model:

| JSON |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| { "text":"Order number 12345678 Order type Sales Force Order abcdef Date 01/01/2001 Customer number 9876543 Customer service 123/ 456 6789 E-mail eshop@gmail.com Your Reference: Order receipt confirmation Customer address 508 W. St Margarets St. Brooklyn, NY 11228 Billing address 508 W. St Margarets St. Brooklyn, NY 11228 Ordered by Fenton Moon Shipping type: UPS 2nd Day Air PM Terms of payment: 30 Days Net due Your message: Item Material Description Qty. Price per Unit Net steel gray / Length 12 mm / 1 35.00 35.00 Gross Amount USD 35.00 Freight/ packaging USD 15.00 Tax 2 % USD 1 Tax 4 % USD 2 Total amount USD 53", "modelName":"sap_invoice_header", "modelVersion":1 } |

www.sap.com/contactsap

© 2020 SAP SE or an SAP affiliate company. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP SE or an SAP affiliate company.

The information contained herein may be changed without prior notice. Some software products marketed by SAP SE and its distributors contain proprietary software components of other software vendors. National product specifications may vary.

These materials are provided by SAP SE or an SAP affiliate company for informational purposes only, without representation or warranty of any kind, and SAP or its affiliated companies shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP or SAP affiliate company products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.

In particular, SAP SE or its affiliated companies have no obligation to pursue any course of business outlined in this document or any related presentation, or to develop or release any functionality mentioned therein. This document, or any related presentation, and SAP SE's or its affiliated companies' strategy and possible future developments, products, and/or platform directions and functionality are all subject to change and may be changed by SAP SE or its affiliated companies at any time for any reason without notice. The information in this document is not a commitment, promise, or legal obligation to deliver any material, code, or functionality. All forward-looking statements are subject to various risks and uncertainties that could cause actual results to differ materially from expectations. Readers are cautioned not to place undue reliance on these forward-looking statements, and they should not be relied upon in making purchasing decisions.

SAP and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP SE (or an SAP affiliate company) in Germany and other countries. All other product and service names mentioned are the trademarks of their respective companies. See www.sap.com/copyright for additional trademark information and notices.