



Configuration Guide - SAP Intelligent Clinical Supply Management - Example Integration with IRT

December 2025

Table of Contents

Document History	3
1. Purpose.....	3
2. Prerequisites.....	3
2.1 SAP Cloud Integration	3
2.2 SAP Event Mesh	3
3. Steps in SAP S/4HANA	4
3.1 Configure Mapping Rules for Inbound and Outbound Interfaces	4
3.2 Configure Enterprise Event Channel	4
3.3 Configure Kit Status Change Tracking	4
3.4 Set Up the Cloud Connector.....	5
3.4.1 Install the Cloud Connector	5
3.4.2 Configure Subaccounts in the Cloud Connector	5
3.4.3 Configuring Access Control	7
3.4.4 Configure User Authentication Against On-Premise Systems	9
4. Steps in SAP Business Technology Platform	9
4.1 Subscriptions in the BTP Subaccount.....	9
4.2 Activate Capabilities in Cloud Integration Suite	9
5. Integration Packages	10
6. Integration Configuration.....	10
6.1 Steps in SAP Cloud Integration.....	10
6.2 Configure Credentials.....	10
6.1.1 User Credentials for SAP S/4HANA	10
6.1.2 User Credentials for SAP Event Mesh	11
6.3 Access Integration Content	11
6.4 Configure Integration Flows.....	12
6.5 Deploy Integration Content	12
7 Integration Scenarios	12
7.1 Inventory Report (v2 version)	12
7.2 Inventory Study Report	17
7.3 Inventory Report for IRT Provider	21
7.4 Shipment Request and Confirmation.....	24
7.5 Dispatch Advice	31
7.6 Receiving Advice.....	34
7.7 Dispensing Advice	37

7.8	Kit Status Change (Inbound)	40
7.9	Kit Status Change (Outbound)	43
7.10	Cloud Study API	46
7.11	Cloud IRTActuals API	47
7.12	Cloud IRTMaster API	48
8	Glossary.....	49

Document History

Version	Date	Change
1.0	2025-12-02	Initial published version

1. Purpose

This document describes an example integration of SAP Intelligent Clinical Supply Management (ICSM) with any IRT system using GS1 Clinical Trials Standard. This includes the various interfaces for inventory report and shipment processes. For further details of the interfaces, see [IRT Interfaces](#).

The iFlows described use SAP Event Mesh to consume the events trigger by SAP Intelligent Clinical Supply Management for different processes.

2. Prerequisites

You have an SAP S/4HANA On-Premise 2022 system or higher.

2.1 SAP Cloud Integration

You have subscribed to the SAP Integration Suite service in BTP.

2.2 SAP Event Mesh

You have subscribed to SAP Event Mesh service in BTP.

3. Steps in SAP S/4HANA

3.1 Configure Mapping Rules for Inbound and Outbound Interfaces

Maintain mappings for Inbound and Outbound Deliveries in the service mapping tool SMT:

In Customizing for Life Sciences, go to **SAP Intelligent Clinical Supply Management > Master Data > Validations and Mapping > Configure Mapping Rules for Inbound and Outbound Interfaces**.

- You have maintained Shipment Request Type Code and mapped this Type Code to Sales Order Type under **Shipment Request Type Code** option.
- You have maintained an Integration profile and assigned mapping steps to the integration profile under **Integration Profile** option. The integration profile determines how mapping is performed for field-level transformations.
- You have assigned the integration profile to the relevant sales order types under **Assigning Integ. Profile to SO Type** for Shipment Request and Confirmation.
- You have maintained process types and maintained movement type/Reason under the **Process Types** option. This is required for posting of material documents for Receiving Advice, Dispensing Advice and Kit status Change.
- You have assigned the integration profile to the relevant process types (defined in step d above) under **Assigning Integration Profile to Process Type** option.
- You have maintained kit status change codes under **Status Change Codes** option. This is required for mapping the kit status change code from GS1 to SAP Intelligent Clinical Supply Management.
- You have assigned integration profile to the kit status change API under **Assigning Integration Profile to MedKit Change API** option.

For further details, see [SMT Mapping for Inbound and Outbound Deliveries](#).

3.2 Configure Enterprise Event Channel

1. You have subscribed to SAP Event Mesh and created an instance in SAP Business Technology Platform (BTP). For further information, see [SAP Event Mesh](#).
2. You have created a new channel in SAP S/4HANA and activated for the SAP Event Mesh instance created in step 1 above.
3. You have maintained outbound event topics. See also [Manage Queues](#).

3.3 Configure Kit Status Change Tracking

This is relevant for outbound interfaces. When the medication kit status changes in SAP Intelligent Clinical Supply Management, an event should be triggered.

Maintain the medication kit fields to be tracked for changes in the Customizing activity **Life Sciences > SAP Intelligent Clinical Supply Management > Master Data > Validations and Mapping > MedKit Fields to be Tracked for Changes**.

3.4 Set Up the Cloud Connector

You need to configure a cloud connector that acts as a reverse invoke proxy between an on-premise network and **SAP BTP**. The cloud connector is a part of the standard **SAP Cloud Integration** service and serves as a link between the **SAP BTP** and on-premise system such as SAP S/4HANA.

All integration scenarios involving SAP Intelligent Clinical Supply Management use a cloud connector.

3.4.1 Install the Cloud Connector

The installation files for cloud connector are located at [SAP Development Tools](#).

For all prerequisites and instructions for installing cloud connectors, see the [SAP BTP Connectivity](#) documentation.

After the installation, an **Administrator** user account is automatically created. The initial password is managed. You will be required to change the initial password on your first login.

3.4.2 Configure Subaccounts in the Cloud Connector

For each SAP BTP subaccount that needs to be connected with an on-premises system, a tenant/customer subaccount must be configured in the cloud connector.

Prerequisites

7

1. You need a subaccount user account to establish the connection between the SAP BTP subaccount and the cloud connector. See also [Managing Subaccounts](#).
2. You have configured an HTTP proxy for the cloud connector to reach the internet. Also, the proxy server must support SSL communication.

Note:

With the cloud connector installed, you can configure the first subaccount and proxy. To do this, on the initial configuration page look for the proxy settings in **Connector Configuration**.

Context

For the integration scenarios, configure the Cloud Foundry subaccount for SAP Cloud Integration in the cloud connector.

Procedure

1. In a web browser, log on to the cloud connector as Administrator by using `https://<hostname>:<port>` as Administrator.

Note:

<hostname> is the hostname of the machine on which the cloud connector is installed. If you access the cloud connector locally from the same machine, you can just enter localhost. For *<port>*, enter the port that you specified during the installation.

The initial password for Administrator is manage.

2. Choose **Connector Add Subaccount**.
3. In the **Add Subaccount** window, enter the following information:

Field	Description
Region	Select the data center in which the relevant SAP BTP subaccount is hosted.
Subaccount	▪ [Cloud Foundry]: Enter the subaccount ID. Note You can find the subaccount ID or technical name in the subaccount list in the global account or on the overview page of each subaccount.
Subaccount User	[Cloud Foundry]: Enter the email address a subaccount user uses to log in the SAP BTP cockpit.
Password	Enter the password that the subaccount user uses to log in the SAP BTP cockpit
Location ID	If you use more than one cloud connector to connect to the same subaccount, define a unique location ID per cloud connector for the subaccount.

4. Save the subaccount.
5. On the **Subaccount Dashboard**, in the **Actions** column, choose  (*Connect this subaccount*) for this subaccount.

Results

The status of the subaccount is shown as **Connected** in the cloud connector.

In addition, you can verify the connection status in the SAP Business Technology Platform cockpit for your subaccount (**Connectivity Cloud Connectors**). The status should also be shown as **Connected**.

3.4.3 Configuring Access Control

Expose the on-premise systems to the cloud and specify the resources accessible from the cloud.

Context

To expose an on-premise system, create a virtual system in the cloud connector and map it to an internal on-premise system. When making the configuration, you need to define a virtual host and a virtual port for the virtual system. The virtual host and port will be used for identifying the on-premise systems when creating destinations in the corresponding SAP Business Technology Platform subaccount.

In addition, you must specify the resources that are accessible from the cloud. This step is required even if you don't limit access to resources. In other words, you need to explicitly specify that all resources are accessible.

Procedure

1. In the cloud connector administration console, choose **<Subaccount> Cloud To On-Premise ACCESS CONTROL**.
2. In the **Mapping Virtual To Internal System** section, choose **⊕ (Add)**.
A wizard appears, guiding you through all the required settings.
3. In the wizard, enter the information according to the protocol used for communication and the specific on-premise system.
 - To communicate with SAP S/4HANA over the RFC protocol, follow the instructions at [Configure Access Control \(RFC\)](#).

See the table below for more details:

On-Premise System	Back-end Type	Principal Type
SAP S/4HANA	ABAP System	None

Note:

The virtual host and virtual port can be freely defined. However, you cannot edit the virtual host or virtual port after you've added the mapping.

4. To specify resources that are accessible from the cloud, add the resources for the system.

You can find detailed instructions at [Configure Accessible Resources](#). In addition, for the required configurations for each integration scenario, see the following table:

All	<URL Path>	Enter </sap>
	<Enabled>	Select the checkbox
	<Access Policy>	Select <Path and all sub-paths>

Results

In the SAP Business Technology Platform cockpit for the corresponding subaccount (**Connectivity Cloud Connectors Exposed Back-End Systems**), you can find the accessible resource configuration.

3.4.4 Configure User Authentication Against On-Premise Systems

To secure communications with an on-premise system, apply the user authentication method.

Context

Scenario	Authentication Method
All	Basic authentication

See also [Authenticating Users against On-Premise Systems](#).

4. Steps in SAP Business Technology Platform

4.1 Subscriptions in the BTP Subaccount

To use the cloud integration flows (iFlows), subscribe to the SAP Cloud Integration Suite in the BTP subaccount.

Procedure

1. Subscribe to the **SAP Cloud Integration** suite. [Subscribing and Configuring Initial Access to SAP Integration Suite](#)
2. Subscribe to the **Event Mesh** service by performing the configuration described in the [SAP Event Mesh](#) section of the admin guide.

4.2 Activate Capabilities in Cloud Integration Suite

Access the Integration Suite Application from the Instances and Subscriptions in the sub account.

Add and activate capabilities for Integration Suite as per the section, [Provisioning the Capabilities](#)

5. Integration Packages

The package **SAP Intelligent Clinical Supply Management Sample Integration with IRT** has been published on the **SAP API Business Hub** and is available in the **Discover** section of SAP Cloud Integration Suite.

6. Integration Configuration

6.1 Steps in SAP Cloud Integration

1. You have access to the **SAP Cloud Integration** web UI account.
2. You have access to the iFlows.

6.2 Configure Credentials

You need to configure user credentials to authenticate your user and fetch the JWT token needed to access the APIs hosted on SAP BTP.

You must create the following credentials:

6.1.1 User Credentials for SAP S/4HANA

1. In the **SAP Integration Suite**, choose **Cloud Integration**.
2. In the navigation tree, choose **Overview**.
3. Select the **Security Material** tile in the **Manage Security** section.
4. Enter the following details in the **Create User Credentials** dialog:

Property	Value
Name	<preferred name>
Description	<preferred description>
Type	User Credentials
User	<SAP S/4 HANA User Name>
Password	<SAP S/4 HANA Password>
Retype Password	<SAP S/4 HANA Password>

5. Select **Deploy**.

Note:

The following prerequisites must be fulfilled for this step:

- The user is enabled for the SAP S/4HANA system. One technical user can be created in the SAP Intelligent Clinical Supply Management system. The technical user requires read and write access to call the relevant APIs.
- The user is authorized to read and modify data in SAP Intelligent Clinical Supply Management.

6.1.2 User Credentials for SAP Event Mesh

- In **SAP Integration Suite**, choose **Cloud Integration**.
- In the navigation tree, choose **Overview**.
- Select the **Security Material** tile in the **Manage Security** section.
- Choose **Create** and select **OAuth2 Credentials**.
- Enter the following details in the **Add OAuth2 Credential** dialog:

Property	Value
Name	<preferred name>
Grant Type	Client Credentials
Description	<preferred description>
Token Service URL	<token URL for Event Mesh service>
Client ID	<client ID for Event Mesh service>
Client Secret	<client secret for Event Mesh service>
Client Authentication	Send as Request Header

Note:

You can get the client credentials from the service key generated for the event mesh service and the default plan. For more information, see [SAP Event Mesh](#).

6.3 Access Integration Content

To access the integration content, follow the steps below:

1. In the **SAP Integration Suite**, choose **Cloud Integration**.
2. On the **Cloud Integration** landing page, choose **Discover**.
3. Choose the integration packages mentioned in the Integration Packages section of this guide.
4. Choose **Copy**.
5. Select the **Design** tab from the side panel.
6. Perform the necessary configurations as described in subsequent sections.

6.4 Configure Integration Flows

Once you have access to the integration packages, you must configure the externalized parameters and deploy them for the integration flows.

For configuring a flow, perform the following steps:

1. Open the package.
2. Select the iFlow and choose **Configure**.
3. Configure values of the different parameters.
4. Choose **Save**.

Configuration Parameters

See section 7 for the configuration parameters per integration scenario.

6.5 Deploy Integration Content

1. Select the copied package and navigate to the **Artifacts** tab. Choose **Actions Deploy** for all the required artifacts that you want to establish integration with. The iFlow is deployed to the **SAP Business Technology Platform** integration system.
2. To check the deployment status, choose the **Monitor** tab on the side panel and verify the data in the **Manage Integration Content** section.

7 Integration Scenarios

See also [IRT scenarios](#).


Note: SAP Recommendation is to use API management Endpoint URLs for all the Inbound Message exchange from IRT vendors to ICSM.

7.1 Inventory Report (v2 version)

The following iFlows are needed for inventory report:

Process Event Mesh Data for Inventory Report

This iFlow gets the event data from messaging server and forward the message to the processing iFlow after converting payload to xml.

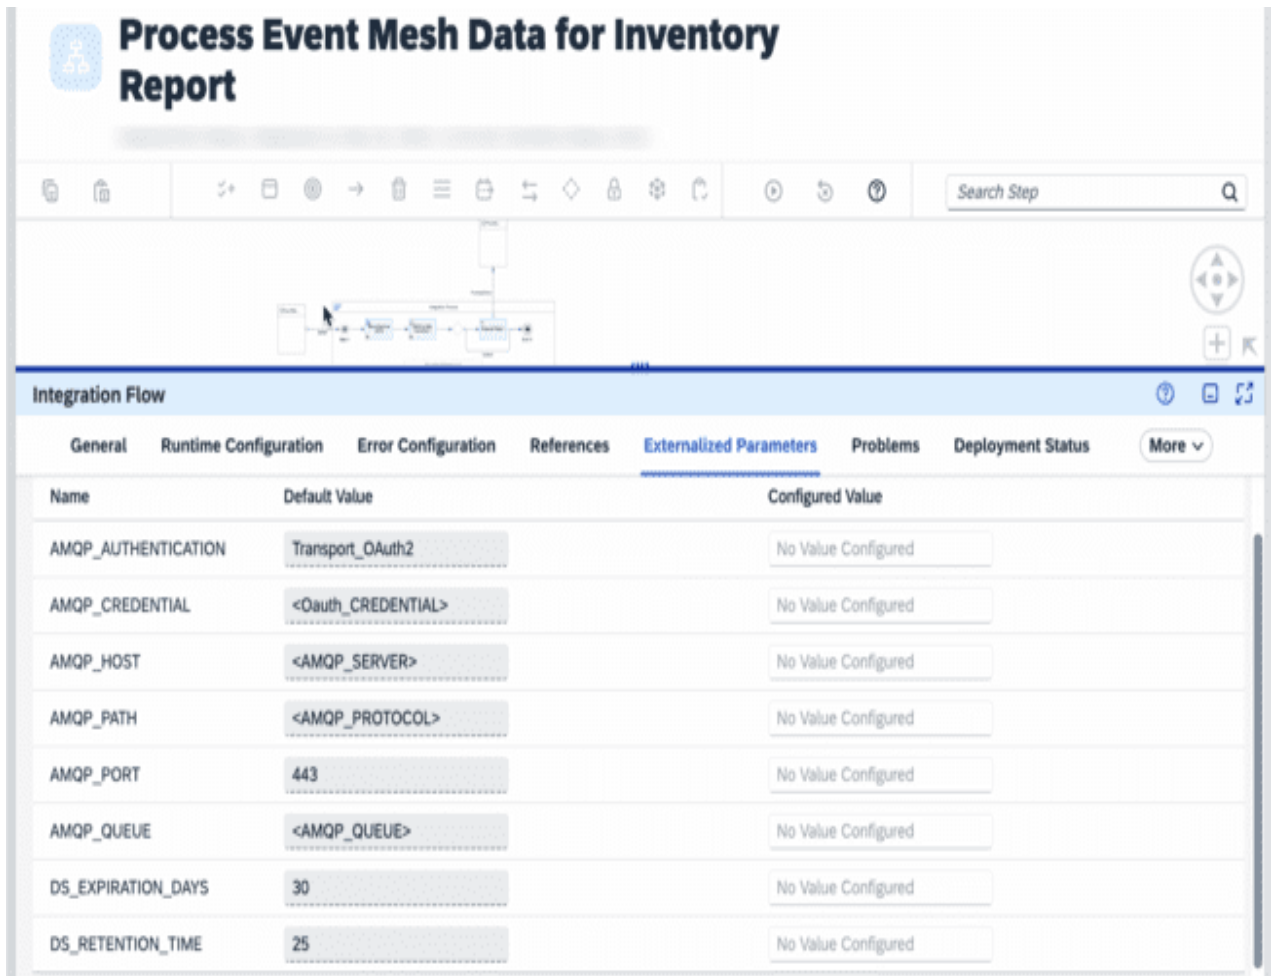

Process Event Mesh Data for Inventory Report

Integration Flow

General Runtime Configuration Error Configuration References **Externalized Parameters** Problems Deployment Status More

Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_SERVER>	No Value Configured
AMQP_PATH	<AMQP_PROTOCOL>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
DS_EXPIRATION_DAYS	30	No Value Configured
DS_RETENTION_TIME	25	No Value Configured

The following parameters need to be configured

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)

Get Inventory from SAP Intelligent Clinical Supply Management and Map to GS1

This iFlow reads the parameters from the event payload, gets the data from SAP Intelligent Clinical Supply Management and convert it to GS1 format. The final payload is put again to messaging queue.




Get Inventory from ICSM and Map to GS1

Get Inventory from ICSM and Map to GS1



Search Step

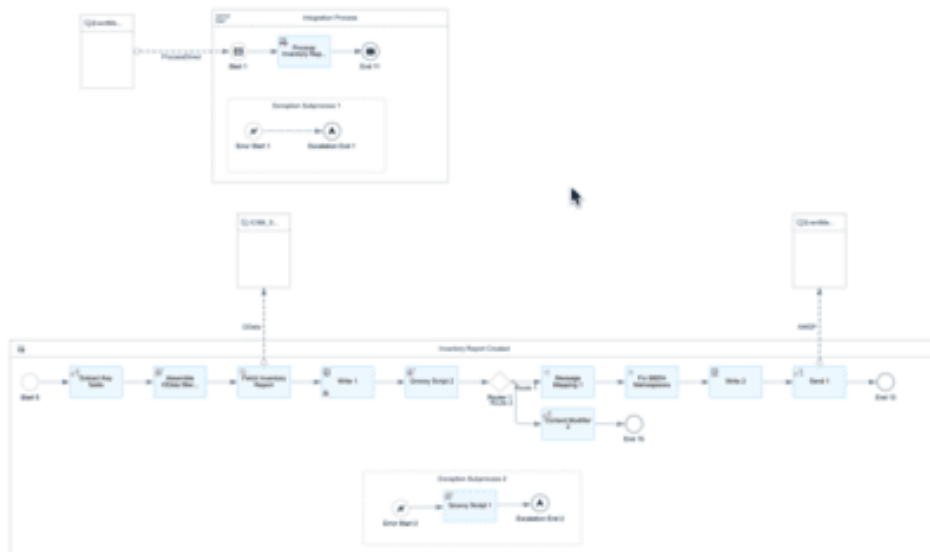

PARAMETER

PARAMETER VALUE

PARAMETER VALUE

AMQP_CREDENTIAL

Transport_OAuth2

No Value Configured

AMQP_CREDENTIAL

<AMQP_CREDENTIAL>

No Value Configured

AMQP_HOST

<AMQP_HOST>

No Value Configured

AMQP_PATH

<AMQP_PATH>

No Value Configured

AMQP_PORT

443

No Value Configured

AMQP_QUEUE

<AMQP_QUEUE>

No Value Configured

API_RESOURCE_PATH

xCTCOxI_INVENTORY_WITH_MEDNO

No Value Configured

CONNECTION_TIMEOUT

10

No Value Configured

DS_EXPIRATION_DAYS

2

No Value Configured

DS_RETENTION_TIME

30

No Value Configured

ICSM_API_ENDPOINT

<Inventory Report Service API>

No Value Configured

ICSM_AUTHENTICATION_TYPE

Basic

No Value Configured

ICSM_CREDENTIAL

<CREDENTIAL_NAME>

No Value Configured

LOCATION_ID_CC

<Location_ID>

No Value Configured

PROXY_TYPE

sapcc

No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)
ICSM_API_ENDPOINT	Inventory report API endpoint
API_RESOURCE_PATH	Inventory report resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
ICSM_CREDENTIAL	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
LOCATION_ID_CC	Cloud connector location id
PROXY_TYPE	Cloud connector proxy type

Note:

This iFlow is also using the message mapping '**Map Inventory Data ICSM to GS1**' and value mapping '**Value Mapping ICSM to GS1 Status Code**' to map the medication kit status in SAP Intelligent Clinical Supply Management to the GS1 relevant status.

This iFlow is used to send the inventory payload to IRT.

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION_TYPE	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)
ICSM_API_ENDPOINT	Inventory report API endpoint
API_RESOURCE_PATH	Inventory report resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
ICSM_CREDENTIAL	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
LOCATION_ID_CC	Cloud connector location id
PROXY_TYPE	Cloud connector proxy type

7.2 Inventory Study Report


The following iFlows are needed for the inventory study report:

Process Event Mesh Data for Inventory Report Study

This iFlow gets the event data from messaging server and forward the message to the processing iFlow after converting payload to xml.



Process Event Mesh Data for Inventory Report Study

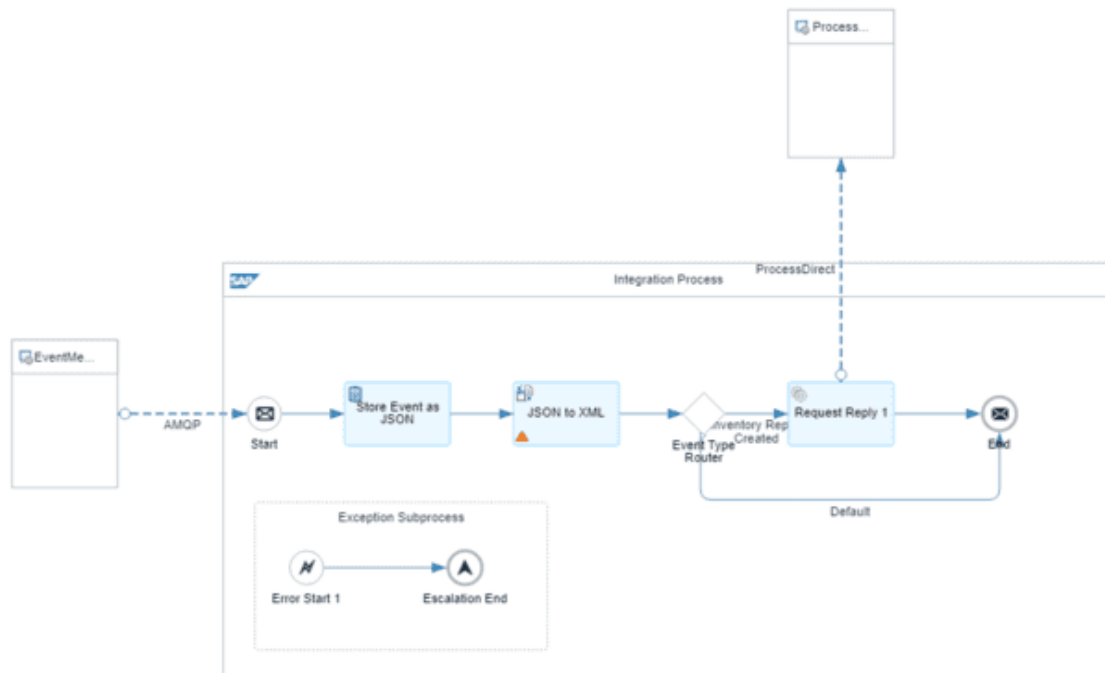


Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_QAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	enterprise-messaging-messaging-gateway.cf...	No Value Configured
AMQP_PART	443	No Value Configured
AMQP_PATH	/protocols/amqp10ws	No Value Configured
AMQP_PROXY_TYPE	none	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)

Get Inventory Study from ICSM to GS1

This iFlow reads the parameters from the event payload, gets the data from SAP Intelligent Clinical Supply Management and convert it to GS1 format. The final payload is put again to messaging queue.

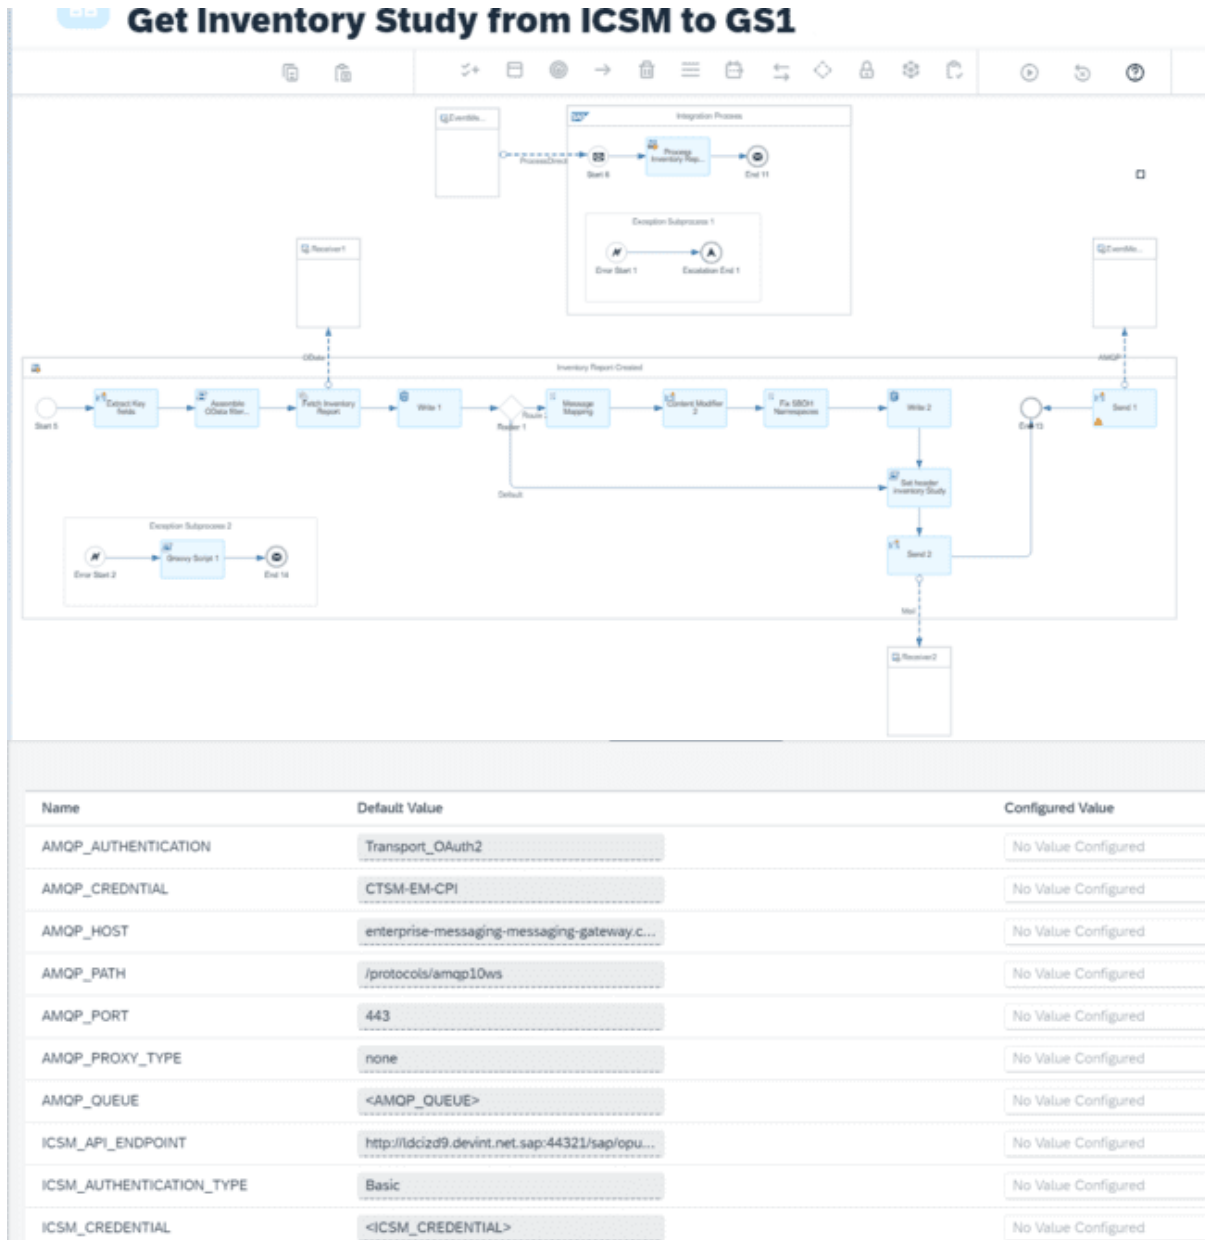

The following parameters must be configured:


Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server

AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)
ICSM_API_ENDPOINT	Inventory report API endpoint
API_RESOURCE_PATH	Inventory report resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
ICSM_CREDENTIAL	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
LOCATION_ID_CC	Cloud connector location id
PROXY_TYPE	Cloud connector proxy type

Note:

This iFlow also uses the message mapping '**M Map Inventory Study Data from SAP Intelligent Clinical Supply Management to GS1**' and value mapping '**Value Mapping ICSM to GS1 Status Code**' to map the kit status to the GS1 relevant status.

This iFlow is used to send the inventory payload to IRT.

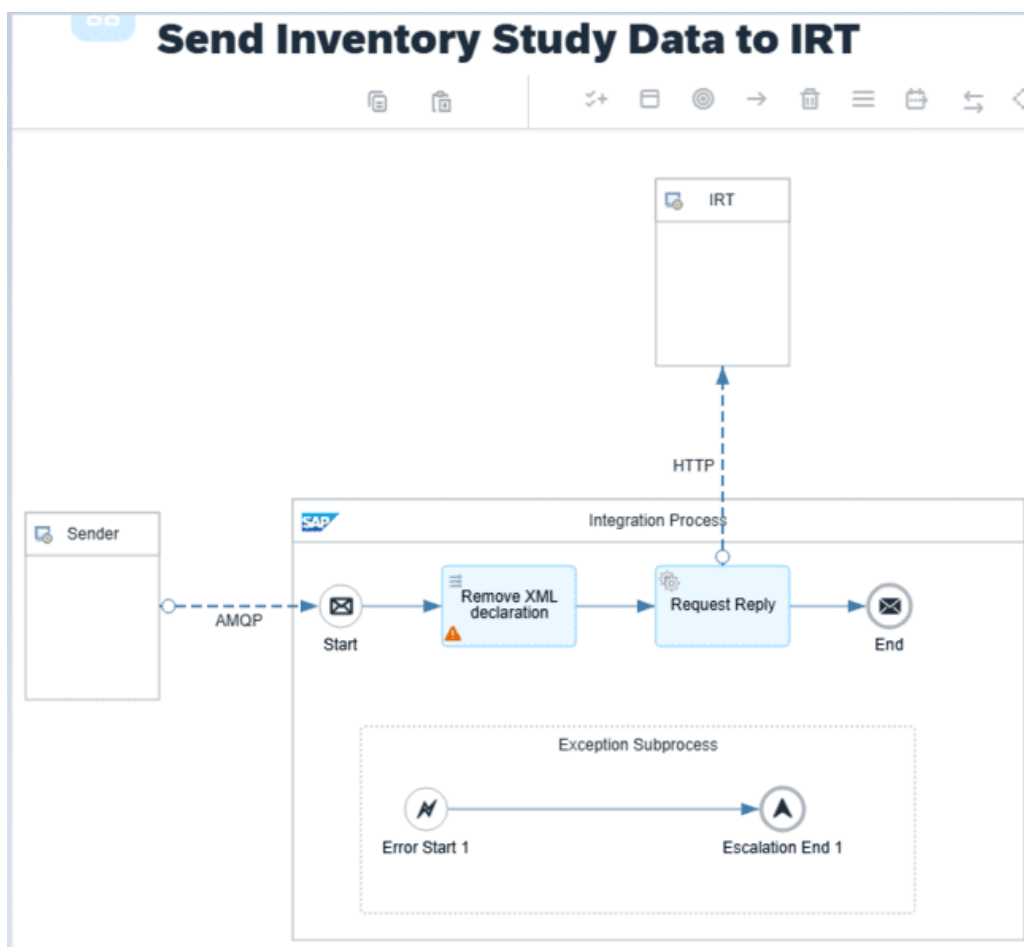

Name	Default Value	Configured Value
AMQP_AUTHENTICATION_TYPE	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<AMQP_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
CONNECTION_TIMEOUT	600000	No Value Configured
DELIVERY_STATUS	REJECTED	No Value Configured
EVENT_MESH_QUEUE	<AMQP_QUEUE>	No Value Configured
IRT_AUTHENTICATION	OAuth2 Client Credentials	No Value Configured
IRT_CREDENTIAL	OAUTH_CRED	No Value Configured
IRT_ENDPOINT	https://test.com	No Value Configured
MaxNumberOfPrefetchedMessages	5	No Value Configured
NumberOfConcurrentProcesses	1	No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION_TYPE	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)
ICSM_API_ENDPOINT	Inventory report API endpoint
API_RESOURCE_PATH	Inventory report resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
ICSM_CREDENTIAL	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
LOCATION_ID_CC	Cloud connector location id
PROXY_TYPE	Cloud connector proxy type


7.3 Inventory Report for IRT Provider

This Inventory Report is based on IRT identifier API and is used to provide information about a list of serialized medication kits that are available for Interactive Response Technology (IRT) System.

The following iFlows are needed for the inventory report for IRT provider:

Get Inventory for IRT Provider from ICSM to Event Mesh

This iFlow gets the event data from messaging server and forward the message to the event mesh queue after converting payload to xml.

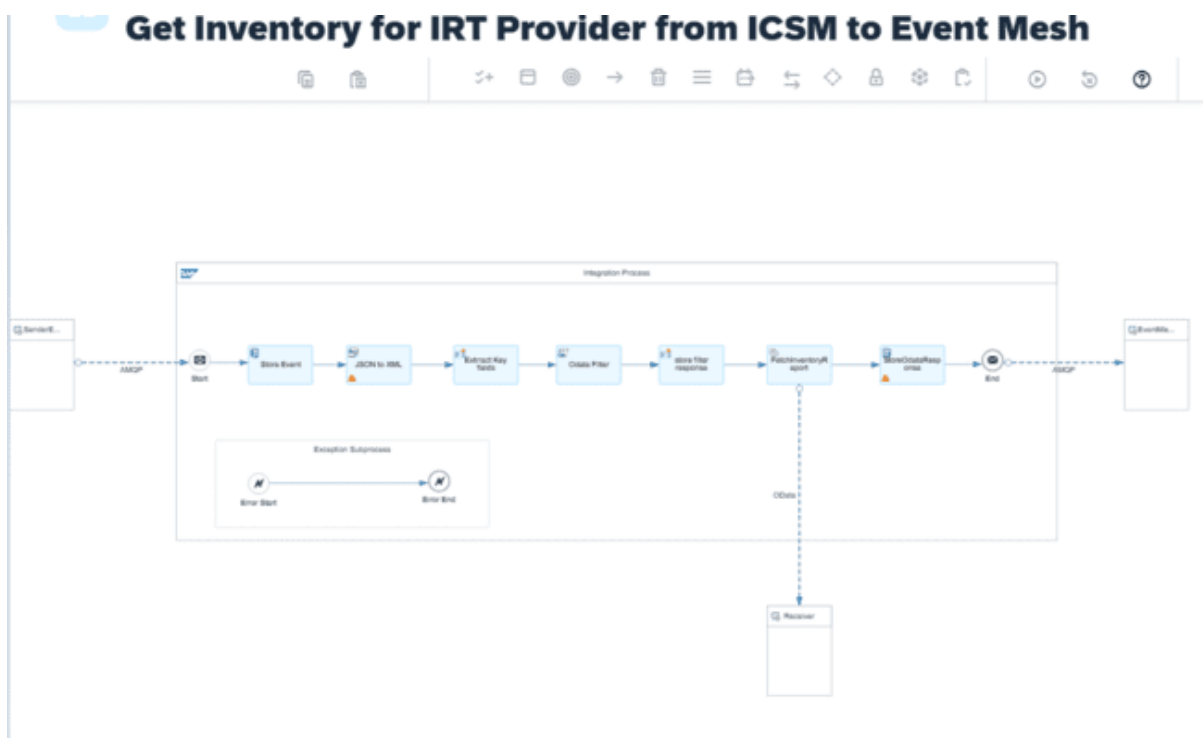

Name	Default Value	Configured Value
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_CREDENTIAL	<AMQP_CREDENTIAL>	No Value Configured
AMQP_QUEUE	<AMQP_InventoryReportProvider_...	No Value Configured
AMQP_ICSM_QUEUE	<AMQP_ICSM_QUEUE>	No Value Configured
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_ICSM_CREDENTIAL	<AMQP_ICSM_CREDENTIAL>	No Value Configured
Odata_ENDPOINT	<ICSM_API_ENDPOINT>	No Value Configured
LOCATION_ID	<LOCATION_ID>	No Value Configured


The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3

AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)

Send Inventory for IRT Provider from Event mesh to IRT

This Iflow sends the final payload stored in the event mesh queue to the Interactive Response Technology (IRT) System.

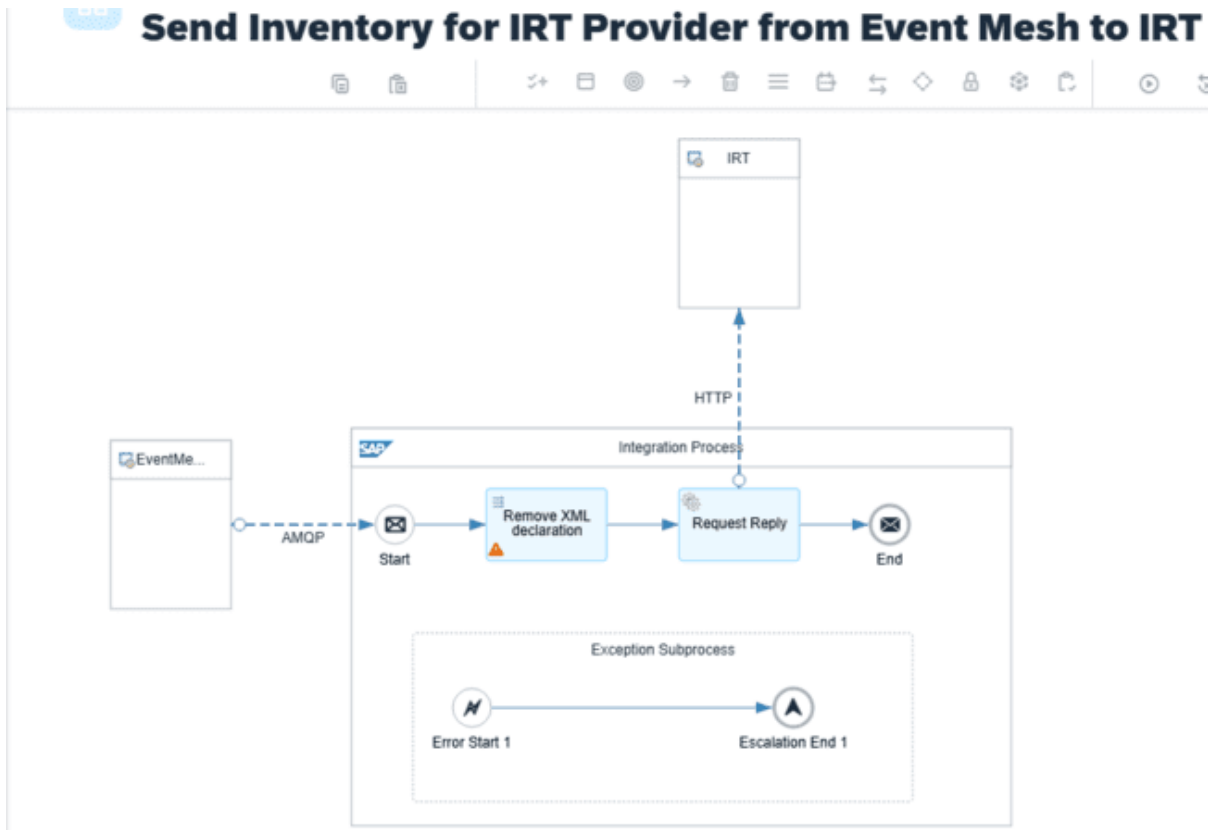

Name	Default Value	Configured Value
AMQP_PORT	443	No Value Configured
EVENT_MESH_QUEUE	<AMQP_InventoryReportProvider_...>	No Value Configured
IRT_CREDENTIAL	<IRT_CREDENTIAL>	No Value Configured
CONNECTION_TIMEOUT	600000	No Value Configured
AMQP_PATH	<AMQP_PATH_NAME>	No Value Configured
AMQP_HOST	<AMQP_HOST_NAME>	No Value Configured
MaxNumberOfPrefetchedMessages	5	No Value Configured
IRT_AUTHENTICATION	OAuth2 Client Credentials	No Value Configured
AMQP_AUTHENTICATION_TYPE	Transport_OAuth2	No Value Configured

The following parameters must be configured:


Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
DS_EXPIRATION_DAYS	Data store expiration number of days
DS_RETENTION_TIME	Data store retention time (in days)

7.4 Shipment Request and Confirmation

The following iFlows are needed for Shipment request and Confirmation:

Receive Shipment Request from IRT to Event Mesh

This iFlow gets the shipment request data from IRT and put the message payload into the event mesh queue. Simultaneously, shipment notification data is stored in the event mesh queue.

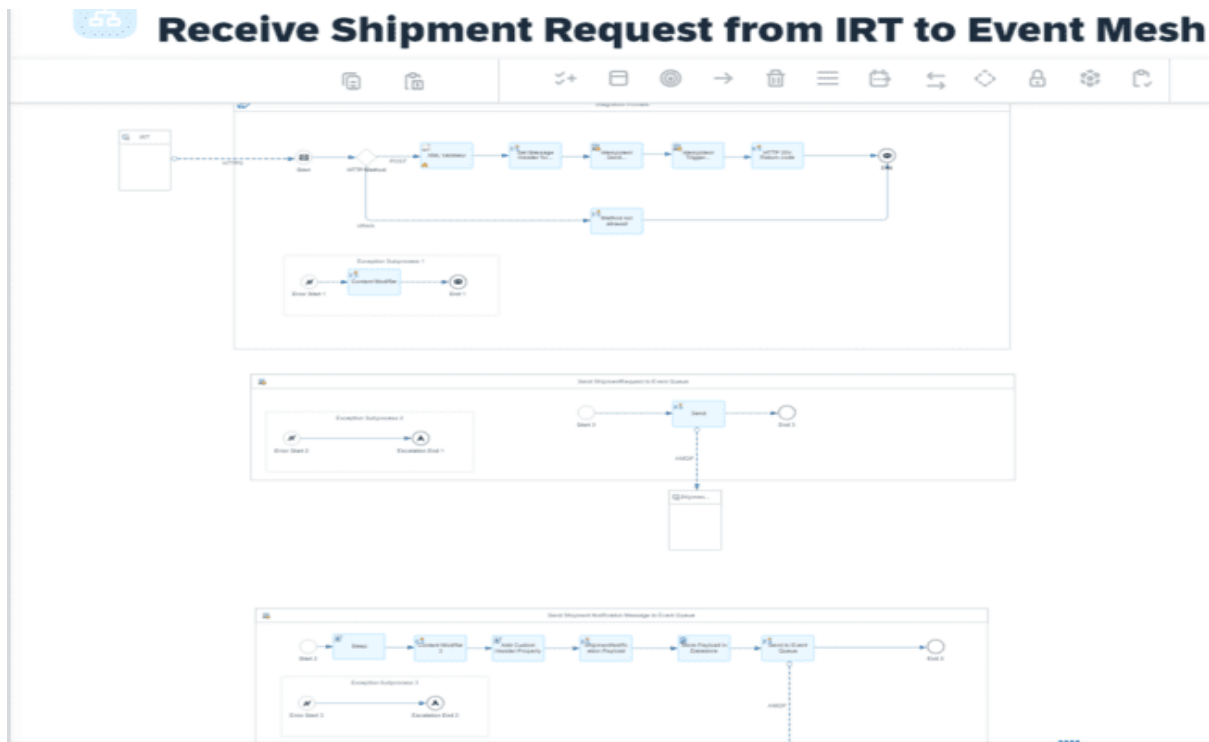


The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
AMQP_QUEUE_SHIPMENT_NOTIFICATION	Messaging Queue name for Shipment Notification
AUTHORIZATION_TYPE	Type of Authorization
SHIPMENTREQUEST_ENDPOINT	ICSM API ENDPOINT for SHIPMENT REQUEST
USERROLE	TYPE OF USERROLE

Once the shipment request is received, the below iFlow is called, and sends a shipment notification to the IRT:

Send Shipment Notification from Event Mesh to IRT

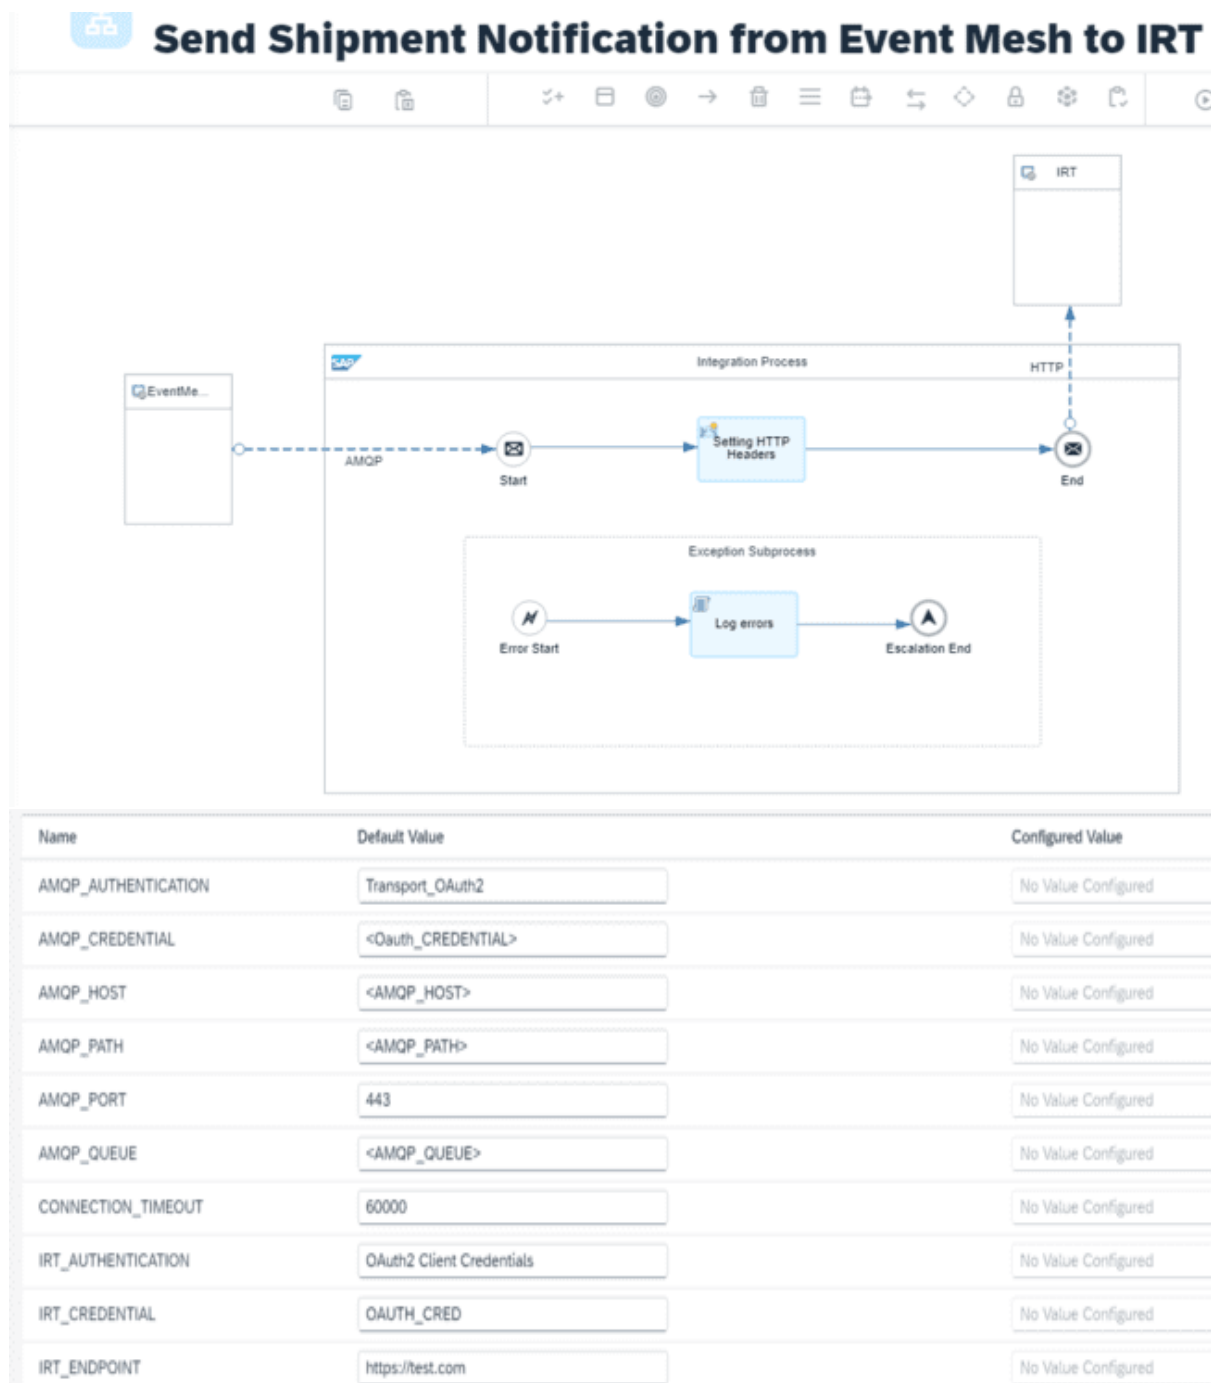


The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server

AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
IRT_AUTHENTICATION	Type of Authentication
IRT_CREDENTIAL	IRT Credentials
IRT_ENDPOINT	Endpoint of the IRT system

Process Shipment Request from Event Mesh to ICSM

This iFlow is used to process the Shipment Request data which is stored in the event mesh queue and perform the mapping transformations to convert the GS1 format into an XML format and send it into SAP Intelligent Clinical Supply Management.

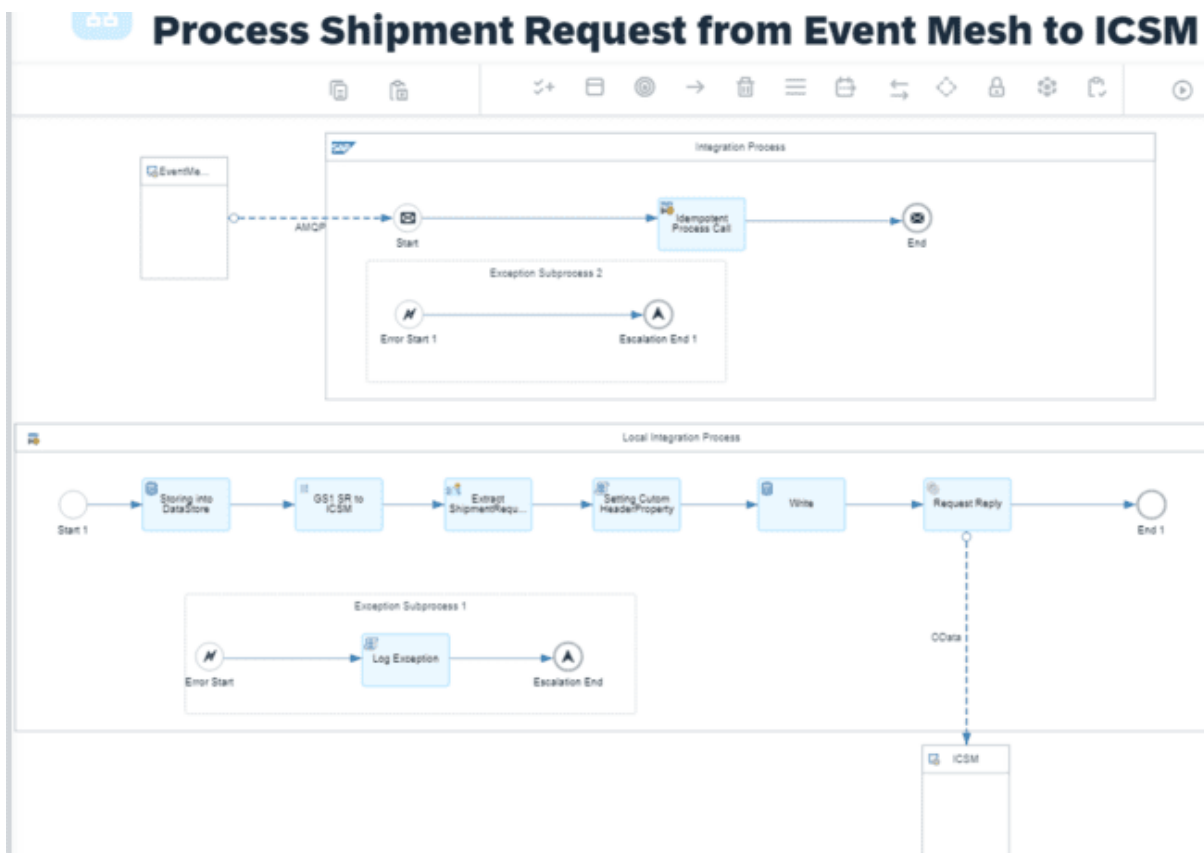

AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
API_RESOURCE_PATH	A_SalesOrder	No Value Configured
CONNECTION_TIMEOUT	1	No Value Configured
CREDENTIAL_NAME	<CREDENTIAL_NAME>	No Value Configured
expiration	30	No Value Configured
ICSM_AUTHENTICATION_TYPE	Basic	No Value Configured
Max. Number of Prefetched Messages	5	No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
EXPIRATION	Data store expiration number of days
ODATA_ENDPOINT	ICSM OData Endpoint
API_RESOURCE_PATH	Sales Order Resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
CREDENTIAL_NAME	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
PROXY_TYPE	Cloud connector proxy type


Sales Order Creation from ICSM to Event Mesh

This iFlow is used to create the Sales order in the ICSM system and convert the JSON data into XML and then convert the data into GS1 format using mapping transformations and send the data to the event mesh queue.



Sales Order Creation from ICSM to Event Mesh

Deployment Sta

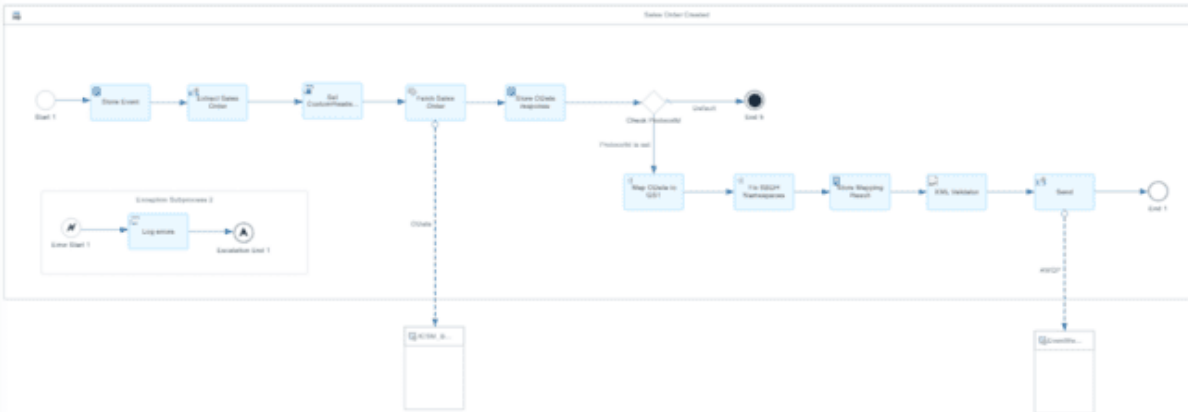

Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
API_RESOURCE_PATH	A_SalesOrder	No Value Configured
ConcurrentProcess	1	No Value Configured
CONNECTION_TIMEOUT	5	No Value Configured
CREDENTIAL_NAME	<CREDENTIAL_NAME>	No Value Configured


The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name

EXPIRATION	Data store expiration number of days
ODATA_ENDPOINT	ICSM OData Endpoint
API_RESOURCE_PATH	Sales Order Resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
CREDENTIAL_NAME	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
PROXY_TYPE	Cloud connector proxy type

Send Shipment Confirmation from Event Mesh to IRT

This iFlow is used to send the Shipment confirmation data payload from the event mesh queue to the IRT system.

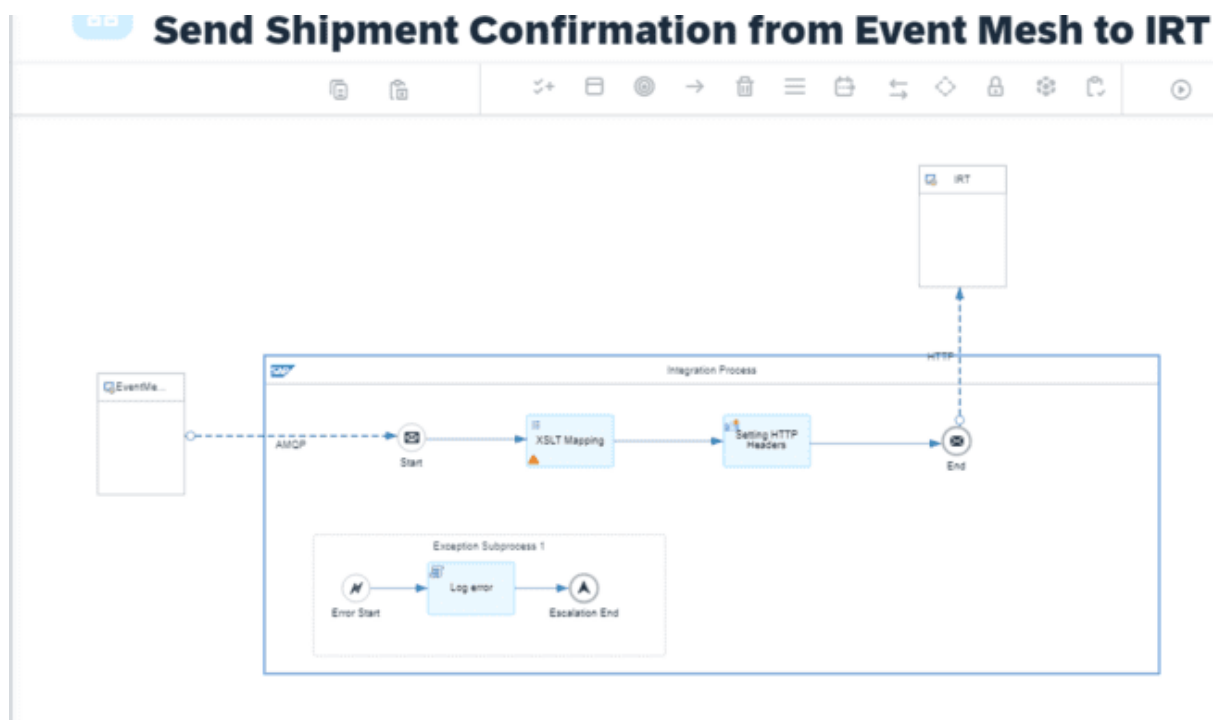

Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
IRT_AUTHENTICATION	OAuth2 Client Credentials	No Value Configured
IRT_CREDENTIAL	<OAUTH_CRED>	No Value Configured
IRT_ENDPOINT	https://test.com	No Value Configured

The following parameters must be configured:


Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
IRT_AUTHENTICATION	Type of Authentication
IRT_CREDENTIAL	IRT Credentials
IRT_ENDPOINT	Endpoint of the IRT system

7.5 Dispatch Advice

The following iFlow are needed for Dispatch Advice:

Process Outbound Delivery from ICSM to Event Mesh

This iFlow gets the Outbound Delivery data from SAP Intelligent Clinical Supply Management and stores the payload in the event mesh queue and further converts it to XML format and performs the mapping transformations to convert it into GS1 Format and then send it to the event mesh queue.

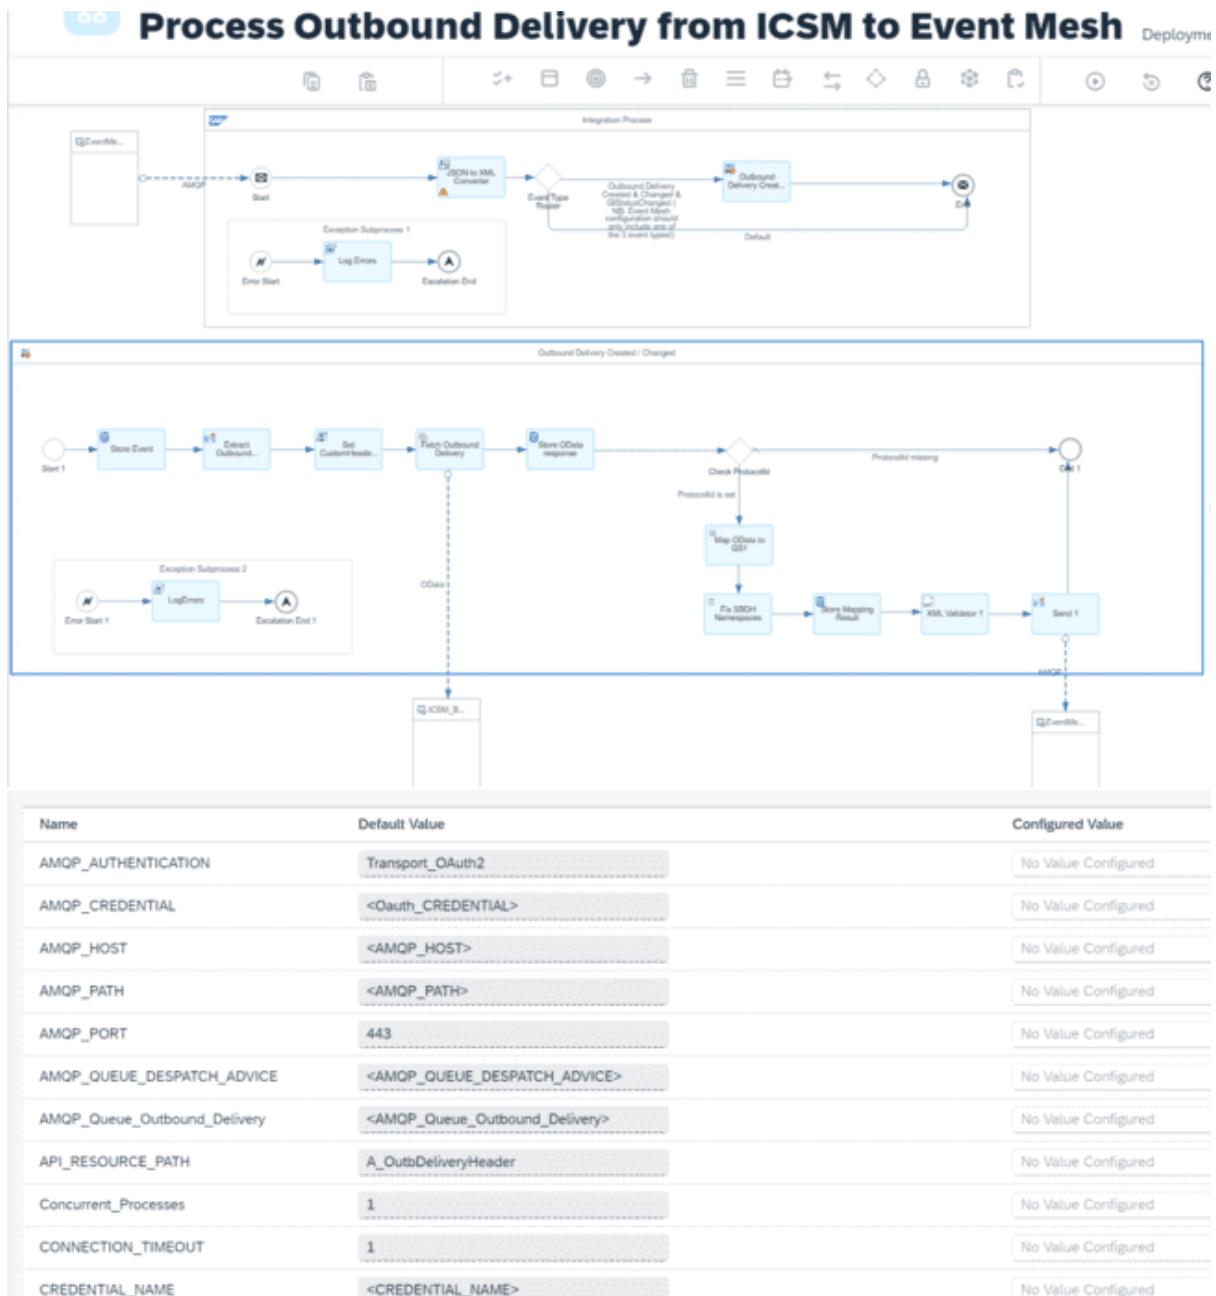


The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name

EXPIRATION	Data store expiration number of days
ODATA_ENDPOINT	ICSM OData Endpoint
API_RESOURCE_PATH	Dispatch Advice Resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
CREDENTIAL_NAME	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
PROXY_TYPE	Cloud connector proxy type
AMQP_QUEUE_DISPATCH_ADVICE	Messaging queue name for Dispatch Advice

Send Dispatch Advice from Event Mesh to IRT

This iFlow is used to send the dispatch advice information payload from the event mesh queue to the IRT system.

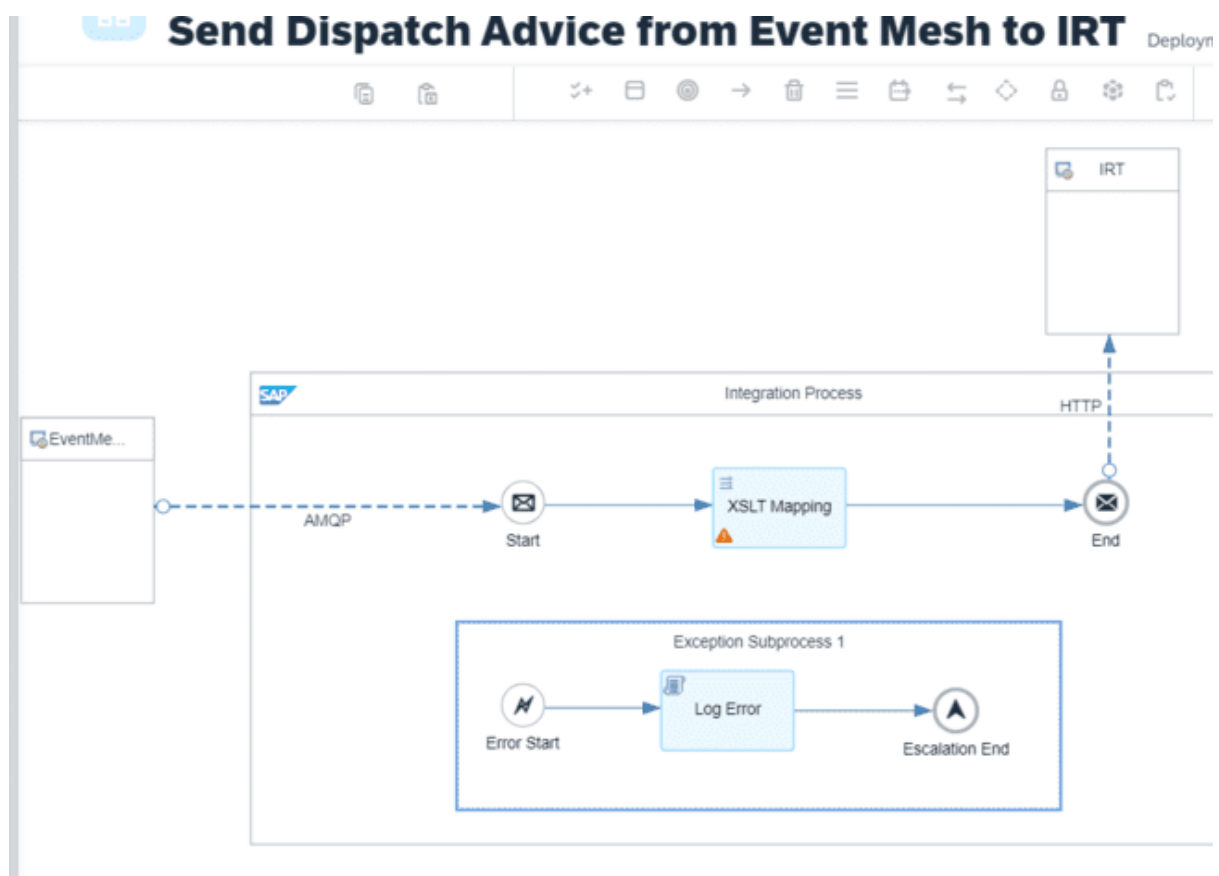

Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<AMQP_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
IRT_AUTHENTICATION	OAuth2 Client Credentials	No Value Configured
IRT_CREDENTIAL	<OAUTH_CRED>	No Value Configured
IRT_ENDPOINT	https://test.com	No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
IRT_AUTHENTICATION	Type of Authentication
IRT_CREDENTIAL	IRT Credentials
IRT_ENDPOINT	Endpoint of the IRT system


7.6 Receiving Advice

The following iFlows are needed for Receiving Advice:

Receive Receiving Advice from IRT to Event Mesh

This iFlow gets the Receiving Advice data from IRT and put the message payload into the event mesh queue.

Deployment




Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<AMQP_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
AUTHORIZATION_TYPE	RoleBased	No Value Configured
RECEIVING_ADVICE_ENDPOINT	/icsm/ReceivingAdvice	No Value Configured
USER_ROLE	ESBMessaging.send	No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
AUTHORIZATION_TYPE	Type of Authorization
RECEIVING_ADVICE_ENDPOINT	ICSM API ENDPOINT for Receiving Advice
USERROLE	TYPE OF USERROLE

Process Receiving Advice from Event Mesh to ICSM

This iFlow is used to process the receiving advice data which is stored in the event mesh queue and perform the mapping transformations to convert the GS1 format into an XML format and send it to SAP Intelligent Clinical Supply Management.

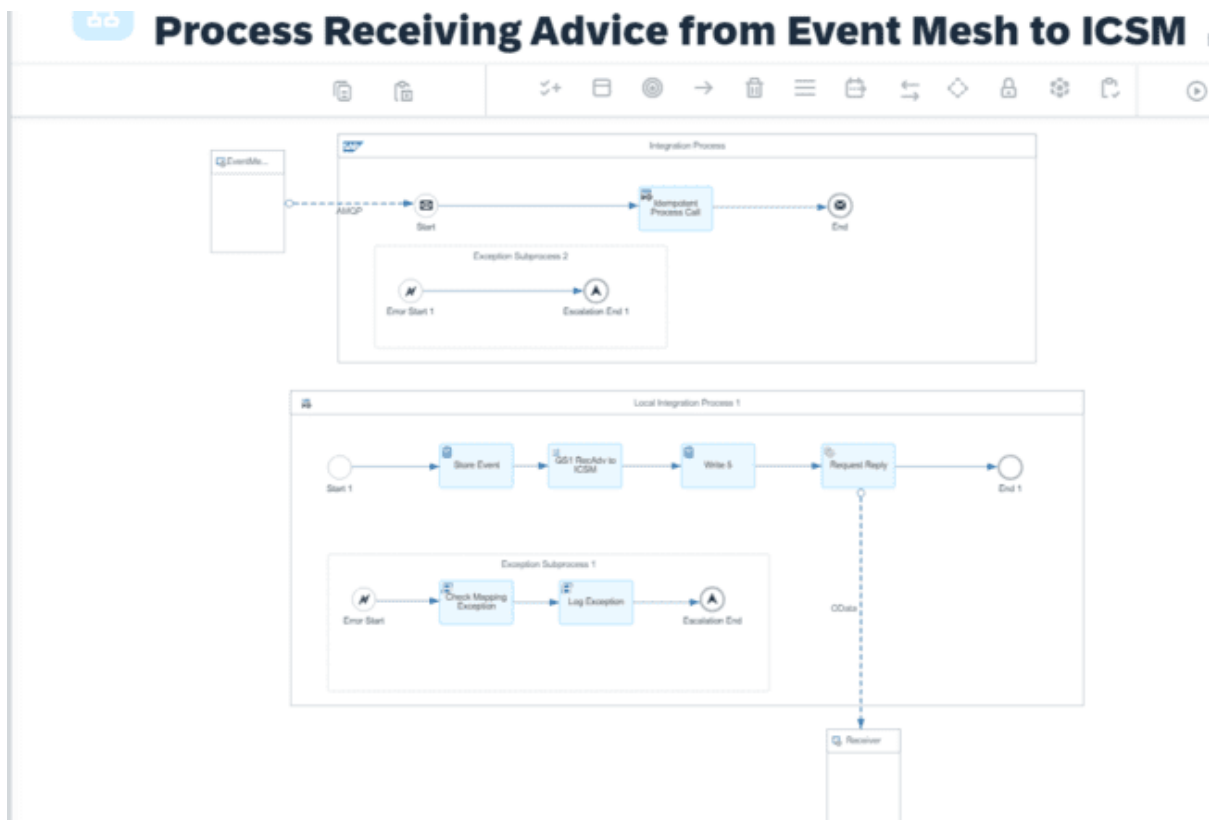

Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
API_RESOURCE_PATH	ReceivingAdvice	No Value Configured
concurrent_Processes	1	No Value Configured
CONNECTION_TIMEOUT	1	No Value Configured
CREDENTIAL_NAME	<CREDENTIAL_NAME>	No Value Configured

The following parameters must be configured:


Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
EXPIRATION	Data store expiration number of days
ODATA_ENDPOINT	ICSM OData Endpoint
API_RESOURCE_PATH	Receiving Advice Resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
CREDENTIAL_NAME	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
PROXY_TYPE	Cloud connector proxy type

7.7 Dispensing Advice

The following iFlows are needed for Dispensing Advice:

Receive Dispensing Advice from IRT to Event Mesh

This iFlow gets the Dispensing Advice data from IRT and put the message payload into the event mesh queue.

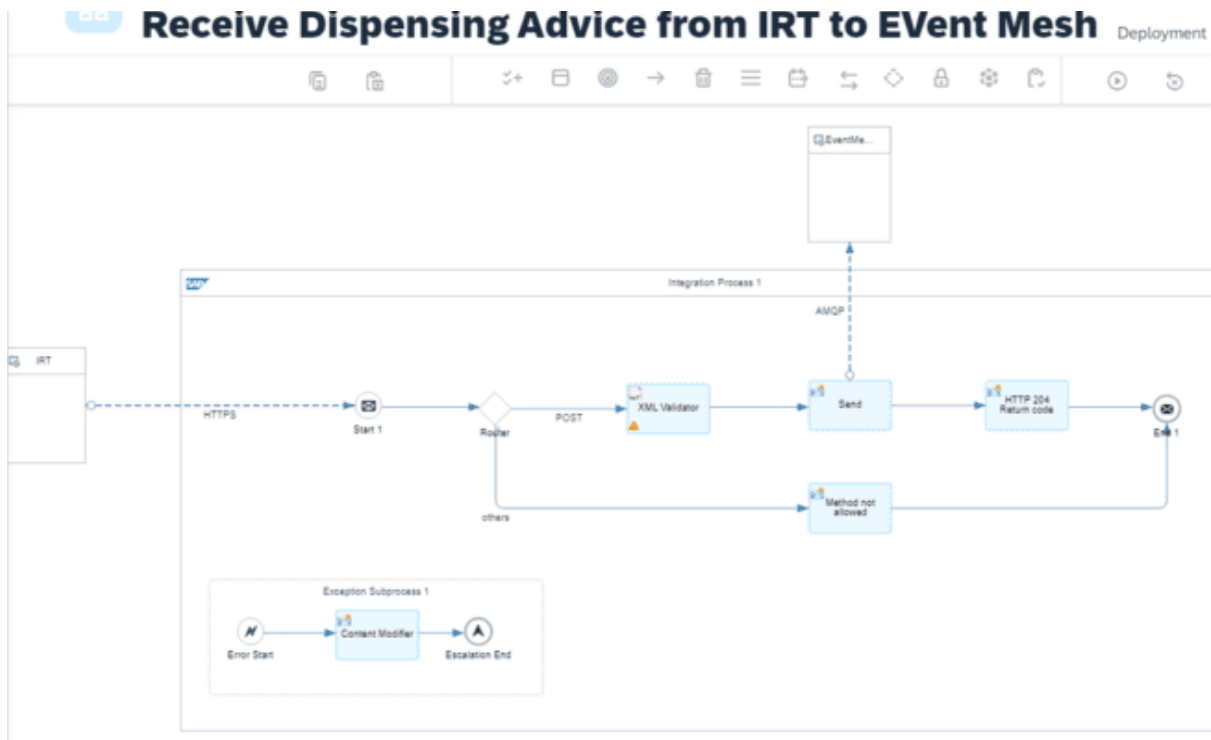


Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
AUTHORIZATION_TYPE	RoleBased	No Value Configured
DISPENSING_ADVICE_ENDPOINT	/icsm/DispensingAdvice	No Value Configured
USER_ROLE	ESBMessaging.send	No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
AUTHORIZATION_TYPE	Type of Authorization
RECEIVING_ADVICE_ENDPOINT	ICSM API ENDPOINT for Dispensing Advice
USERROLE	TYPE OF USERROLE

Process Dispensing Advice from Event Mesh to ICSM

This iFlow is used to process the dispensing advice data which is stored in the event mesh queue and perform the mapping transformations to convert the GS1 format into JSON format and send it to SAP Intelligent Clinical Supply Management.

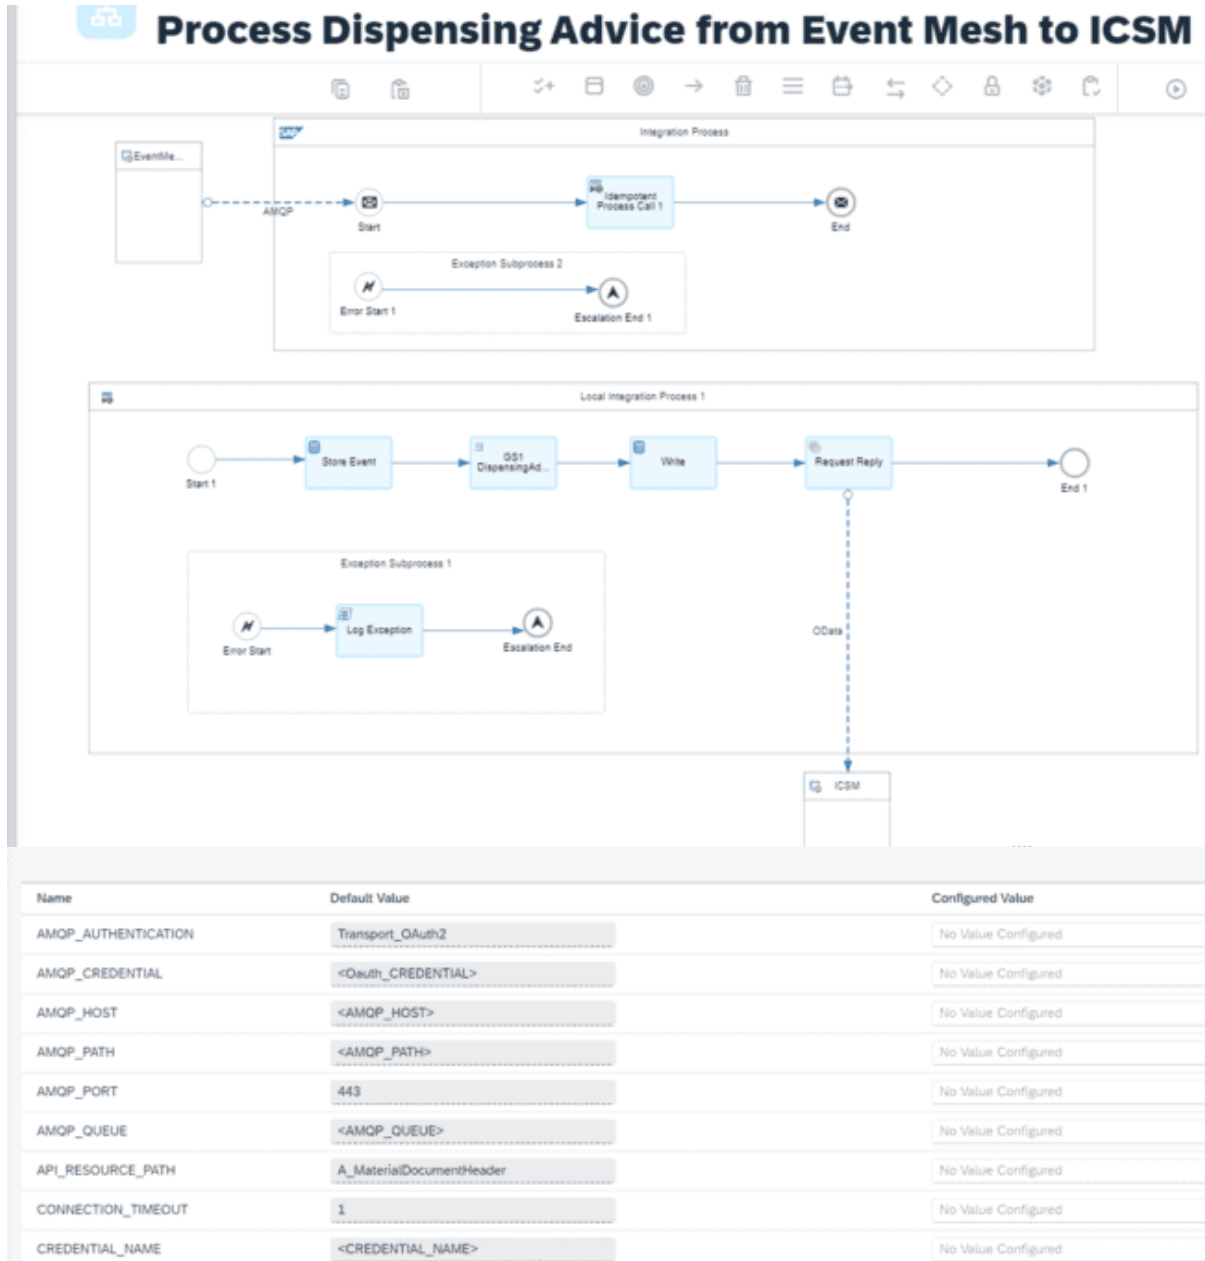

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server


AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
EXPIRATION	Data store expiration number of days
ODATA_ENDPOINT	ICSM OData Endpoint
API_RESOURCE_PATH	Dispensing Advice Resource path
ICSM_AUTHENTICATION_TYPE	Authentication type for ICSM connection
CREDENTIAL_NAME	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
PROXY_TYPE	Cloud connector proxy type

7.8 Kit Status Change (Inbound)

The following iFlows are needed for Kit Status Change (Inbound)

Receive KitStatusChange from IRT to Event Mesh

This iFlow is used to get the KitStatusChange data from IRT and put the message payload into the event mesh queue.

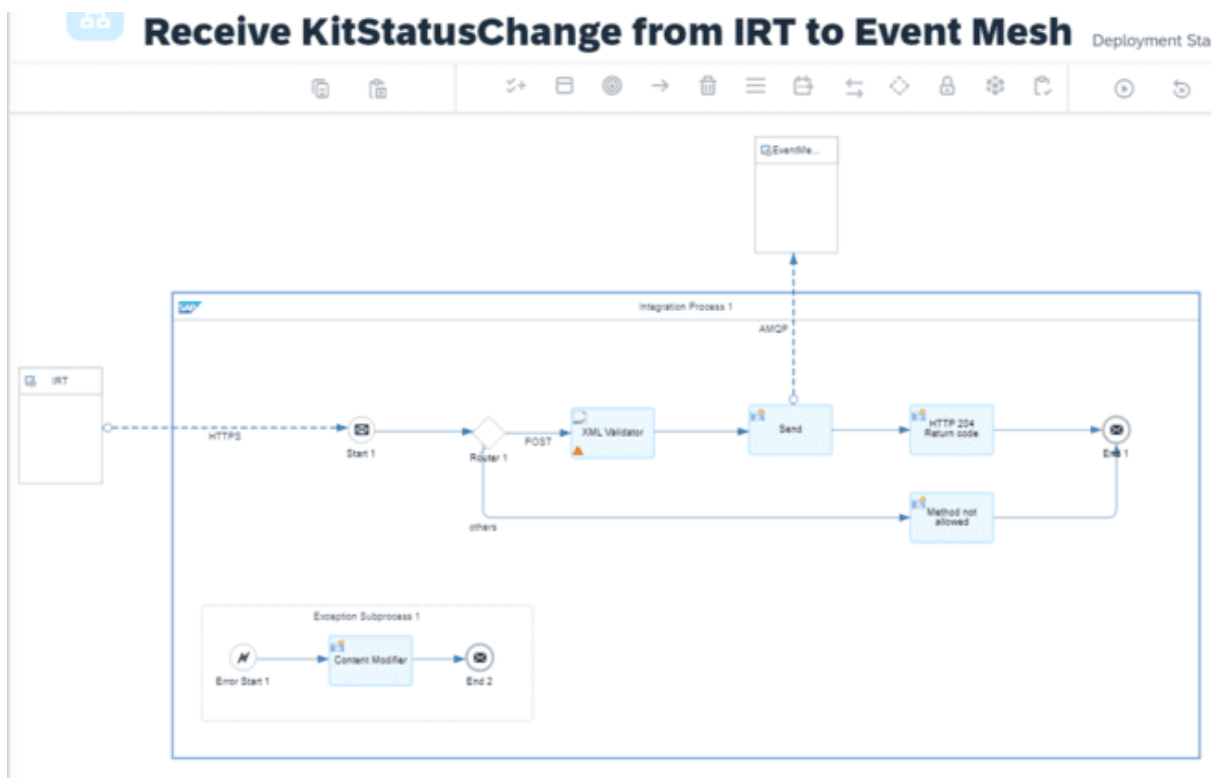

Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
AUTHORIZATION_TYPE	RoleBased	No Value Configured
KITSTATUSCHANGE_ENDPOINT	/icsm/KitStatusChange	No Value Configured
USER_ROLE	ESBMessaging.send	No Value Configured

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
AUTHORIZATION_TYPE	Type of Authorization
KITSTATUSCHANGE_ENDPOINT	ICSM API ENDPOINT for KitStatusChange
USERROLE	TYPE OF USERROLE

Process KitStatusChange from Event Mesh to ICSM

This iFlow is used to process the KitStatusChange data which is stored in the event mesh queue and perform the mapping transformations to convert the GS1 format into JSON format and send it to SAP Intelligent Clinical Supply Management.

General	Runtime Configuration	Error Configuration	References	Externalized Parameters	Problems	Deployment Status	Design Guidelines
Name	Default Value					Configured Value	
AMQP_AUTHENTICATION	Transport OAuth2					No Value Configured	
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>					No Value Configured	
AMQP_HOST	<AMQP_HOST>					No Value Configured	
AMQP_PATH	<AMQP_PATH>					No Value Configured	
AMQP_PORT	443					No Value Configured	
AMQP_QUEUE	<AMQP_QUEUE>					No Value Configured	
API_RESOURCE_PATH	A_MaterialDocumentHeader					No Value Configured	
AUTHENTICATION_TYPE	Basic					No Value Configured	
CONNECTION_TIMEOUT	10					No Value Configured	
ICSM_ODATA_ENDPOINT	https://test.com					No Value Configured	
LOCATION_ID	<LOCATION_ID>					No Value Configured	

The following parameters must be configured:

Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
EXPIRATION	Data store expiration number of days


ODATA_ENDPOINT	ICSM OData Endpoint
API_RESOURCE_PATH	KitStatusChange Resource path
AUTHENTICATION_TYPE	Authentication type for ICSM connection
CREDENTIAL_NAME	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
PROXY_TYPE	Cloud connector proxy type
LOCATION_ID	Cloud connector Location ID

7.9 Kit Status Change (Outbound)

The following iFlow are needed for Kit Status Change (Outbound):

Process MedicationKitStatusChange from ICSM to Event Mesh

This iFlow is used to get the MedicationKitStatusChange data from SAP Intelligent Clinical Supply Management and store the payload in the event mesh queue and further convert it to XML format and perform the mapping transformations to convert it into GS1 Format and then send it to the event mesh queue.

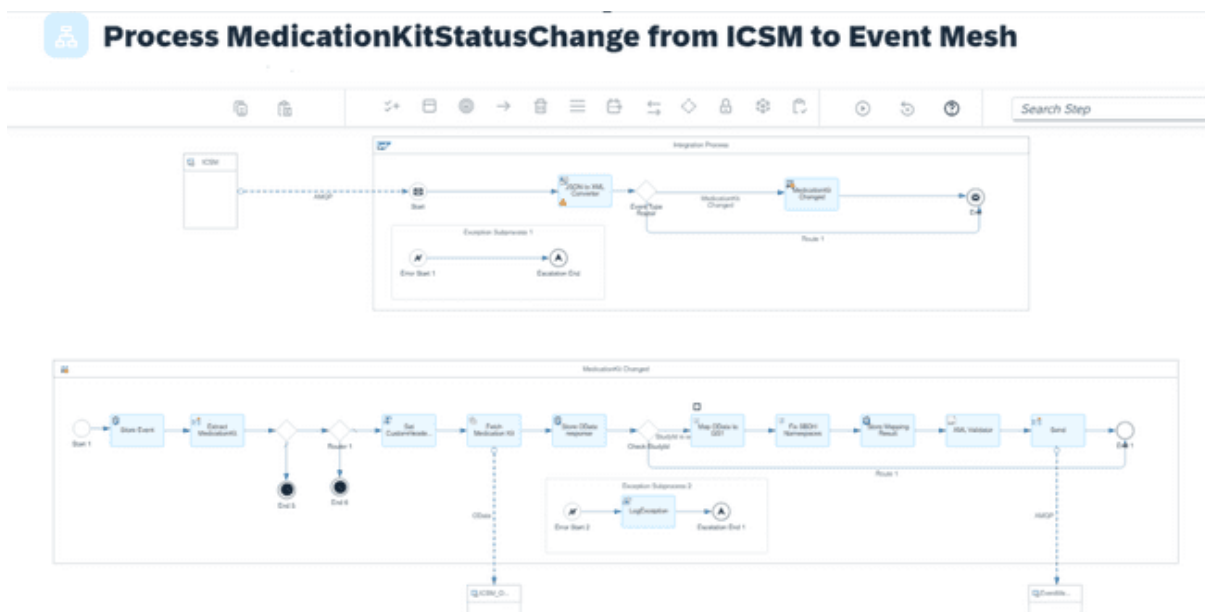

General	Runtime Configuration	Error Configuration	References	Externalized Parameters	Problems	Deployment Status	Design Guidelines
AMQP_AUTHENTICATION	Transport_OAuth2					No Value Configured	
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>					No Value Configured	
AMQP_HOST	<AMQP_HOST>					No Value Configured	
AMQP_KITSTATUSCHANGE_QUEUE	<AMQP_KITSTATUSCHANGE_QUEUE>					No Value Configured	
AMQP_MEDICATIONKIT_QUEUE	<AMQP_MEDICATIONKIT_QUEUE>					No Value Configured	
AMQP_PATH	<AMQP_PATH>					No Value Configured	
AMQP_PORT	443					No Value Configured	
LOCATION_TYPE	<LOCATION_TYPE>					No Value Configured	
ODATA_API_ENDPOINT	http://test.com					No Value Configured	
ODATA_API_RESOURCE_PATH	MedicationKit					No Value Configured	
ODATA_AUTHENTICATION_TYPE	Basic					No Value Configured	
ODATA_CREDENTIAL_NAME	<ODATA_CREDENTIAL_NAME>					No Value Configured	

The following parameters must be configured:


Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_KITSTATUSCHANGE_QUEUE	Messaging queue name for KitStatusChange
EXPIRATION	Data store expiration number of days
ODATA_API_ENDPOINT	ICSM OData Endpoint
ODATA_API_RESOURCE_PATH	Medication Kit Resource path
API_RESOURCE_PATH	Dispatch Advice Resource path
ODATA_AUTHENTICATION_TYPE	Authentication type for ICSM connection
ODATA_CREDENTIAL_NAME	Credentials for ICSM API connection
CONNECTION_TIMEOUT	Connection time-out
PROXY_TYPE	Cloud connector proxy type
AMQP_MEDICATIONKIT_QUEUE	Messaging queue name for MedicationKit queue
LOCATION_ID	Cloud connector Location ID

Send MedicationKitStatusChange from Event Mesh to IRT

This iFlow is used to send the MedicationKitStatusChange information payload from the event mesh queue to the IRT system.



Send MedicationKitStatusChange from Event Mesh to IRT

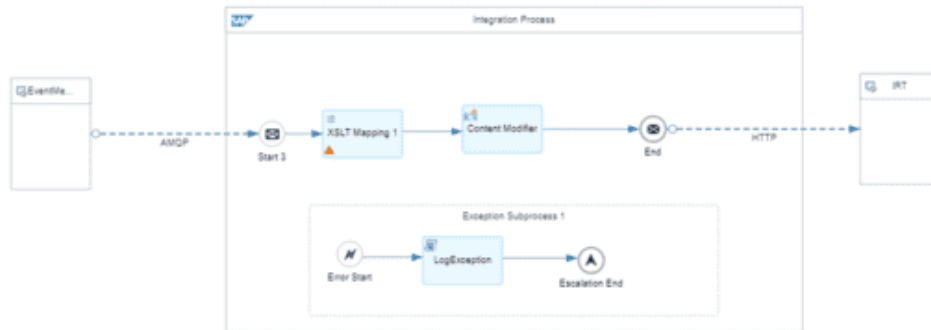

General Runtime Configuration Error Configuration References Externalized Parameters Problems Deployment Status Design Guidelines

Name	Default Value	Configured Value
AMQP_AUTHENTICATION	Transport_OAuth2	No Value Configured
AMQP_CREDENTIAL	<OAuth_CREDENTIAL>	No Value Configured
AMQP_HOST	<AMQP_HOST>	No Value Configured
AMQP_PATH	<AMQP_PATH>	No Value Configured
AMQP_PORT	443	No Value Configured
AMQP_QUEUE	<AMQP_QUEUE>	No Value Configured
IRT_AUTHENTICATION	OAuth2 Client Credentials	No Value Configured
IRT_CREDENTIAL	<OAuth_CRED>	No Value Configured
IRT_ENDPOINT	<http://test.com>	No Value Configured

The following parameters must be configured:


Parameter	Value
AMQP_HOST	Host of Event messaging server
AMQP_PORT	Port of Event messaging server
AMQP_PATH	Path of Event messaging server
AMQP_AUTHENTICATION	Authentication type
AMQP_CREDENTIAL	Credential alias maintained in section 6.2.3
AMQP_QUEUE	Messaging queue name
IRT_AUTHENTICATION	Type of Authentication
IRT_CREDENTIAL	IRT Credentials
IRT_ENDPOINT	Endpoint of the IRT system

7.10 Cloud Study API

The Below following iflow needed for Cloud Study API

Fetch Study Information data from Clinical Study API

This iflow enables external system to read study data information from the Cloud study API and add a study entity and submit the results.

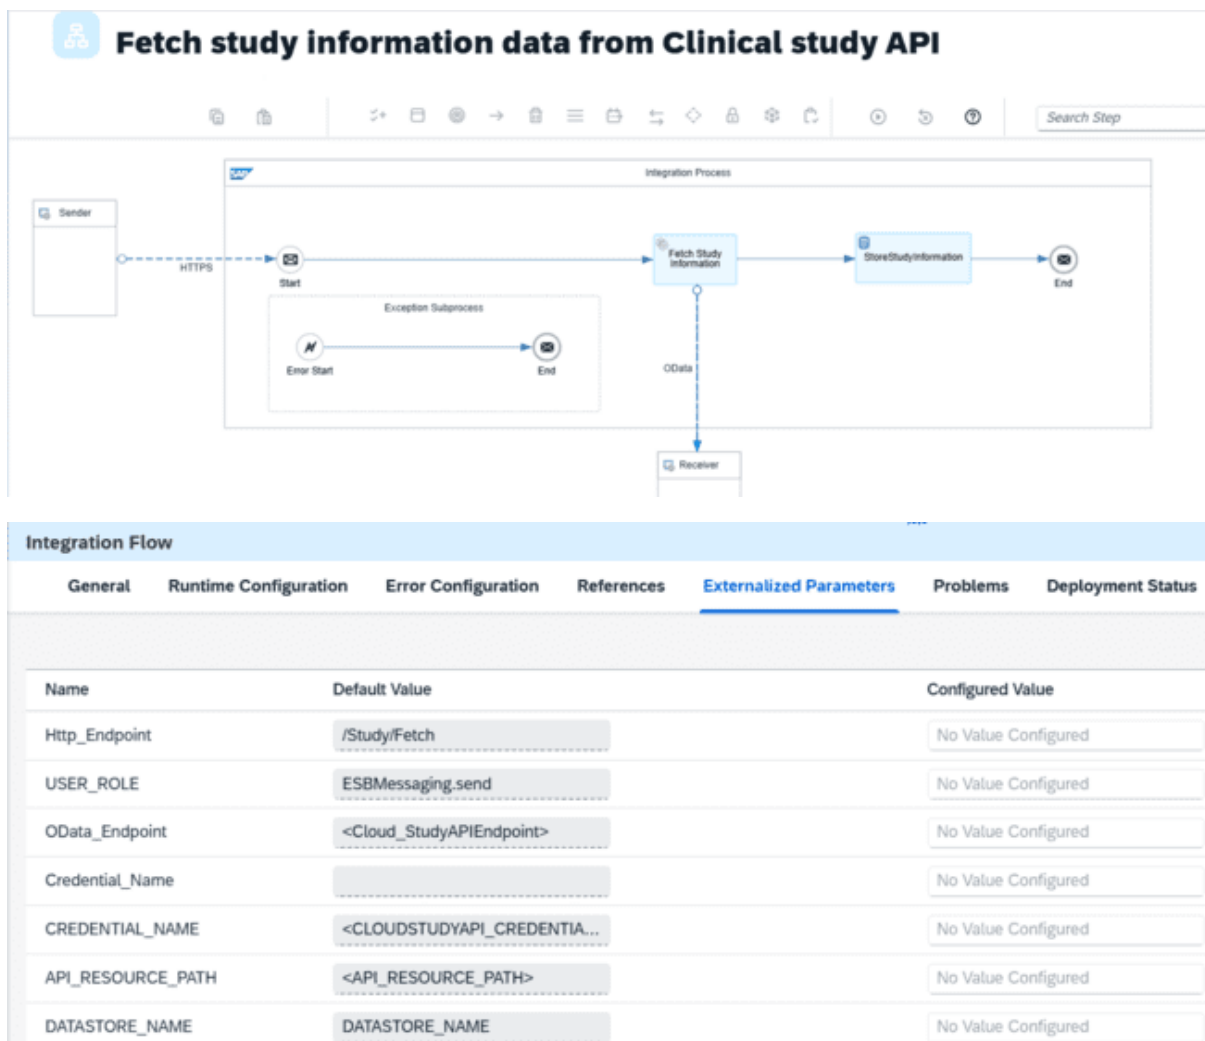

The following parameters must be configured:


Parameter	Value
OData_Endpoint	Cloud Study API Endpoint
CREDENTIAL_NAME	OData Study API Credential Name
API_RESOURCE_PATH	STUDY API Resource Path
DATASTORE_NAME	DataStore Name to store Study API

7.11 Cloud IRTActuals API

The Below following iflow needed for Cloud IRTActuals API

Receive IRT Actuals Data from IRT during a clinical study

This interface is used to receive Actuals data (on visit level) from an interactive response technology system during a clinical study.

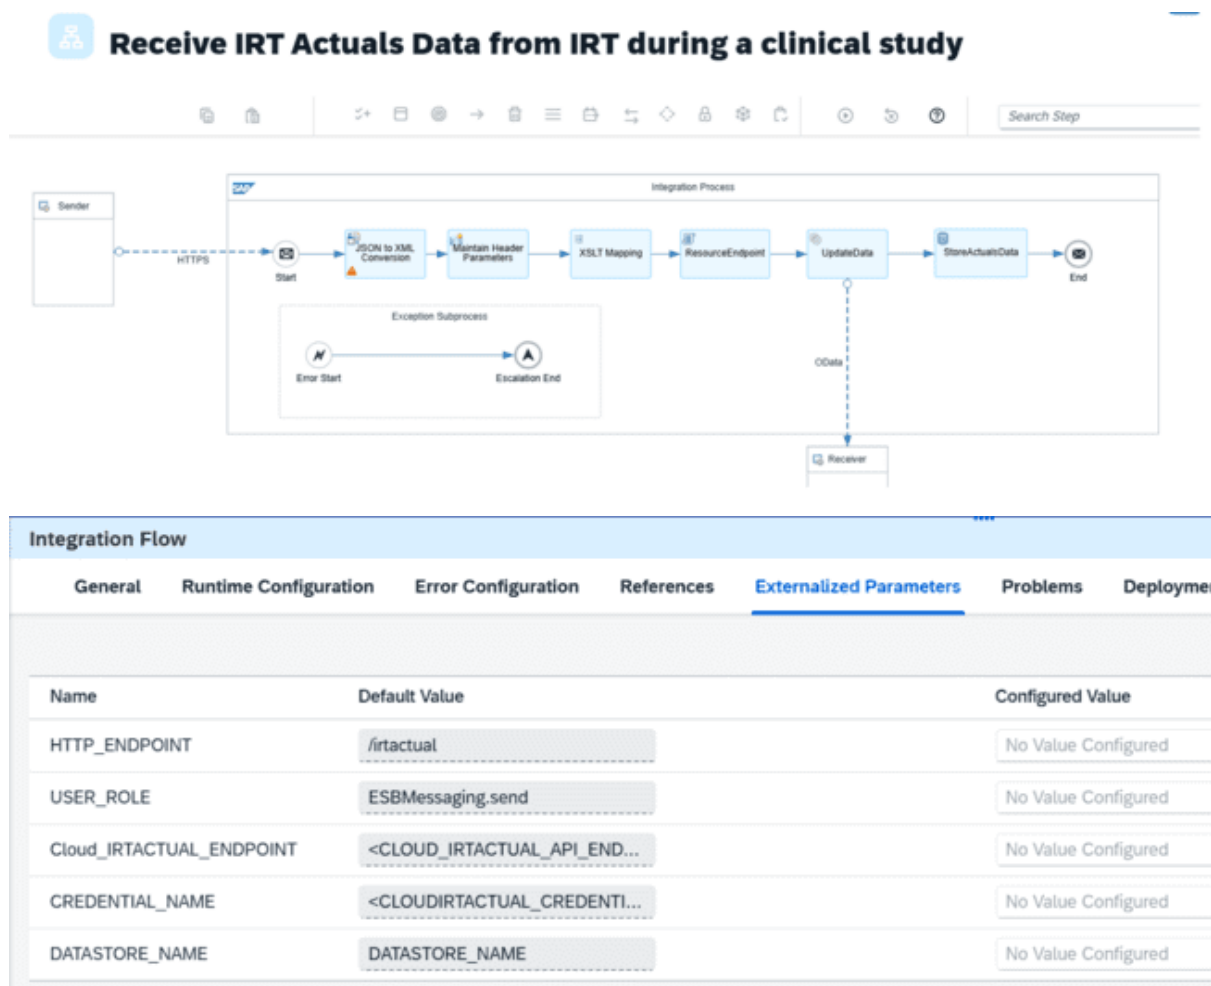

The following parameters must be configured:

Parameter	Value
OData_Endpoint	Cloud IRTActuals API Endpoint
CREDENTIAL_NAME	OData IRTActual API Credential Name


API_RESOURCE_PATH	IRTRActuals API Resource Path Data
DATASTORE_NAME	DataStore Name to store IRTRActuals API data

7.12 Cloud IRTMaster API

The Below following iflow needed for Cloud IRTMaster API

Receive IRT Master data from IRT during a clinical study

This interface is used to receive master data (Subject Status, Treatment Arm, Dose, Phase) and actual enrolment data (on visit level) from an interactive response technology system during a clinical study.

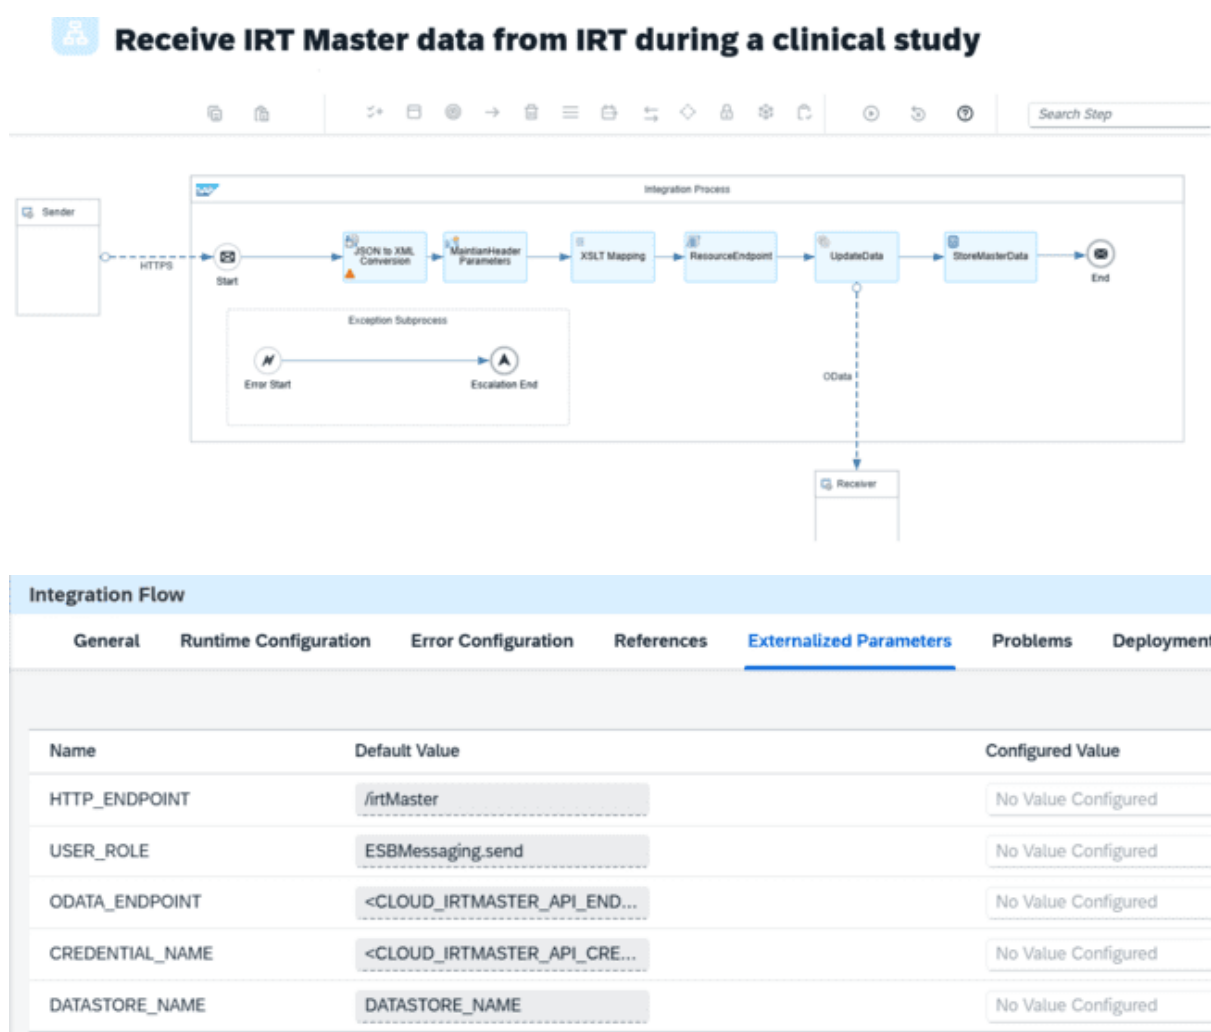

The following parameters must be configured:

Parameter	Value
ODATA_ENDPOINT	Cloud IRTMaster API Endpoint
CREDENTIAL_NAME	OData IRTMaster API Credential Name
API_RESOURCE_PATH	IRTMaster API Resource Path Data
DATASTORE_NAME	DataStore Name to store IRTMaster API data

8 Glossary

SAP ICSM	SAP Intelligent Clinical Supply Management
CPI	Cloud Platform Integration
APIM	Application programming interface Management
IRT	Interactive Responsive Technology
SAP BTP	Business Technology Management