


Host Static Website in S3 and manages request , response with EC2 instance (server)

- Download any web template for web and unzip it
- Upload Files in S3 bucket also host website in s3
- Create EC2 instance (Linux computer) in AWS
- Connect to EC2 instance with its
- **1.IP address,**
- **2.private-key .pem**
- **3.ec2 username** with SSH method with mobaXterm terminal software.
- Copy S3 files to our linux server and
- open <http://18.191.20.163> in browser

1. Go to Amazon S3 service > create bucket

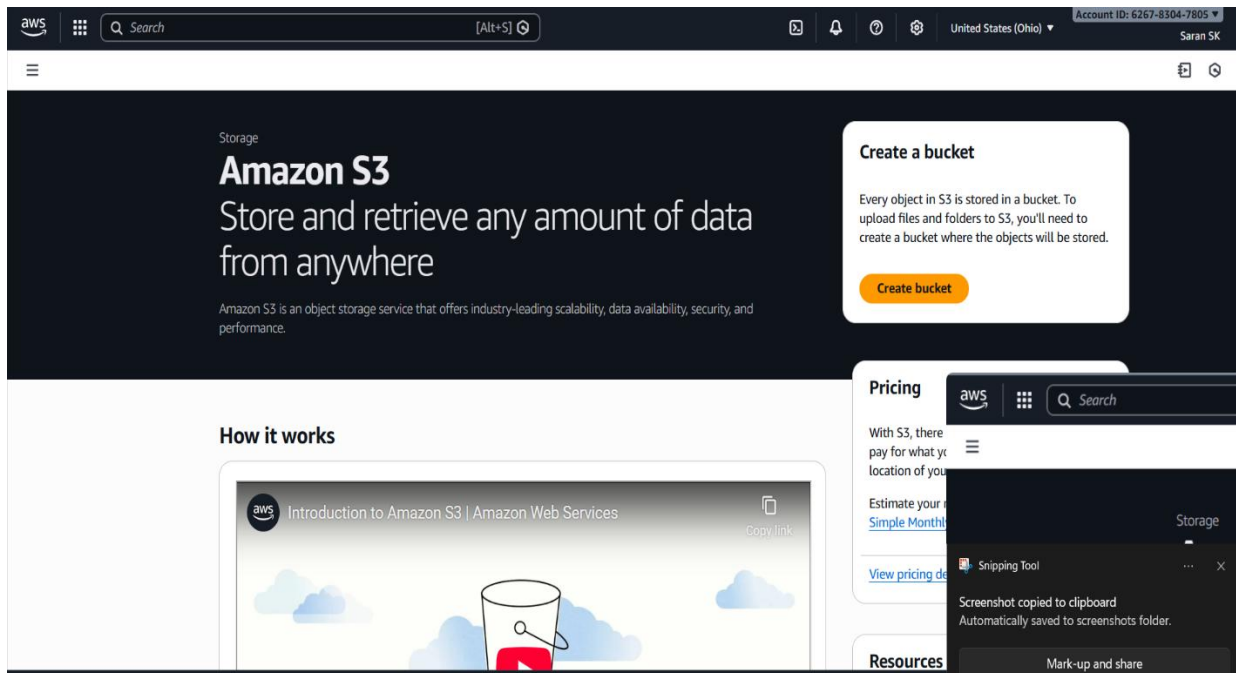

2. create bucket with unique name

Create bucket [info](#)
Buckets are containers for data stored in S3.

General configuration

AWS Region
US East (Ohio) us-east-2

Bucket type [info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [info](#)
chain-dev-web

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)


Format: s3://bucket/prefix

Object Ownership [info](#)
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.


[CloudShell](#) [Feedback](#) [Console Mobile App](#)

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)


3. Bucket created

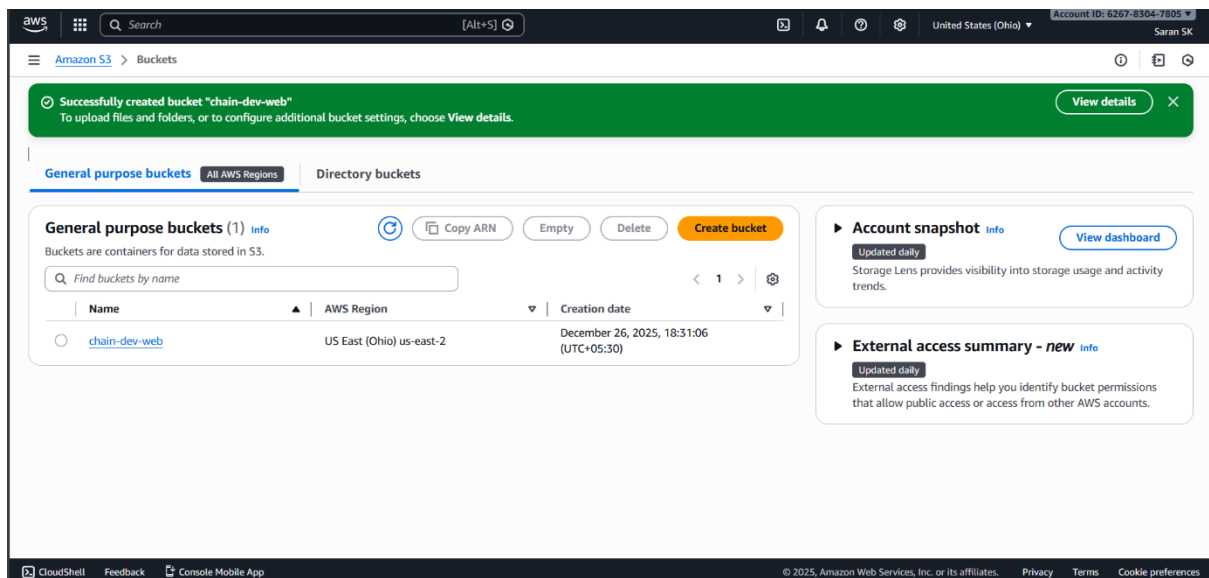

4. Go to created bucket > Upload

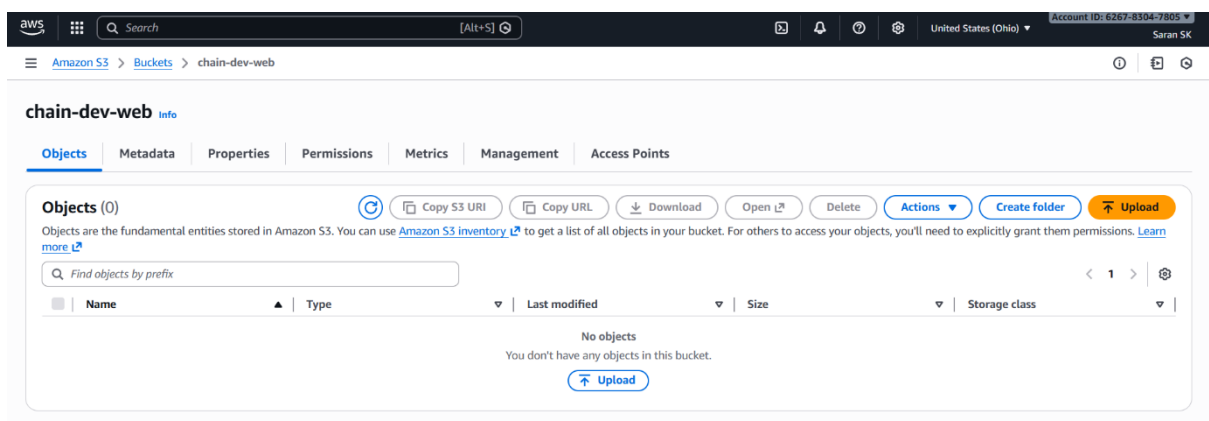

5. Drag and drop the website files to upload in s3

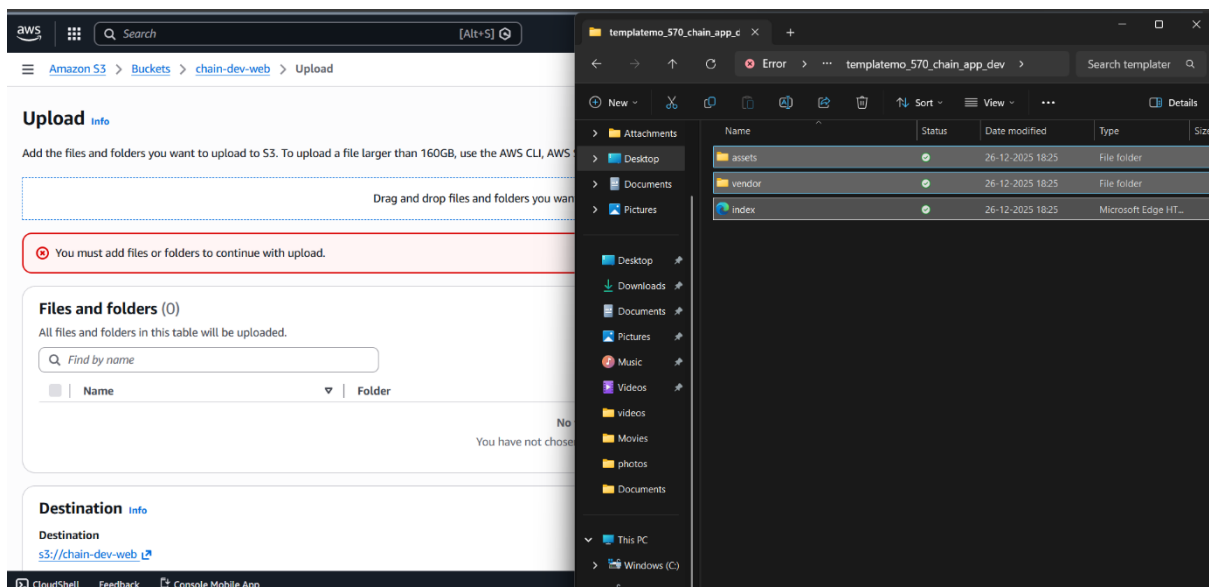

aws

Search

[Alt+S]

United States (Ohio)

Account ID: 6267-8304-7805

Saran SK

Amazon S3

Buckets

chain-dev-web

Upload

Files and folders (66 total, 3.7 MB)

All files and folders in this table will be uploaded.

Find by name

☐

Name

▼

☐

Folder

▼

☐

Type

▼

☐

Size

▼

☐

services-right-dec.png

assets/images/

image/png

6.2 KB

☐

slider-dec.png

assets/images/

image/png

20.0 KB

☐

slider-left-dec.png

assets/images/

image/png

57.6 KB

☐

white-logo.png

assets/images/

image/png

2.8 KB

☐

animation.js

assets/js/

text/javascript

5.8 KB

☐

custom.js

assets/js/

text/javascript

5.2 KB

☐

imagesloaded.js

assets/js/

text/javascript

13.0 KB

☐

isotope.js

assets/js/

text/javascript

34.6 KB

☐

owl-carousel.js

assets/js/

text/javascript

91.2 KB

☐

popup.js

assets/js/

text/javascript

1.0 KB

Remove

Add files

Add folder

<

1

2

3

4

5

6

7

>

Destination

Info

Destination

s3://chain-dev-web

CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

6.>Upload files in S3 bucket

aws

Search

[Alt+S]

United States (Ohio)

Account ID: 6267-8304-7805

Saran SK

Amazon S3

Buckets

chain-dev-web

Upload

Files and folders (66 total, 3.7 MB)

All files and folders in this table will be uploaded.

Find by name

☐

Name

▼

☐

Folder

▼

☐

Type

▼

☐

Size

▼

☐

popup.js

assets/js/

text/javascript

1.0 KB

Remove

Add files

Add folder

<

1

2

3

4

5

6

7

>

Destination

Info

Destination

s3://chain-dev-web

► Destination details

Bucket settings that impact new objects stored in the specified destination.

► Permissions

Grant public access and access to other AWS accounts.

► Properties

Specify storage class, encryption settings, tags, and more.

Cancel

Upload

CloudShell

Feedback


Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates.


Privacy

Terms


Cookie preferences

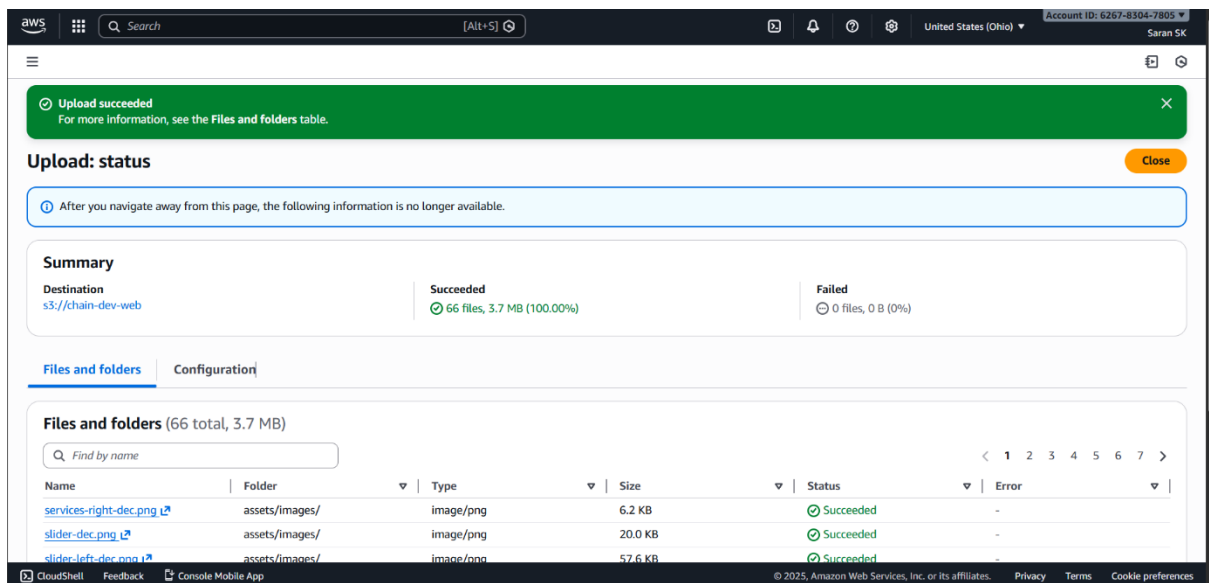


7. Go to EC2 service > Launch Instance

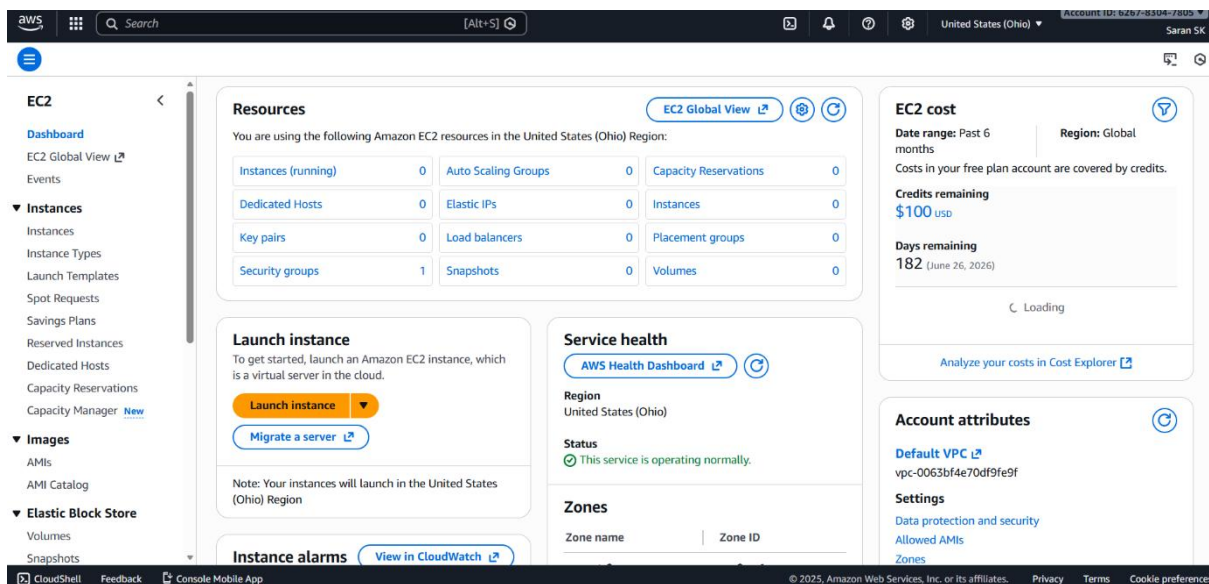

8. Create instance with a name > create private key (.pem) to connect with EC2 instance later with SSH(secure shell) protocol

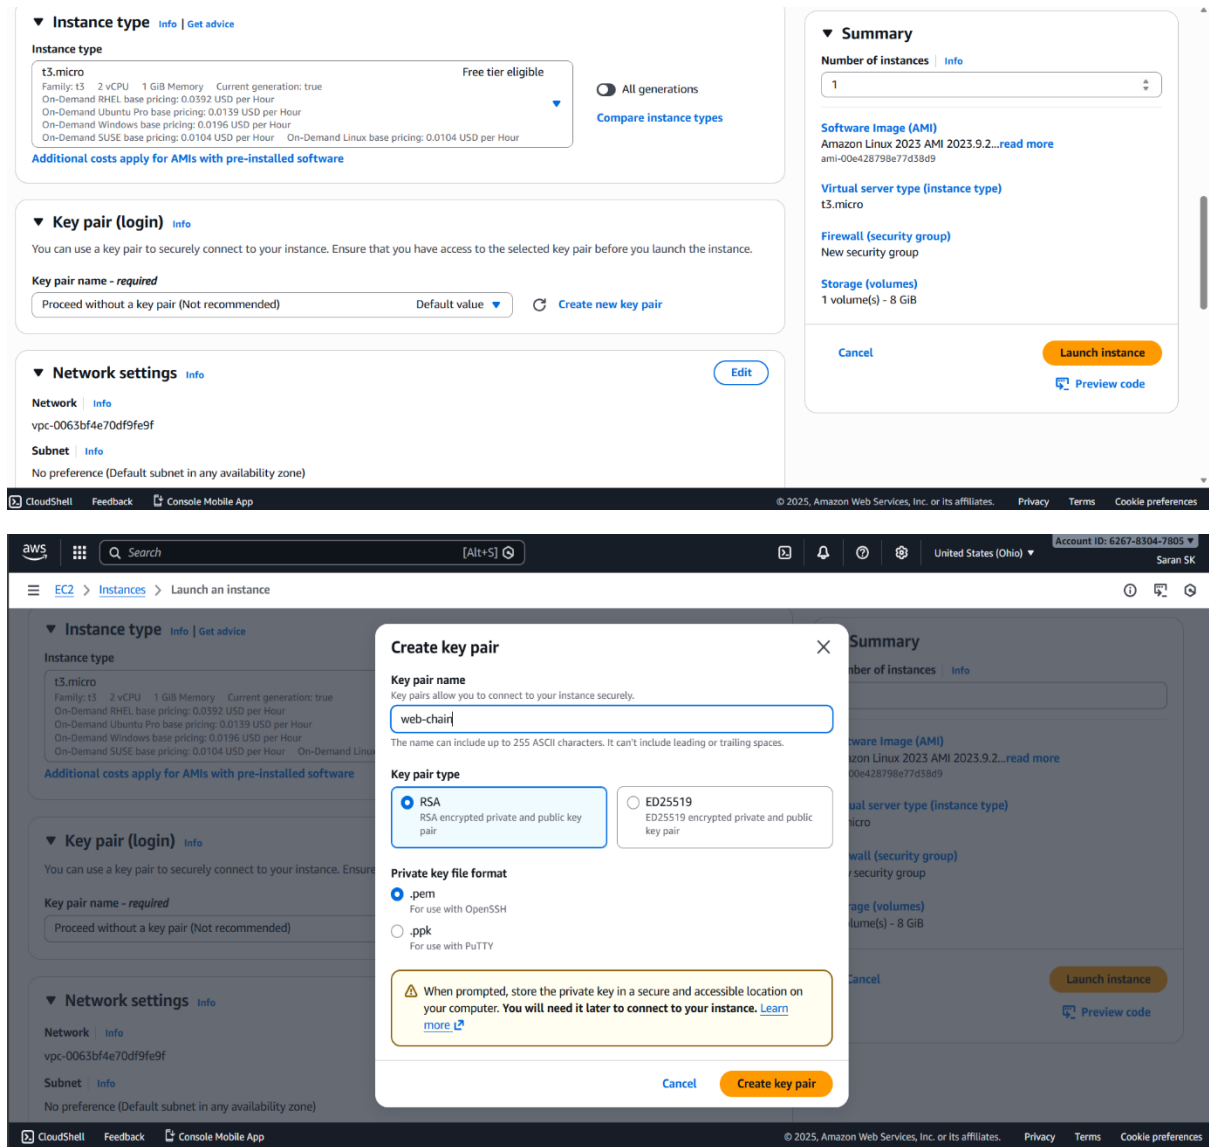

Private-key “web-chain.pem” is created and downloaded locally

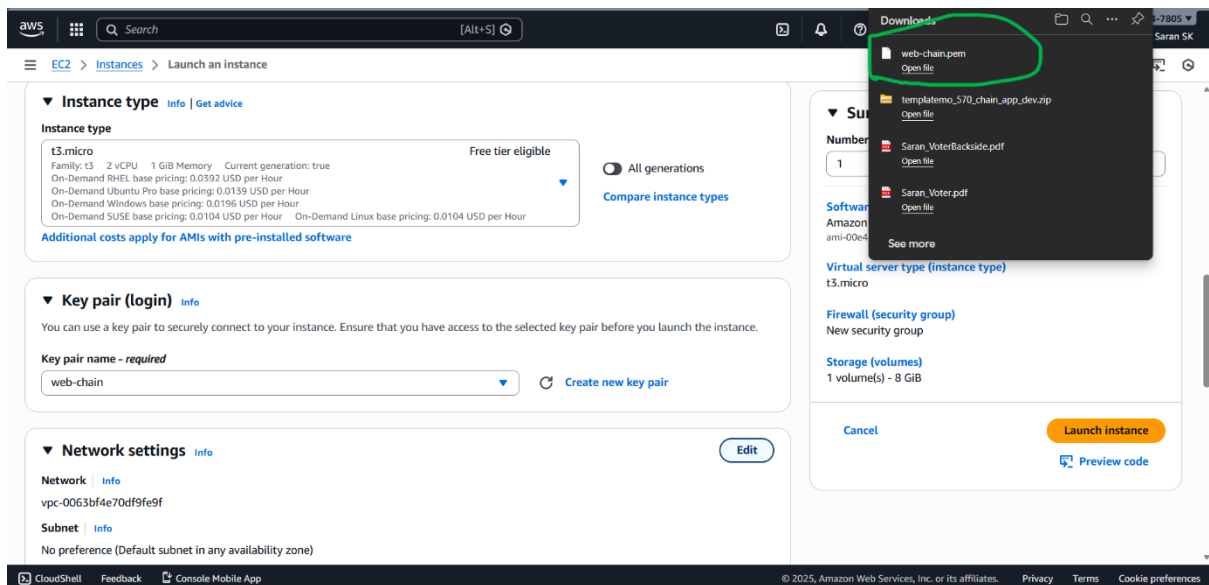

9. Check the boxes to allow SSH and HTTP req/res to the linux computer (EC2)

The screenshot shows the 'Firewall (security groups)' section of the AWS 'Launch an instance' wizard. The 'Create security group' option is selected. A new security group named 'launch-wizard-1' is being created with the following rules:

- ☒ Allow SSH traffic from: Anywhere (0.0.0.0/0)
- ☐ Allow HTTPS traffic from the internet
- ☒ Allow HTTP traffic from the internet

A warning message states: 'Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.'

The 'Summary' panel on the right shows:

- Number of instances: 1
- Software Image (AMI): Amazon Linux 2023 AMI 2023.9.2...
- Virtual server type (instance type): t3.micro
- Firewall (security group): New security group
- Storage (volumes): 1 volume(s) - 8 GiB

Buttons for 'Cancel', 'Launch instance', and 'Preview code' are visible.

10. in advanced options > add the below server-start script .


>> This script **install http server** in our linux computer (EC2 instance) when we start the server for first time (**initialization script**)

The screenshot shows the 'User data - optional' section of the AWS 'Launch an instance' wizard. The 'Choose file' button is highlighted. The user data field contains the following script:

```
#!/bin/bash
yum update -y
yum install -y httpd
systemctl start httpd
systemctl enable httpd
```


The 'Summary' panel on the right shows the same configuration as the previous screenshot, but with the 'Firewall (security group)' set to 'New security group'.

11. Our Linux computer (EC2 instance) is virtually created in AWS

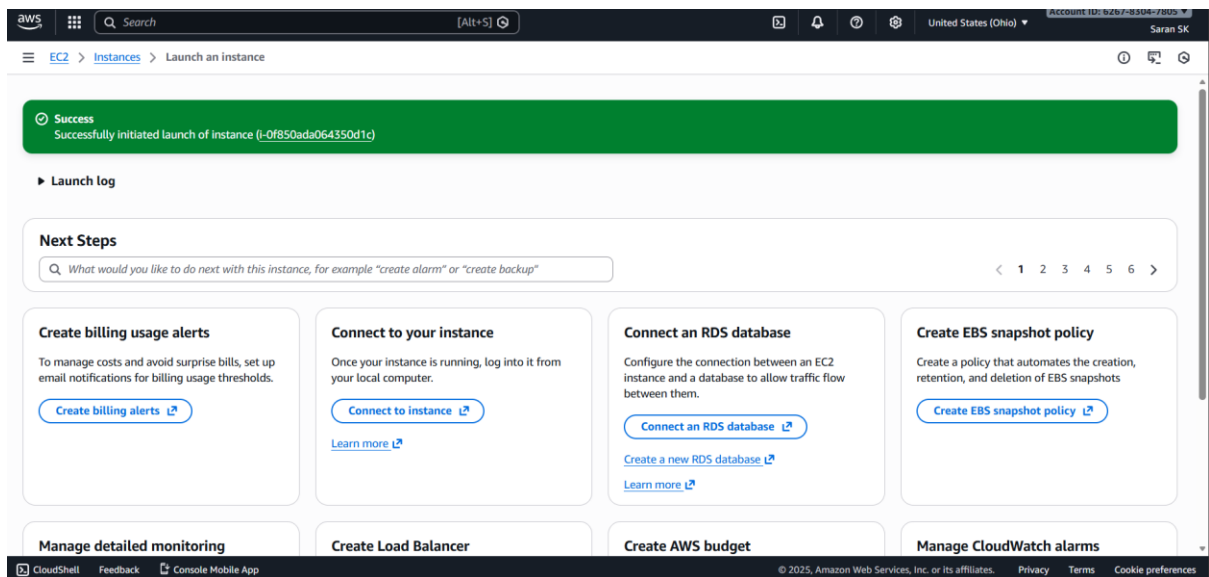


12.>>Server details with Public IP address “18.191.20.163”

“This is the IP address of our Linux computer running in AWS data center”

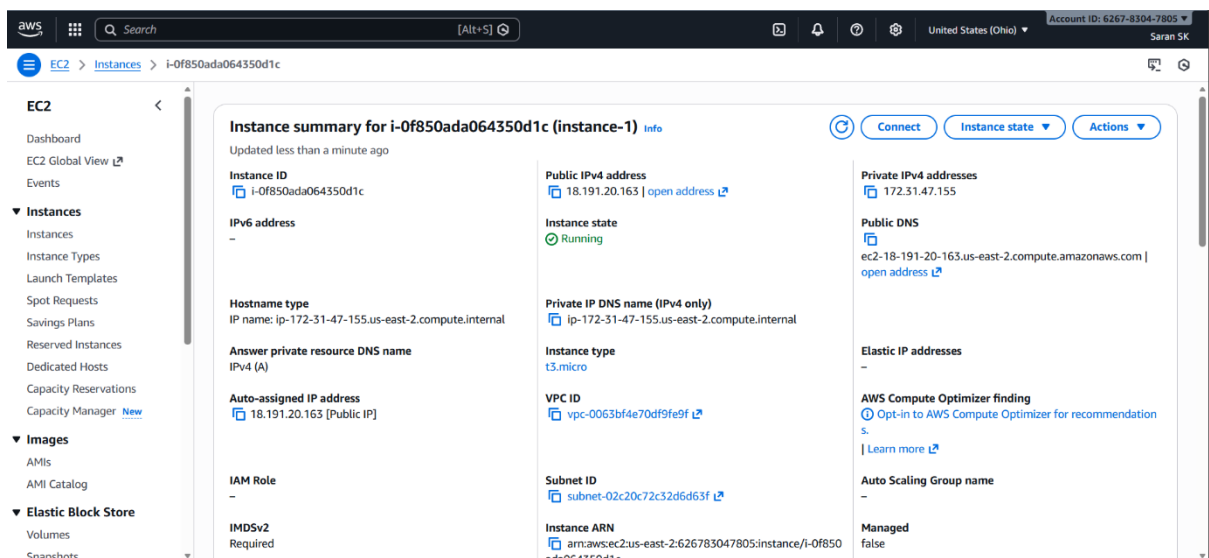


13.in browser > search <http://18.191.20.163> > our linux computer running apache server returns “It Works!”

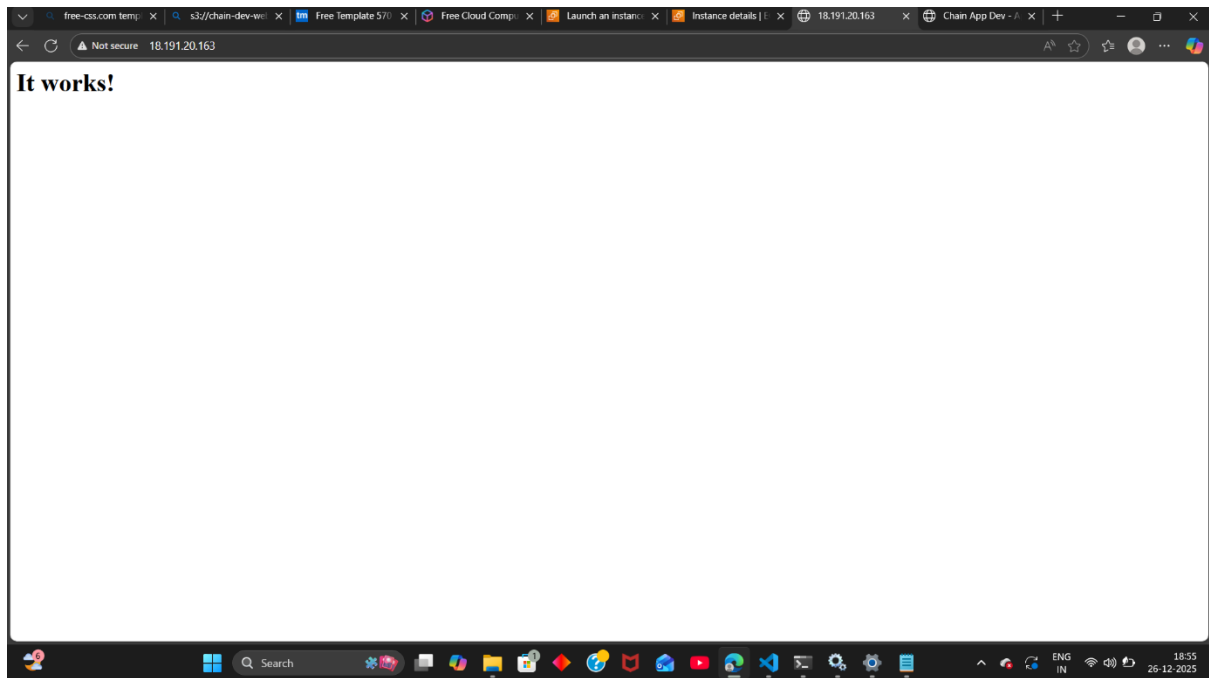


14. Install MobaXterm terminal software to connect with our linux computer> new session

Why this ? >> **“OUR EC2 INSTANCE IS A LINUX COMPUTER THAT IS RUNNING REMOTELY ON AWS DATA CENTER . SO, WE NEED THIS SOFTWARE TO CONNECT WITH OUR LINUX EC2 INSTANCE FROM OUR WINDOWS COMPUTER WITH SSH(SECURE SHELL) PROTOCOL WITH PROVIDING PRIVATE KEY”**

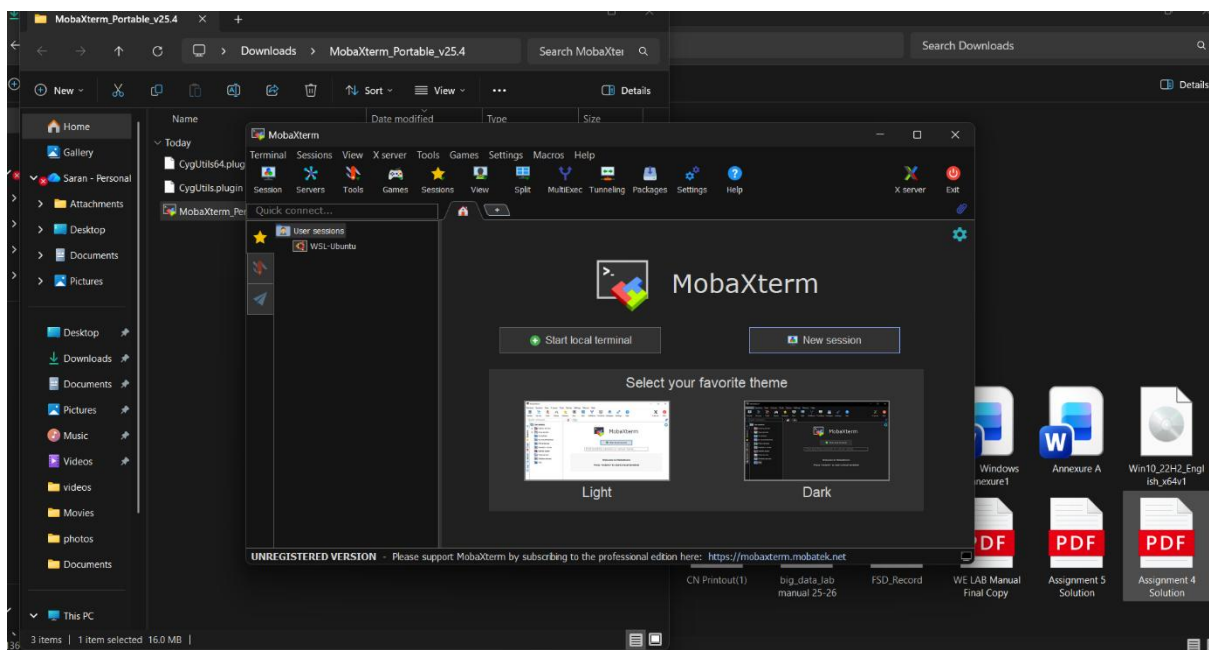


15.EC2> Connect to instance > Copy ec2 username “ec2-user”

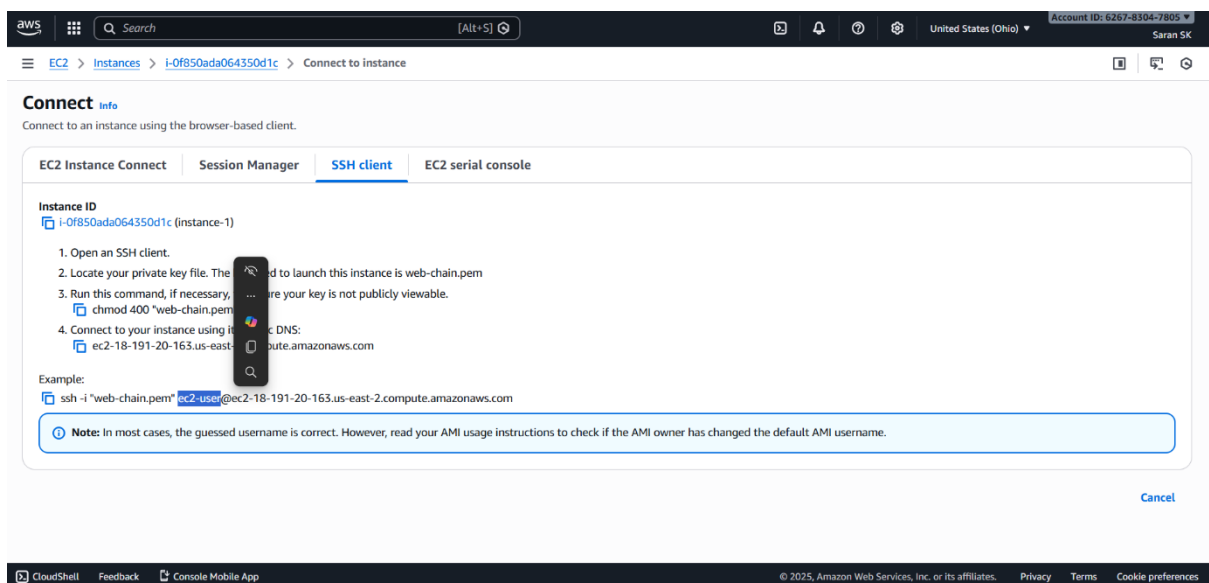


16.in mobaXterm > new session > SSH > provide our linux computer IP address “18.191.20.163” with user name “ec2-user”


Upload private key “web-chain.pem” to connect with our linux server in SSH protocol

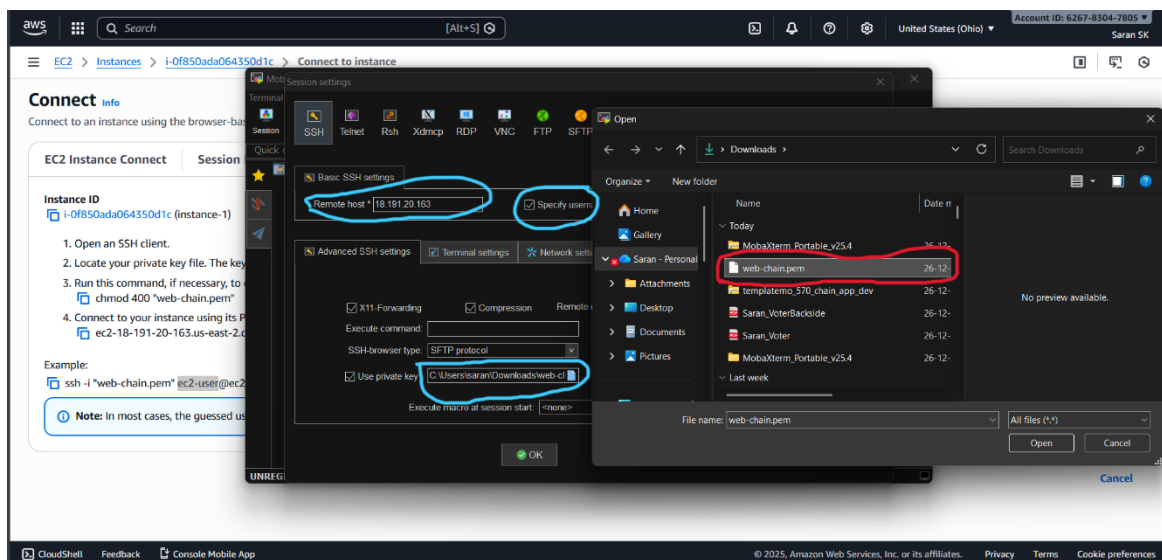


17. Now, we connected to our linux computer (EC2 instance) with private key “web-chain.pem” + ip-address “18.191.20.163” + username “ec2-user”.

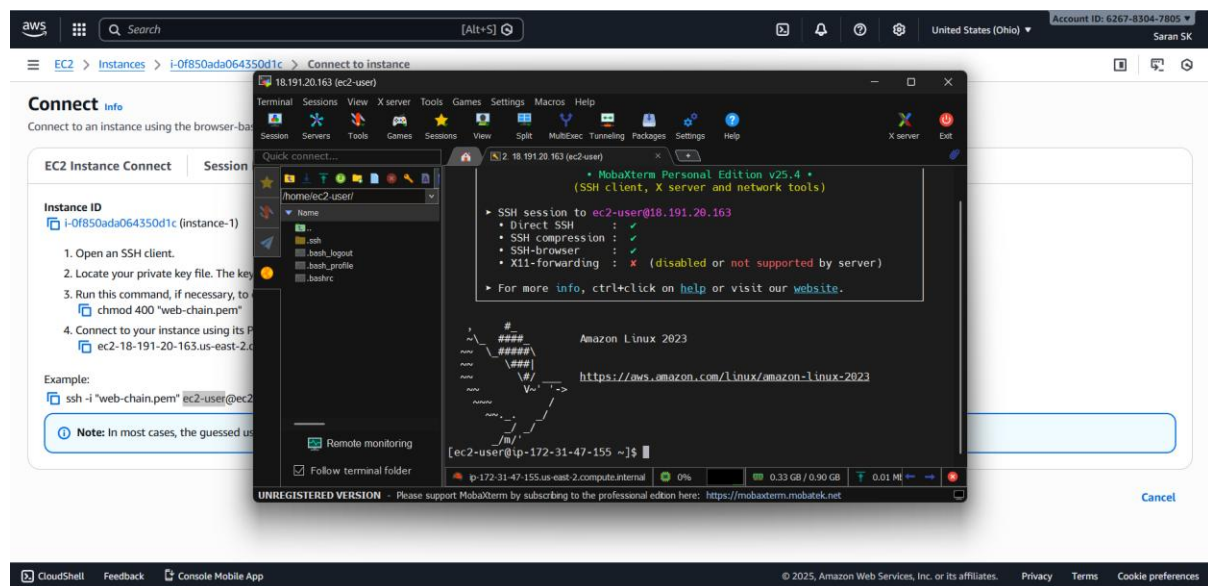


18. IAM Service > Create Role (for specifying policy and permissions for our EC2 linux server).

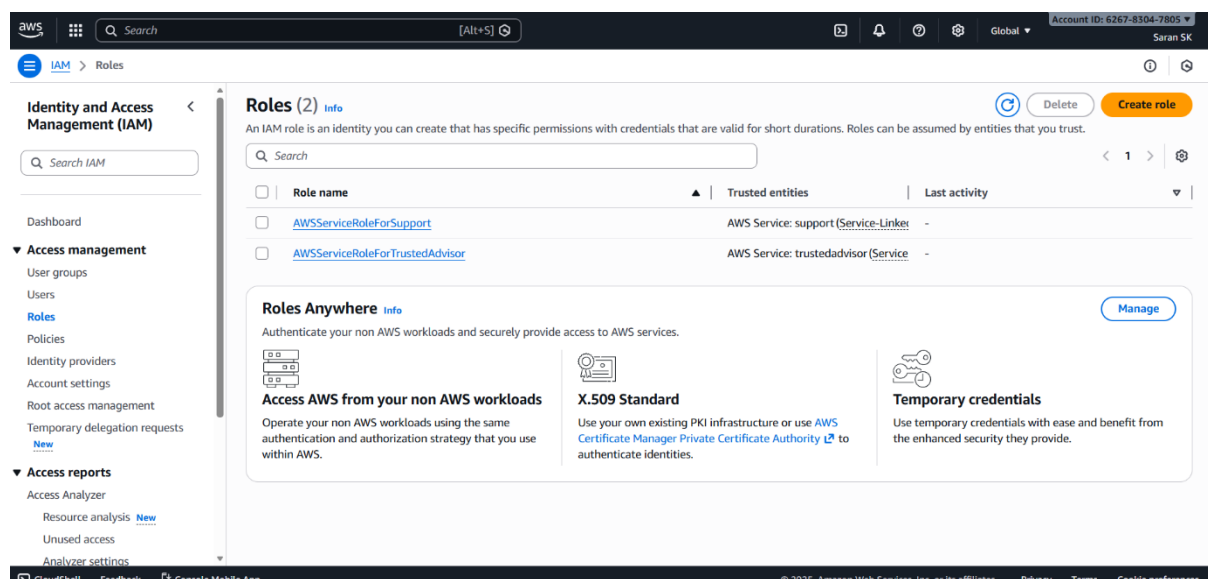



19. Use case > select EC2 (for allowing EC2 instance to use our AWS account)

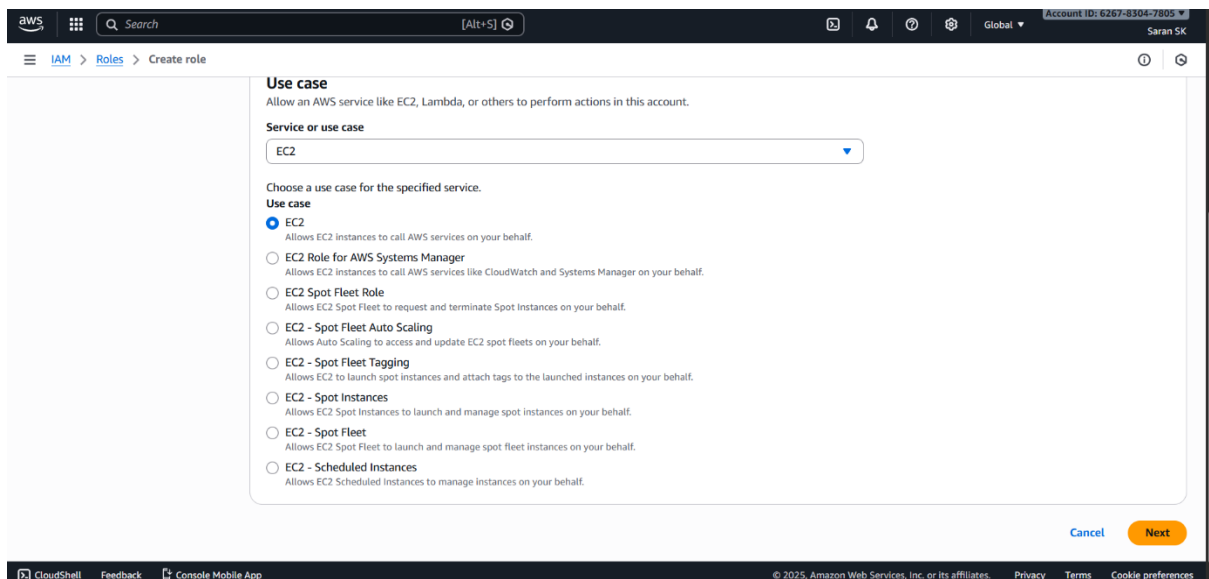


20. Add permissions > Select “**AmazonS3FullAccess**” (for granting s3 bucket for AWS bucket to access our AWS account).

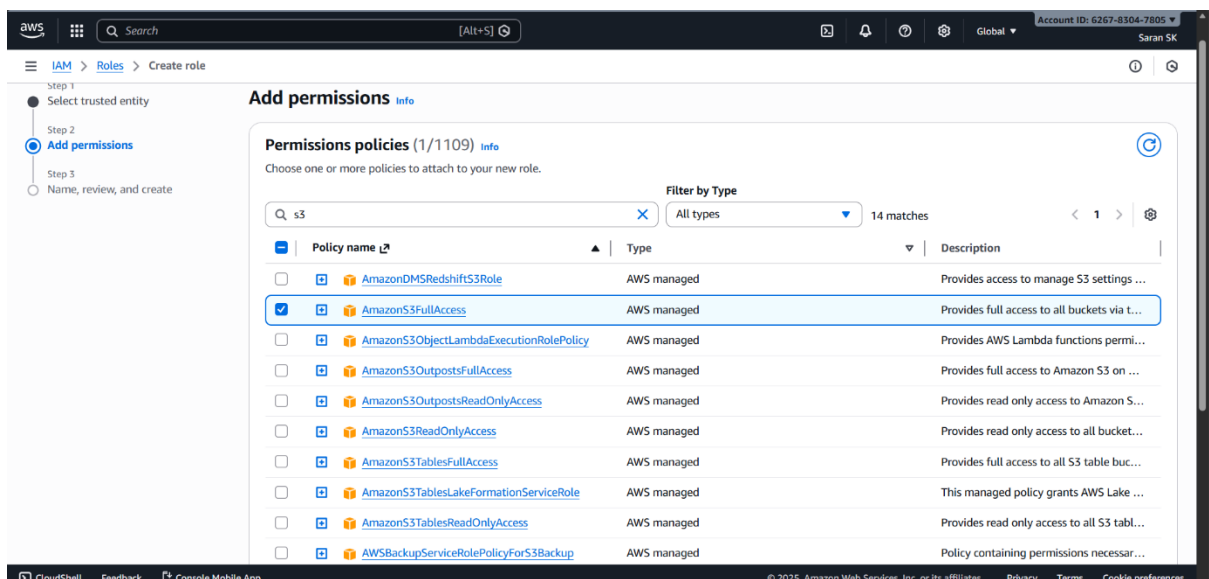



21. enter role name “webchain” > Create Role.

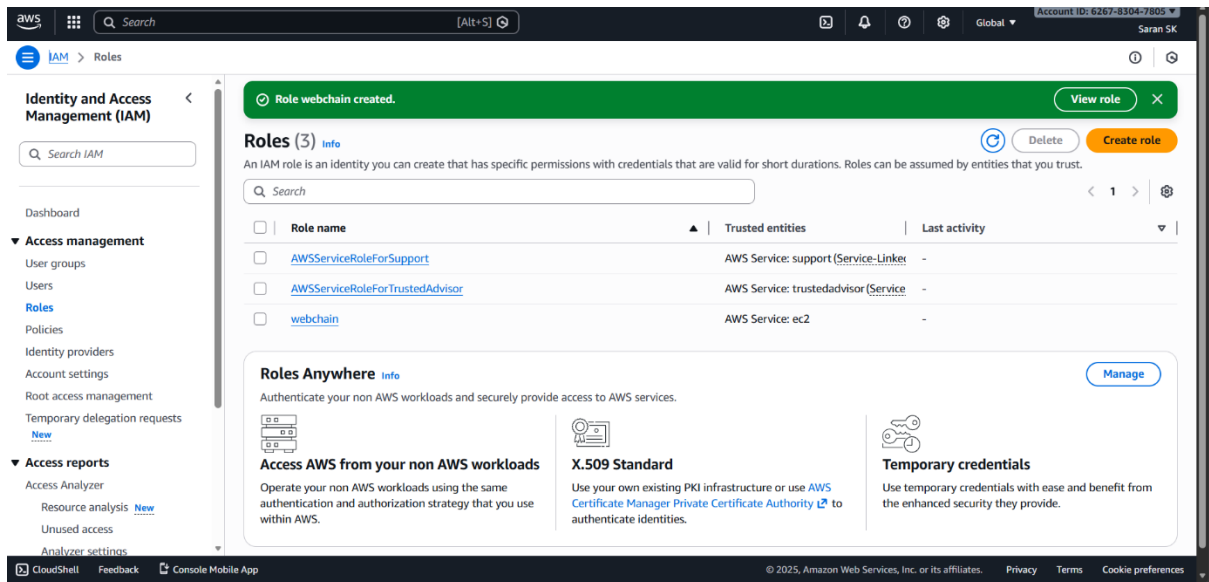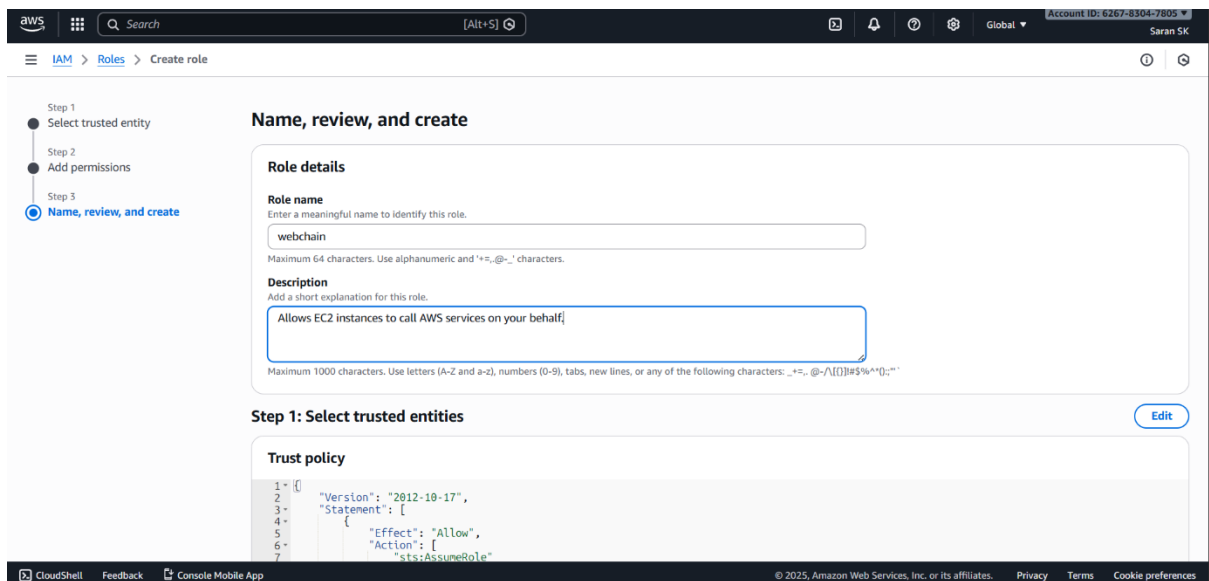


22.created EC2 instance > Actions > Security > Modify IAM role.

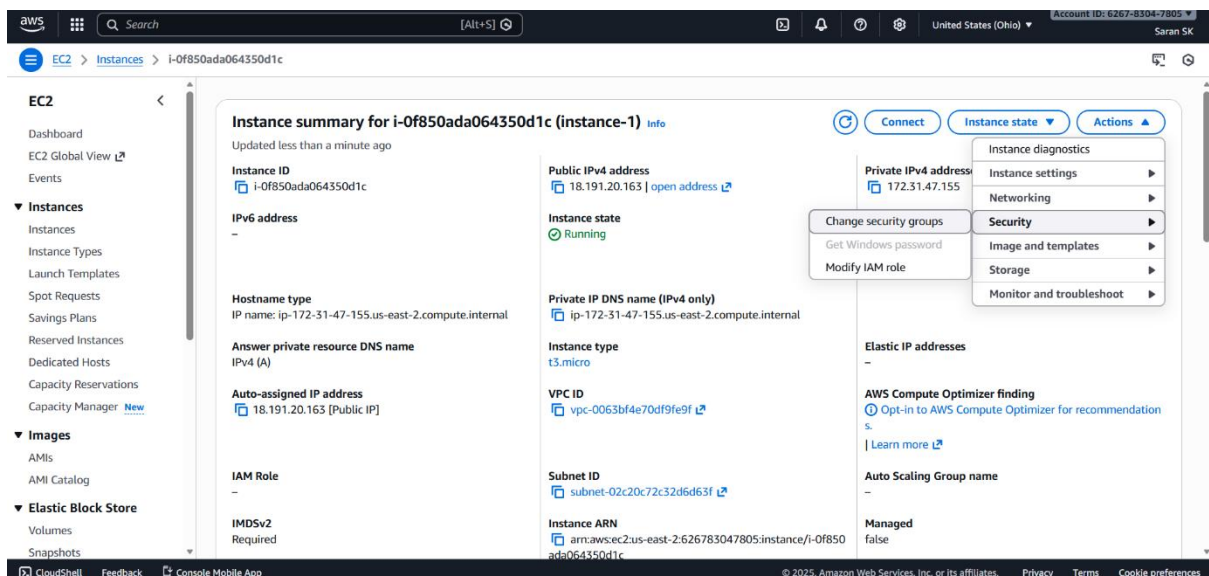

23. select already created IAM role “**webchain**” to our EC2 instance >>
Update IAM role.

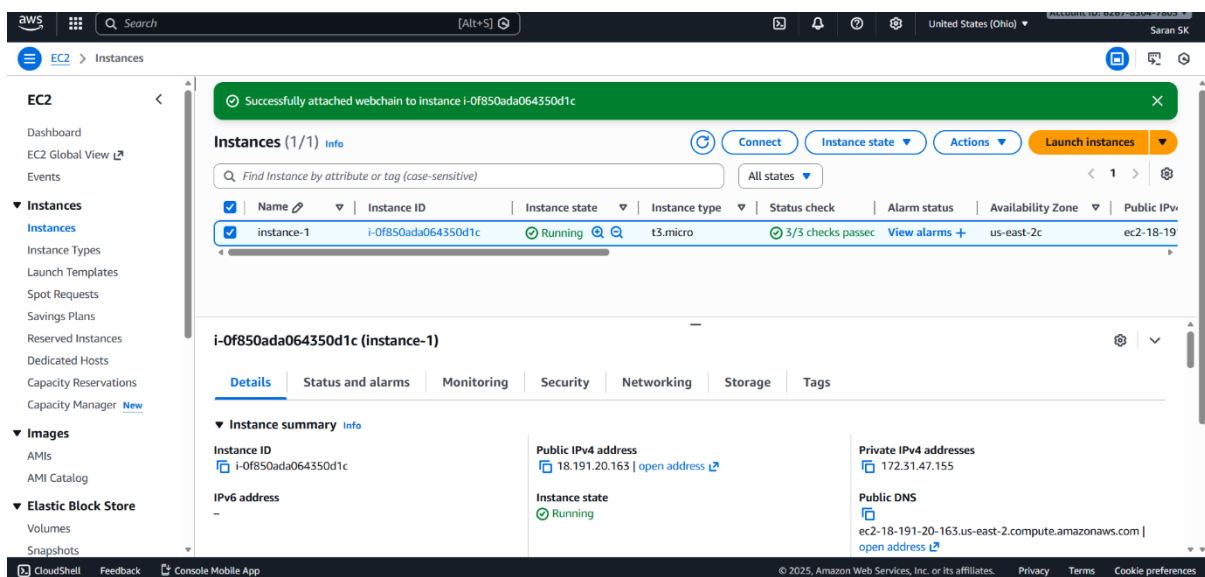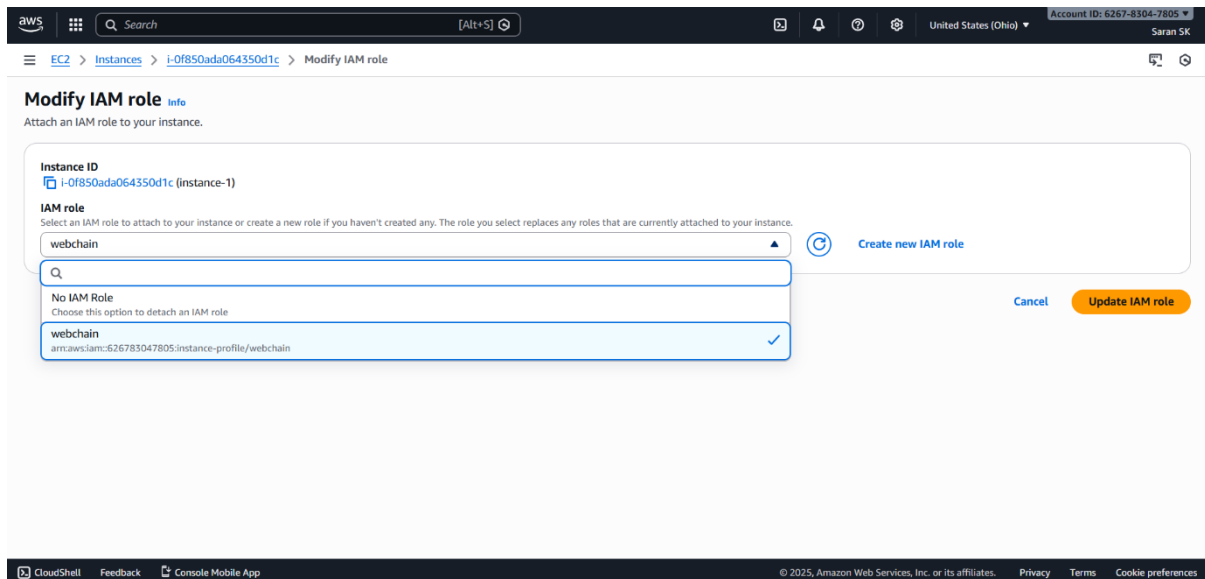

24. enter command “**aws s3 ls**” in our remote linux computer to list all our S3 buckets.

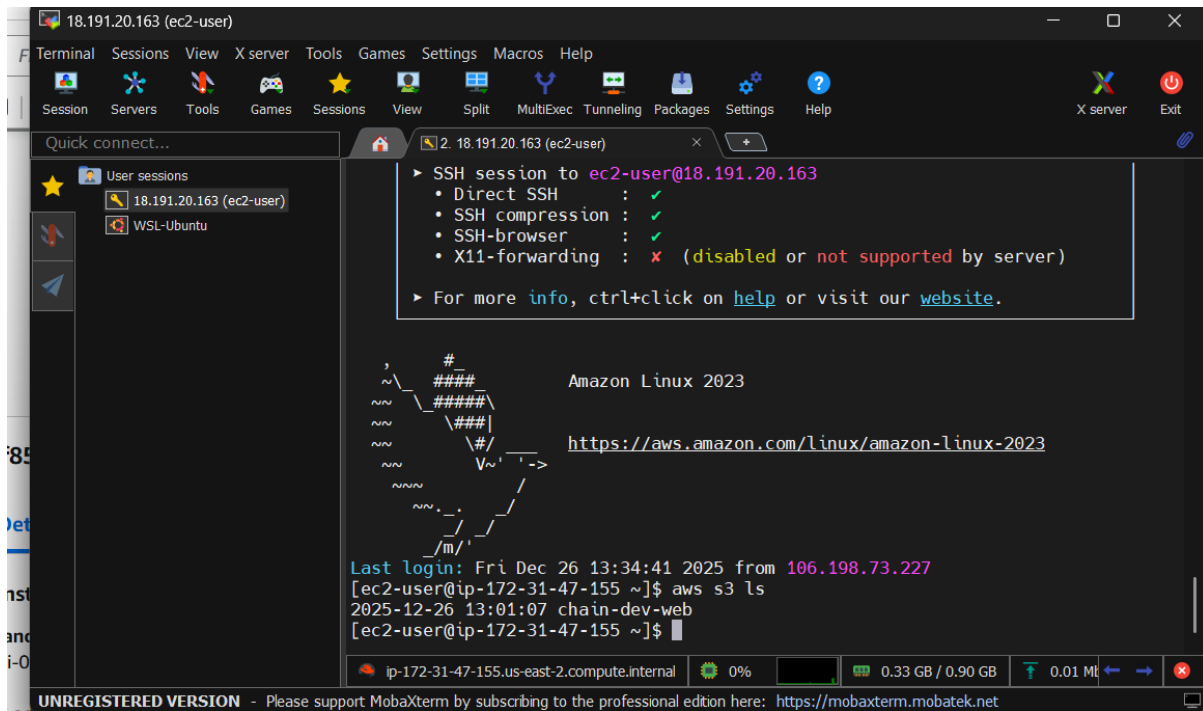

25. enter command **"cd /var/www/html"** to change path to location **"/var/www/html"** (in this location , html files are saved in the server)

"sudo aws s3 cp --recursive s3://chain-dev-web ." >> This command is used to copy files from S3 bucket to current directory of our linux EC2 computer

Why : "OUR EC2 SERVER IS RUNNING WITH IP **18.191.20.163** AND COPY OUR S3 BUCKET WHERE INDEX.HTML IS STORED TO OUR LINUX SERVER AND **OUR SERVER RETURNS INDEX.HTML** WEBSITE WHEN ENTERED ROOT ADDRESS <http://18.191.20.163> "

The screenshot shows a MobaXterm terminal window with the title bar '18.191.20.163 (ec2-user)'. The terminal displays the following commands and output:

```
~\###|
~\#/' -> https://aws.amazon.com/linux/amazon-linux-2023
~\m/'

Last login: Fri Dec 26 13:34:41 2025 from 106.198.73.227
[ec2-user@ip-172-31-47-155 ~]$ aws s3 ls
2025-12-26 13:01:07 chain-dev-web
[ec2-user@ip-172-31-47-155 ~]$ cd /var/www/html
[ec2-user@ip-172-31-47-155 html]$ ls
[ec2-user@ip-172-31-47-155 html]$ sudo aws s3 cp -recursive s3://chain-dev-web .

Unknown options: -recursive
[ec2-user@ip-172-31-47-155 html]$ sudo aws s3 cp --recursive s3://chain-dev-web
.
Completed 43.4 KiB/~332.3 KiB (580.8 KiB/s) with ~11 file(s) remaining (calculat
download: s3://chain-dev-web/assets/css/fontawesome.css to assets/css/fontawesom
e.css
Completed 43.4 KiB/~332.3 KiB (580.8 KiB/s) with ~10 file(s) remaining (calculat
Completed 48.2 KiB/~890.7 KiB (412.6 KiB/s) with ~18 file(s) remaining (calculat
download: s3://chain-dev-web/assets/css/owl.css to assets/css/owl.css
```

The status bar at the bottom shows 'ip-172-31-47-155.us-east-2.compute.internal', '0%' CPU usage, and '0.35 GB / 0.90 GB' memory usage. A footer message reads: 'UNREGISTERED VERSION - Please support MobaXterm by subscribing to the professional edition here: https://mobaxterm.mobatek.net'.

➤ <http://18.191.20.163>

