
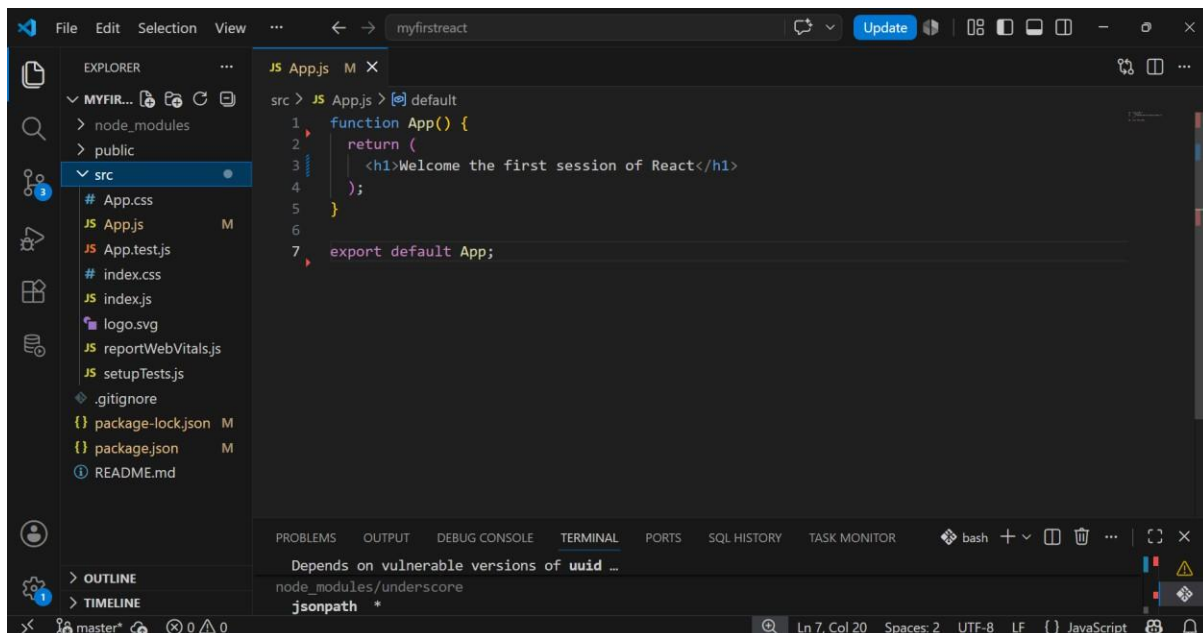



DIGITAL NURTURE 5.0 DEEPSKILLING

WEEK 5 – HANDS-ON

REACT

1. ReactJS-HOL

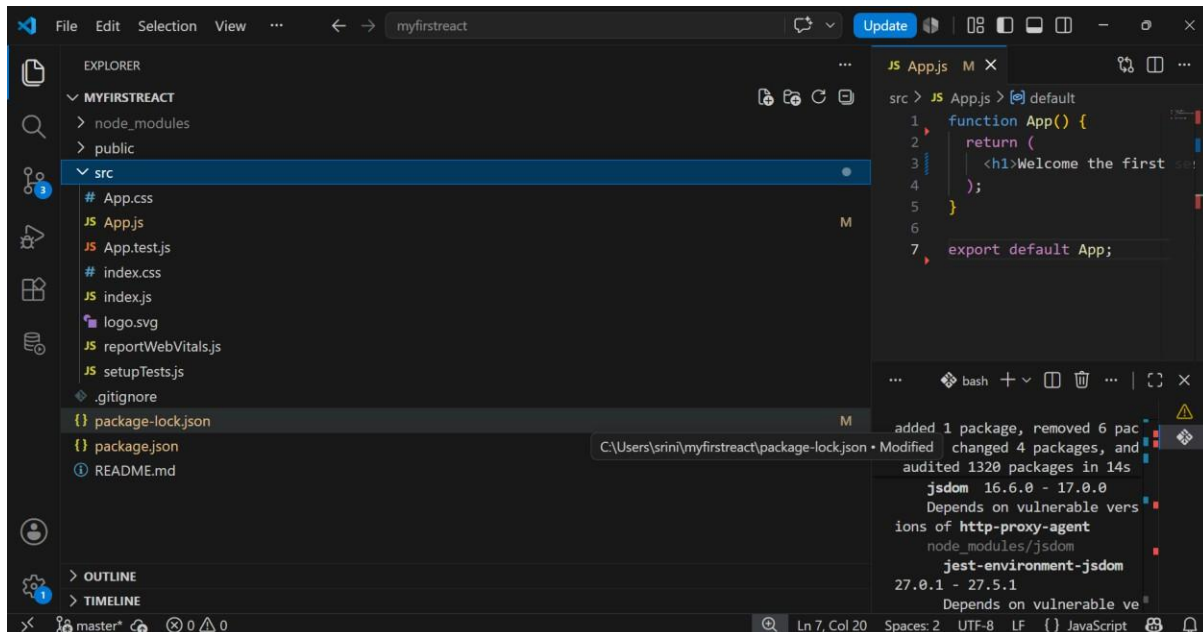

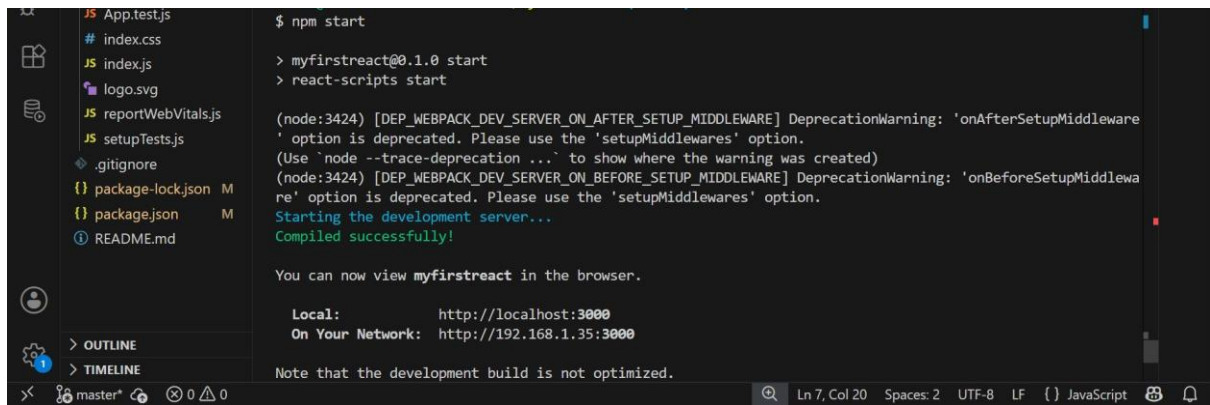

The screenshot shows a code editor with a file explorer on the left and a terminal on the right. The file explorer lists files like `App.test.js`, `index.css`, `index.js`, `logo.svg`, `reportWebVitals.js`, `setupTests.js`, `.gitignore`, `package-lock.json`, `package.json`, and `README.md`. The terminal shows the command `$ npm start` and the output of the development server starting, including deprecation warnings and the URL `http://localhost:3000`.

```
$ npm start


> myfirstreact@0.1.0 start
> react-scripts start

(node:3424) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use `node --trace-deprecation ...` to show where the warning was created)
(node:3424) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!


You can now view myfirstreact in the browser.


Local:      http://localhost:3000
On Your Network: http://192.168.1.35:3000


Note that the development build is not optimized.
```

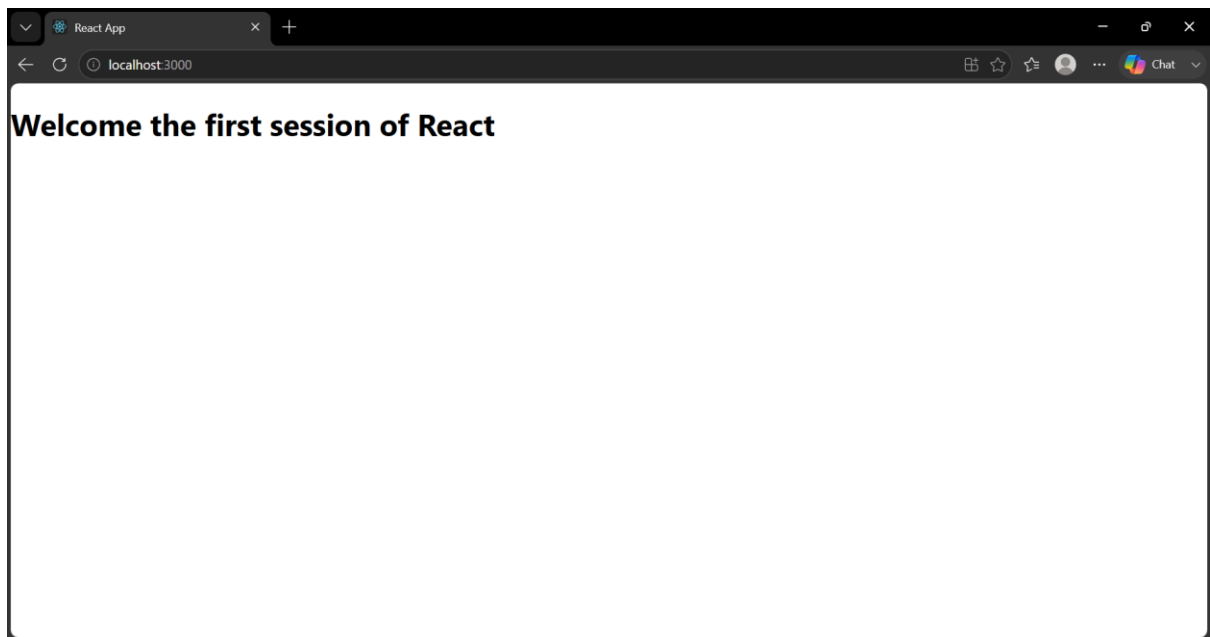


2. ReactJS-HOL

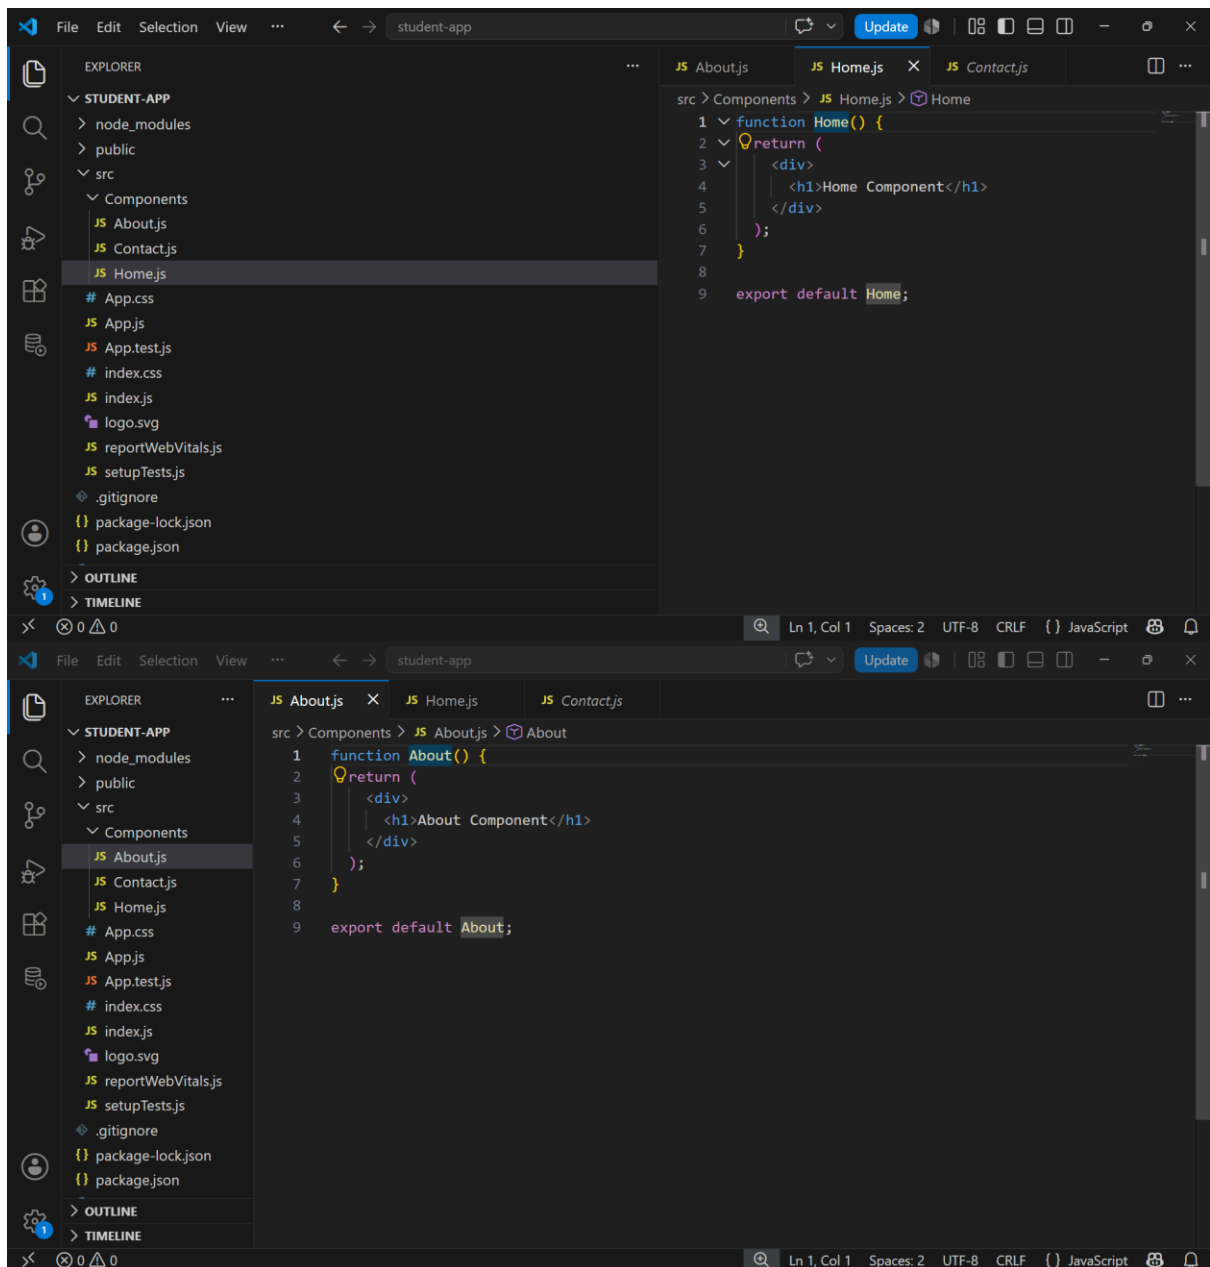


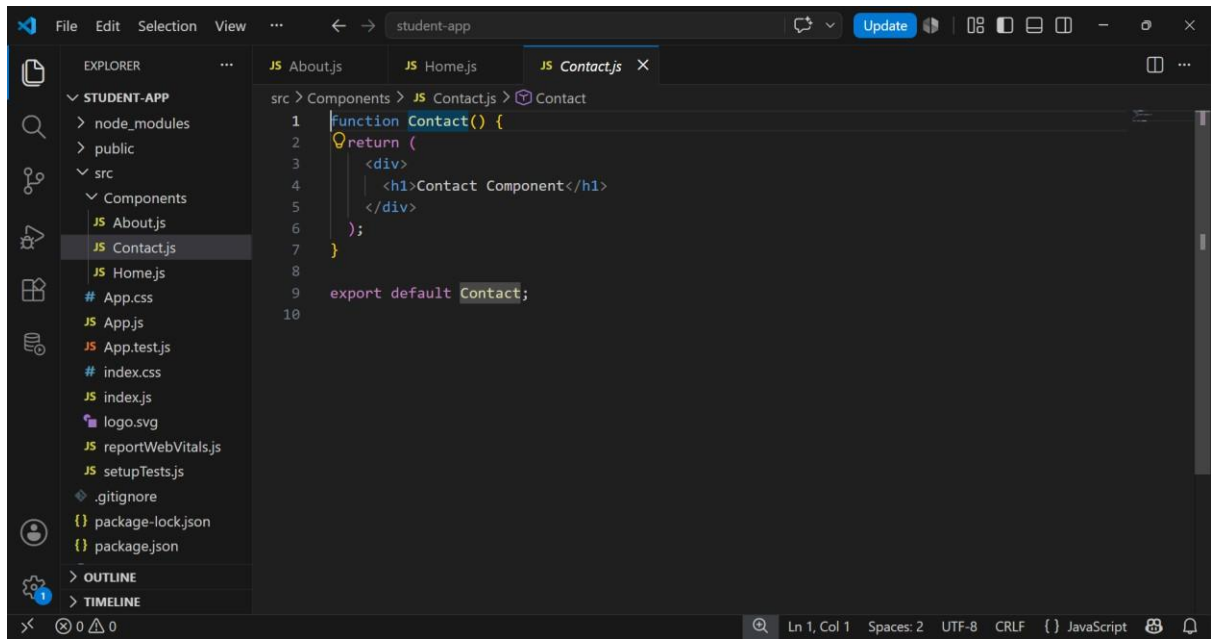

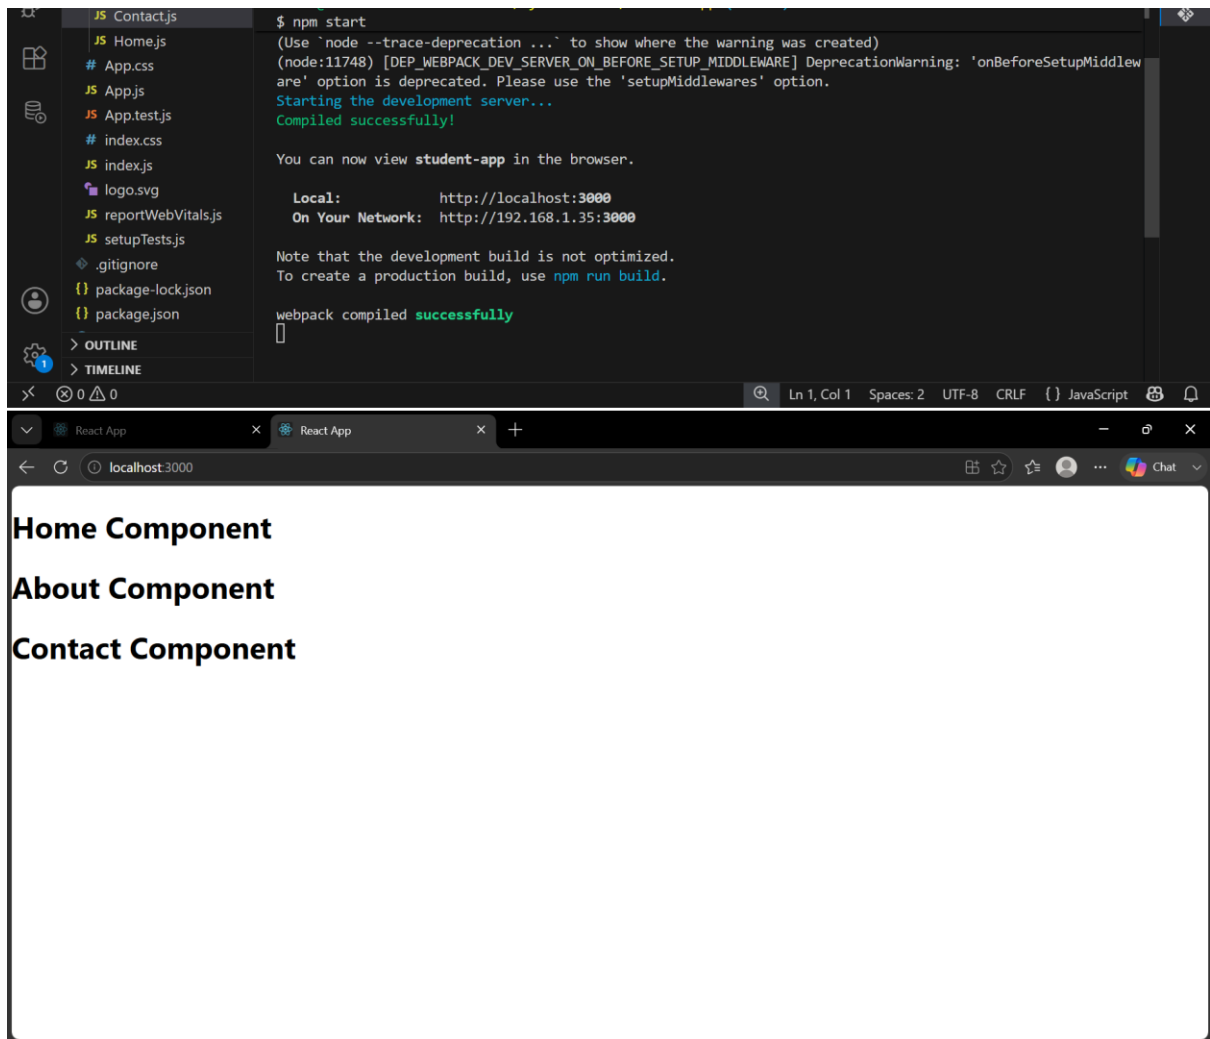


3. ReactJS-HOL

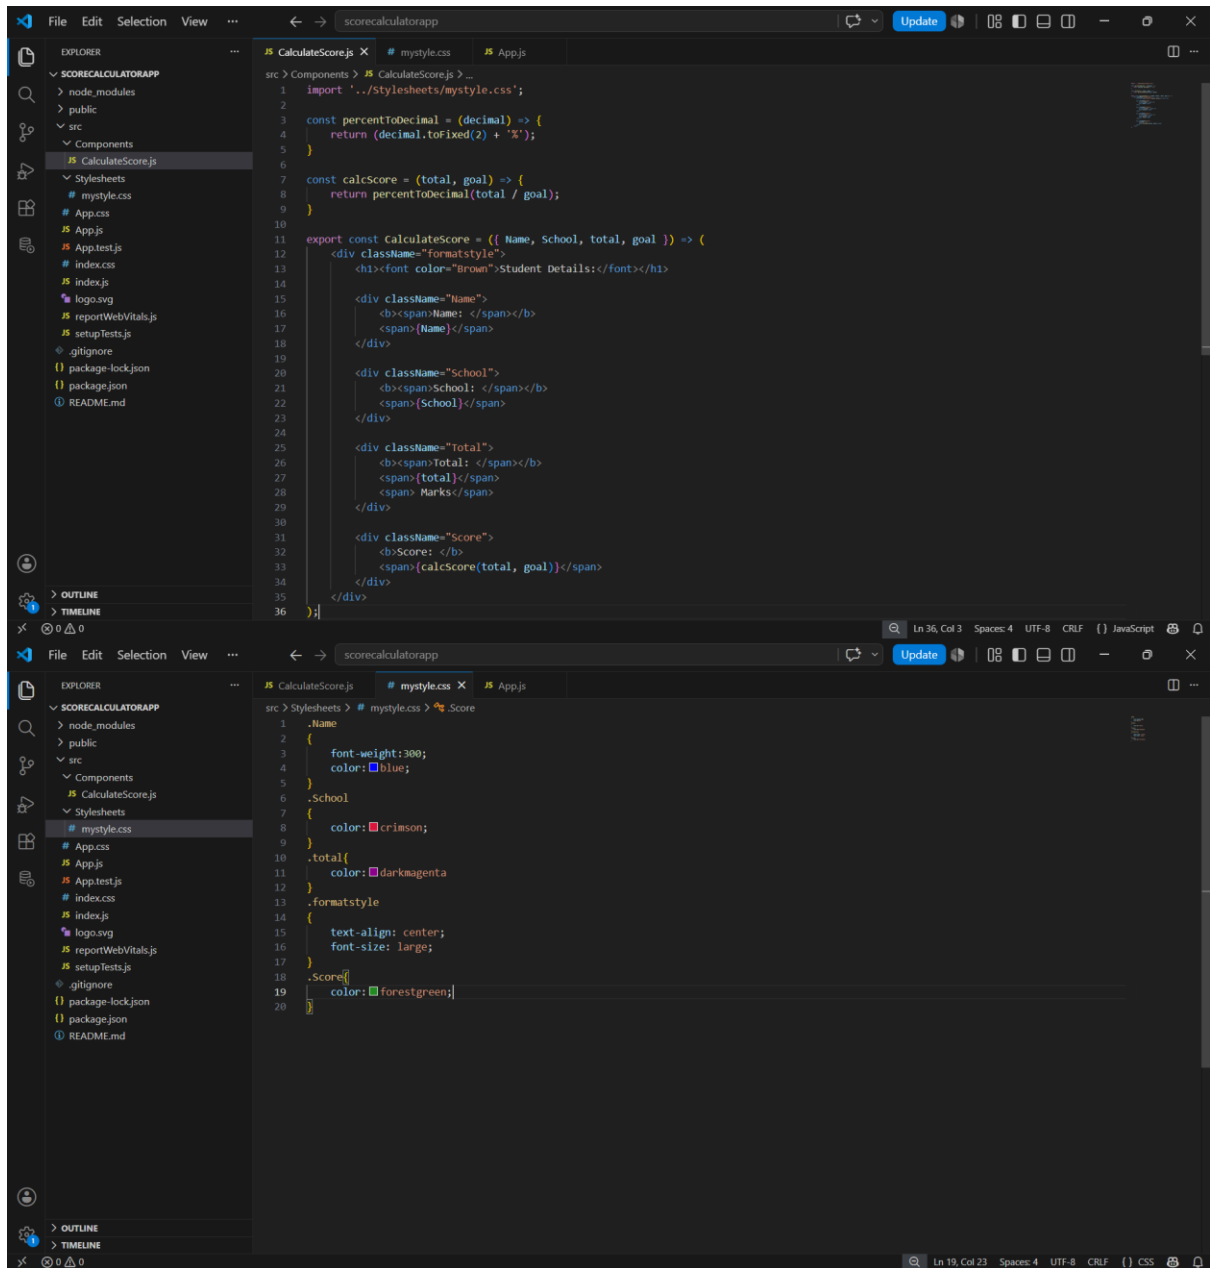

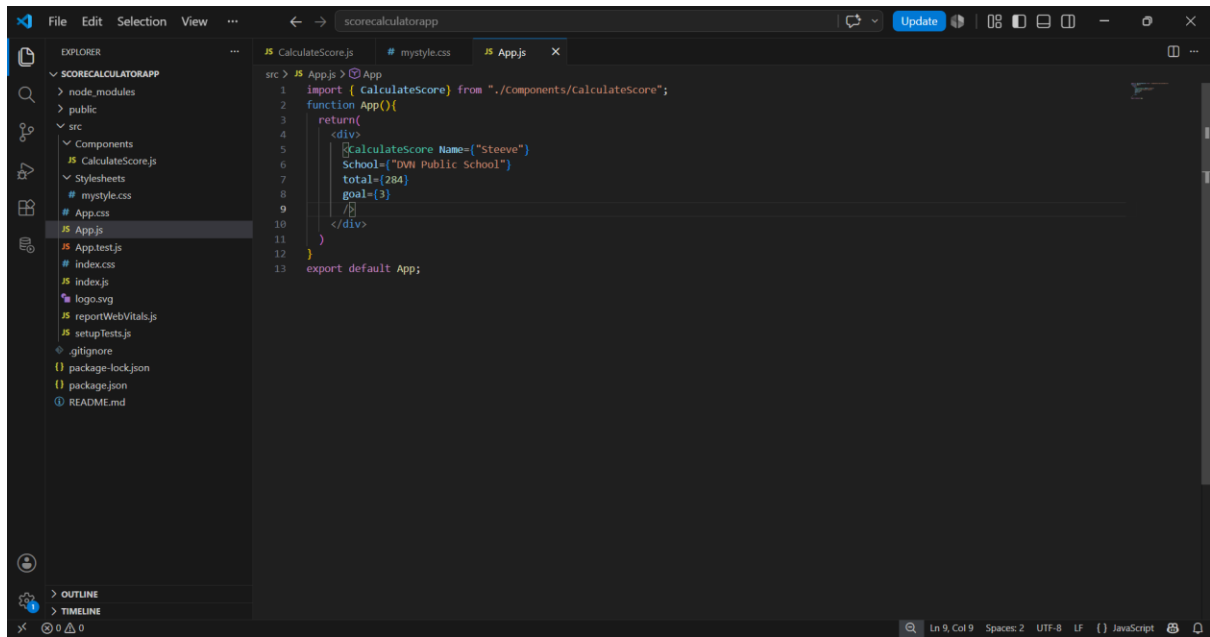

The screenshot shows the Visual Studio Code editor with a project named 'scorecalculatorapp'. The Explorer sidebar on the left shows the file structure, including 'src' with 'Components', 'stylesheets', and 'App.js'. The main editor area displays the content of 'App.js'.

```
src > JS App.js > App
1  import { calculateScore } from './components/calculateScore';
2  function App(){
3    return(
4      <div>
5        <calculateScore Name="Steeve">
6          School="DWN Public School"
7          total={784}
8          goal={3}
9        </calculateScore>
10     </div>
11   )
12 }
13 export default App;
```

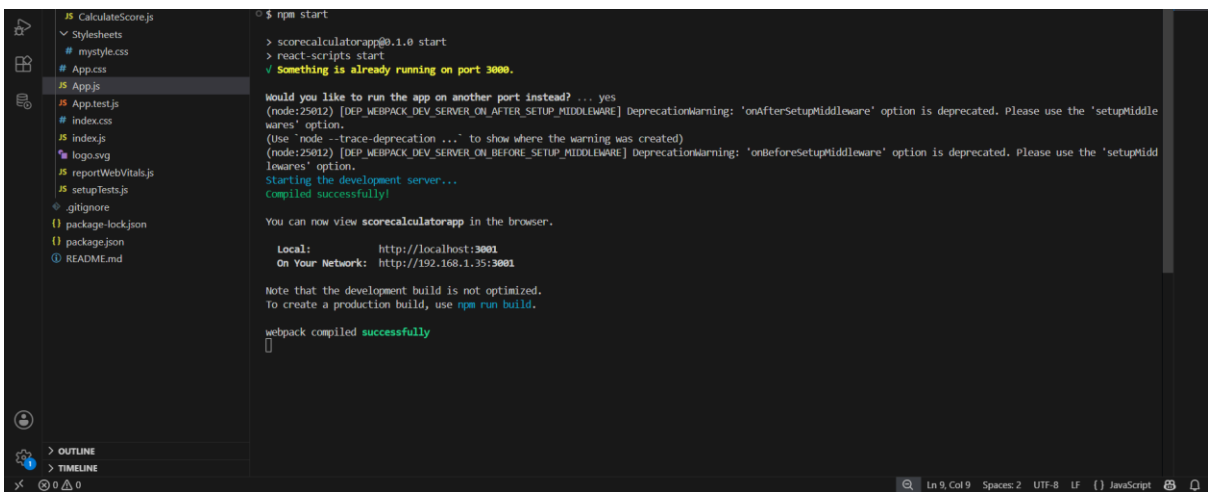

The screenshot shows the Visual Studio Code editor with the same project. The Explorer sidebar is visible on the left. The main editor area displays the terminal output of running the application.

```
$ npm start
> scorecalculatorapp@0.1.0 start
> react-scripts start
✓ Something is already running on port 3000.


Would you like to run the app on another port instead? ... yes
(node:25012) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(node:25012) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view scorecalculatorapp in the browser.


Local:      http://localhost:3001
On Your Network:  http://192.168.1.35:3001

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

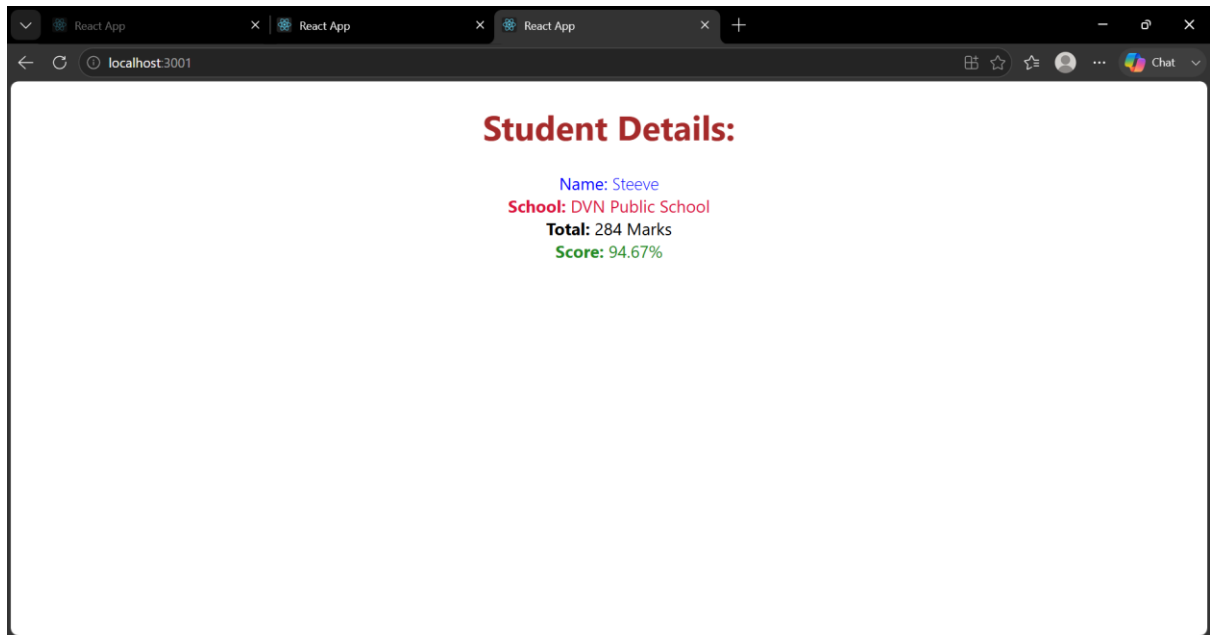

4. ReactJS-HOL

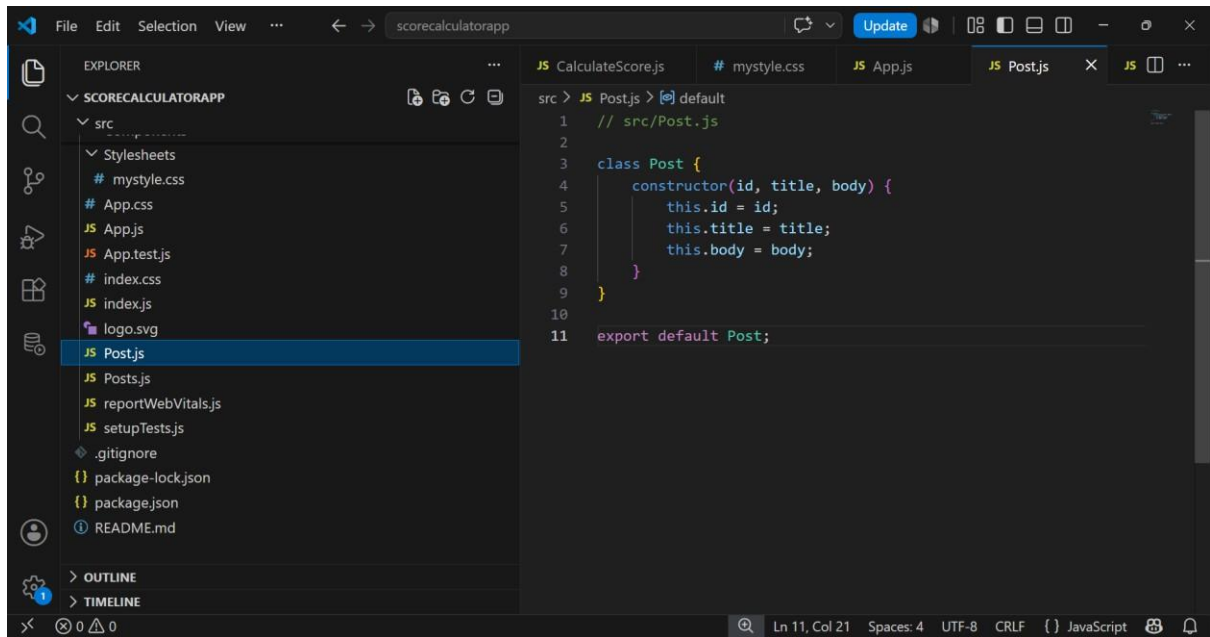


```
1 // src/Posts.js
2
3 import React, { Component } from "react";
4 import Post from "../Post";
5
6 class Posts extends Component {
7
8   constructor(props) {
9     super(props);
10
11     this.state = {
12       posts: []
13     };
14   }
15
16   loadPosts() {
17
18     fetch("https://jsonplaceholder.typicode.com/posts")
19       .then(response => response.json())
20       .then(data => {
21
22         const posts = data.map(item =>
23           new Post(item.id, item.title, item.body)
24         );
25
26         this.setState({
27           posts: posts
28         });
29       })
30       .catch(error => {
31         throw error;
32       });
33   }
34
35   componentDidMount() {
36     this.loadPosts();
37   }
38
39   componentDidCatch(error, info) {
40     alert("Error : " + error);
41   }
42
43   render() {
44
45   }
46 }
```

```
1 // src/Posts.js
2
3 import React, { Component } from "react";
4 import Post from "../Post";
5
6 class Posts extends Component {
7
8   constructor(props) {
9     super(props);
10
11     this.state = {
12       posts: []
13     };
14   }
15
16   loadPosts() {
17
18     fetch("https://jsonplaceholder.typicode.com/posts")
19       .then(response => response.json())
20       .then(data => {
21
22         const posts = data.map(item =>
23           new Post(item.id, item.title, item.body)
24         );
25
26         this.setState({
27           posts: posts
28         });
29       })
30       .catch(error => {
31         throw error;
32       });
33   }
34
35   componentDidMount() {
36     this.loadPosts();
37   }
38
39   componentDidCatch(error, info) {
40     alert("Error : " + error);
41   }
42
43   render() {
44
45     return (
46       <div>
47         <h1>Blog Posts</h1>
48         <div key={this.state.posts.map(post => (
49           <div key={post.id}>
50             <h2>{post.title}</h2>
51             <p>{post.body}</p>
52             <hr />
53           </div>
54         ))}>
55       </div>
56     );
57   }
58
59   export default Posts;
60 }
```

VS Code Explorer

SCORE...

blogapp

node_modules

public

src

App.css

App.js

App.test.js

index.css

index.js

logo.svg

reportWebVitals.js

setupTests.js

.gitignore

package-lock.json

OUTLINE

TIMELINE

src > JS App.js > default

```
1 import Posts from "../Posts";
2
3 function App() {
4   return (
5     <div>
6       <Posts />
7     </div>
8   );
9 }
10
11 export default App;
```

Ln 11, Col 20 Spaces: 2 UTF-8 LF { } JavaScript

React App

localhost:3002

Chat

Blog Posts

sunt aut facere repellat provident occaecati excepturi optio reprehenderit

quia et suscipit suscipit recusandae consequuntur expedita et cum reprehenderit molestiae ut ut quas totam nostrum rerum est autem sunt rem eveniet architecto

qui est esse

est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla


ea molestias quasi exercitationem repellat qui ipsa sit aut

et iusto sed quo iure voluptatem occaecati omnis eligendi aut ad voluptatem doloribus vel accusantium quis pariatur molestiae porro eius odio et labore et velit aut

eum et est occaecati

ullam et saepe reiciendis voluptatem adipisci sit amet autem assumenda provident rerum culpa quis hic commodi nesciunt rem tenetur doloremque ipsam iure quis sunt voluptatem rerum illo velit

nesciunt quas odio

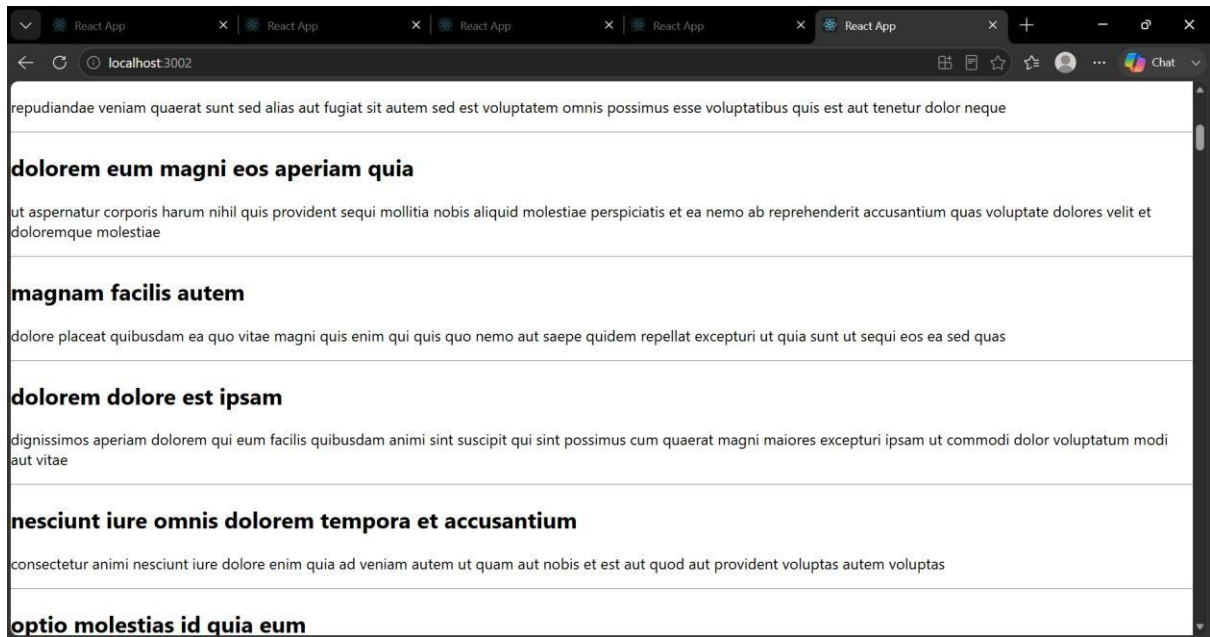


5. ReactJS-HOL

This screenshot shows the VS Code editor with the `CohortDetails.js` file open. The Explorer sidebar on the left shows the project structure for `cohorttracker`, including `node_modules`, `public`, `src`, and various source files like `App.css`, `App.js`, `App.test.js`, `CohortDetails.js`, `CohortDetails.module.css`, `index.css`, `index.js`, `logo.svg`, `reportWebVitals.js`, `setupTests.js`, `.gitignore`, `package-lock.json`, `package.json`, and `README.md`. The main editor area displays the following JavaScript code:


```
src > CohortDetails.js | default
1 import React from "react";
2 import styles from "../CohortDetails.module.css";
3
4 function CohortDetails({ cohort }) {
5
6   return (
7
8     <div className={styles.box}>
9
10      <h3>
11        {
12          style={
13            {
14              cohort.currentStatus === "Ongoing"
15                ? "green"
16                : "blue"
17            }
18          }
19        }
20      </h3>
21
22      <div>
23        {cohort.name}
24      </div>
25
26      <dl>
27        <dt>Started On</dt>
28        <dd>{cohort.startedOn}</dd>
29
30        <dt>Current Status</dt>
31        <dd>{cohort.currentStatus}</dd>
32
33        <dt>Coach</dt>
34        <dd>{cohort.coach}</dd>
35
36        <dt>Trainer</dt>
37        <dd>{cohort.trainer}</dd>
38      </dl>
39    </div>
40  );
41}
42
43 export default CohortDetails;
```

This screenshot shows the VS Code editor with the `CohortDetails.module.css` file open. The Explorer sidebar on the left shows the project structure for `cohorttracker`, including `node_modules`, `public`, `src`, and various source files like `App.css`, `App.js`, `App.test.js`, `CohortDetails.js`, `CohortDetails.module.css`, `index.css`, `index.js`, `logo.svg`, `reportWebVitals.js`, `setupTests.js`, `.gitignore`, `package-lock.json`, `package.json`, and `README.md`. The main editor area displays the following CSS code:


```
src > CohortDetails.module.css | dd
1 .box {
2   width: 300px;
3   display: inline-block;
4   margin: 10px;
5   padding: 10px 20px;
6   border: 1px solid black;
7   border-radius: 10px;
8   box-shadow: 0px 2px 8px rgba(0,0,0,0.2);
9 }
10
11 dt {
12   font-weight: 500;
13 }
14
15 dd {
16   margin-bottom: 10px;
17 }
```

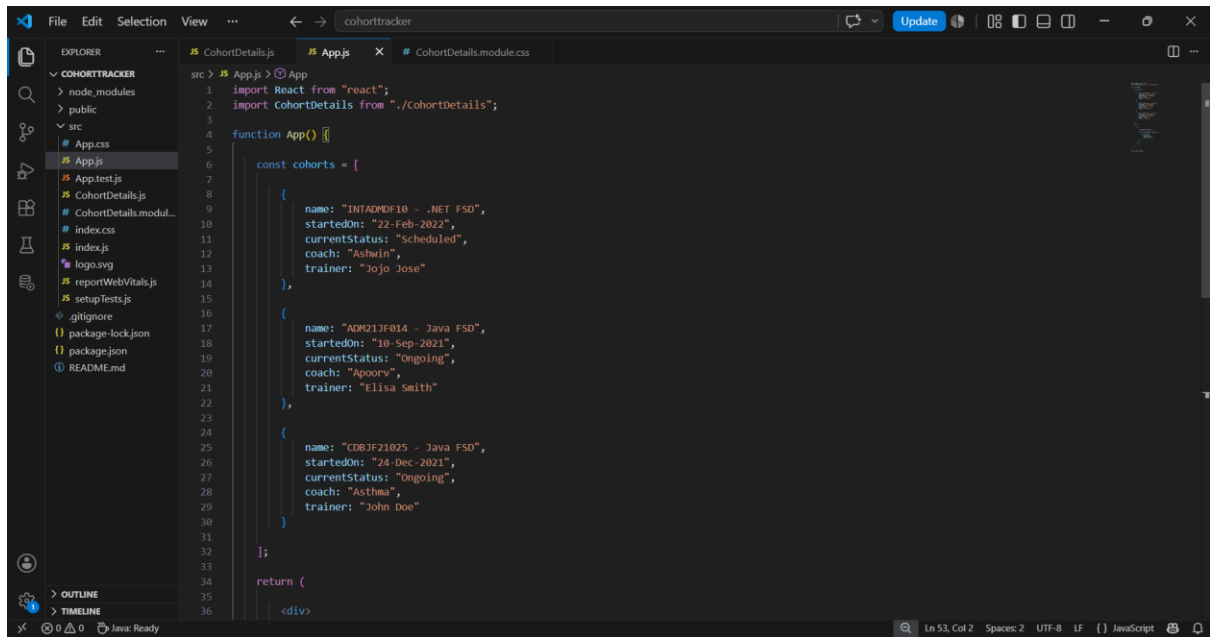


```
1 import React from "react";
2 import CohortDetails from "../CohortDetails";
3
4 function App() {
5
6   const cohorts = [
7
8     {
9       name: "INTADMF10 - .NET FSD",
10      startDate: "22-Feb-2022",
11      currentStatus: "Scheduled",
12      coach: "Ashwin",
13      trainer: "Jojo Jose"
14    },
15
16    {
17      name: "ADMG17F014 - Java FSD",
18      startDate: "10-Sep-2021",
19      currentStatus: "Ongoing",
20      coach: "Apoorv",
21      trainer: "Elisa Smith"
22    },
23
24    {
25      name: "CDBJF21025 - Java FSD",
26      startDate: "24-Dec-2021",
27      currentStatus: "Ongoing",
28      coach: "Ashima",
29      trainer: "John Doe"
30    }
31  ];
32
33  return (
34    <div>
35
```

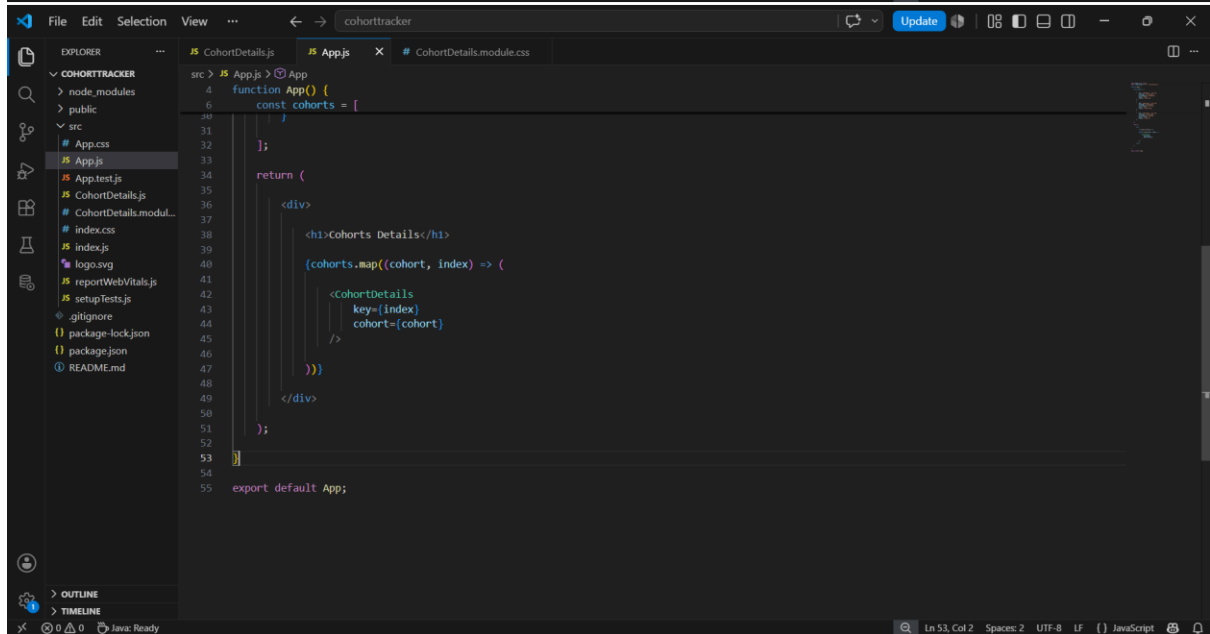

```
36    <div>
37      <h1>Cohorts Details</h1>
38
39      {cohorts.map((cohort, index) => (
40
41        <CohortDetails
42          key={index}
43          cohort={cohort}
44        />
45      ))}
46    </div>
47  );
48
49  };
50
51  export default App;
```

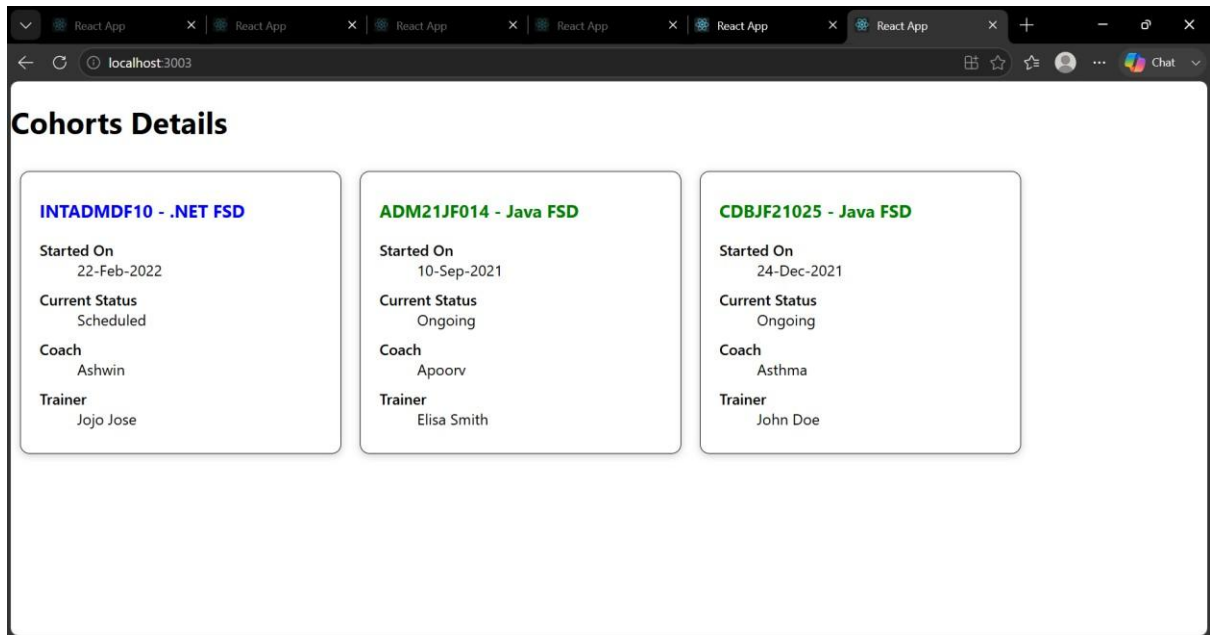

9. ReactJS-HOL


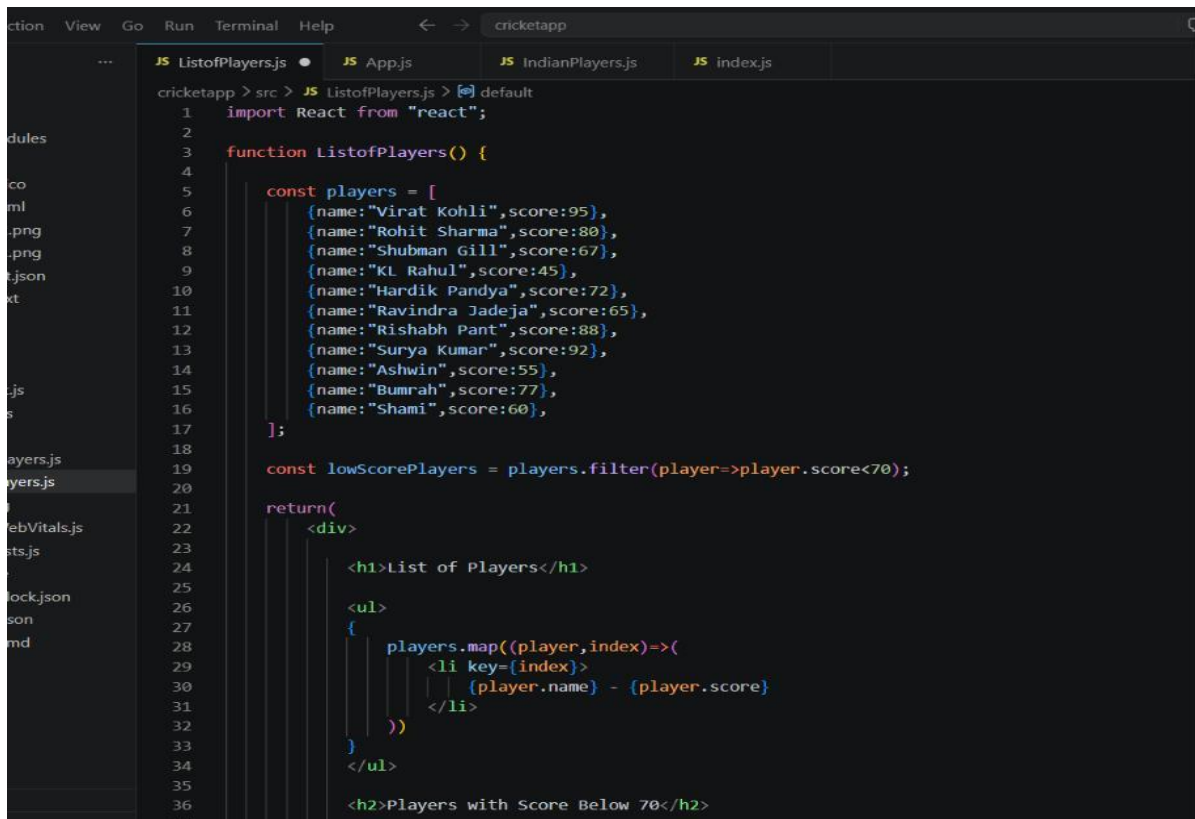


```
JS ListofPlayers.js • JS App.js JS IndianPlayers.js JS index.js
cricketapp > src > JS ListofPlayers.js > default
3 function ListofPlayers() {
22   <div>
23     <h1>List of Players</h1>
24     <ul>
25       {
26         players.map((player,index)=>{
27           <li key={index}>
28             {player.name} - {player.score}
29           </li>
30         })
31       }
32     </ul>
33     <h2>Players with Score Below 70</h2>
34     <ul>
35       {
36         lowScorePlayers.map((player,index)=>{
37           <li key={index}>
38             {player.name} - {player.score}
39           </li>
40         })
41       }
42     </ul>
43   </div>
44   );
45 }
46 export default ListofPlayers;
```

```
File Edit Selection View Go Run Terminal Help cricketapp
EXPLORER
CRICKETAPP
  cricketapp
    node_modules
    public
      favicon.ico
      index.html
      logo192.png
      logo512.png
      manifest.json
      robots.txt
    src
      App.css
      JS App.js
      JS App.test.js
      # index.css
      JS index.js
      JS IndianPlayers.js
      JS ListofPlayers.js
      logo.svg
      JS reportWebVitals.js
      JS setupTests.js
      .gitignore
      package-lock.json
      package.json
JS ListofPlayers.js • JS App.js X JS IndianPlayers.js JS index.js
cricketapp > src > JS App.js > App > flag
1 import React from "react";
2 import ListofPlayers from "../ListofPlayers";
3 import IndianPlayers from "../IndianPlayers";
4
5 function App() {
6   const flag = false;
7
8   if (flag) {
9     return <ListofPlayers />;
10   } else {
11     return <IndianPlayers />;
12   }
13 }
14
15 export default App;
```

```
cricketapp > src > JS IndianPlayers.js > default
1  import React from "react";
2
3  function IndianPlayers() {
4
5      const players = [
6          "Virat",
7          "Rohit",
8          "Gill",
9          "Rahul",
10         "Hardik",
11         "Jadeja"
12     ];
13
14     // Destructuring
15     const [p1, p2, p3, p4, p5, p6] = players;
16
17     const T20Players = [
18         "Virat",
19         "Rohit",
20         "Surya",
21         "Hardik"
22     ];
23
24     const RanjiPlayers = [
25         "Sarfaraz",
26         "Jaiswal",
27         "Ruturaj",
28         "Mukesh"
29     ];
30
31     const mergedPlayers = [...T20Players, ...RanjiPlayers];
32
33     return <div>
```

```
cricketapp > src > JS IndianPlayers.js > default
3  function IndianPlayers() {
30
31     const mergedPlayers = [...T20Players, ...RanjiPlayers];
32
33     return (
34         <div>
35             <h2>Odd Team Players</h2>
36
37             <ul>
38                 <li>{p1}</li>
39                 <li>{p3}</li>
40                 <li>{p5}</li>
41             </ul>
42
43             <h2>Even Team Players</h2>
44
45             <ul>
46                 <li>{p2}</li>
47                 <li>{p4}</li>
48                 <li>{p6}</li>
49             </ul>
50
51             <h2>Merged Players</h2>
52
53             <ul>
54                 {mergedPlayers.map((player, index) => (
55                     <li key={index}>{player}</li>
56                 ))}
57             </ul>
58         </div>
59     );
60 }
61
62 export default IndianPlayers;
```

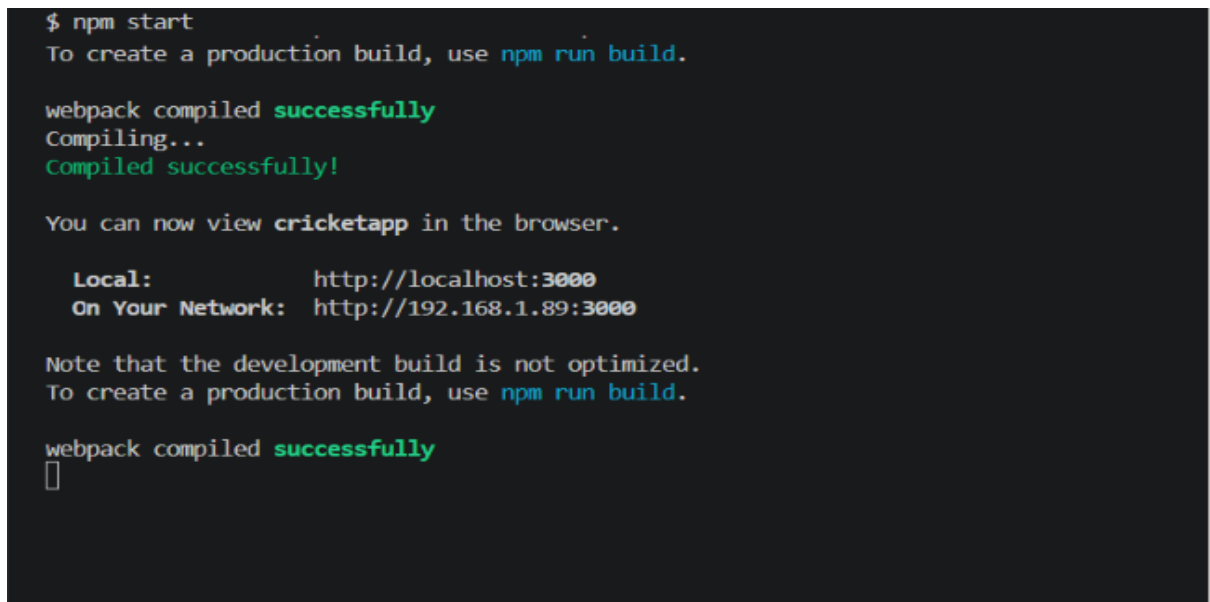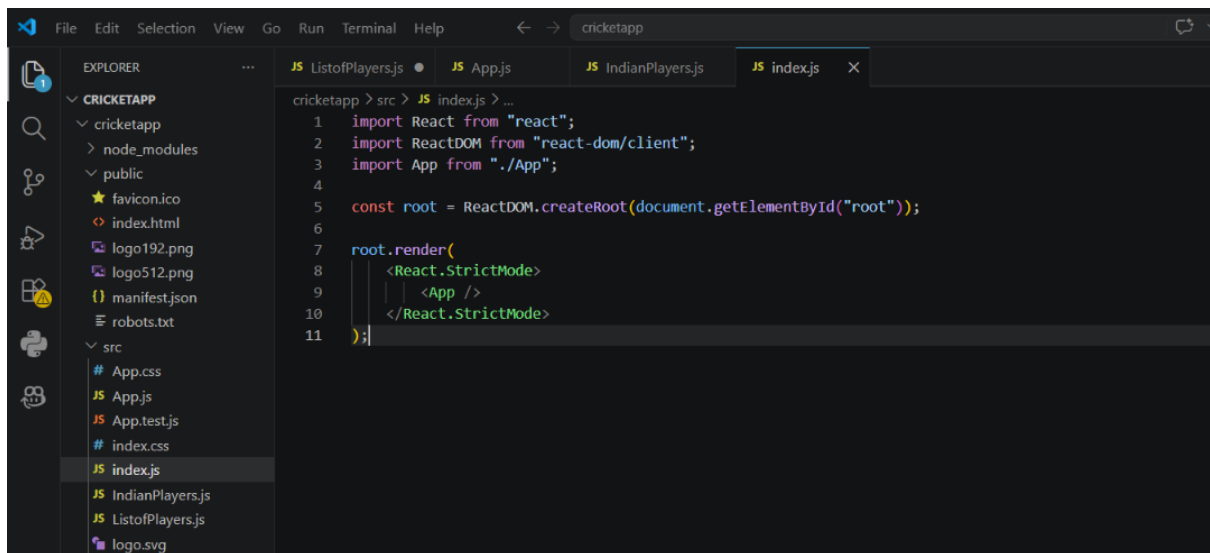Odd Team Players

- Virat
- Gill
- Hardik

Even Team Players

- Rohit
- Rahul
- Jadeja

Merged Players

- Virat
- Rohit
- Surya
- Hardik
- Sarfaraz
- Jaiswal
- Ruturaj
- Mukesh

List of Players

- Virat Kohli - 95
- Rohit Sharma - 80
- Shubman Gill - 67
- KL Rahul - 45
- Hardik Pandya - 72
- Ravindra Jadeja - 65
- Rishabh Pant - 88
- Surya Kumar - 92
- Ashwin - 55
- Bumrah - 77
- Shami - 60

Players with Score Below 70

- Shubman Gill - 67
- KL Rahul - 45
- Ravindra Jadeja - 65
- Ashwin - 55
- Shami - 60

```
JS App.js X React App JS index.js
src > JS App.js > App
1 import React from "react";
2 import officeImage from "../office.jpg";
3
4 function App() {
5
6   const office = {
7     name: "Smart Office",
8     rent: 55000,
9     address: "Anna Nagar, Chennai"
10  };
11
12   const officeList = [
13     {
14       name: "Smart Office",
15       rent: 55000,
16       address: "Anna Nagar, Chennai"
17     },
18     {
19       name: "Tech Park",
20       rent: 75000,
21       address: "Electronic City, Bangalore"
22     },
23     {
24       name: "Business Hub",
25       rent: 45000,
26       address: "Hitech City, Hyderabad"
27     },
28     {
29       name: "Corporate Plaza",
30       rent: 90000,
31       address: "T Nagar, Chennai"
32     }
33   ];
34
35   return (
36     <div style={{ padding: "20px" }}>
37       <h1>Office Space Rental App</h1>
```

```
JS App.js X React App JS index.js
src > JS App.js > App
4 function App() {
36 <div style={{ padding: 20px }}>
37 <h1>Office Space Rental App</h1>
38
39 <img
40   src={officeImage}
41   alt="Office"
42   width="500"
43   height="300"
44 >/>
45
46 <h2>Office Details</h2>
47
48 <p><b>Name:</b> {office.name}</p>
49
50 <p
51   style={{
52     color: office.rent < 60000 ? "red" : "green"
53   }}
54 >
55   <b>Rent:</b> ₹{office.rent}
56 </p>
57
58 <p><b>Address:</b> {office.address}</p>
59
60 <hr />
61
62 <h2>Office Space List</h2>
63
64 {officeList.map((item, index) => (
65   <div key={index}>
66     <p><b>Name:</b> {item.name}</p>
67
68     <p
69       style={{
70         color: item.rent < 60000 ? "red" : "green"
71       }}
72     >
```

```

4   function App() {
64     {officeList.map((item, index) => (
65       <div key={index}>
66         <p><b>Name:</b> {item.name}</p>
67
68         <p
69           style={{
70             color: item.rent < 60000 ? "red" : "green"
71           }}
72         >
73           <b>Rent:</b> ₹{item.rent}
74         </p>
75
76         <p><b>Address:</b> {item.address}</p>
77
78         <hr />
79       </div>
80     )]}
81
82   </div>
83 );
84 }
85
86 export default App;

```

tion View Go Run Terminal Help ← → officespacereentalapp



... JS App.js React App JS index.js X

src > JS index.js > ...

```

1   import React from "react";
2   import ReactDOM from "react-dom/client";
3   import App from "./App";
4
5   const root = ReactDOM.createRoot(document.getElementById("root"));
6
7   root.render(
8     <React.StrictMode>
9       <App />
10    </React.StrictMode>
11  );

```

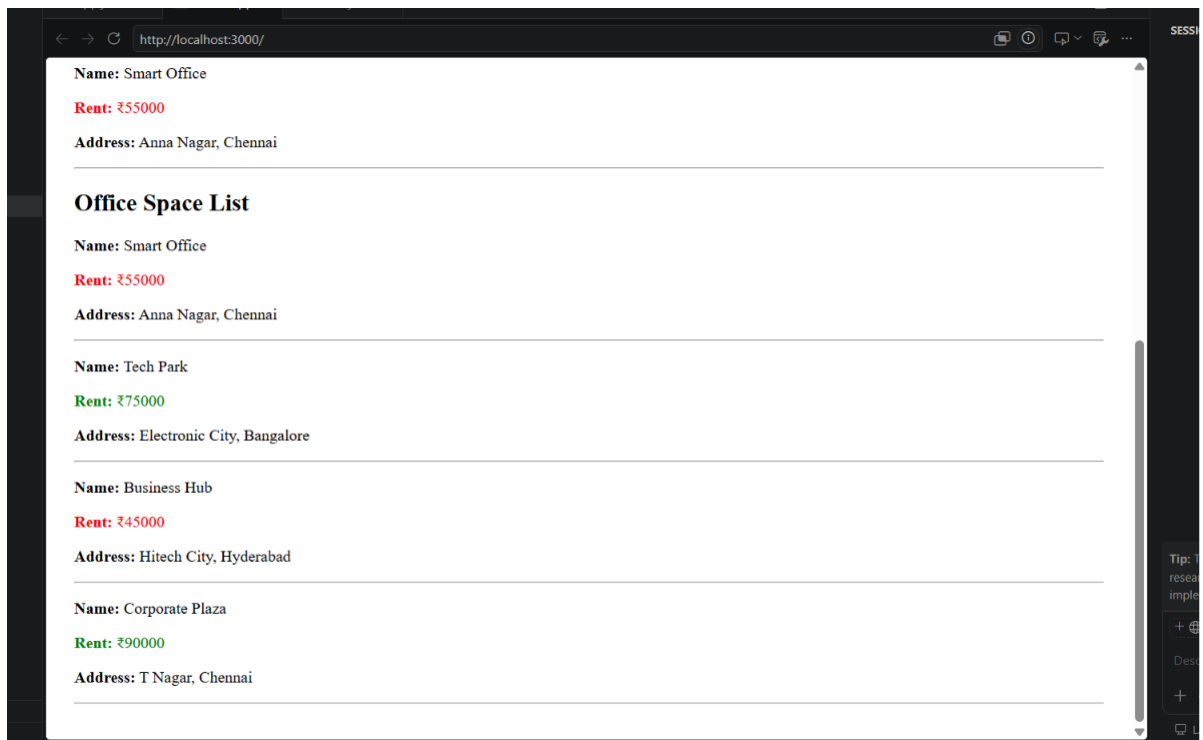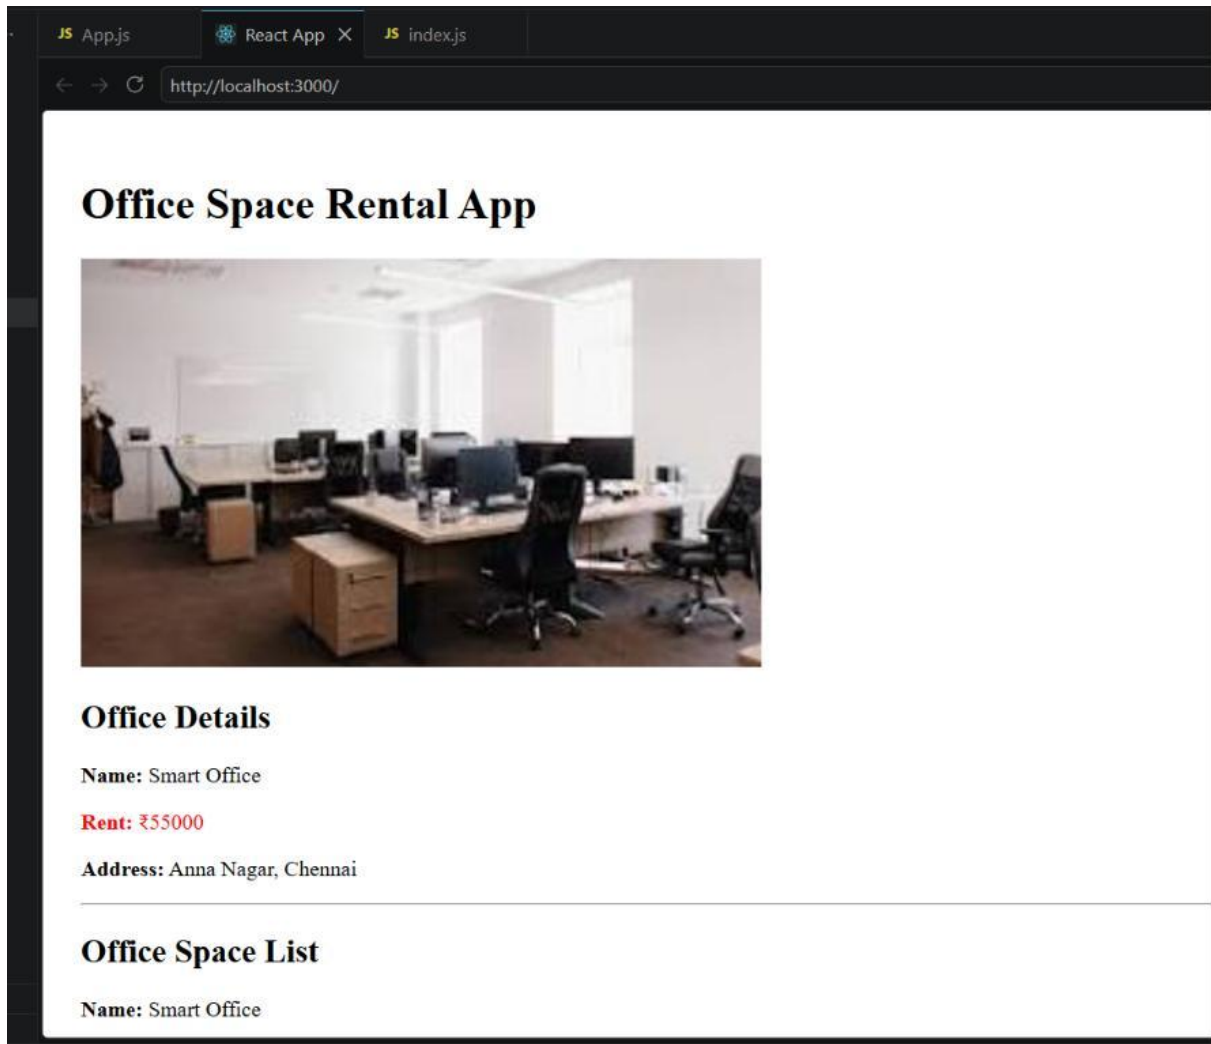

11. ReactJS-HOL

```
App.jsx • CurrencyConverter.jsx • # App.css • # index.css reactlab
src > components > CurrencyConverter.jsx > CurrencyConverter
1  import { useState } from "react";
2  export default function CurrencyConverter() {
3    const [amount, setAmount] = useState("");
4    const [currency, setCurrency] = useState("");
5    function handleSubmit(e) {
6      e.preventDefault();
7      const euro = Number(amount) / 90;
8      alert(`Converting to Euro Amount is ${euro.toFixed(2)}`);
9    }
10   return (
11     <div className="converter">
12       <h1>Currency Converter!!!</h1>
13
14       <form onSubmit={handleSubmit}>
15         <label>Amount : </label>
16         <input
17           type="number"
18           value={amount}
19           onChange={(e) => setAmount(e.target.value)}
20         />
21
22         <br /><br />
23
24         <label>Currency : </label>
25         <input
26           type="text"
27           value={currency}
28           onChange={(e) => setCurrency(e.target.value)}
29         />
30         <br /><br />
31         <button type="submit">Submit</button>
32       </form>
33     </div>
34   );
35 }
```


```
App.jsx • CurrencyConverter.jsx • # App.css • # index.css reactlab
src > App.jsx > default
5  function App() {
15 }
16
17  function sayWelcome() {
18    | alert("Welcome");
19  }
20
21  function onPress() {
22    | alert("I was clicked");
23  }
24
25  return (
26    <div className="container">
27      <h2>{count}</h2>
28
29      <button onClick={increment}>Increment</button>
30      <br /><br />
31
32      <button onClick={decrement}>Decrement</button>
33      <br /><br />
34
35      <button onClick={sayWelcome}>Say Welcome</button>
36      <br /><br />
37
38      <button onClick={onPress}>Click on me</button>
39
40      <CurrencyConverter />
41    </div>
42  );
43 }
44
45 export default App;
```

```
src > # App.css > input
1  .container{
2    padding:20px;
3    font-family:Arial;
4  }
5
6  button{
7    width:120px;
8    padding:8px;
9    margin:5px 0;
10 }
11
12 .converter{
13   margin-top:30px;
14 }
15
16 .converter h1{
17   color: green;
18 }
19
20 input{
21   width:180px;
22   padding:6px;
23 }
```

```
App.jsx • CurrencyConverter.jsx # App.css # index.css X reactlab
src > # index.css > body
1  body{
2    margin:20px;
3    font-family:Arial, sans-serif;
4  }
```

Count is 10

12. ReactJS-HOL

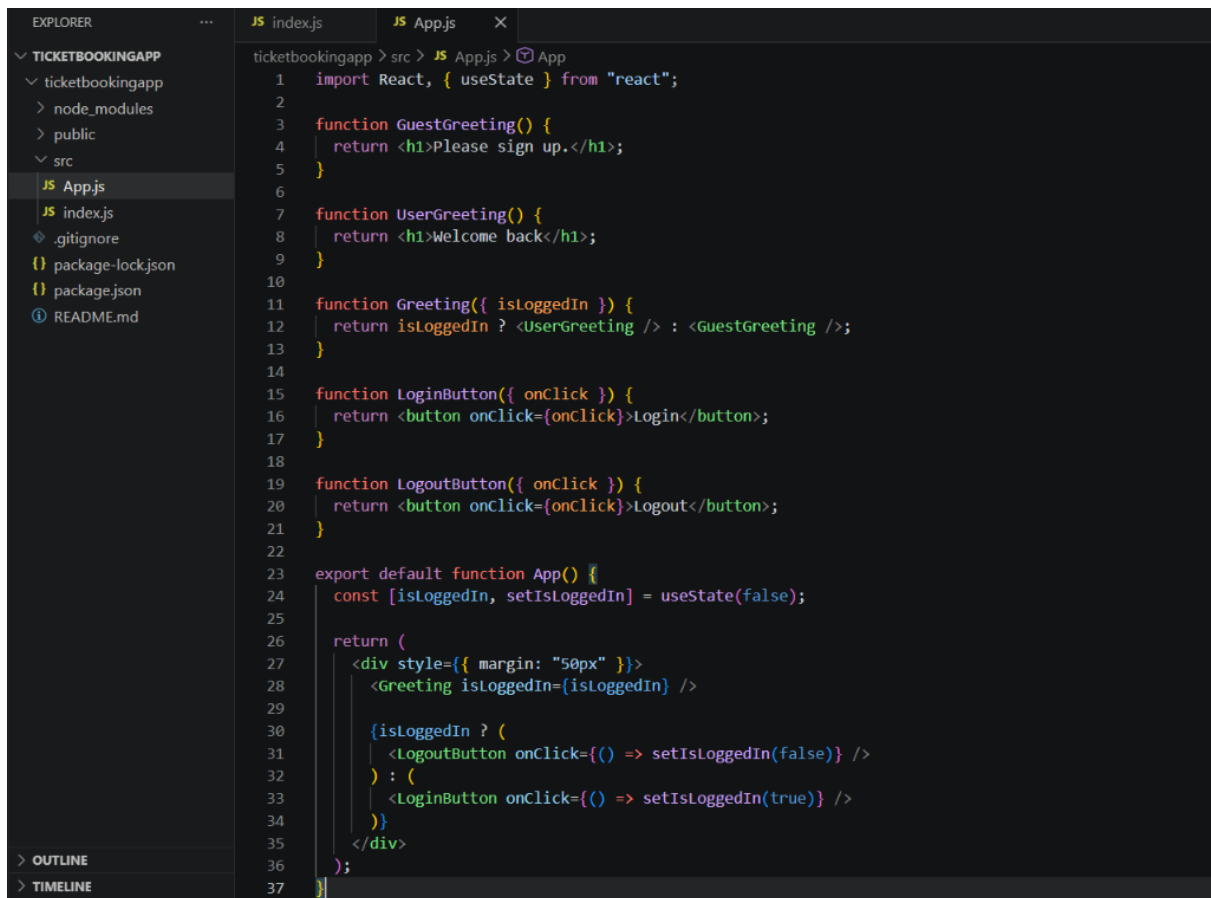

The screenshot shows the VS Code editor with the Explorer sidebar on the left. The project structure is: ticketbookingapp > src > JS > App.js. The App.js file is open in the editor, showing the following code:

```
1  import React, { useState } from "react";
2
3  function GuestGreeting() {
4    return <h1>Please sign up.</h1>;
5  }
6
7  function UserGreeting() {
8    return <h1>Welcome back</h1>;
9  }
10
11 function Greeting({ isLoggedIn }) {
12   return isLoggedIn ? <UserGreeting /> : <GuestGreeting />;
13 }
14
15 function LoginButton({ onClick }) {
16   return <button onClick={onClick}>Login</button>;
17 }
18
19 function LogoutButton({ onClick }) {
20   return <button onClick={onClick}>Logout</button>;
21 }
22
23 export default function App() {
24   const [isLoggedIn, setIsLoggedIn] = useState(false);
25
26   return (
27     <div style={{ margin: "50px" }}>
28       <Greeting isLoggedIn={isLoggedIn} />
29
30       {isLoggedIn ? (
31         <LogoutButton onClick={() => setIsLoggedIn(false)} />
32       ) : (
33         <LoginButton onClick={() => setIsLoggedIn(true)} />
34       )}
35     </div>
36   );
37 }
```



The screenshot shows the VS Code editor with the Explorer sidebar on the left. The project structure is: ticketbookingapp > src > JS > index.js. The index.js file is open in the editor, showing the following code:

```
1  import React from "react";
2  import ReactDOM from "react-dom/client";
3  import App from "./App";
4
5  const root = ReactDOM.createRoot(document.getElementById("root"));
6
7  root.render(
8    <React.StrictMode>
9      <App />
10    </React.StrictMode>
11  );
```

Please sign up.

Login

Welcome back

Logout

13. ReactJS-HOL

```
JS BookDetails.js X JS BlogDetails.js JS CourseDetails.js JS App.js
bloggerapp > src > components > JS BookDetails.js > default
1  function BookDetails() {
2      const books = [
3          { id: 101, bname: "Master React", price: 670 },
4          { id: 102, bname: "Deep Dive into Angular 11", price: 800 },
5          { id: 103, bname: "Mongo Essentials", price: 450 },
6      ];
7
8      return (
9          <div className="card">
10             <h1>Book Details</h1>
11
12             {books.map((book) => (
13                 <div key={book.id}>
14                     <h3>{book.bname}</h3>
15                     <h4>{book.price}</h4>
16                 </div>
17             ))}
18             </div>
19         );
20     }
21
22     export default BookDetails;
```

```
JS BookDetails.js JS BlogDetails.js X JS CourseDetails.js JS App.js
bloggerapp > src > components > JS BlogDetails.js > default
1  function BlogDetails() {
2      const blogs = [
3          {
4              id: 1,
5              title: "React Learning",
6              author: "Stephen Biz",
7              desc: "Welcome to learning React!"
8          },
9          {
10             id: 2,
11             title: "Installation",
12             author: "Schwzen denier",
13             desc: "You can install React from npm."
14         }
15     ];
16
17     return (
18         <div className="card">
19             <h1>Blog Details</h1>
20
21             {blogs.map((blog) => (
22                 <div key={blog.id}>
23                     <h2>{blog.title}</h2>
24                     <h4>{blog.author}</h4>
25                     <p>{blog.desc}</p>
26                 </div>
27             ))}
28             </div>
29         );
30     }
31
32     export default BlogDetails;
```

```
JS BookDetails.js JS BlogDetails.js JS CourseDetails.js X JS App.js
bloggerapp > src > components > JS CourseDetails.js > [0] default
1  function CourseDetails() {
2      const courses = [
3          {
4              id: 1,
5              name: "Angular",
6              date: "4/5/2021",
7          },
8          {
9              id: 2,
10             name: "React",
11             date: "6/3/2020",
12         },
13     ];
14
15     return (
16         <div className="card">
17             <h1>Course Details</h1>
18
19             {courses.map((course) => (
20                 <div key={course.id}>
21                     <h2>{course.name}</h2>
22                     <h4>{course.date}</h4>
23                 </div>
24             ))}
25         </div>
26     );
27 }
28
29 export default CourseDetails;
```

```
Run Terminal Help bloggerapp
$ BookDetails.js JS BlogDetails.js JS CourseDetails.js JS App.js X
bloggerapp > src > JS App.js > [0] default
1  import BookDetails from "../components/BookDetails";
2  import BlogDetails from "../components/BlogDetails";
3  import CourseDetails from "../components/CourseDetails";
4
5  function App() {
6      return (
7          <div className="container">
8              <CourseDetails />
9              <BookDetails />
10             <BlogDetails />
11          </div>
12      );
13  }
14
15  export default App;
```

Course Details

Angular

4/5/2021

React

6/3/2020

Book Details

Master React

670

Deep Dive into Angular 11

800

Mongo Essentials

450

Blog Details

React Learning

Stephen Biz

Welcome to learning React!

Installation

Schwzen denier

You can install React from npm.