
Nexus — Version 4 Database Schema

PostgreSQL on Supabase. Crow's foot notation: one user has many of everything below.

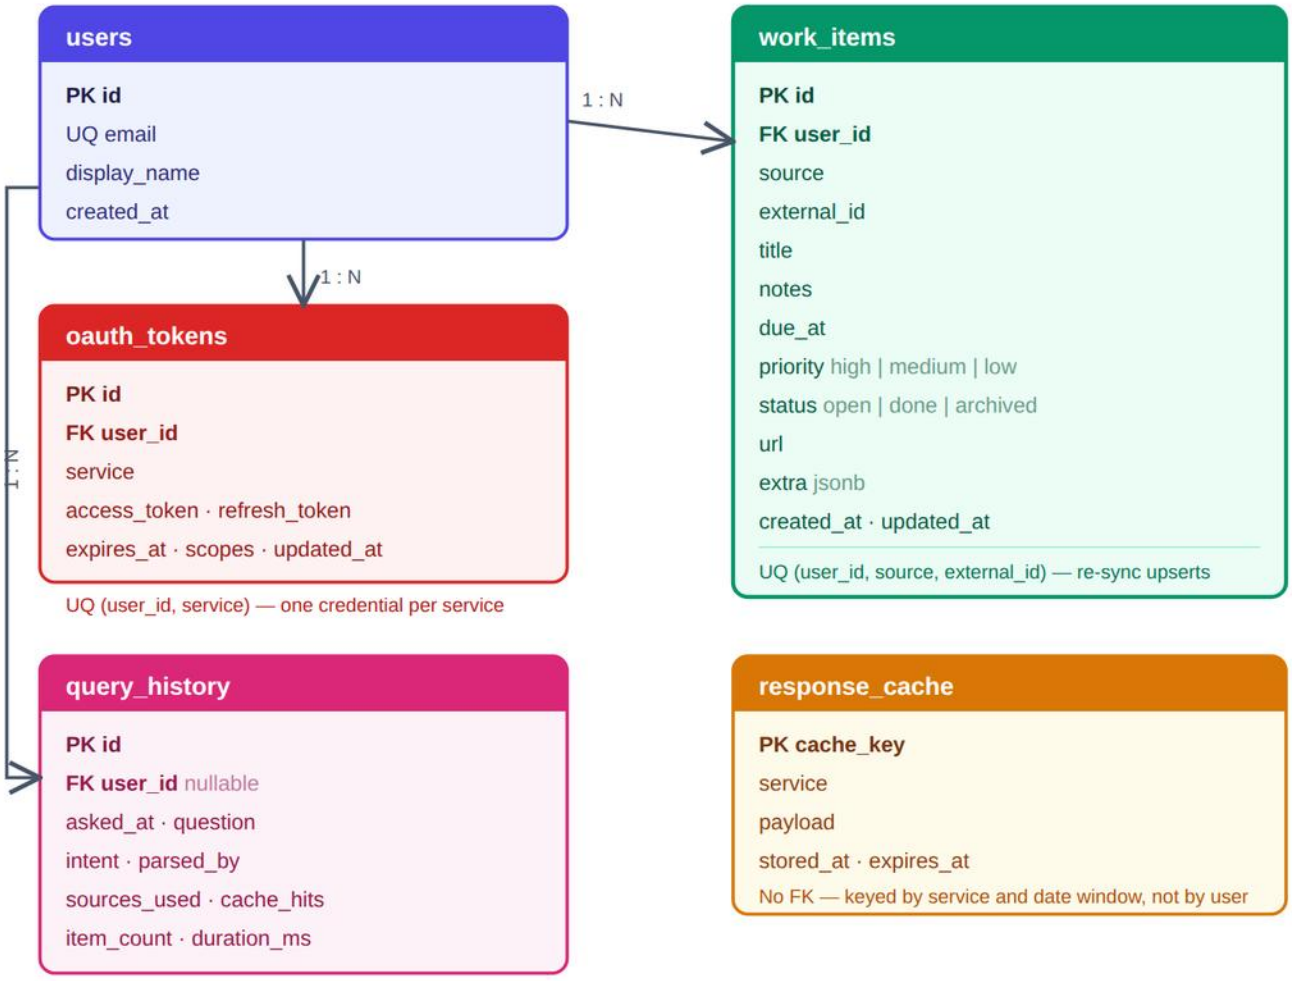

Design notes

An item is either synced from a service — source names the plugin, external_id is that service's own id — or created in Nexus, where source is 'nexus' and external_id is null.

A sync updates the provider's fields and leaves status alone, so an item the user marked done stays done.

CHECK constraints on priority and status keep invalid values out even if a caller skips validation.

Indexes: (user_id, due_at), (user_id, status), (user_id, source).