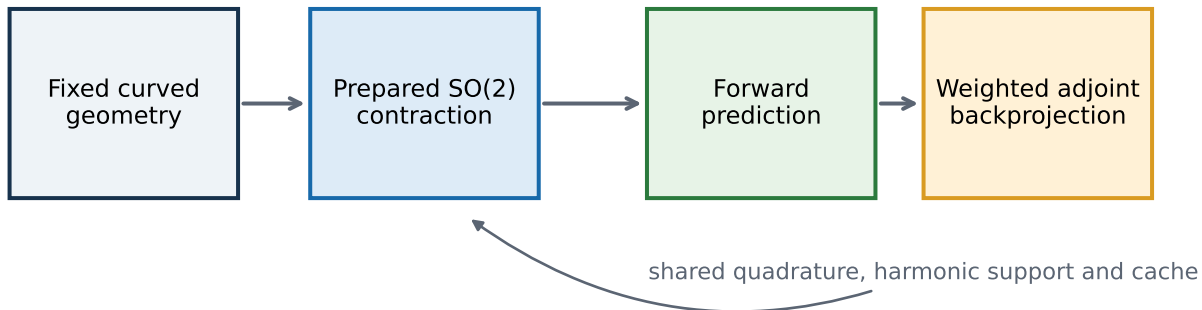


a

Geometry preparation and paired reuse

**b**

Accuracy contract

$$H_{req} = \max(H_{kernel}, H_{data}) + p_H$$

Require $H_{req} \leq H_{Nyq}$

Set $H_{compute} = H_{req}$

Use separate Miller margin M_{rec}

Increase azimuthal sampling when Nyquist fails

c

Lowest eligible representation

