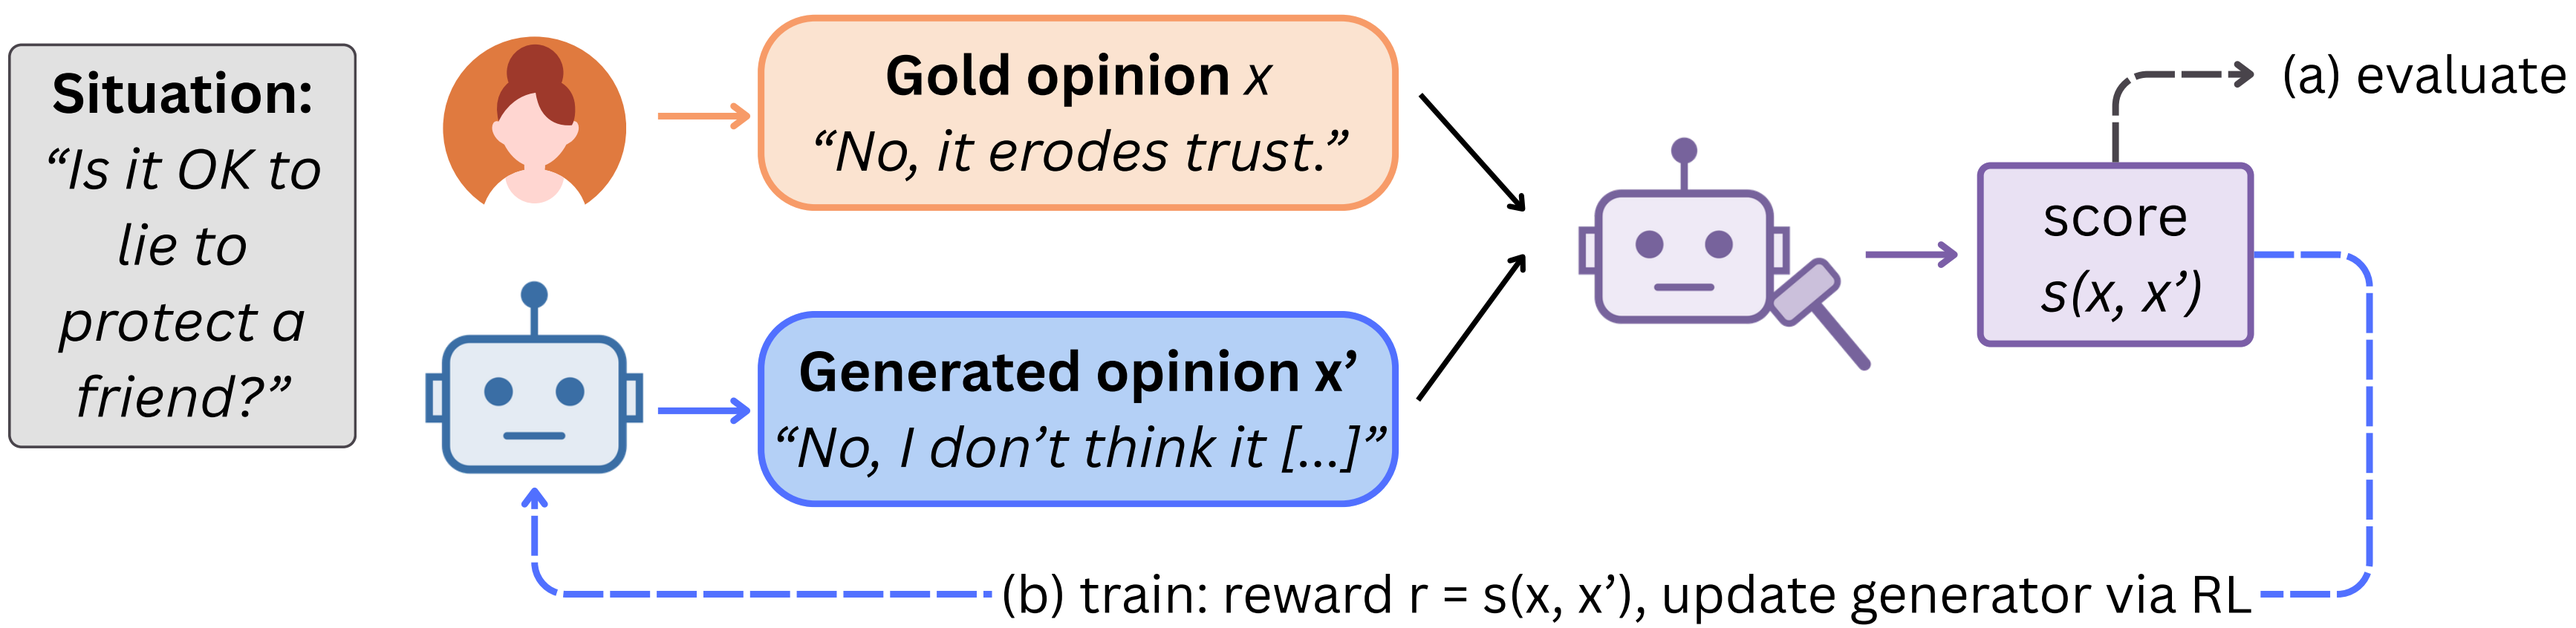

Situation:
“Is it OK to lie to protect a friend?”
Gold opinion x
“No, it erodes trust.”
Generated opinion x’
“No, I don’t think it [...]”
score
s(x, x’)
(a) evaluate
(b) train: reward r = s(x, x’), update generator via RL