

# Session 01

# Getting Started

([http://docs.oracle.com/javase/tutorial/getStarted  
/  
index.html](http://docs.oracle.com/javase/tutorial/getStarted/index.html))

# Objectives

- About the Java Technology
- What can Java Technology do?
- How can Java support platform-independence?
- Java Platform
- Set up Environment Variables
- The first Java program in the NetBeans
- Structure of a Java program.
- End users run Java Programs

# About the Java Technology(1)

## ● *History*

- 1990, James Gosling, Bill Joy, Patrick Naughton(Sun Microsystem) developed the Oak language for embedding programs to devices such as VCR, PDA (personal data assistant). The Oak programs require:
  - Platform independent/- Extremely reliable/ - Compact
- 1993, interactive TV and PDA failed, Internet and Web were introduced, **Sun** change the Oak to an internet-development environment with a new project, named **Java**.
- 1994, the Sun's *HotJava Browser was introduced* (written using Java). It showed the strength of Java applets and abilities to develop Java application.

# About the Java Technology(2)

## *History...*

- **Embedded Systems (1991 – 1994)**
- **A client – side Wonder (1995 – 1997)**
- **Moved into the Middle – tier (1997 – to present)**
- **Future: may gain more success**

# About the Java Technology(3)

The Java Programming Language is a high-level language. It's **characteristics**:




- Simple
- Object oriented
- Distributed
- Multithreaded
- Dynamic linking
- Architecture neutral
- Portable
- High performance
- Robust
- Secure

# What can Java Technology do?

## Using Java, we can:


- Development Tools.
  - Application Programming Interface (API).
  - Deployment Technologies.
  - User Interface Toolkits.
  - Integration Libraries.
- ➔ Desktop Application ( Console App, GUI Apps)
  - ➔ Web-based Applications
  - ➔ Network-based Applications
  - ➔ Game
  - ➔ Distributed Applications
  - ➔ Embedding Application (Apps on Devices)

# How can Java support platform-independence?

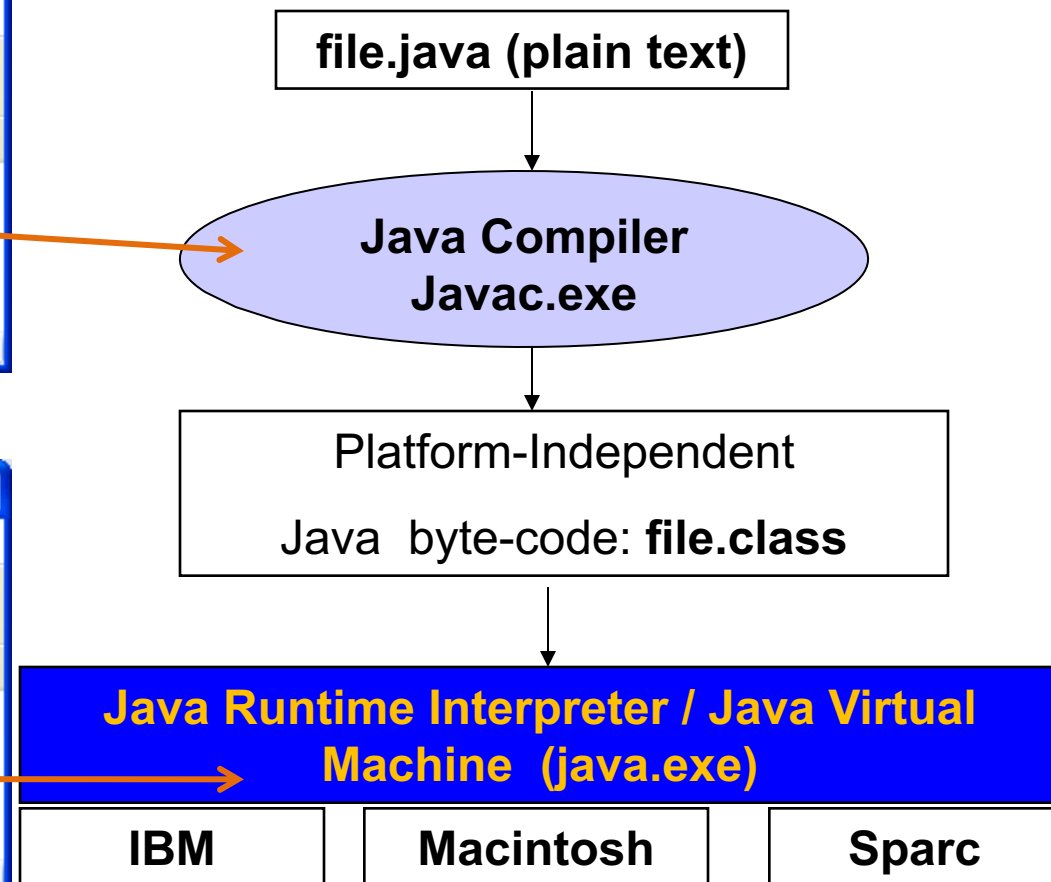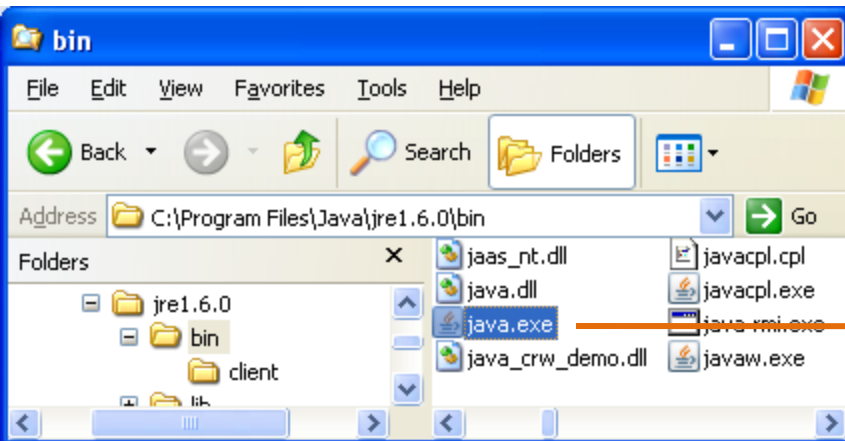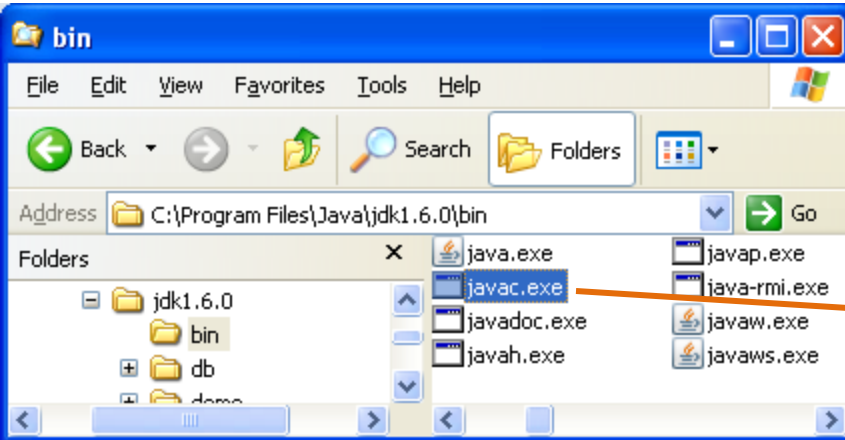

# Java Virtual Machine


- The Java Virtual Machine is an abstract computing machine. Like a real computing machine, it has an instruction set and manipulates various memory areas at run time. It is reasonably common to implement a programming language using a virtual machine; the best-known virtual machine may be the P-Code machine of UCSD Pascal.

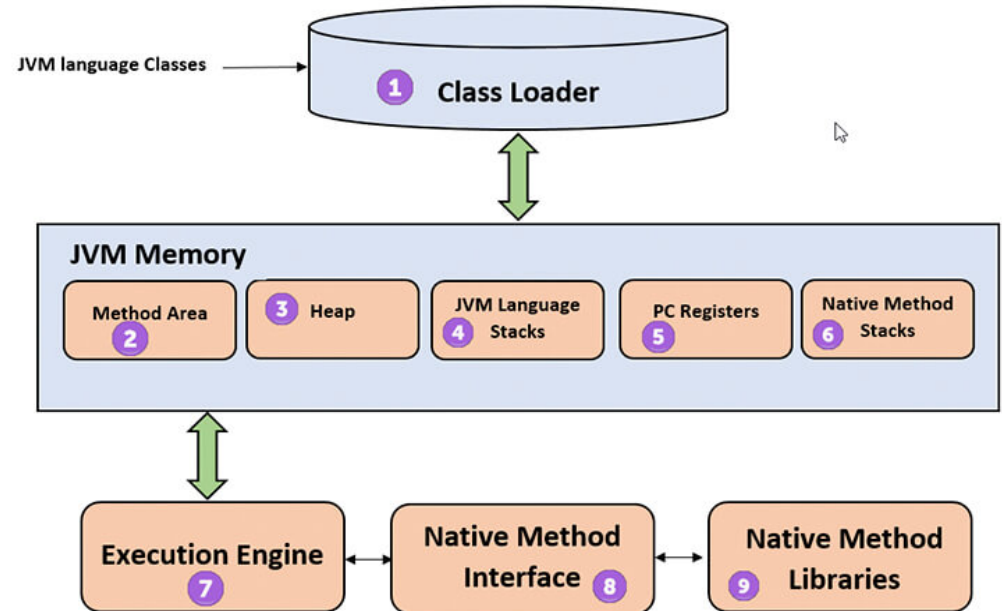




# Java Platform

- A platform is the hardware or software environment in which a program runs.
- The Java platform has two components:
  - The Java Virtual Machine
  - The Java **A**pplication **P**rogramming **I**nterface (API)

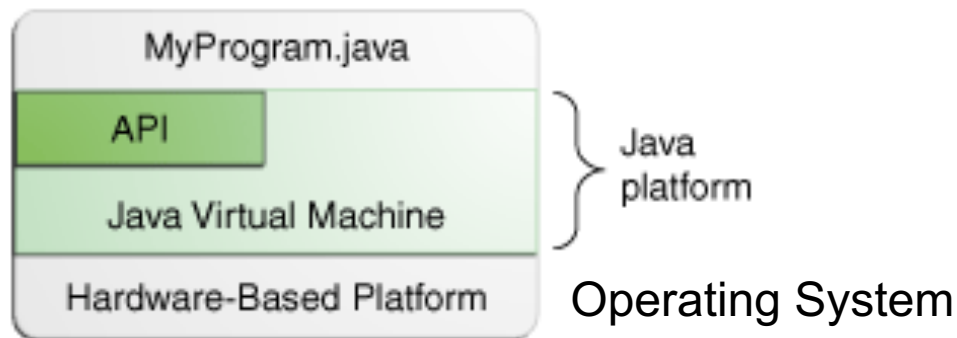

# Set up Environment Variables

- After installing JavaSE (Java Development Kit Standard Edition), environment variables should be setup to point to the folder in which JavaSE is installed.
- Steps: My Computer/ Properties/ Advanced/Environment Variables/System Variables/ Path/ Edit
- Why?**

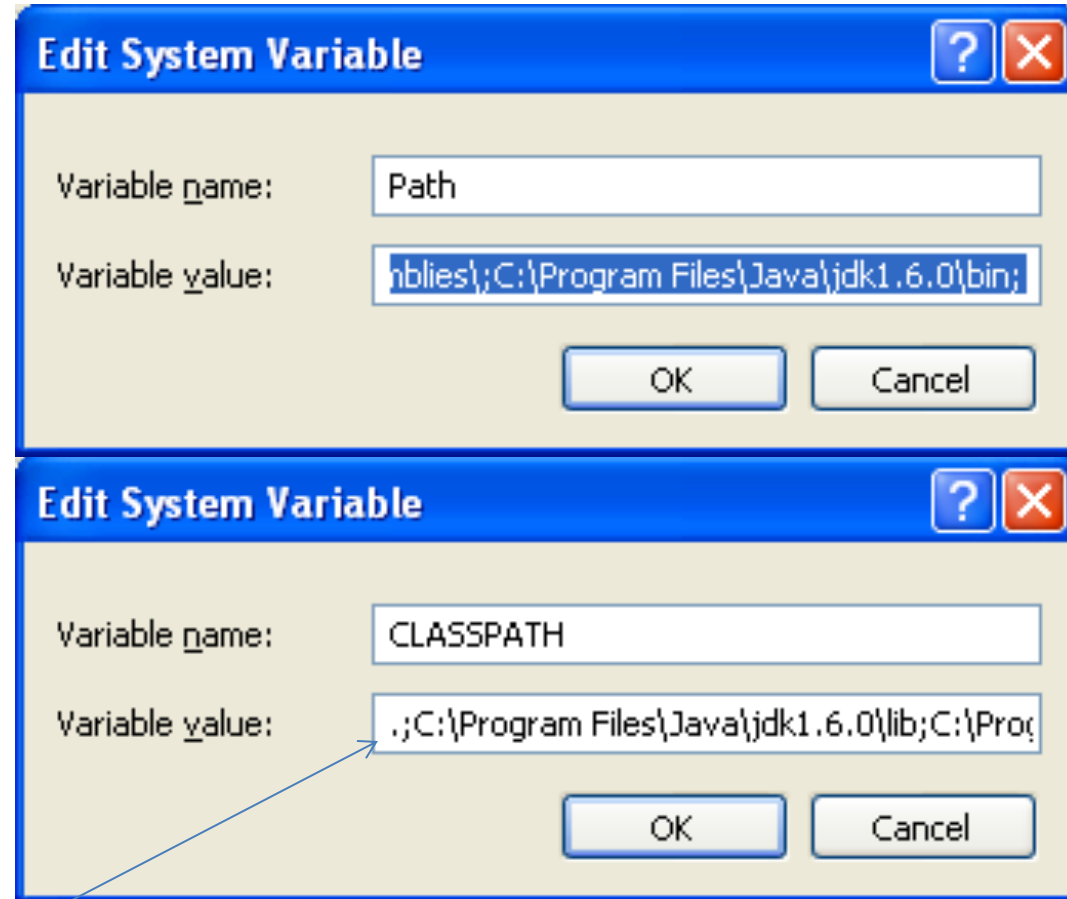

The point at the beginning of the CLASSPATH means that classes will be searched first in the current working folder.



# The first Java program in the NetBeans

This program will show the string “Hello World” to the screen.


## Steps

- 1- Create a new Java NetBeans project
- 2- Add a Java class
- 3- Write code
- 4- Compile/Run the program

# Step 1- New Project

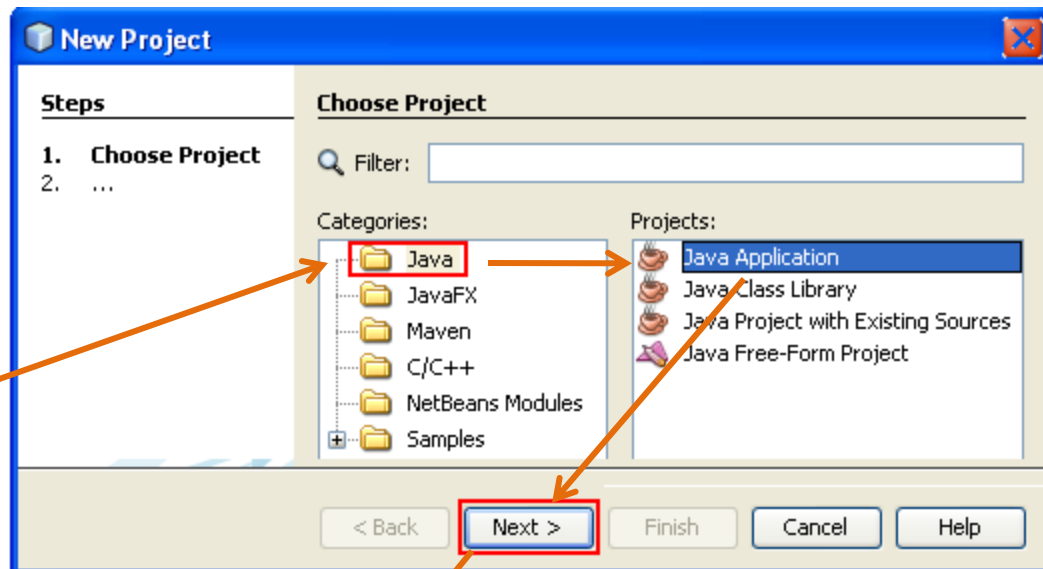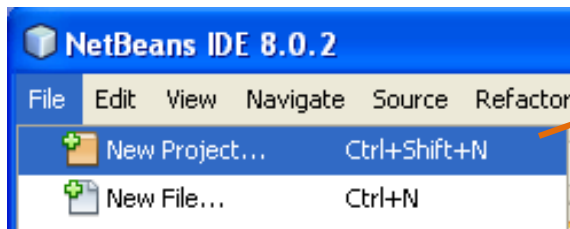


If this option is checked, NetBeans will automatically generate a class, named Main, for the project.

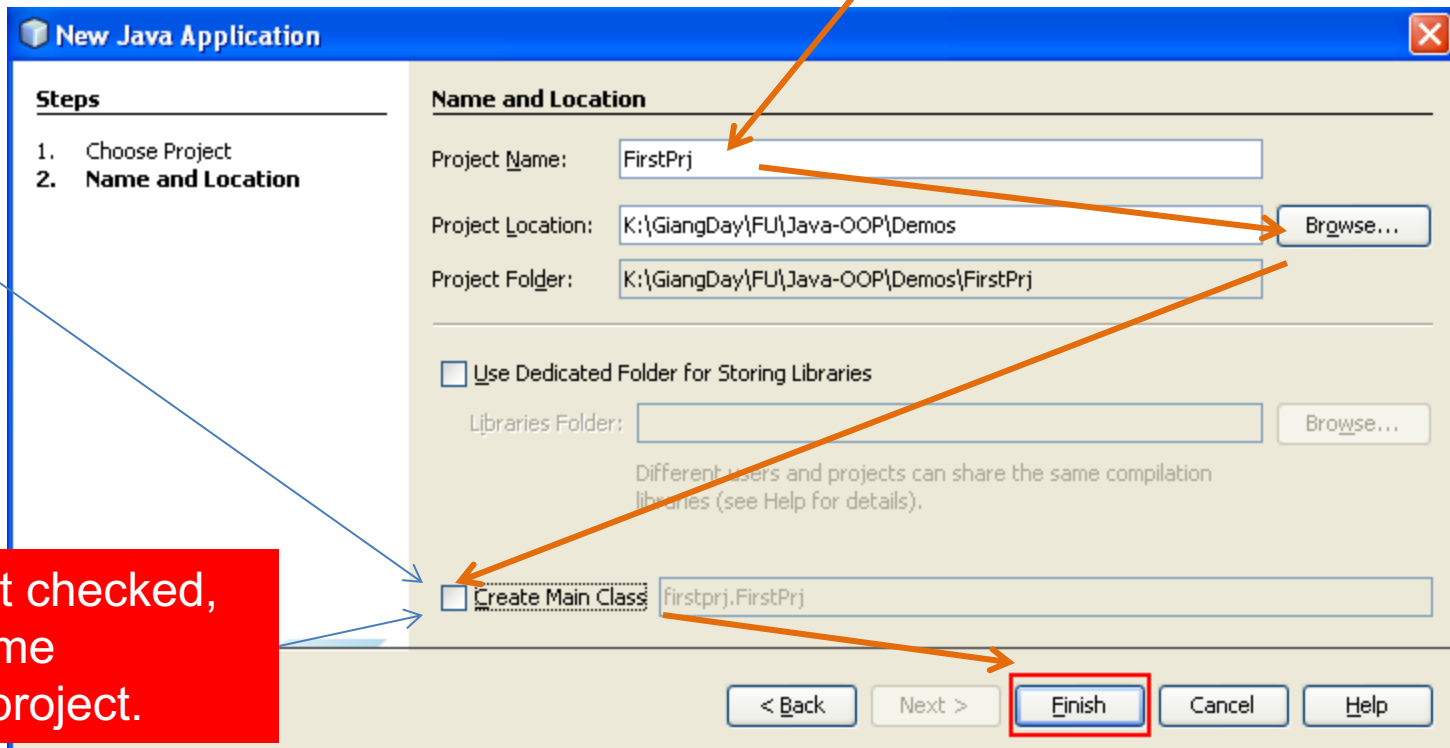


If this option is not checked, we can create some programs in one project.

# New Project...: Initial Project Structure


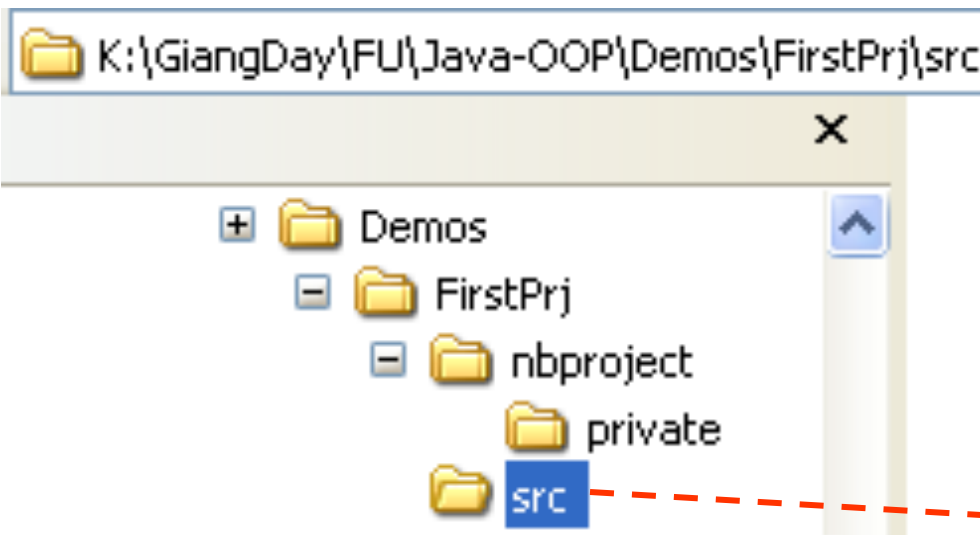


In Windows Explorer

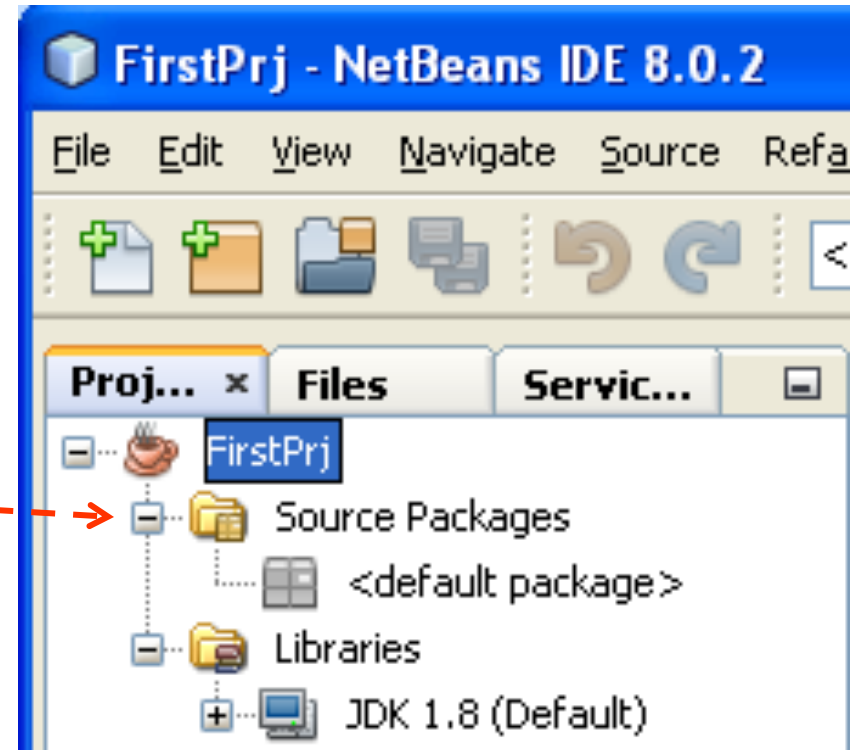

In NetBeans


# Step 2: Add a Java Class

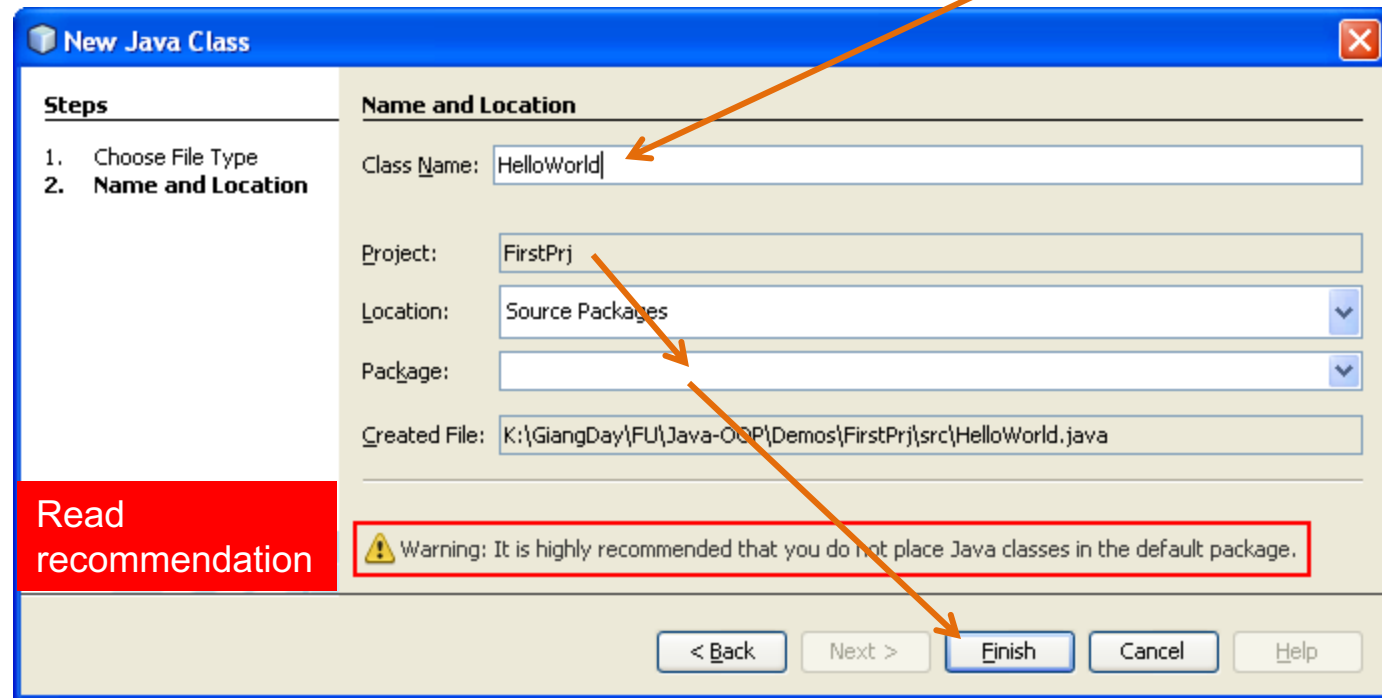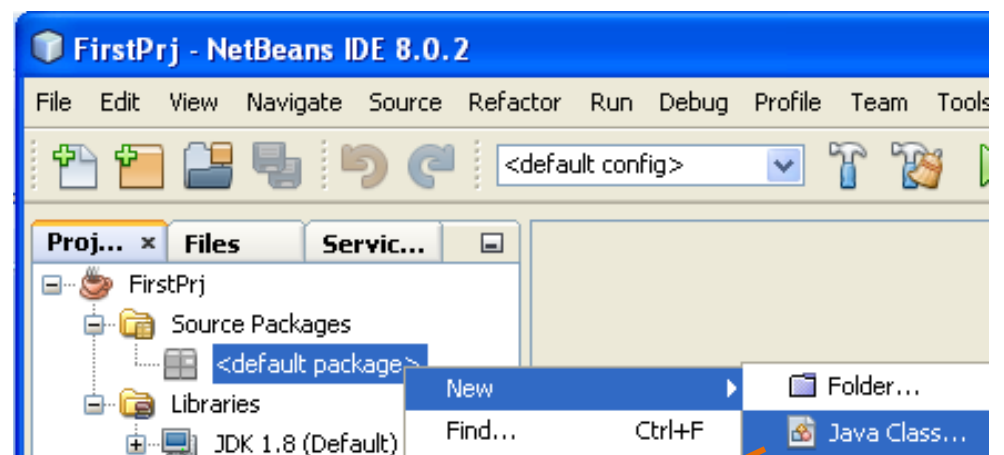

Read  
recommendation

In this demo, we do not specify  
package intentionally


# Add a Java Class...

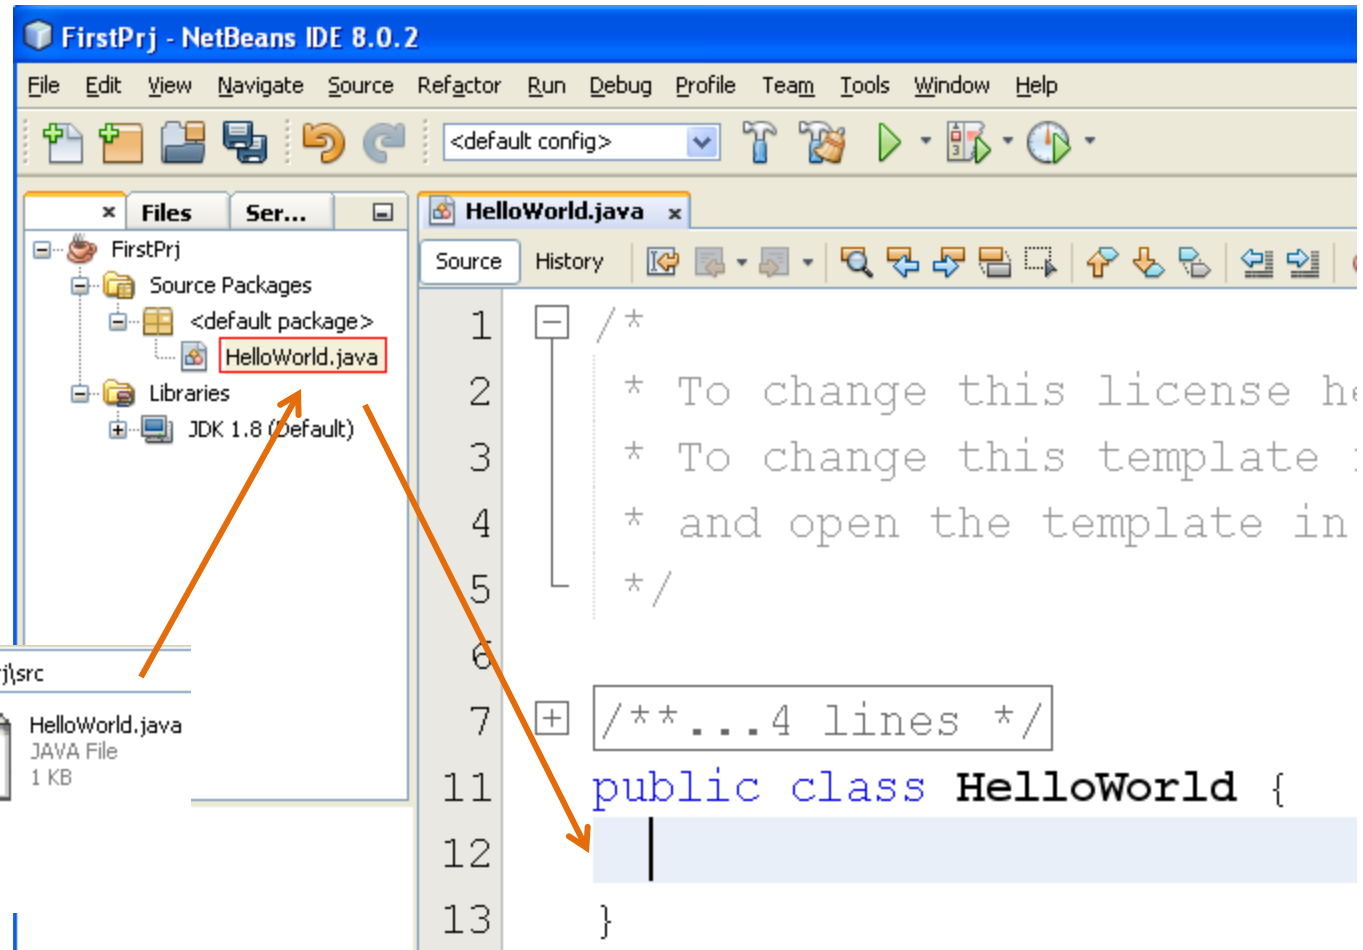

In Windows Explorer





In NetBeans

# Step 3: Write code


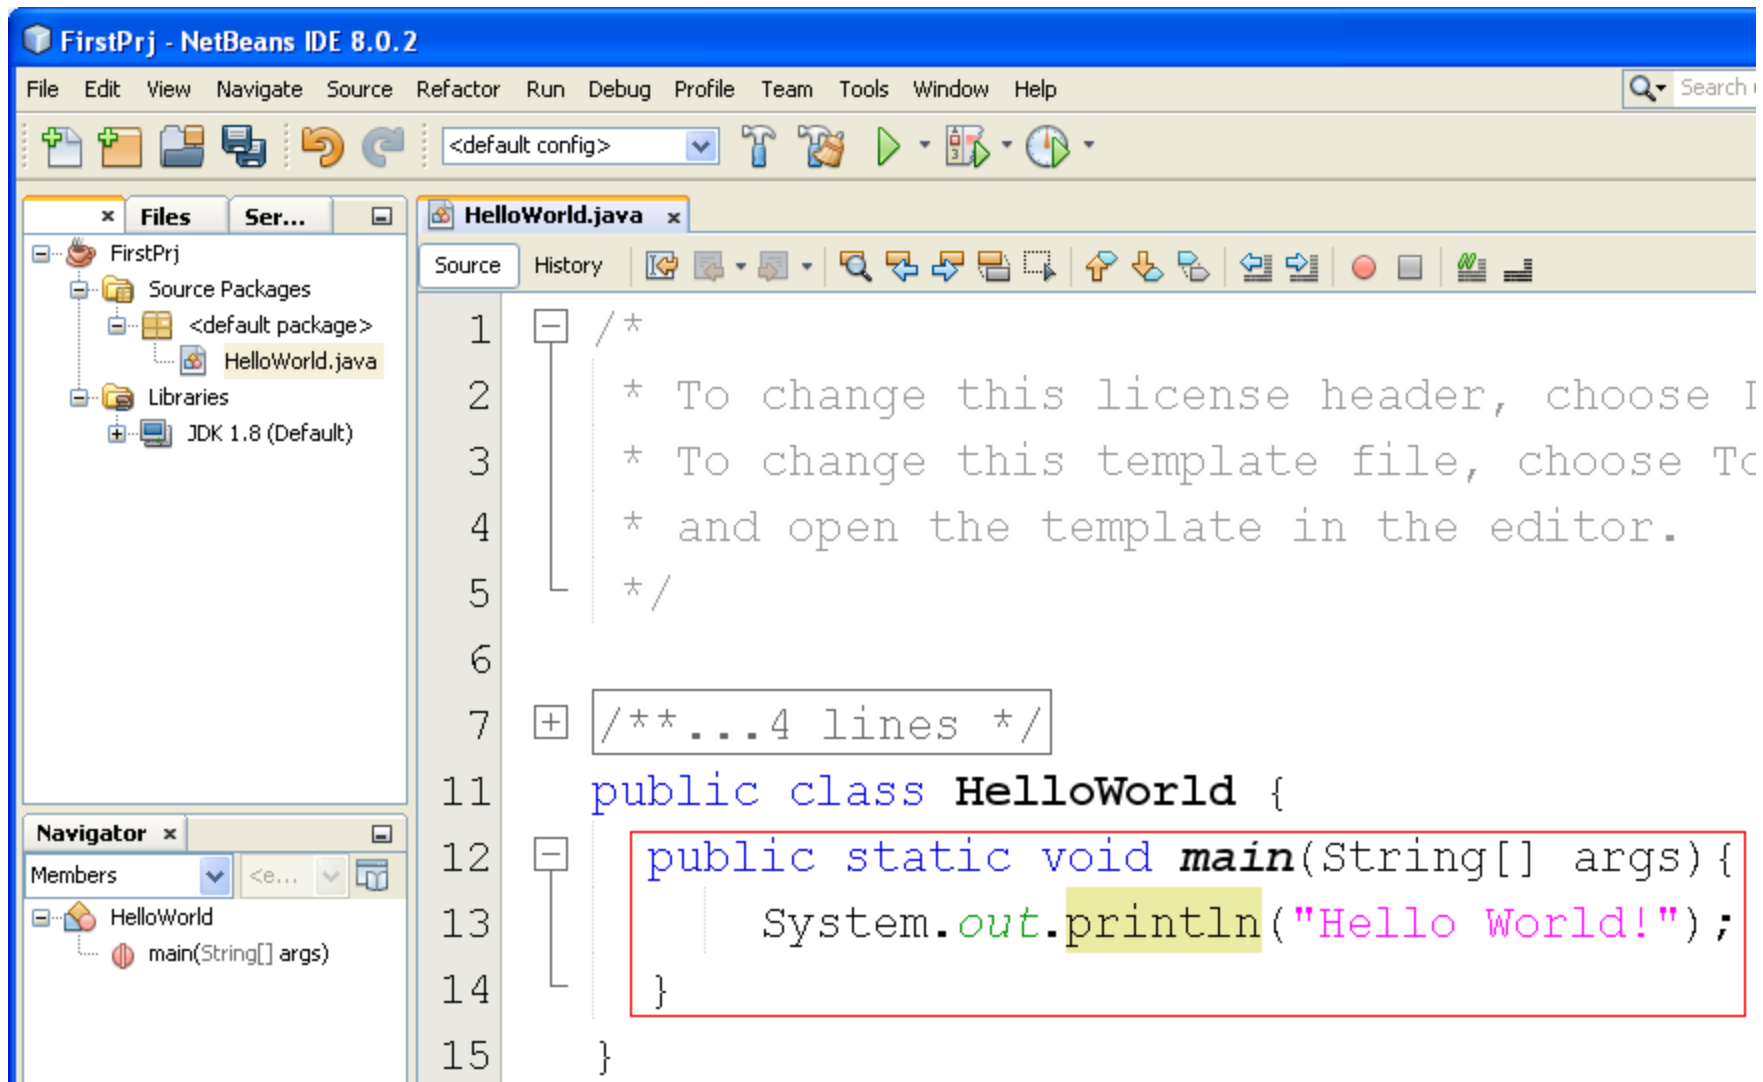




# Step 4: 4 ways to Compile/Run program in NetBeans

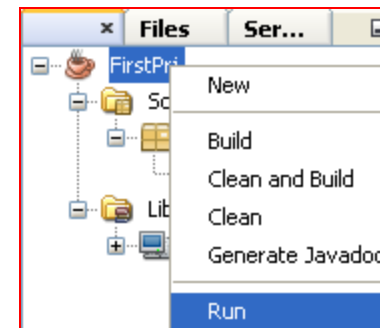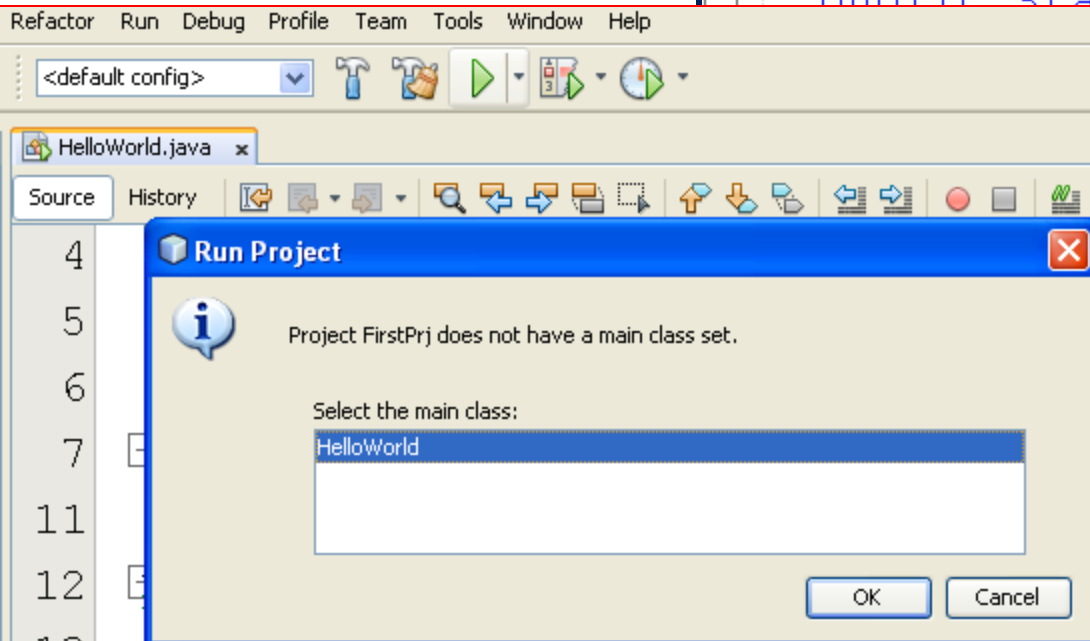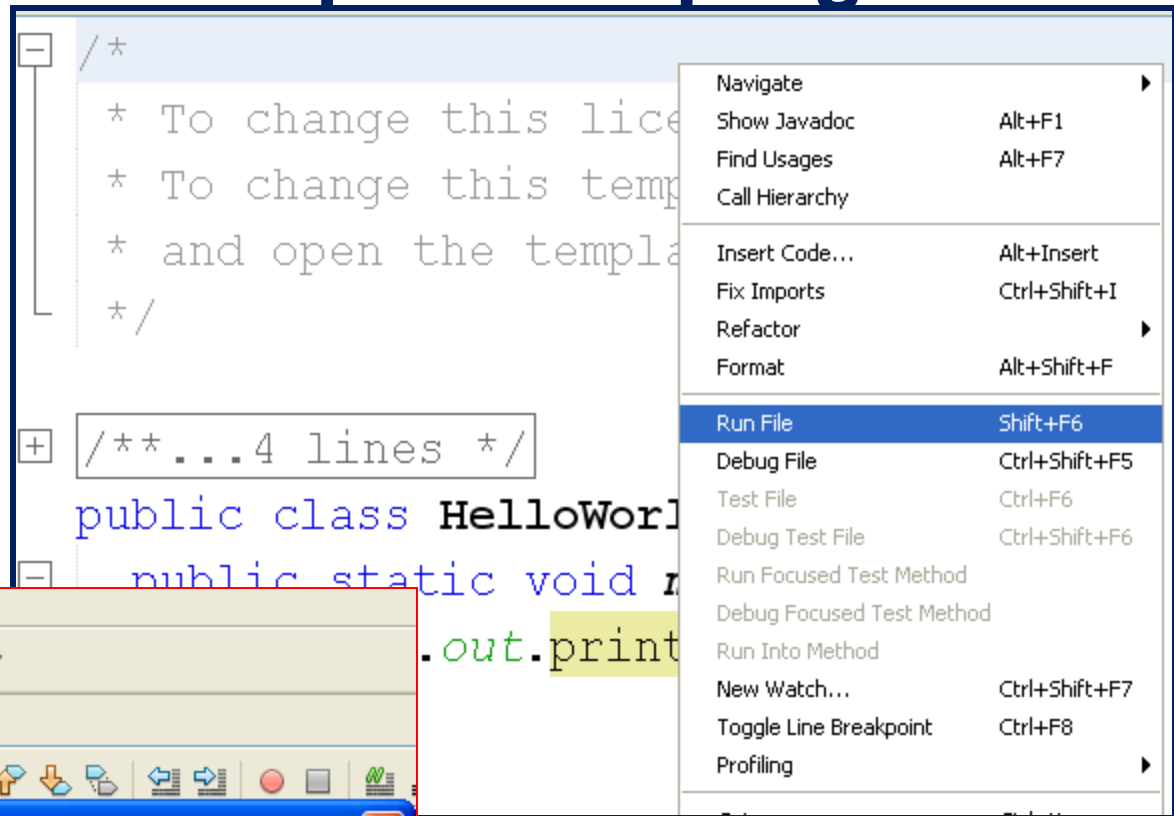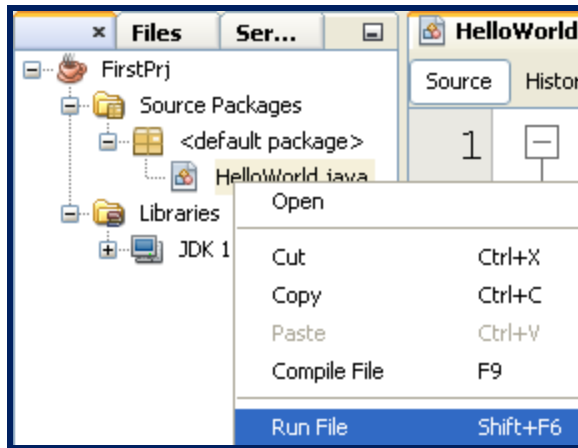


# Result:

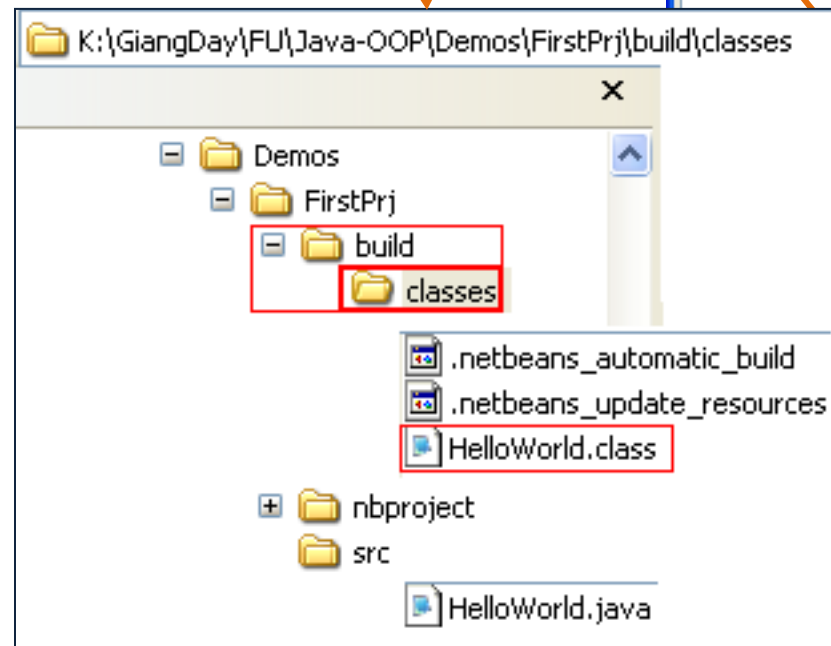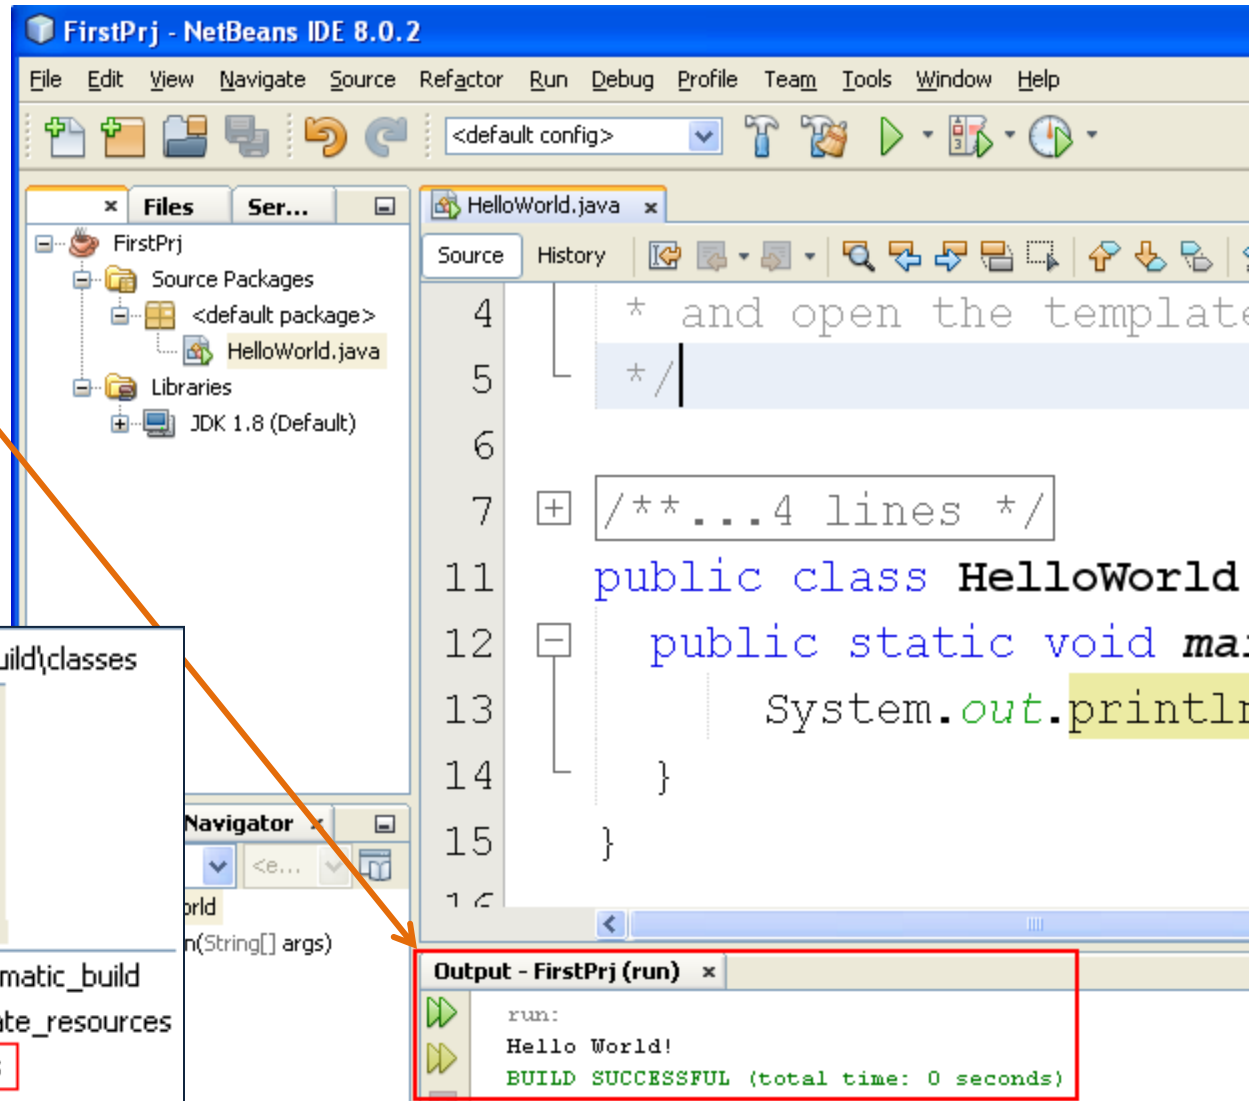

# End users run Java Programs

- Users can not run Java programs in NetBeans but in Java Runtime Environment (**jre**) installed (Java.exe and related files)
- Syntax for running a Java program:

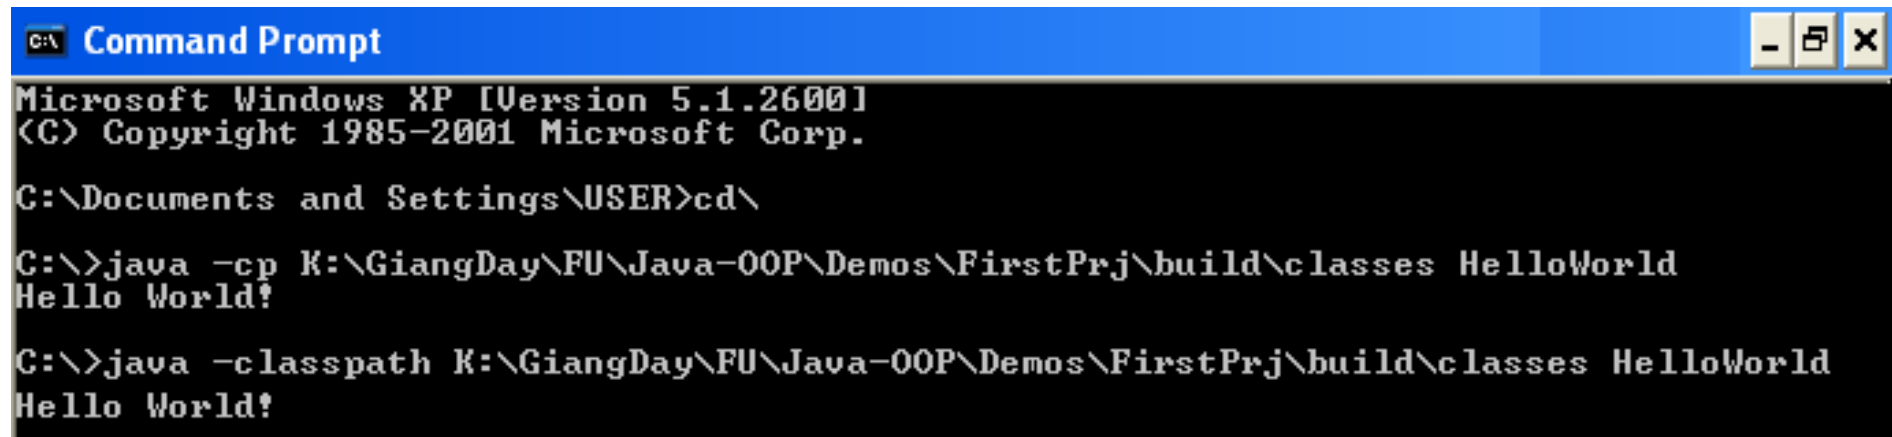

```

C:\ Command Prompt
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\USER>cd\



C:\>java -cp K:\GiangDay\FU\Java-OOP\Demos\FirstPrj\build\classes HelloWorld
Hello World!

C:\>java -classpath K:\GiangDay\FU\Java-OOP\Demos\FirstPrj\build\classes HelloWorld
Hello World!
  
```


Re-try it using **Helloworld**, **helloworld** → Give comments

# End users run Java Programs...

- If the environment variable was setup with “.”, we can run it at the working folder as:

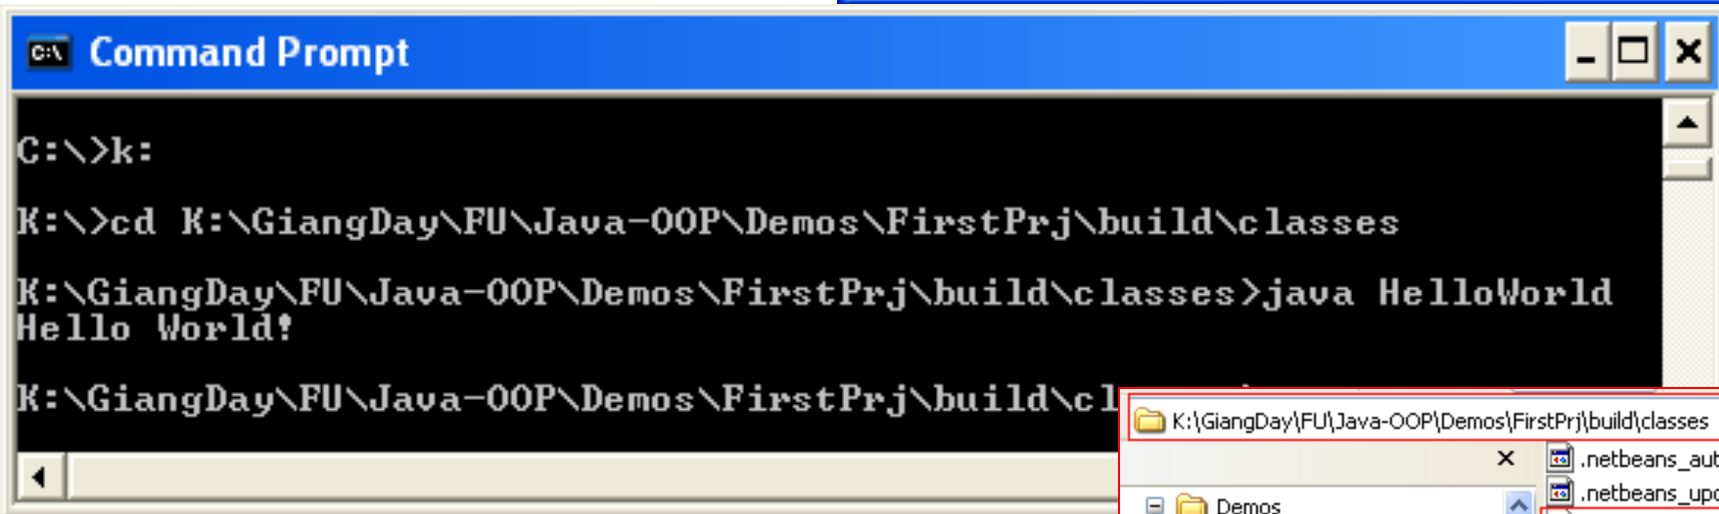
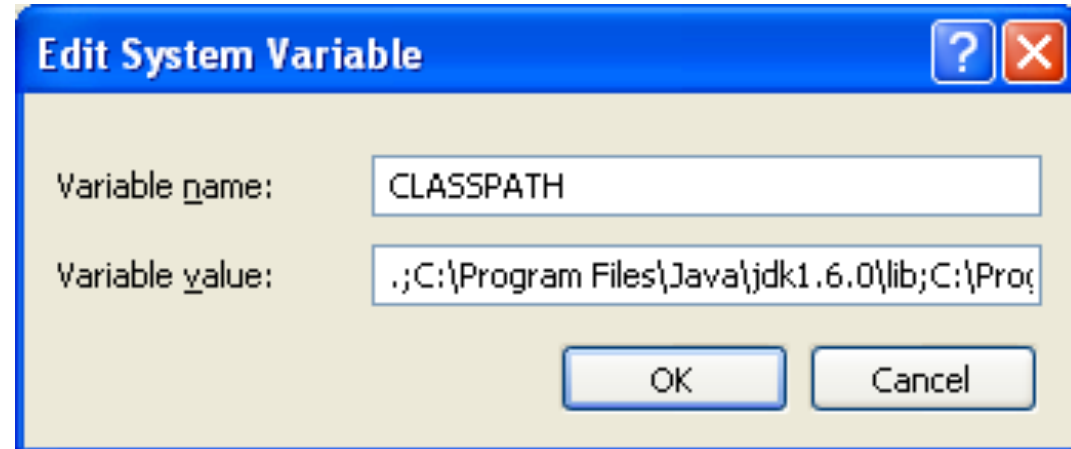


**K:** Change working drive to K  
**cd** Change working directory

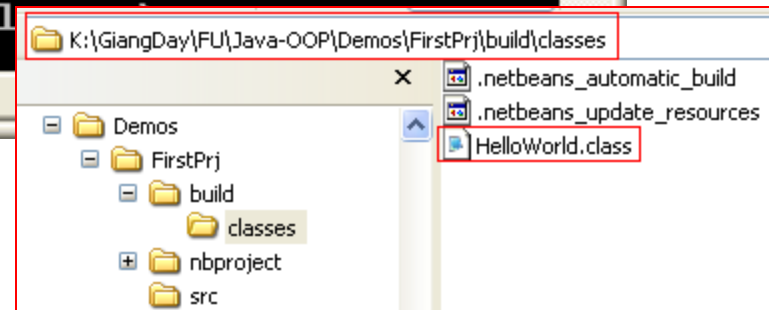

# End users run Java Programs...

- Developer should support end users an easier way to run the program: a **BAT file**

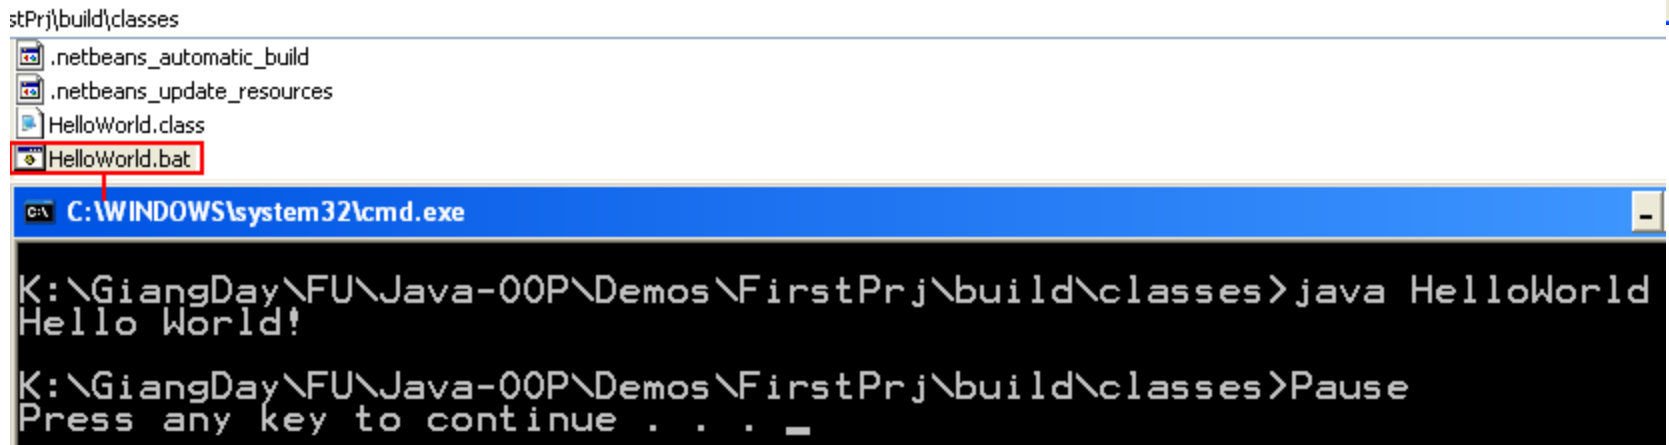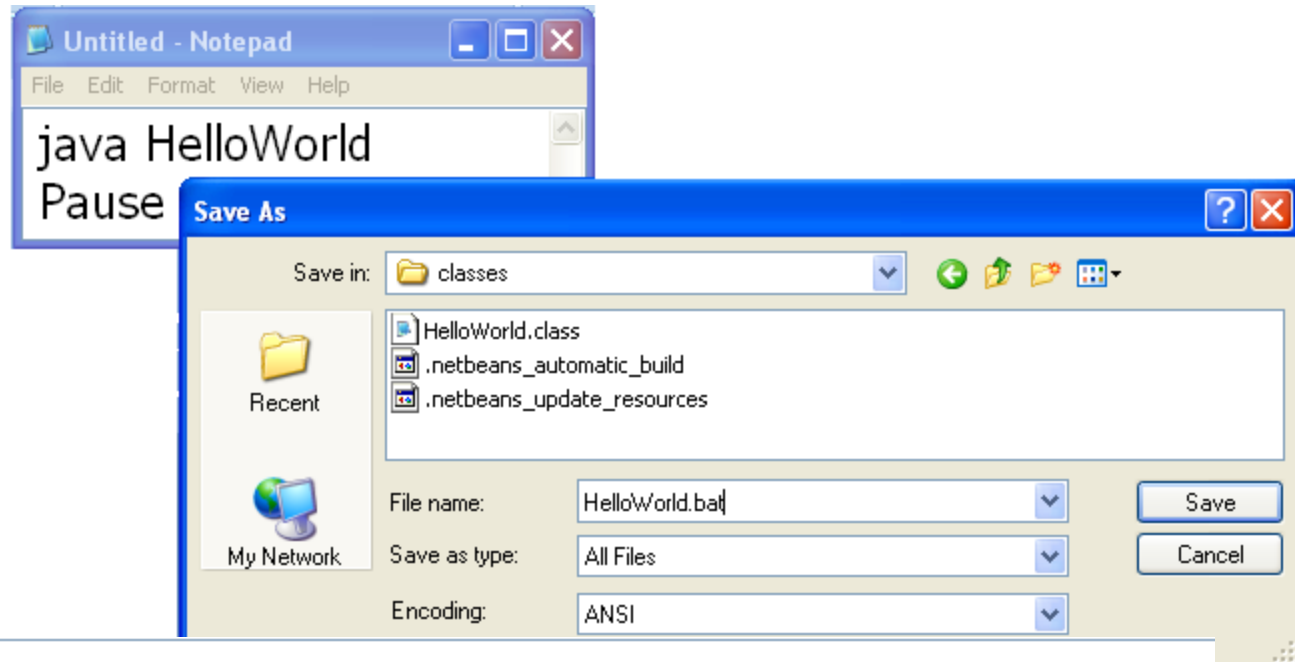

# Explain JDK and its tools

- javac (Java compiler)

```
javac [option] source
```

where,


source is one or more file names that end with the extension .java.

- java (Java interpreter)

```
java [option] classname [arguments]
```

where,

classname is the name of the class file.

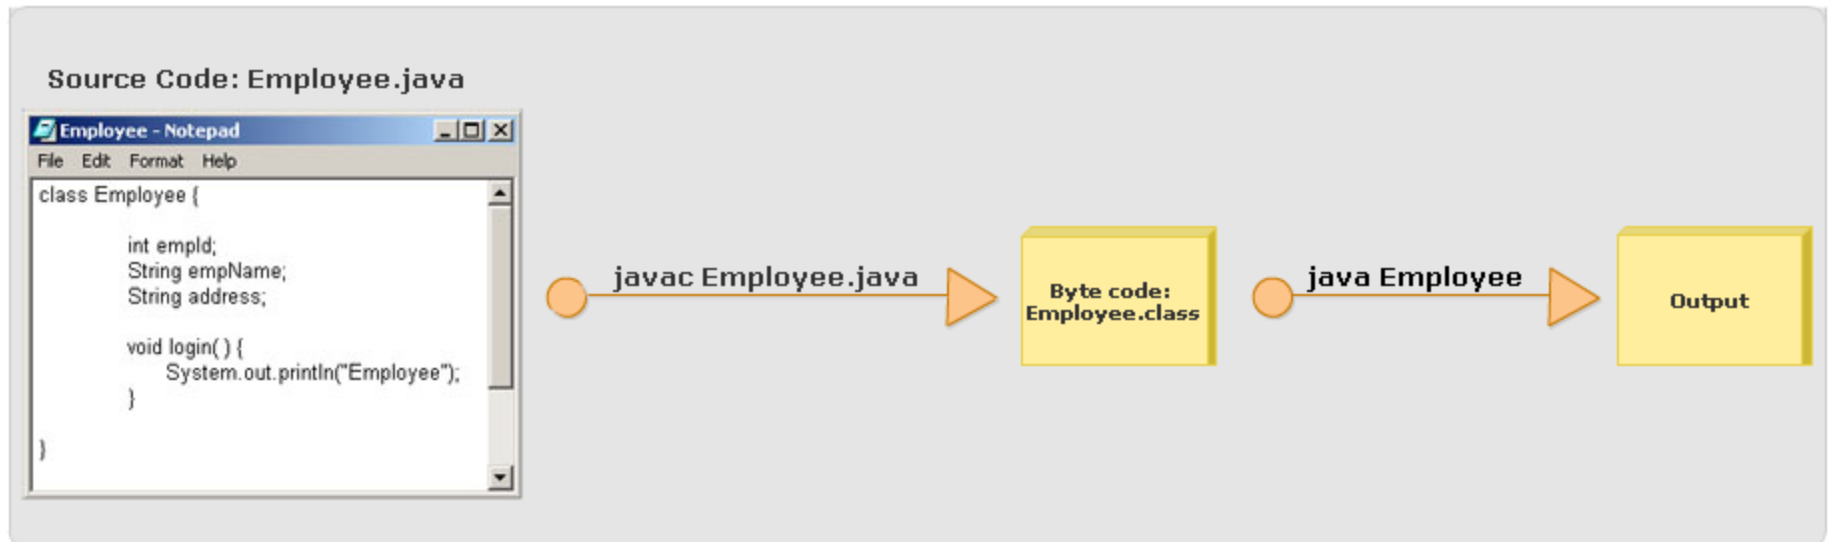

# A Closer Look at the "Hello World!" Application

- **Comments**
  - Traditional **`/*this is a comment*/`**
  - Comment to line end **`//this is an end of line comment`**
- **Class declaration**
  - **`public class ClassName { ... }`**
  - For example: `public class HelloWorld { ... }`
- **The main Method – Entry point of Java program**
  - **`public static void main(String[] args) {..}`**
  - public and static can be written in either order
  - **The main method accepts a single argument: an array of elements of type String. A demonstration for passing strings to the main method will be presented in the next session.**

# Common Problems (and Their Solutions)

- **Compiler Problems**

'javac' is not recognized as an internal or external command, operable program or batch file

->Updating the **PATH** variable in the **JDK**

- Syntax Errors (All Platforms)
- Semantic Errors

- **Runtime Problems**

- Exception in thread "main"  
java.lang.NoClassDefFoundError
- Could not find or load main class  
HelloWorld.class

**Classname  
is incorrect**



# Try and Explore

Change	To – If no error, try run it
public class HelloWorld	public class HelloWorld2
public class HelloWorld	class HelloWorld2
public static void main(String[] args)	public static void main(String args[]) ✓
public static void main(String[] args)	public ✓ void main( <del>String[] args</del> )
public static void main(String[] args)	<del>void main(String[] args)</del>

# Summary

- An overview of Java technology as a whole.
- What to download, what to install, and what to type, for creating a simple "Hello World!" application.
- Discusses the "Hello World!" application.
- Trouble compiling or running the programs.