

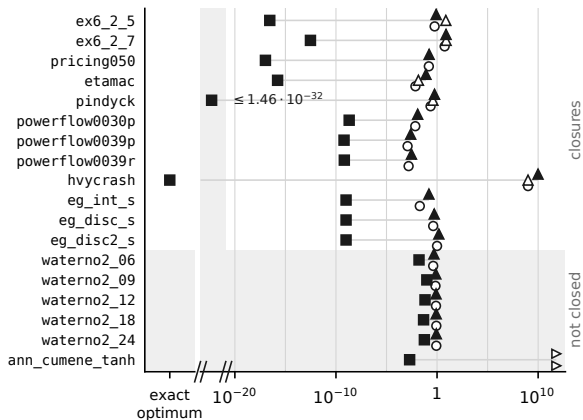


(a) Instances with exactly feasible points

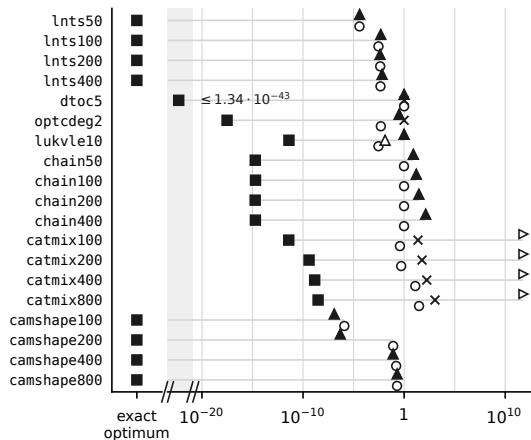

(b) KAN instances. Different models: certified lower bound for $\mathcal{R}$; listed and one-hour bounds for the stored models (descriptive)

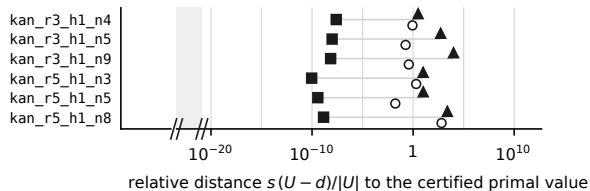

- certified dual bound
- best listed dual
- ▲ best one-hour dual, globality guarantee, unmodified model
- △ SCIP, tightened log/power argument bounds
- × BARON, no globality guarantee
- ▷ no finite bound