

# Simulation Experiment Description Markup Language (SED-ML) : Level 1 Version 2

Draft

March 9, 2013

**Disclaimer:** This is a working draft of the Simulation Experiment Description Markup Language (SED-ML) Level 1 Version 2 specification. It is not a normative document.

## Editors

Dagmar Waltemath  
Frank T. Bergmann  
Jonathan Cooper  
David Nickerson  
Nicolas Le Novère

*University of Rostock, Germany*  
*University of Washington, Seattle, USA*  
*University of Oxford, UK*  
*Auckland Bioengineering Institute, New Zealand*  
*European Bioinformatics Institute, UK*

The latest release of the Level 1 Version 2 specification is available at  
<http://sed-ml.org/>

To discuss any aspect of the current SED-ML specification as well as language details, please send your messages to the mailing list  
[sed-ml-discuss@lists.sourceforge.net](mailto:sed-ml-discuss@lists.sourceforge.net).

To get subscribed to the mailing list, please write to the same address  
[sed-ml-discuss@lists.sourceforge.net](mailto:sed-ml-discuss@lists.sourceforge.net).

To contact the authors of the SED-ML specification, please write to  
[sed-ml-editors@lists.sourceforge.net](mailto:sed-ml-editors@lists.sourceforge.net)



<b>1</b>	<b>Introduction</b>	<b>4</b>
1.1	Motivation: A sample experiment . . . . .	5
1.1.1	A simple time-course simulation . . . . .	5
1.1.2	Applying pre-processing . . . . .	5
1.1.3	Applying post-processing . . . . .	6
1.2	Overview of SED-ML . . . . .	8
1.2.1	Conventions . . . . .	8
1.2.2	Models . . . . .	10
1.2.3	Simulation setup . . . . .	10
1.2.4	Task . . . . .	11
1.2.5	Output . . . . .	11
1.2.6	Data Generator . . . . .	12
<b>2</b>	<b>SED-ML technical specification</b>	<b>13</b>
2.1	Conventions used in this document . . . . .	14
2.1.1	UML Classes . . . . .	14
2.1.2	UML Relationships . . . . .	14
2.1.3	XML Schema language elements . . . . .	15
2.1.4	Type extensions . . . . .	16
2.2	Concepts used in SED-ML . . . . .	18
2.2.1	MathML subset . . . . .	18
2.2.2	URI Scheme . . . . .	19
2.2.3	XPath usage . . . . .	20
2.2.4	KiSAO . . . . .	20
2.2.5	SED-ML resources . . . . .	21
2.3	General attributes and classes . . . . .	22
2.3.1	<code>id</code> . . . . .	22
2.3.2	<code>name</code> . . . . .	22
2.3.3	<code>SEDBase</code> . . . . .	22
2.3.4	SED-ML top level element . . . . .	25
2.3.5	Reference relations . . . . .	26
2.3.6	<code>Variable</code> . . . . .	29
2.3.7	<code>Parameter</code> . . . . .	31
2.3.8	<code>ListOf<sup>*</sup></code> containers . . . . .	31
2.4	SED-ML Components . . . . .	37
2.4.1	<code>Model</code> . . . . .	37
2.4.2	<code>Change</code> . . . . .	39
2.4.3	<code>Simulation</code> . . . . .	46
2.4.4	<code>Abstract Task</code> . . . . .	50
2.4.5	<code>Task</code> . . . . .	51
2.4.6	<code>Repeated Task</code> . . . . .	52

2.4.7	DataGenerator	56
2.4.8	Output	57
2.4.9	Output components	61
<b>3</b>	<b>Acknowledgements</b>	<b>65</b>
<b>A</b>	<b>SED-ML UML Overview</b>	<b>66</b>
<b>B</b>	<b>XML Schema</b>	<b>67</b>
<b>C</b>	<b>Examples</b>	<b>73</b>
C.1	Le Loup Model (SBML)	74
C.2	Le Loup Model (CellML)	76
C.3	The IkappaB-NF-kappaB signaling module (SBML)	79
<b>D</b>	<b>The COMBINE archive</b>	<b>81</b>

# 1. Introduction

As Systems Biology transforms into one of the main fields in life sciences, the number of available computational models is growing at an ever increasing pace. At the same time, their size and complexity are also increasing. The need to build on existing studies by reusing models therefore becomes more imperative. It is now generally accepted that one needs to be able to exchange the biochemical and mathematical structure of models. The efforts to standardise the representation of computational models in various areas of biology, such as the *Systems Biology Markup Language* (SBML, [Hucka et al., 2003]), *CellML* [Lloyd et al., 2004] or *NeuroML* [Goddard et al., 2001], resulted in such an increase of the exchange and re-use of models. However, the description of the structure of models is not sufficient to enable the reproduction of simulation results. One also needs to describe the procedures the models are subjected to, as described by the *Minimum Information About a Simulation Experiment (MIASE)* [Waltemath et al., 2011].

This document presents Level 1 Version 2 of the *Simulation Experiment Description Markup Language* (SED-ML), a computer-readable format for encoding simulation experiments. SED-ML files are encoded in the *eXtensible Markup Language* (XML) [Bray et al., 2006]. The SED-ML format is defined by an XML Schema [Fallside et al., 2001].



**Figure 1.1:** Time-course simulation of the repressilator model, imported from BioModels Database and simulated in COPASI. The number of repressor proteins lacI, tetR and cI is shown. (taken from Waltemath et al. [2011])

## 1.1 Motivation: A sample experiment

To demonstrate how a simulation experiment can be described simply and effectively, we make use of a rather simple, though famous, model that may yet display rich and variable behaviors. The simulation example is taken from Waltemath et al. [2011].

The *repressilator* is a synthetic oscillating network of transcription regulators in Escherichia coli [Elowitz and Leibler, 2000]. The network is composed of the three repressor genes Lactose Operon Repressor (lacI), Tetracycline Repressor (tetR) and Repressor CI (cI), which code for proteins binding to the promoter of the other, blocking their transcription. The three inhibitions together in tandem, form a cyclic negative-feedback loop. To describe the interactions of the molecular species involved in the network, the authors built a simple mathematical model of coupled first-order differential equations. All six molecular species included in the network (three mRNAs, three repressor proteins) participated in creation (transcription/translation) and degradation processes. The model was used to determine the influence of the various parameters on the dynamic behavior of the system. In particular, parameter values were sought which induce stable oscillations in the concentrations of the system components. Oscillations in the levels of the three repressor proteins are obtained by numerical integration.

### 1.1.1 A simple time-course simulation

The first experiment we intend to run on the model is the simulation that will lead to the oscillation shown in Figure 1c of the reference publication [Elowitz and Leibler, 2000]. The according simulation experiment can be described as:

1. Import the model identified by the Unified Resource Identifier (URI) [Berners-Lee et al., 2005] <urn:miriam:biomodels.db:BIOMD0000000012>.
2. Select a deterministic method.
3. Run a uniform time course simulation for 1000 min with an output interval of 1 min.
4. Plot the amount of `lacI`, `tetR` and `cI` against time in a 2D Plot.

Following those steps and performing the simulation in the simulation tool COPASI [Hoops et al., 2006] led to the result shown in Figure 1.1.

### 1.1.2 Applying pre-processing

The fine-tuning of the model can be shown by adjusting parameters before simulation. When changing the initial values of the parameters *protein copies per promoter* and *leakiness in protein copies per promoter* the system's behavior switches from sustained oscillation to asymptotic steady-state. The adjustments leading to that behavior may be described as:

1. Import the model as above.



**Figure 1.2:** Time-course simulation of the repressilator model, imported from BioModels Database and simulated in COPASI after modification of the initial values of the protein copies per promoter and the leakiness in protein copies per promoter. The number of repressor proteins lacI, tetR and cI is shown. (taken from [Waltemath et al. \[2011\]](#))

2. Change the value of the parameter `tps_repr` from “0.0005” to “1.3e-05”.
3. Change the value of the parameter `tps_active` from “0.5” to “0.013”.
4. Select a deterministic method.
5. Run a uniform time course for the duration of 1000 min with an output interval of 1 min.
6. Plot the amount of lacI, tetR and cI against time in a 2D Plot.

Figure 1.2 shows the result of the simulation.

### 1.1.3 Applying post-processing

The raw numerical output of the simulation steps may be subjected to data post-processing before plotting or reporting. In order to describe the production of a normalized plot of the time-course in the first example (section 1.1.1), depicting the influence of one variable on another (in phase-planes), one could define the following further steps:

(Please note that the description steps 1 - 4 remain as given in section 1.1.1 above.)

5. Collect lacI(t) , tetR(t) and cI(t).
6. Compute the highest value for each of the repressor proteins,  $\max(\text{lacI}(t))$ ,  $\max(\text{tetR}(t))$ ,  $\max(\text{cI}(t))$ .
7. Normalize the data for each of the repressor proteins by dividing each time point by the maximum value, i. e.  $\text{lacI}(t)/\max(\text{lacI}(t))$ ,  $\text{tetR}(t)/\max(\text{tetR}(t))$  , and  $\text{cI}(t)/\max(\text{cI}(t))$ .
8. Plot the normalized lacI protein as a function of the normalized cI, the normalized cI as a function of the normalized tetR protein, and the normalized tetR protein against the normalized lacI protein in a 2D plot.

Figure 1.3 on the following page illustrates the result of the simulation after post-processing of the output data.



**Figure 1.3:** Time-course simulation of the repressilator model, imported from BioModels Database and simulated in COPASI, showing the normalized temporal evolution of repressor proteins *lacI*, *tetR* and *cl* in phase-plane. (taken from [Waltemath et al. \[2011\]](#))


## 1.2 Overview of SED-ML

The *Simulation Experiment Description Markup Language* (SED-ML) is an XML-based format for the description of simulation experiments. It serves to store information about the simulation experiment performed on one or more models with a given set of outputs. Support for SED-ML compliant simulation descriptions will enable the exchange of simulation experiments across tools.

### 1.2.1 Conventions


The Business Process Modeling Notation Version 1.2 (BPMN) was initially intended to describe internal business procedures (processes) in a graphical way. However, we will use BPMN to graphically describe the steps and processes of setting up a simulation experiment description. The major parts of BPMN that are used to specify SED-ML are activities, gateways, events, data, and documentation.

An *activity* is “work that is performed on a [...] process”, for example “Specify the simulation settings”. Activities may be atomic or non-atomic. SED-ML in particular makes use of the *task* activities, i. e., specific work units that need to be performed. Non-atomic tasks might be collapsed or expanded in the graphical representation (Figure 1.4). Each collapsed subprocess has a corresponding expanded subprocess definition.

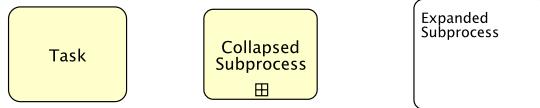

**Figure 1.4:** BPMN activities: task, collapsed process, expanded subprocess

*Gateways* serve as means to control the flow of sequence in the diagram. As the term already implies, a gateway needs some “mechanism that either allows or disallows passage through” [White et al., 2004]. The result of a gateway pass-through can be that processes are merged or split. Graphically, a gateway is represented as a diamond.

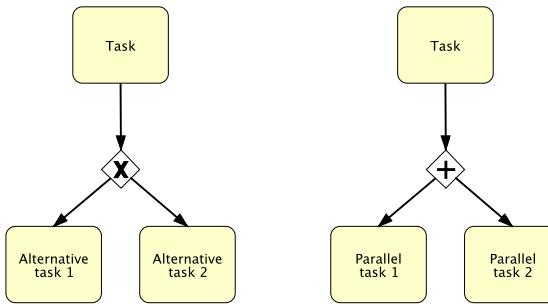

**Figure 1.5:** BPMN gateway types: Exclusive (left), parallel (right)


While there exist a number of different gateway types [White et al., 2004, p. 93], the SED-ML specification only uses the parallel and the exclusive gates (Figure 1.5).

*Exclusive* gateways – also denoted as decisions – allow the sequence flow to take two or more alternative paths (Figure 1.5, left hand side). However, *only one* of the paths may be chosen (not more). Sometimes two alternative branches need to be merged together again, in which case the exclusive gate must be used as well: The sequence flow continues as soon as *one* of the incoming processes send a signal. An exclusive gateway is marked by an X in the graphical notation.

*Parallel* gateways, “provide a mechanism to synchronize parallel flow and to create parallel flow” [White et al., 2004] (Figure 1.5, right hand side). They are used to show parallel paths in the workflow; even if

sometimes not required they might help in understanding the process. Synchronisation allows to start two processes in parallel at the same time in the sequence flow: The sequence flow will continue with *all* processes leaving the parallel gateway. Joining two processes with a parallel gateway is also possible: the process flow will only continue after a signal has arrived from *all* processes coming in the parallel gateway. A parallel gateway is marked by a + in the graphical notation.

*Events* mark everything happening during the execution of the sequence flow, usually they interrupt the business process, having some cause or impact on the execution. From the broad range of events that BPMN offers, SED-ML only uses a small subset, namely the start event and the end event (Figure 1.6).

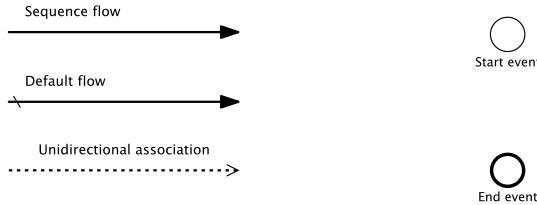


**Figure 1.6:** BPML connectors (left) and events (right).

All events are graphically drawn as small circles. A *start event* is drawn with a single thin line and mark the start of a process, it can not have any incoming sequence flow. Start events may be triggered by different mechanisms, for the case of SED-ML the untyped start event (no marker inside the circle) is used. The trigger to start the process is “Create new simulation experiment”. The *end event* is marked with a thick line. It indicates the end of a process. SED-ML specification makes use of the untyped end event (no marker inside the circle). The end event is used to show the end of sub-processes as well as processes. If the end of a sub-process is reached, the sequence flow returns to the according parent process.

*Connectors* are used to combine different BPMN objects with each other (White et al. [2004], p. 30) show the full list of valid connections). SED-ML uses only a subset of available connectors, namely sequence flow, default flow, and unidirectional associations (Figure 1.6). *Sequence flow* defines the execution order of activities. *Default flow* marks the default branch to be chosen if other conditions leave various possibilities for further execution of the sequence flow. A *unidirectional association* is used to indicate that a data object is modified, i. e. read and written during the execution of an activity [Business Process Technology group, 2009].

The rough SED-ML workflow is shown in Figure 1.7. The process of defining a SED-ML simulation

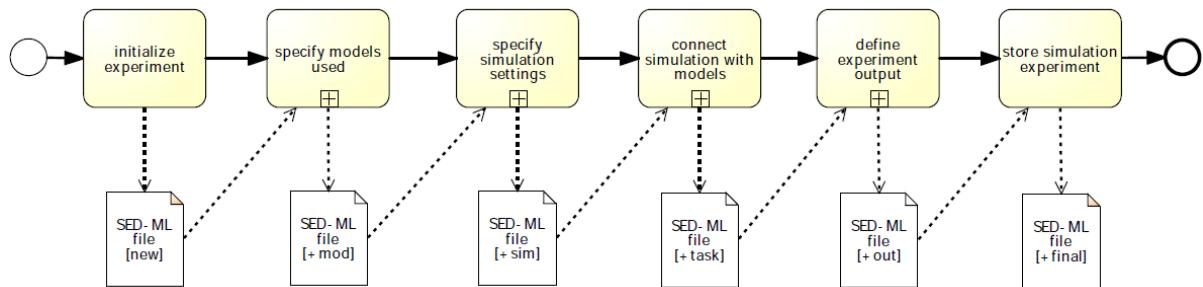

**Figure 1.7:** The process of defining a simulation experiment in SED-ML (overview)

experiment starts by initialising the experiment and creating a new SED-ML file. Afterwards, the **models** needed for the simulation are specified and stored into the existing SED-ML file (Section 1.2.2). In a third step, the simulation experiment **setups** are defined and stored into the same file (Section 1.2.3). To assign a setup to a number of models used in the experiment, these connections have to be defined and recorded (Section 1.2.4), called **task** in SED-ML. After simulation, the **output** should be defined,

based on the specified tasks and performed simulation experiment. The information is added to the existing SED-ML file (Section 1.2.5). In the end, the whole experiment is stored in the final SED-ML file. All collapsed processes are described in the following sections. Examples in XML are provided in the more technical description.

## 1.2.2 Models

To define a simulation experiment, first of all a new SED-ML file is created. The models to be used in the experiment (zero or many) are referenced, using a link to a model description in some open, curated model database (e.g. Biomodels Database [Li et al., 2010] or CellML Repository [Beard et al., 2009]). All necessary changes to correctly simulate the model are defined, e.g., assigning new parameter values or updating the mathematics of the model (Figure 1.8). The procedure is repeated until all models




**Figure 1.8:** The process of defining model(s) in SED-ML

participating in the experiment have been described. Each such model gets an internal SED-ML ID and an optional name.

## 1.2.3 Simulation setup

Secondly, the simulation setups (zero or many) used throughout the simulation experiment are described (Figure 1.9). Those may stem from various different types of simulation, e.g., steady state analysis or

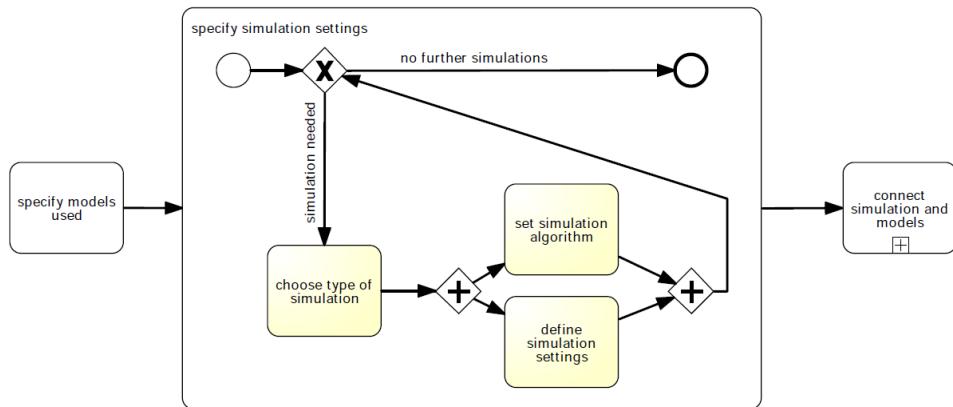

**Figure 1.9:** The process of defining simulation(s) in SED-ML


bifurcation. Depending on the specific type of experiment, the information encoded for the simulation setup might differ. Thus, the definition of simulation settings is specific to the simulation experiment.

In a simple case the experiment consists of one simulation, but it can get far more complex. For example, one might define a nested sequence of simulations, in which case every simulation has to be defined separately. Each simulation setup gets its own internal ID and an optional name. For each of the setups, the simulation algorithm to be used for that simulation is defined through a reference to a well-defined

algorithm name, e.g. an ontology or controlled vocabulary. One approach to define such a controlled vocabulary of simulation algorithms is the *Kinetic Simulation Algorithm Ontology* (Section 2.2.4). The setup definition is repeated until all different simulations have been described.

### 1.2.4 Task

SED-ML allows to apply one defined simulation setting to one defined model at a time. However, any number of tasks may be defined inside a simulation experiment description (Figure 1.10). To do so, each

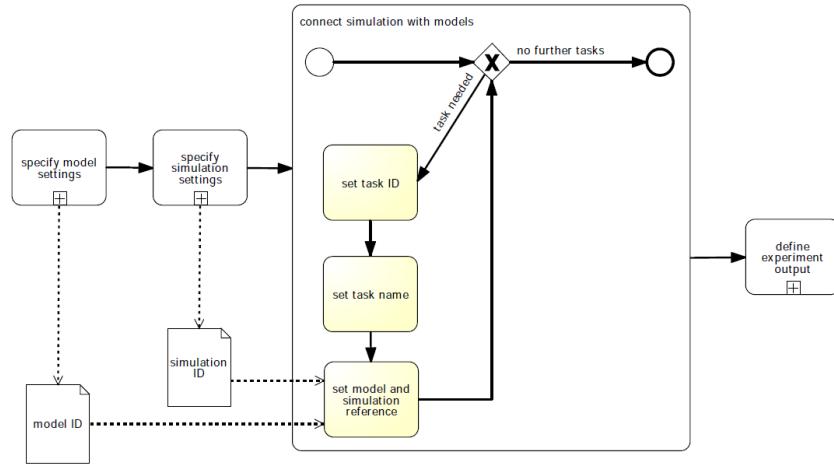


**Figure 1.10:** The process of defining simulation task(s) in SED-ML

task refers to one of the formerly specified models and to one of the formerly specified simulation setups. Each task has its own ID and an optional name. The process of task definition is repeated until all tasks have been defined.

The current SED-ML does not allow to nest or order tasks. However, these features are evaluated for future versions of SED-ML.

### 1.2.5 Output

The SED-ML finally consists of output definitions that describe what kind of output the experiment uses to present the simulation result to the user, i.e., a plot or a data table (Figure 1.11), and also which data is part of the output. Therefore, SED-ML first defines a set of data generators (Figure 1.12), which

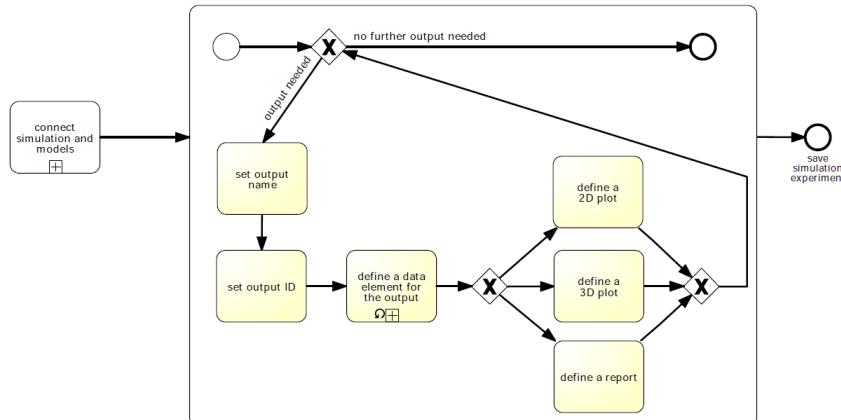


**Figure 1.11:** The process of defining output(s) in SED-ML

are then used to specify a particular result, i. e. output (Section 1.2.6).

The SED-ML specification comes with three pre-defined types of outputs: 2D- and 3D plots, and reports. All use the aforementioned data generators to specify the information to be plotted on the different axes, or in the table columns respectively.

### 1.2.6 Data Generator

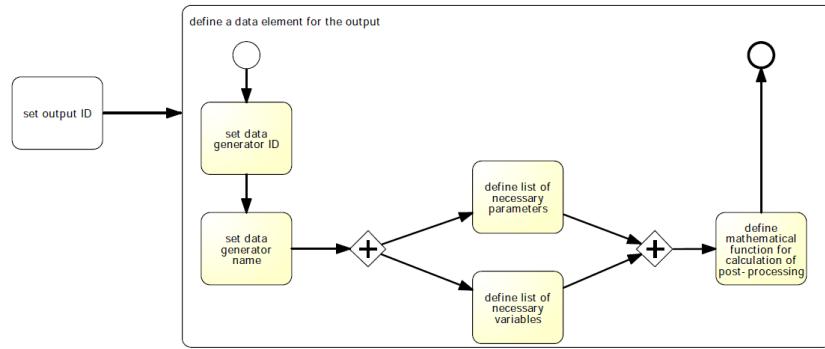

**Figure 1.12:** The process of defining data generator(s) in SED-ML

A data generator may use data elements, e. g., variables or parameters, that either (1) have been taken directly from the model, or (2) have been generated in a post-processing step. If post-processing needs to be applied, variables and parameters from the various, previously defined models may be used, but also existing global parameters, such as *time*. If the variables are taken from existing models, a reference to the model and the particular variable needs to be given. If post-processing is necessary, a reference to an existing variable or parameter, including other data generators, has to be provided. Additional mathematical rules to be applied on the referred variable or parameter must then be specified. In a SED-ML file, any number of data generators can be created for later re-use in the output definition.

## 2. SED-ML technical specification


This document represents the technical specification of SED-ML. We also provide an XML Schema [[W3C, 2004](#)] and a UML Class diagram representation of that XML Schema (Appendix A). UML class diagrams are a subset of the *Unified Markup Language* notation (UML, [[OMG, 2009](#)]). Sample experiment descriptions are given as XML snippets that comply with the XML Schema.

It should however be noted that some of the concepts of SED-ML cannot be captured using XML Schema alone. In these cases it is the specification that is considered the normative document.

## 2.1 Conventions used in this document

### 2.1.1 UML Classes

A SED-ML UML class (Figure 2.1) consists of a class name (**ClassName**) and a number of attributes (**attribute**) each of a specific data type (**type**). The SED-ML UML specification does not make use of UML operations.




**Figure 2.1:** SED-ML UML Class with class names and attributes

SED-ML class names always begin with upper case letters. If they are composed of different words, the camel case style is used, as in e.g. **DataGenerator**.

### 2.1.2 UML Relationships

#### 2.1.2.1 UML Relation Types

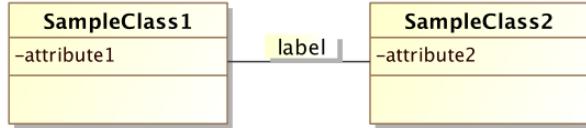

**Figure 2.2:** UML Class connectors

Links between classes specify the connection of objects with each other (Figure 2.2). The different relation types used in the SED-ML specification include aggregation, composite aggregation, and generalisation. The label on the line is called symbol (**label**) and describes the relation of the objects of both classes.


The **association** (Figure 2.3) indicates the existence of a connection between the objects of the participating classes. Often associations are directed to show how the label should be read (in which direction). Associations can be uni-directional (one arrowhead), or bidirectional (zero or two arrowheads).



**Figure 2.3:** UML Association

The **aggregation** (Figure 2.4 on the following page, top) indicates that the objects of the participating classes are connected in a way that one class (**Whole**) consists of several parts (**Part**). In an aggregation, the parts may be independent of the whole. For example, a car (**Whole**) has several parts called wheel (**Part**); however, the wheels can exist independently of the car while the car requires the wheels in order to function.


The **composite aggregation** (Figure 2.4 on the next page, bottom) indicates that the objects of the participating classes are connected in a way that one class (**Whole**) consists of several parts (**Part**). In contrast to the aggregation, the subelements (**Part**) are dependent on the parent class (**Whole**). An example is that a university (**Whole**) consists of a number of departments (**Part**) which have a so-called

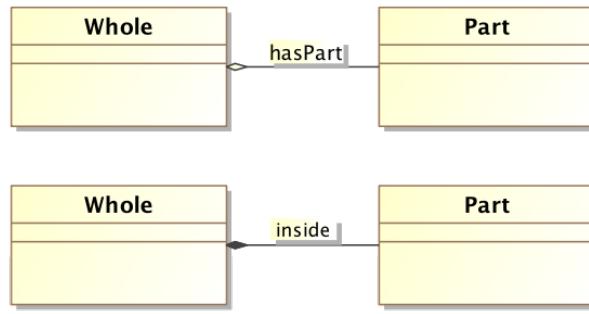

**Figure 2.4:** UML Aggregation

“lifetime responsibility” with the university, e.g. if the university vanishes, the departments will vanish with it [Bell, 2003].

The **generalisation** (Figure 2.5) allows to extend classes (**BaseClass**) by additional properties. The derived class (**DerivedClass**) inherits all properties of the base class and defines additional ones. In the given example, an instance of **DerivedClass** has two attributes **attribute1** and **attribute2**.

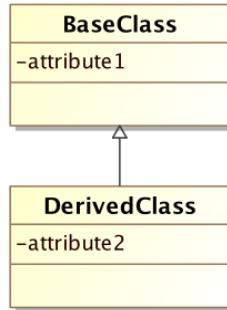


**Figure 2.5:** UML Generalisation

### 2.1.2.2 UML multiplicity

UML multiplicity defines the number of objects in one class that can be related to one object in the other class (also known as **cardinality**). Possible types of multiplicity include values (1), ranges (1..4), intervals (1,3,9), or combinations of ranges and intervals. The standard notation for “many” is the asterisk (\*).

Multiplicity can be defined for both sides of a relationship between classes. The default relationship is “many to many”. The example in Figure 2.6 expresses that a class is given by a professor, and a professor might give one to many classes.

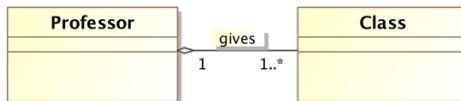

**Figure 2.6:** UML Multiplicity in an Aggregation

### 2.1.3 XML Schema language elements

The main building blocks of an XML Schema specification are:

- simple and complex types

- element specifications
- attribute specifications

XML Schema [definitions](#) create new types, [declarations](#) define new elements and attributes. The definition of new (simple and complex) types can be based on a number of already existing, predefined types (string, boolean, float). Simple types are restrictions or extensions of predefined types. Complex types describe how attributes can be assigned to elements and how elements can contain further elements. The current SED-ML XML Schema only makes use of *complex type definitions*. An example for a complex type definition is given in listing 2.1:

```

1 <xs:element name="computeChange">
2   <xs:complexType>
3     <xs:complexContent>
4       <xs:extension base="SEDBase">
5         <xs:sequence>
6           <xs:element ref="listOfVariables" minOccurs="0" />
7           <xs:element ref="listOfParameters" minOccurs="0" />
8           <xs:element ref="math" />
9         </xs:sequence>
10        <xs:attribute name="target" use="required" type="xs:token" />
11      </xs:extension>
12    </xs:complexContent>
13  </xs:complexType>
14</xs:element>
```

**Listing 2.1:** Complex Type definition of the SED-ML `computeChange` element

It shows the declaration of an element called `computeChange` that is used in SED-ML to change mathematical expressions. The element is defined using an *unnamed* complex type which is build of further elements called `listOfVariables`, `listOfParameters`, and `math`. Additionally, the element `computeChange` has an attribute `target` declared. Please note that the definition of the elements inside the complex type are only referred to and will be found elsewhere in the schema.

The nesting of elements in the schema can be expressed using the `xs:sequence` (a sequence of elements), `xs:choice` (an alternative of elements to choose from), or `xs:all` (a set of elements that can occur in any order) concepts. The current SED-ML XML Schema only uses the *sequence* of elements.

### 2.1.3.1 Multiplicities

The standard multiplicity for each defined `element` is 1. Explicit multiplicity is to be defined using the `minOccurs` and `maxOccurs` attributes inside the complex type definition, as shown in listing 2.2.

```

1 <xs:element name="dataGenerator">
2   <xs:complexType>
3     <xs:complexContent>
4       <xs:extension base="SEDBase">
5         <xs:sequence>
6           <xs:element ref="listOfVariables" minOccurs="0" />
7           <xs:element ref="listOfParameters" minOccurs="0" />
8           <xs:element ref="math" />
9         </xs:sequence>
10        <xs:attributeGroup ref="idGroup" />
11      </xs:extension>
12    </xs:complexContent>
13  </xs:complexType>
14</xs:element>
```

**Listing 2.2:** Multiplicity for complex types in XML Schema

In this example, the `dataGenerator` type is build of a sequence of three elements: The `listOfVariables` element is not necessary for the definition of a valid `dataGenerator` XML structure (it may occur 0 times or once). The same is true for the `listOfParameters` element (it may as well occur 0 times or once). The `math` element, however, uses the implicit standard multiplicity – it must occur exactly 1 time in the `dataGenerator` specification.

### 2.1.4 Type extensions

XML Schema offers mechanisms to restrict and extend previously defined complex types. Extensions add element or attribute declarations to existing types, while restrictions restrict the types by adding further characteristics and requirements (facets) to a type. An example for a type extension is given in listing 2.3.

```

1   <xs:element name="sedML">
2       <xs:complexType>
3           <xs:complexContent>
4               <xs:extension base="SEDBase">
5                   <xs:sequence>
6                       <xs:element ref="listOfSimulations" minOccurs="0" />
7                       <xs:element ref="listOfModels" minOccurs="0" />
8                       <xs:element ref="listOfTasks" minOccurs="0" />
9                       <xs:element ref="listOfDataGenerators" minOccurs="0" />
10                      <xs:element ref="listOfOutputs" minOccurs="0" />
11                  </xs:sequence>
12                  <xs:attribute name="level" type="xs:decimal" use="required"
13                      fixed="1" />
14                  <xs:attribute name="version" type="xs:decimal" use="required"
15                      fixed="1" />
16              </xs:extension>
17          </xs:complexContent>
18      </xs:complexType>
19  </xs:element>

```

**Listing 2.3:** Definition of the sedML type through extension of SEDBase in SED-ML

The **sedML** element is an extension of the previously defined **SEDBase** type. It extends **SEDBase** by a sequence of five additional elements (**listOfSimulations**, **listOfModels**, **listOfTasks**, **listOfDataGenerators**, and **listOfOutputs**) and a new attribute **version**.

## 2.2 Concepts used in SED-ML

### 2.2.1 MathML subset

The SED-ML specification allows for the encoding of pre-processing applied to the computational model, as well as for the encoding of post processing applied to the raw simulation data before output. The corresponding mathematical expressions are encoded using MathML 2.0 [Carlisle et al., 2001]. MathML is an international standard for encoding mathematical expressions using XML. It is also used as a representation of mathematical expressions in other formats, such as SBML and CellML, two of the languages supported by SED-ML.

#### 2.2.1.1 MathML operations

In order to make the SED-ML format easier to adopt, at the beginning we restrict the MathML subset to the following operations:

- *token*: `cn`, `ci`, `csymbol`, `sep`
- *general*: `apply`, `piecewise`, `piece`, `otherwise`, `lambda`
- *relational operators*: `eq`, `neq`, `gt`, `lt`, `geq`, `leq`
- *arithmetic operators*: `plus`, `minus`, `times`, `divide`, `power`, `root`, `abs`, `exp`, `ln`, `log`, `floor`, `ceiling`, `factorial`
- *logical operators*: `and`, `or`, `xor`, `not`
- *qualifiers*: `degree`, `bvar`, `logbase`
- *trigonometric operators*: `sin`, `cos`, `tan`, `sec`, `csc`, `cot`, `sinh`, `cosh`, `tanh`, `sech`, `csch`, `coth`, `arcsin`, `arccos`, `arctan`, `arcsec`, `arccsc`, `arccot`, `arcsinh`, `arccosh`, `arctanh`, `arcsech`, `arccsch`, `arccoth`
- *constants*: `true`, `false`, `notanumber`, `pi`, `infinity`, `exponentiale`
- *MathML annotations*: `semantics`, `annotation`, `annotation-xml`

#### 2.2.1.2 MathML Symbols

All the operations listed above only operate on *scalar* values. However, as one of SED-ML's aims is to provide post processing on the results of simulation experiments, we need to enhance this basic set of operations by some aggregate functions. Therefore a defined set of MathML symbols that represent vector values are supported by SED-ML Level 1 Version 2. To simplify things for SED-ML L1V1 the only symbols to be used are the identifiers of variables defined in the `listOfVariables` of `DataGenerators`. These variables represent the data collected from the simulation experiment with the associated task.

#### 2.2.1.3 MathML functions

The following aggregate functions are available for use in SED-ML Level 1 Version 2.

- *min*: Where the minimum of a variable represents the smallest value the simulation experiment yielded (Listing 2.4).

```
1 <apply>
2   <csymbol encoding="text" definitionURL="http://sed-ml.org/#min">
3     min
4   </csymbol>
5   <ci> variableId </ci>
6 </apply>
```

**Listing 2.4:** Example for the use of the MathML `min` function.

- *max*: Where the maximum of a variables represents the largest value the simulation experiment yielded (listing 2.5).

```
1 <apply>
2   <csymbol encoding="text" definitionURL="http://sed-ml.org/#max">
3     max
4   </csymbol>
5   <ci> variableId </ci>
6 </apply>
```

**Listing 2.5:** Example for the use of the MathML `max` function.

- *sum*: All values of the variable returned by the simulation experiment are summed (listing 2.6).

```

1 <apply>
2   <csymbol encoding="text" definitionURL="http://sed-ml.org/#sum">
3     sum
4   </csymbol>
5   <ci> variableId </ci>
6 </apply>

```

**Listing 2.6:** Example for the use of the MathML `sum` function.

- *product*: All values of the variable returned by the simulation experiment are multiplied (listing 2.7).

```

1 <apply>
2   <csymbol encoding="text" definitionURL="http://sed-ml.org/#product">
3     product
4   </csymbol>
5   <ci> variableId </ci>
6 </apply>

```

**Listing 2.7:** Example for the use of the MathML `product` function.

These represent the only exceptions. At this point SED-ML Level 1 Version 2 does not define a complete algebra of vector values. For more information see the description of the [DataGenerator](#) class.

## 2.2.2 URI Scheme

URIs are needed at different points in SED-ML Level 1 Version 2: Firstly, they are the preferred mechanism to refer to model encodings. Secondly, they are used to specify the language of the referenced model. Thirdly, they enable addressing implicit model variables. Finally, annotations of SED-ML elements should be provided with a standardised annotation scheme.

The use of a standardised URI Scheme ensures long-time availability of particular information that can unambiguously be identified.

### 2.2.2.1 Model references

The preferred way for referencing a model from a SED-ML file is adopted from the [MIRIAM URI Scheme](#). MIRIAM enables identification of a data resource (in this case a model resource) by a predefined URN. A data entry inside that resource is identified by an ID. That way each single model in a particular model repository can be unambiguously referenced. To become part of MIRIAM resources, a model repository must ensure permanent and consistent model references, that is stable IDs.

One model repository that is part of MIRIAM resources is the [BioModels Database](#) [Li et al., 2010]. Its data resource name in MIRIAM is `urn:miriam:biomodels.db`. To refer to a particular model, a standardised identifier scheme is defined in [MIRIAM Resources](#)<sup>1</sup>. The ID entry maps to a particular model in the model repository. That model is never deleted. A sample BioModels Database ID is `BIOMD0000000048`. Together with the data resource name it becomes unambiguously identifiable by the URN `urn:miriam:biomodels.db:BIOMD0000000048` (in this case referring to the 1999 Kholodenko model on EGFR signaling).

SED-ML recommends to follow the above scheme for model references, if possible. SED-ML does not specify how to resolve the URNs. However, MIRIAM Resources offers web services to do so<sup>2</sup>. For the above example of the `urn:miriam:biomodels.db:BIOMD0000000048` model, the resolved URL may look like:

- <http://biomodels.caltech.edu/BIOMD0000000048> or
- <http://www.ebi.ac.uk/biomodels-main/BIOMD0000000048>

depending on the physical location of the resource chosen to resolve the URN.

An alternative means to obtain a model may be to provide a single resource containing necessary models and a SED-ML file. Although a specification of such a resource is beyond the scope of this document, one proposal – SED-ML archive format – is described in Appendix D. Further information on the `source` attribute referencing the model location is provided in Section 2.4.1.2.

---

<sup>1</sup><http://www.ebi.ac.uk/miriam/>

<sup>2</sup><http://www.ebi.ac.uk/miriam/>

### 2.2.2.2 Language references

To specify the language a model is encoded in, a set of pre-defined SED-ML URNs can be used. The structure of SED-ML language URNs is `urn:sedml:language:name.version`. SED-ML allows to specify a model representation format very generally as being XML, if no standardised representation format has been used to encode the model. On the other hand, one can be as specific as defining a model being in a particular version of a language, as “SBML Level 2, Version 2, Revision 1”.

The list of URNs is available from <http://sed-ml.org/>. Further information on the `language` attribute is provided in Section 2.4.1.1.

### 2.2.2.3 Implicit variables

Some variables used in an experiment are not explicitly defined in the model, but may be implicitly contained in it. For example, to plot a variable’s behaviour over time, that variable is defined in an SBML model, while `time` is not explicitly defined.

To overcome this issue and allow SED-ML to refer to such variables in a common way, the notion of *implicit variables* is used. Those variables are called `symbols` in SED-ML. They are defined following the idea of MIRIAM URNs and using the SED-ML URN scheme. The structure of the URNs is `urn:sedml:symbol:implicit variable`. To refer from a SED-ML file to the definition of `time`, for example, the URN is `urn:sedml:symbol:time`.

The list of predefined symbols is available from the SED-ML site on <http://sed-ml.org/>. From that source, a mapping of SED-ML symbols on possibly existing concepts in the single languages supported by SED-ML is provided.

### 2.2.2.4 Annotations

When annotating SED-ML elements with semantic `annotations`, the [MIRIAM URI Scheme](#) should be used. In addition to providing the data type (e.g. PubMed) and the particular data entry inside that data type (e.g. 10415827), the relation of the annotation to the annotated element should be described using the standardised [biomodels.net qualifier](#). The list of qualifiers, as well as further information about their usage, is available from <http://www.biomodels.net/qualifiers/>.

## 2.2.3 XPath usage

XPath is a language for finding information in an XML document [Clarke and DeRose, 1999]. Within Level 1 Version 2, XPath version 1 expressions are used to identify nodes and attributes within an XML representation of a biological model in the following ways:

1. Within a `Variable` definition, where XPath identifies the model variable required for manipulation in SED-ML.
2. Within a `Change` definition, where XPath is used to identify the target XML to which a change should be applied.

For proper application, XPath expressions should contain prefixes that allow their resolution to the correct XML namespace within an XML document. For example, the XPath expression referring to a species `X` in an SBML model:

`/sbml:sbml/sbml:model/sbml:listOfSpecies/sbml:species[@id='X'] ✓ -CORRECT`

is preferable to

`/sbml/model/listOfSpecies/species[@id='X'] ✗ -INCORRECT`

which will only be interpretable by standard XML software tools if the SBML file declares no namespaces.

## 2.2.4 KiSAO

An important aspect of a simulation experiment is the simulation algorithm used to solve the system. But the sole reference of a simulation algorithm through its name in form of a string is error prone and ambiguous. Firstly, typing mistakes or language differences may make the identification of the intended

algorithm difficult. Secondly, many algorithms exist with more than one name, having synonyms or various abbreviations that are commonly used.

These problems can be solved by using a controlled vocabulary to refer to a particular simulation algorithm. One attempt to provide such a vocabulary is the *Kinetic Simulation Algorithm Ontology* (KiSAO, [Courtot et al., 2011]). KiSAO is a community-driven approach of classifying and structuring simulation approaches by model characteristics and numerical characteristics. Model characteristics include, for instance, the type of variables used for the simulation (such as discrete or continuous variables) and the spatial resolution (spatial or non-spatial descriptions). Numerical characteristics specify whether the system's behavior can be described as deterministic or stochastic, and whether the algorithms use fixed or adaptive time steps. Related algorithms are grouped together, producing classes of algorithms. KiSAO is available from BioPortal at <http://purl.bioontology.org/ontology/KiSAO>. The project homepage is at <http://www.biomodels.net/kisao/>.

Although work is still at an early stage, the use of KiSAO is recommended when referring to a simulation algorithm from a SED-ML description. However, the use of KiSAO for the moment is limited. One may look up the algorithm that was used in the simulation experiment (through resolving the KiSAO ID) and then try and use one algorithm that is as similar to the original one as possible. KiSAO will become more supportive for SED-ML as soon as the ontology contains a wider range of relationships between different algorithms, as well as extended descriptions of the algorithm characteristics.

## 2.2.5 SED-ML resources

Information on SED-ML can be found on <http://sed-ml.org>. The SED-ML XML Schema, the UML schema and related implementations, libraries, validators and so on can be found on the SED-ML source-forge project page <http://sed-ml.svn.sourceforge.net/>.

## 2.3 General attributes and classes

In this section we introduce attributes and concepts used repeatedly throughout the SED-ML specification.

### 2.3.1 id

Most objects in SED-ML carry an `id` attribute. The `id` attribute, if it exists for an object, is always required and identifies SED-ML constituents unambiguously. The data type for `id` is `SId` which is a datatype derived from the basic XML type `string`, but with restrictions about the characters permitted and the sequences in which those characters may appear. The definition is shown in Figure 2.7.

```
letter ::= 'a'...'z', 'A'...'Z'  
digit ::= '0'...'9'  
idChar ::= letter | digit | '_'  
SId ::= ( letter | '_' ) idChar*
```

**Figure 2.7:** The definition of the type `SId`

For a detailed description see also the SBML specification on the “Type SId” [Hucka et al., 2010, p. 11].

All `ids` have a global scope, i. e. the `id` must be unambiguous throughout a whole SED-ML document. As such it identifies the constituent it is related to.

An example for a defined `id` is given in Listing 2.8.

```
1 <model id="m00001" language="urn:sedml:language:sbml" source="urn:miriam:biomodels.db:BIOMD0000000012">  
2 [MODEL DEFINITION]  
3 </model>
```

**Listing 2.8:** SED-ML identifier definition, e. g. for a model

The defined model carries the `id m00001`. If the model is referenced elsewhere in the SED-ML document, it is referred to by that `id`.

### 2.3.2 name

Besides an `id`, a SED-ML constituent may carry an optional `name`. However, names do not have identifying character; several SED-ML constituents may carry the same name. The purpose of the `name` attribute is to keep a human-readable name of the constituent, e. g. for display to the user. In the XML Schema representation, names are of the data type `String`.

Listing 2.9 extends the model definition in listing 2.8 by a model name.

```
1 <model id="m00001" name="Circadian oscillator" language="urn:sedml:language:sbml" source="urn:miriam:biomodels.db:BIOMD0000000012">  
2 [MODEL DEFINITION]  
3 </model>
```

**Listing 2.9:** SED-ML name definition, e. g. for a model

### 2.3.3 SEDBase

`SEDBase` is the base class of SED-ML Level 1 Version 2. All other classes are derived from it. As such it provides means to attach additional information on all other classes (Figure 2.8 on the next page). That information can be specified by human readable `Notes` or custom `Annotations`.



**Figure 2.8:** The *SEDBase* class

Table 2.1 shows all attributes and sub-elements for the *SEDBase* element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaID <sup>o</sup>	<a href="#">page 23</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.1:** Attributes and nested elements for *SEDBase*.  $xy^o$  denotes optional elements and attributes.

### 2.3.3.1 *metaid*

The main purpose of the *metaid* attribute is to attach semantic annotations in form of the *Annotation* class to SED-ML elements. The type of *metaid* is XML ID and as such the *metaid* attribute is globally unique throughout the whole SED-ML document.

An example showing how to link a semantic annotation to a SED-ML object via the *metaid* is given in the *Annotation* class description.

### 2.3.3.2 *Notes*

A *note* is considered a human-readable description of the element it is assigned to. It serves to display information to the user. Instances of the *Notes* class may contain any valid XHTML [Pemberton et al., 2002], ranging from short comments to whole HTML pages for display in a Web browser. The namespace URL for XHTML content inside the *Notes* class is <http://www.w3.org/1999/xhtml>. It may either be declared in the *sedML XML element*, or directly used in top level XHTML elements contained within the *notes* element. For further options of how to set the namespace and detailed examples, please refer to [Hucka et al., 2010, p. 14].

Table 2.2 shows all attributes and sub-elements for the *Notes* element as defined by the SED-ML Level 1 Version 2 XML Schema. *Notes* does not have any further sub-elements defined in SED-ML, nor

attribute	description
xmlns:string “http://www.w3.org/1999/xhtml”	<a href="#">page 26</a>
sub-elements	
<i>well-formed content permitted in XHTML</i>	

**Table 2.2:** Attributes and nested elements for *Notes*.  $xy^o$  denotes optional elements and attributes.

attributes associated with it.

Listing 2.10 shows the use of the `notes` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <sedML [...]>
2   <notes>
3     <p xmlns="http://www.w3.org/1999/xhtml">The enclosed simulation description shows the oscillating
      behaviour of
4       the Repressilator model using deterministic and stochastic simulators.</p>
5   </notes>
6 </sedML>
```

**Listing 2.10:** *The notes element*

In this example, the namespace declaration is inside the `notes` element and the note is related to the `sedML` root element of the SED-ML file. A note may, however, occur inside *any* SED-ML XML element, except `note` itself and `annotation`.

### 2.3.3.3 Annotation

An `annotation` is considered a computer-processible piece of information. Annotations may contain any valid XML content. For further guidelines on how to use annotations, we would like to encourage the reading of the corresponding section in the SBML specification [Hucka et al., 2010, pp. 14-16]. The style of annotations in SED-ML is briefly described in Section 2.2.2.4 on page 20.

Table 2.3 shows all attributes and sub-elements for the `Annotation` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
<code>none</code>	
sub-elements	description
<code>none</code> in the SED-ML namespace	

**Table 2.3:** *Attributes and nested elements for Annotation.*  $xy^o$  denotes optional elements and attributes.

Listing 2.11 shows the use of the `annotation` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```


1 <sedML>
2   [...]
3   <model id="model1" metaID="001" language="urn:sedml:language:cellml"
4     source="http://models.cellml.org/workspace/leloup_gonze_goldbeter_1999/@rawfile/
      d6613d7e1051b3eff2bb1d3d419a445bb8c754ad/leloup_gonze_goldbeter_1999_a.cellml" >
5     <annotation>
6       <rdf:RDF xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
7         xmlns:bqmodel="http://biomodels.net/model-qualifiers/">
8         <rdf:Description rdf:about="#001">
9           <bqmodel:isDescribedBy>
10          <rdf:Bag>
11            <rdf:li rdf:resource="urn:miriam:pubmed:10415827"/>
12          </rdf:Bag>
13        </bqmodel:isDescribedBy>
14      </rdf:Description>
15    </rdf:RDF>
16  </annotation>
17 </model>
18 [...]
19 </sedML>
```

**Listing 2.11:** *The annotation element*

In that example, a SED-ML `model` element is annotated with a reference to the original publication. The `model` contains an `annotation` that uses the `biomodels.net model-qualifier isDescribedBy` to link to the external resource `urn:miriam:pubmed:10415827`. In natural language the annotation content could be interpreted as “The model *is described by* the published article available from *pubmed* under ID *10415827*”. The example annotation follows the proposed `URI Scheme` suggested by the MIRIAM reference standard. The MIRIAM URN can be resolved to the PubMED (<http://pubmed.gov>) publication with ID 10415827, namely the article “Alternating oscillations and chaos in a model of two coupled biochemical oscillators driving successive phases of the cell cycle.” published by Romond et al. in 1999.

### 2.3.4 SED-ML top level element

Each SED-ML Level 1 Version 2 document has a main class called SED-ML which defines the document's structure and content (Figure 2.9). It consists of several parts; the parts are all connected to the SED-ML class through aggregation: the Model class (for model specification, see Section 2.4.1), the Simulation class (for simulation setup specification, see Section 2.4.3), the Task class (for the linkage of models and simulation setups, see Section 2.4.5), the DataGenerator class (for the definition of post-processing, see Section 2.4.7), and the Output class (for the output specification, see Section 2.4.8). All of them are shown in Figure 2.9 and will be explained in more detail in the relevant sections of this document.

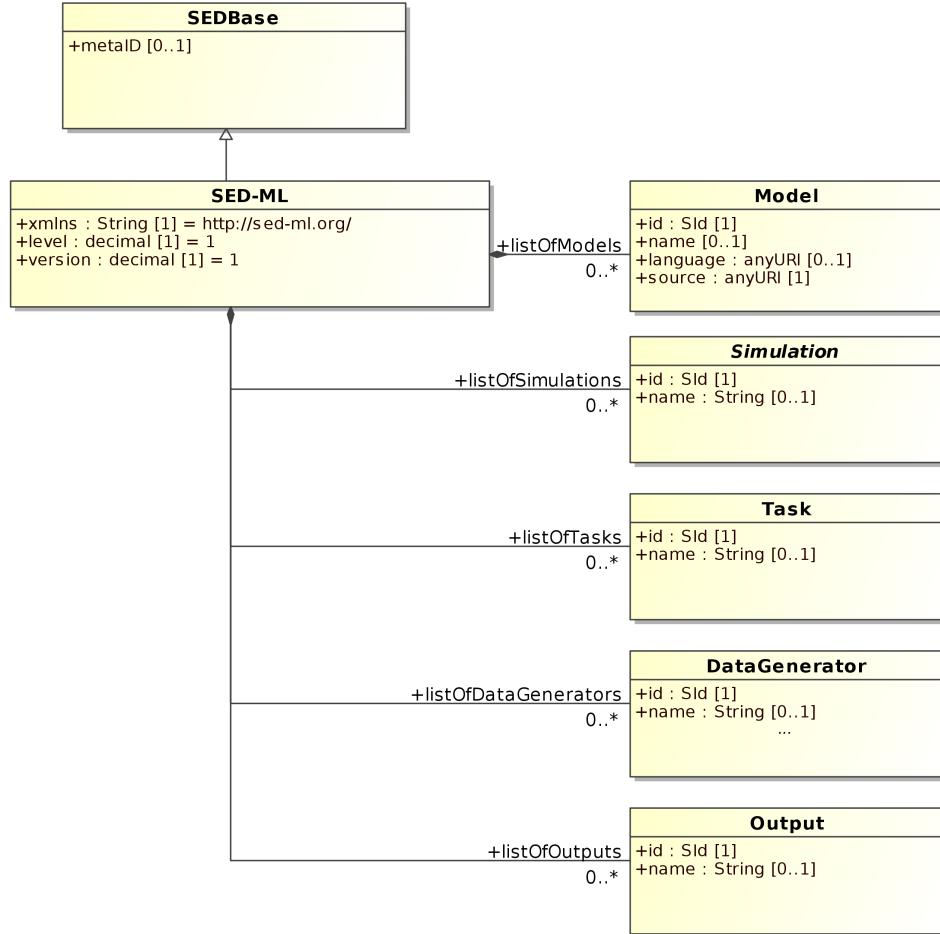

**Figure 2.9:** The sub-classes of SED-ML

Table 2.4 on the next page shows all attributes and sub-elements for the SED-ML element as defined by the SED-ML Level 1 Version 2 XML Schema.

A SED-ML document needs to have the SED-ML namespace defined through the mandatory `xmlns` attribute. In addition, the SED-ML `level` and `version` attributes are mandatory.

The basic XML structure of a SED-ML file is shown in listing 2.12.

```

1  <?xml version="1.0" encoding="utf-8"?>
2  <sedML xmlns:math="http://www.w3.org/1998/Math/MathML"
3      xmlns="http://sed-ml.org/" level="1" version="1">
4      <listOfModels />
5      [MODEL REFERENCES AND APPLIED CHANGES]
6      <listOfSimulations />
7      [SIMULATION SETUP]
8      <listOfTasks />
9      [MODELS LINKED TO SIMULATIONS]
10     <listOfDataGenerators />
11     [DEFINITION OF POST-PROCESSING]
12     <listOfOutputs />
  
```

attribute	description
metaID <sup>o</sup>	<a href="#">page 23</a>
xmlns	<a href="#">page 26</a>
level	<a href="#">page 26</a>
version	<a href="#">page 26</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
listOfModels <sup>o</sup>	<a href="#">page 33</a>
listOfSimulations <sup>o</sup>	<a href="#">page 34</a>
listOfTasks <sup>o</sup>	<a href="#">page 35</a>
listOfDataGenerators <sup>o</sup>	<a href="#">page 35</a>
listOfOutputs <sup>o</sup>	<a href="#">page 35</a>

**Table 2.4:** Attributes and nested elements for [SED-ML](#). xy<sup>o</sup> denotes optional elements and attributes.

```

13 [DEFINITION OF OUTPUT]
14 </sedML>

```

**Listing 2.12:** The SED-ML root element

The root element of each SED-ML XML file is the `sedML` element, encoding `version` and `level` of the file, and setting the necessary namespaces. Nested inside the `sedML` element are the five lists serving as containers for the encoded data (`listOfModels` for all models, `listOfSimulations` for all simulations, `listOfTasks` for all tasks, `listOfDataGenerators` for all post-processing definitions, and `listOfOutputs` for all output definitions).

#### 2.3.4.1 `xmlns`

The `xmlns` attribute declares the namespace for the SED-ML document. The pre-defined namespace for SED-ML documents is <http://sed-ml.org/>.

In addition, SED-ML makes use of the `MathML` namespace <http://www.w3.org/1998/Math/MathML> to enable the encoding of mathematical expressions in MathML 2.0. SED-ML uses a subset of MathML as described in Section 2.2.1 on page 18.

SED-ML `notes` use the XHTML namespace <http://www.w3.org/1999/xhtml>. The `Notes` class is described in Section 2.3.3.2 on page 23.

Additional external namespaces might be used in `annotations`.

#### 2.3.4.2 `level`

The current SED-ML `level` is “level 1”. Major revisions containing substantial changes will lead to the definition of forthcoming levels.

The `level` attribute is **required** and its value is a **fixed** decimal. For SED-ML Level 1 Version 2 the value is set to 1, as shown in the example in Listing 2.12.

#### 2.3.4.3 `version`

The current SED-ML `version` is “version 2”. Minor revisions containing corrections and refinements of SED-ML elements will lead to the definition of forthcoming versions.

The `version` attribute is **required** and its value is a **fixed** decimal. For SED-ML Level 1 Version 2 the value is set to 1, as shown in the example in Listing 2.12.

### 2.3.5 Reference relations

The `reference` concept is used to refer to a particular element inside the SED-ML document. It may occur in five different ways in the SED-ML document:

1. as an association between two `Models` (`modelReference`),

2. as an association between a [Variable](#) and a [Model](#) ([modelReference](#)),
3. as an association between a [Variable](#) and a [Task](#) ([taskReference](#)),
4. as an association between a [Task](#) and the associated [Model](#) ([modelReference](#)) or
5. as an association between a [Task](#) and the [Simulation](#) ([simulationReference](#)).
6. as an association between an [Output](#) and a [DataGenerator](#) ([dataReference](#)),

The definition of a [Task](#) object demands a reference to a particular Model object ([modelReference](#), see Section 2.3.5.1 on page 27); furthermore, the Task object must be associated with a particular Simulation object ([simulationReference](#), see Section 2.3.5.3 on page 28).

Depending on the use of the [reference](#) relation in connection with a [Variable](#) object, it may take different roles:

- a. The [reference](#) association might occur between a Variable object and a Model object, if the variable is to define a [Change](#). In that case the [variable](#) element contains a [modelReference](#) to refer to the particular model that contains the variable used to define the change (see Section 2.3.5.1 on page 27).
- b. If the [reference](#) is used as an association between a Variable object and a Task object inside the [dataGenerator](#) class, then the [variable](#) element contains a [taskReference](#) to unambiguously refer to an observable in a given task (see Section 2.3.5.2 on page 28).

Four different types of [data references](#) exist in SED-ML Level 1 Version 2. They are used depending on the *type* of output for the simulation. A 2d plot has an [xDataReference](#) and a [yDataReference](#) assigned. A 3D plot has in addition a [zDataReference](#) assigned. To define a report, each data column has a [dataReference](#) assigned.

### 2.3.5.1 [modelReference](#)

The [modelReference](#) either represents a relation between two [Model](#) objects, a [Variable](#) object and a [Model](#) object, or a relation between a [Task](#) object and a [Model](#) object.

The [source](#) attribute of a [Model](#) is allowed to reference either a URI or an [SID](#) to a second [Model](#). Constructs where a model **A** refers to a model **B** and **B** to **A** are invalid.

If pre-processing needs to be applied to a model before simulation, then the model update can be specified by creating a Change object. In the particular case that a change must be calculated with a mathematical function, variables need to be defined. To refer to an existing entity in a defined [Model](#), the [modelReference](#) is used.

The [modelReference](#) attribute of the [variable](#) element contains the [id](#) of a model that is defined in the document. Listing 2.13 shows the use of the [modelReference](#) element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <model id="m0001" [...]>
2   <listOfChanges>
3     <computeChange>
4       <listOfVariables>
5         <variable id="v1" modelReference="cellML" target="/cellml:model/cellml:component[@cmeta:id='MP']/
6           cellml:variable[@name='vsP']/@initial_value" />
7         [...]
8       </listOfVariables>
9       <listOfParameters [...] />
10      <math>
11        [CALCULATION OF CHANGE]
12      </math>
13    </computeChange>
14  </listOfChanges>
15 [...]
16 </model>
```

**Listing 2.13:** SED-ML [modelReference](#) attribute inside a variable definition of a [computeChange](#) element

In the example, a change is applied on model **m0001**. In the [computeChange](#) element a list of variables is defined. One of those variable is **v1** which is defined in another model ( **cellML**). The XPath expression given in the [target](#) attribute identifies the variable in the model which carries the ID **cellML**.

The `modelReference` is also used to indicate that a `Model` object is used in a particular `Task`. Listing 2.14 shows how this can be done for a sample SED-ML document.

```

1 <listOfTasks>
2 <task id="t1" name="Baseline" modelReference="model1" simulationReference="simulation1" />
3 <task id="t2" name="Modified" modelReference="model2" simulationReference="simulation1" />
4 </listOfTasks>
```

**Listing 2.14:** SED-ML `modelReference` definition inside a `task` element

The example defines two different tasks; the first one applies the simulation settings of `simulation1` on `model1`, the second one applies the same simulation settings on `model2`.

### 2.3.5.2 `taskReference`

`DataGenerator` objects are created to apply post-processing to the simulation results before simulation output.

For certain types of post-processing `Variable` objects need to be created. These link to a defined `Task` from which the model that contains the variable of interest can be inferred. A `taskReference` association is used to realise that link from a `Variable` object inside a `DataGenerator` to a `Task` object. Listing 2.15 gives an example.

```

1 <listOfDataGenerators>
2 <dataGenerator id="tim3" name="tim mRNA (difference v1-v2+20)">
3   <listOfVariables>
4     <variable id="v1" taskReference="t1" [...] />
5   </listOfVariables>
6   <math [...] />
7 </dataGenerator>
8 </listOfDataGenerators>
```

**Listing 2.15:** SED-ML `taskReference` definition inside a `dataGenerator` element

The example shows the definition of a variable `v1` in a `dataGenerator` element. The variable appears in the model that is used in task `t1`. The task definition of `t1` might look as shown in Listing 2.16.

```

1 <listOfTasks>
2   <task id="t1" name="task definition" modelReference="model1" simulationReference="simulation1" />
3 </listOfTasks>
```

**Listing 2.16:** Use of the reference relations in a task definition

Task `t1` references the model `model1`. Therefore we can conclude that the variable `v1` defined in listing 2.15 targets an element of the model with ID `model1`. The targeting process itself will be explained in section 2.3.6.1 on page 30.

### 2.3.5.3 `simulationReference`

The `simulationReference` is used to refer to a particular `Simulation` in a `Task`. Listing 2.14 shows the reference to a defined simulation for a sample SED-ML document. In the example, both tasks `t1` and `t2` use the simulation settings defined in `simulation1` to run the experiment.

### 2.3.5.4 `dataReference`

The `dataReference` is used to refer to a particular `DataGenerator` instance from an `Output` instance. Listing 2.17 shows the reference to a defined data set for a sample SED-ML document.

```

1 <listOfOutputs>
2   <plot2D id="p1" [...] >
3     <curve id="c1" xDataReference="dg1" yDataReference="dg2" />
4     [...]
5   </plot>
6 </listOfOutputs>
```

**Listing 2.17:** Example for the use of data references in a curve definition

In the example, the output type is a 2D plot, which defines one curve with id `c1`. A curve must refer to two different data generators which describe how to procure the data that is to be plotted on the x-axis and y-axis respectively.

### 2.3.6 Variable

Variables are references to already existing entities, either existing in one of the defined models or externally defined symbols (Figure 2.10).

Variable
+id : SId [1]
+name : String [0..1]
+target : XPath [0..1]
+symbol : String [0..1]

Figure 2.10: The Variable class

If the variable is defined through a reference to a model constituent, such as an SBML species, then the reference is specified using the target attribute. If the variable is defined through a reference to an external entity, then the symbol attribute is used. It holds a SED-ML URI. A variable is always placed inside a listOfVariables. Symbol and target must not be used together in a single instance of Variable.

Table 2.5 shows all attributes and sub-elements for the Variable element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
target	<a href="#">page 30</a>
symbol	<a href="#">page 30</a>
taskReference	<a href="#">page 28</a>
modelReference	<a href="#">page 27</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

Table 2.5: Attributes and nested elements for Variable. xy<sup>o</sup> denotes optional elements and attributes.

A variable element must contain a taskReference if it occurs inside a listOfVariables inside a dataGenerator element. A variable element must contain a modelReference if it occurs inside a listOfVariables inside a computeChange element.

Listing 2.18 shows the use of the variable element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <sedML>
2   <listOfModels>
3     <model [...]>
4       <listOfChanges>
5         <computeChange target="TARGET ELEMENT OR ATTRIBUTE">
6           <listOfVariables>
7             <variable id="v1" name="maximum velocity"
8               target="XPath TO A MODEL ELEMENT OR ATTRIBUTE IN ANY SPECIFIED MODEL" />
9               [FURTHER VARIABLE DEFINITIONS]
10            </listOfVariables>
11            [...]
12          </computeChange>
13        </listOfChanges>
14        [...]
15      </model>
16      [...]
17    </listOfModels>
18    <listOfDataGenerators>
19      <dataGenerator [...]>
20        <listOfVariables>
21          <variable id="v2" name="time" taskReference="task1" symbol="urn:sedml:symbol:time" />
22          [FURTHER VARIABLE DEFINITIONS]
23        </listOfVariables>

```

```

24   </dataGenerator>
25 </listOfDataGenerators>
26 [...]
27 </sedML>
```

**Listing 2.18:** SED-ML variable definitions inside the `computeChange` element and inside the `dataGenerator` element

Listing 2.18 defines a variable `v1` (line 7) to compute a change on a model constituent (referenced by the `target` attribute on `computeChange` in line 5). The value of `v1` corresponds with the value of the targeted model constituent references by the `target` attribute in line 8. The second variable, `v2` (line 21), is used inside a `dataGenerator`. As the variable is `time` as used in `task1`, the `symbol` attribute is used to refer to the SED-ML URI for time (line 21).

### 2.3.6.1 target

An instance of `Variable` refers to a model constituent inside a particular `model` through an `XPath` expression stored in the required `target` attribute. `XPath` unambiguously identifies an element or attribute in an XML file.

Listing 2.19 shows the use of the `target` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1   <listOfVariables>
2     <variable id="v1" name="TetR protein" taskReference="task1"
3       target="/sbml:sbml/sbml:listOfSpecies/sbml:species[@id='PY']" />
4   </listOfVariables>
```

**Listing 2.19:** SED-ML target definition

It should be noted that the identifier and names inside the SED-ML document do not have to comply with the identifiers and names that the model and its constituents carry in the model definition. In listing 2.19, the variable with ID `v1` is defined. It is described as the `TetR protein`. The reference points to a species in the referenced SBML model. The particular species can be identified through its ID in the SBML model, namely `PY`. However, SED-ML does not forbid to use identical identifiers and names as in the referenced models neither. The following Listing 2.20 is another valid example for the specification of a variable, but uses the sane naming in the variable definition as in the original model (as opposed to Listing 2.19):

```

1   <listOfVariables>
2     <variable id="PY" name="TetR protein" taskReference="task1"
3       target="/sbml:sbml/sbml:listOfSpecies/sbml:species[@id='PY']" />
4   </listOfVariables>
```

**Listing 2.20:** SED-ML variable definition using the original model identifier and name in SED-ML

```

1 <sbml [...]>
2   <listOfSpecies>
3     <species metaid="PY" id="PY" name="TetR protein" [...]>
4     [...]
5     </species>
6   </listOfSpecies>
7 [...]
8 </sbml>
```

**Listing 2.21:** Species definition in the referenced model (extracted from <urn:miriam:biomodels.db:BIOMD0000000012>)

The `XPath` expression used in the `target` attribute unambiguously leads to the particular place in the XML SBML model – the species is to be found in the `sbml` element, and there inside the `listOfSpecies` (Listing 2.21).

### 2.3.6.2 symbol

`Symbols` are predefined, implicit variables that can be called in a SED-ML file by referring to the defined URNs representing that variable's concept. The notion of implicit variables is explained in Section 2.2.2.3 on page 20.

Listing 2.22 on the next page shows the use of the `symbol` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The example encodes a computed change of model `m001`. To specify that change, a symbol is defined (i.e. the SED-ML symbol for `time` is assigned to the variable `t1`). How to compute the change itself is explained in Section 2.4.2.6.

```


1   <listOfVariables>
2     <variable id="t1" name="time" taskReference="task1"
3       symbol="urn:sedml:symbol:time" />
4   </listOfVariables>

```

**Listing 2.22:** SED-ML symbol definition

### 2.3.7 Parameter

The SED-ML [Parameter](#) class creates instances with a constant value (Figure 2.11).

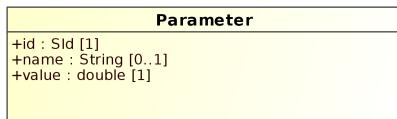

**Figure 2.11:** The Parameter class

SED-ML uses parameters in two ways: Firstly, parameters may be defined in the [ComputeChange](#) class for describing the mathematical computation of a change of a model's observable. Secondly, parameters may be part of a [DataGenerator](#) specification. In both cases the parameter definitions are local to the particular class defining them.

Table 2.6 shows all attributes and sub-elements for the [parameter](#) element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaID <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
value	<a href="#">page 31</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.6:** Attributes and nested elements for [parameter](#).  $xy^o$  denotes optional elements and attributes.

A parameter can unambiguously be identified through its given [id](#). It may additionally carry an optional [name](#). Each parameter has one associated [value](#).

Listing 2.23 shows the use of the [parameter](#) element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The listing shows the definition of a parameter [p1](#) with the [value="40"](#) assigned.

```

1 <listOfParameters>
2   <parameter id="p1" name="KM" value="40" />
3 </listOfParameters>

```

**Listing 2.23:** The definition of a parameter in SED-ML

#### 2.3.7.1 value

Each [parameter](#) has exactly one fixed [value](#). The [value](#) attribute of XML data type [Double](#) is required for each [parameter](#) element.


### 2.3.8 ListOf\* containers

SED-ML [listOf\\*](#) elements serve as containers for a collection of objects of the same type. For example, the [listOfModels](#) contains all [Model](#) objects of a SED-ML document. Lists do not carry any further

semantics nor do they add additional attributes to the language. They might, however, be annotated with [Notes](#) and [Annotations](#) as they are derived from SBase. All [listOf\\*](#) elements are optional in a SED-ML document.

#### 2.3.8.1 [listOfVariables](#): The variable definition container

SED-ML uses the [variable](#) concept to refer to existing entities inside a model. The container for all variables is [listOfVariables](#) (Figure 2.12). It includes all variables that need to be defined to either describe a change in the model by means of mathematical equations ([ComputeChange](#)) or to set up a [dataGenerator](#).

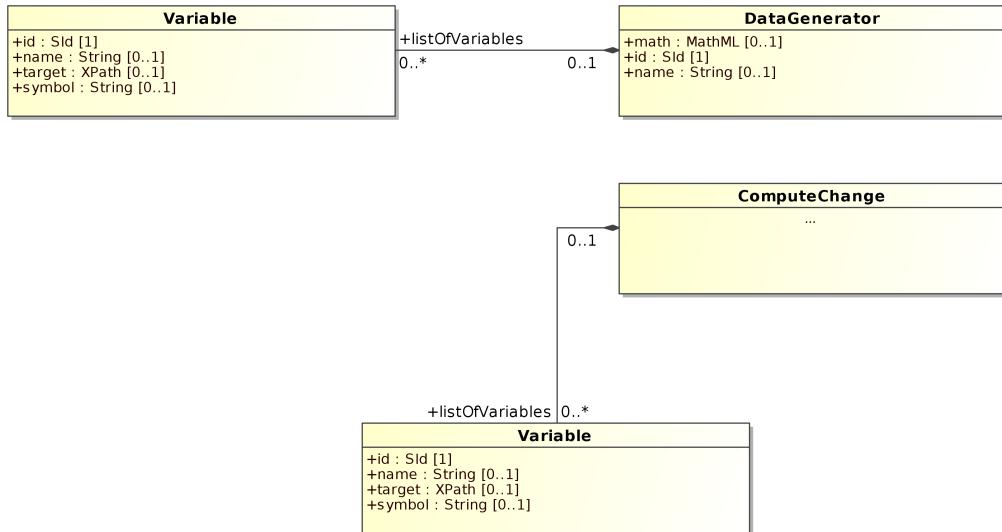

**Figure 2.12:** The SED-ML [listOfVariables](#) container

Listing 2.24 shows the use of the [listOfVariables](#) element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The [listOfVariables](#) is optional and may contain zero to many variables.

```


1 <listOfVariables>
2   <variable id="v1" name="maximum velocity" taskReference="task1"
3     target="/cellml:model/cellml:component[@cmeta:id='MP']/cellml:variable[@name='vsP']/@initial_value"
4   />
5   <variable id="v2" taskReference="task2" symbol="urn:sedml:symbol:time" />

```

**Listing 2.24:** SED-ML [listOfVariables](#) element

#### 2.3.8.2 [listOfParameters](#): The parameter definition container

All parameters needed throughout the simulation experiment, either to compute a change on a model prior to simulation ([ComputeChange](#)) or to set up a [DataGenerator](#), are defined inside a [listOfParameters](#) (Figure 2.13 on the next page).

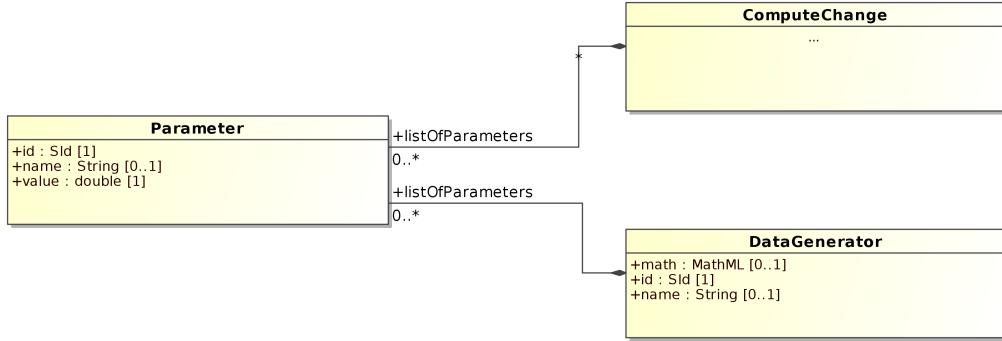

**Figure 2.13:** The SED-ML `listOfParameters` container

Listing 2.25 shows the use of the `listOfParameters` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The element is optional and may contain zero to many parameters.

```


1 <listOfParameters>
2   <parameter id="p1" value="1" />
3   <parameter id="p2" name="Kadp_2" value="0.23" />
4 </listOfParameters>

```

**Listing 2.25:** SED-ML `listOfParameters` element

#### 2.3.8.3 `listOfModels`: The model description container

In order to specify a simulation experiment, the participating models have to be defined. SED-ML uses the `listOfModels` container for all necessary models (Figure 2.14).

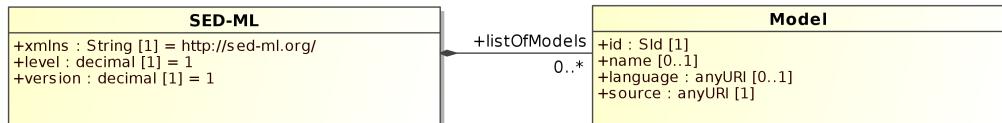

**Figure 2.14:** The SED-ML `listOfModels` container

Listing 2.26 shows the use of the `listOfModels` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The `listOfModels` is optional and may contain zero to many models. However, if the Level 1 Version 2 document contains one or more `Task` elements, at least one `Model` element must be defined to which the `Task` element refers (Section 2.3.5.1 on page 27).

```

1 <listOfModels>
2   <model id="m0001" language="urn:sedml:language:sbml"
3     source="urn:nirian:biomodels.db:BIOMD0000000012" />
4   <model id="m0002" language="urn:sedml:language:cellml"
5     source="http://models.cellml.org/workspace/leloup_gonze_goldbeter_1999/@rawfile/
6       d6613d7e1051b3eff2bb1d3d419a445bb8c754ad/leloup_gonze_goldbeter_1999_a.cellml" />
6 </listOfModels>

```

**Listing 2.26:** SED-ML `listOfModels` element

#### 2.3.8.4 `listOfChanges`: The change definition container

The `listOfChanges` contains the defined changes to be applied to a particular `model` (Figure 2.15 on the next page).



**Figure 2.15:** The SED-ML `listOfChanges` container

It always occurs as an optional subelement of the `model` element.

Listing 2.27 shows the use of the `listOfChanges` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The `listOfChanges` is nested inside the `model` element.

```

1 <model id="m0001" [...]>
2   <listOfChanges>
3     [CHANGE DEFINITION]
4   </listOfChanges>
5 </model>

```

**Listing 2.27:** The SED-ML `listOfChanges` element, defining a change on a model

#### 2.3.8.5 `listOfSimulations`: The simulation description container

The `listOfSimulations` element is the container for `simulation` descriptions (Figure 2.16).



**Figure 2.16:** The `listOfSimulations` container

Listing 2.28 shows the use of the `listOfSimulation` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfSimulations>
2   <simulation id="s1" [...]>
3     [UNIFORM TIMECOURSE DEFINITION]
4   </simulation>
5   <simulation id="s2" [...]>
6     [UNIFORM TIMECOURSE DEFINITION]
7   </simulation>
8 </listOfSimulations>

```

**Listing 2.28:** The SED-ML `listOfSimulations` element, containing two simulation setups

For all SED-ML Level 1 Version 2 documents, the encoded simulation definitions are instances of the Uniform Timecourse class. The `listOfSimulations` is optional and may contain zero to many simulations. However, if the Level 1 Version 2 document contains one or more `Task` elements, at least one `Simulation` element must be defined to which the `Task` element refers - see section 2.3.5.3 on page 28.

#### 2.3.8.6 `listOfAlgorithmParameters`: The container for algorithm parameters

The `listOfAlgorithmParameters` contains the settings for the simulation algorithm used in a simulation experiment. It may list several instances of the `Algorithm` class (Figure ?? on page ??).

Listing 2.29 shows the use of the `listOfAlgorithmParameters` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The `listOfAlgorithmParameters` is optional and may contain zero to many models.

```

1 <listOfAlgorithmParameters>
2   <algorithmParameter kisaoID="KISAO:0000211" value="23"/>
3 </listOfAlgorithmParameters>

```

**Listing 2.29:** SED-ML `listOfAlgorithmParameters` element

### 2.3.8.7 `listOfTasks`: The task specification container

The `listOfTasks` element contains the defined tasks for the simulation experiment (Figure 2.17).



**Figure 2.17:** The SED-ML `listOfTasks` container

Listing 2.30 shows the use of the `listOfTasks` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfTasks>
2   <task id="t1" name="simulating v1" modelReference="m1" simulationReference="s1">
3     [FURTHER TASK DEFINITIONS]
4   </listOfTasks>
  
```

**Listing 2.30:** The SED-ML `listOfTasks` element, defining one task

The `listOfTasks` is optional and may contain zero to many tasks. However, if the Level 1 Version 2 document contains a `DataGenerator` element with at least one `Variable` element, at least one `Task` must be defined to which variable(s) in the `DataGenerator` element refers - see section 2.3.5.2 on page 28.

### 2.3.8.8 `listOfDataGenerators`: The post-processing container

In SED-ML, all variable- and parameter values that shall be used in the `Output` class need to be defined as a `dataGenerator` beforehand. The container for those data generators is the `listOfDataGenerators` (Figure 2.18).



**Figure 2.18:** The SED-ML `listOfDataGenerators` container

Listing 2.31 shows the use of the `listOfDataGenerators` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```


1 <listOfDataGenerators>
2   <dataGenerator id="d1" name="time">
3     [DATA GENERATOR DEFINITION FOLLOWING]
4   </dataGenerator>
5   <dataGenerator id="LaCI" name="LaCI repressor">
6     [DATA GENERATOR DEFINITION FOLLOWING]
7   </dataGenerator>
8 </listOfDataGenerators>
  
```

**Listing 2.31:** The `listOfDataGenerators` element, defining two data generators time and LaCI repressor

The `listOfDataGenerators` is optional and in general may contain zero to many `DataGenerators`. However, if the Level 1 Version 2 document contains an `Output` element, at least one `DataGenerator` must be defined to which the `Output` element refers - see section 2.3.5.4 on page 28.

### 2.3.8.9 `listOfOutputs`: The output specification container

The `listOfOutputs` container holds the output specifications for a simulation experiment.

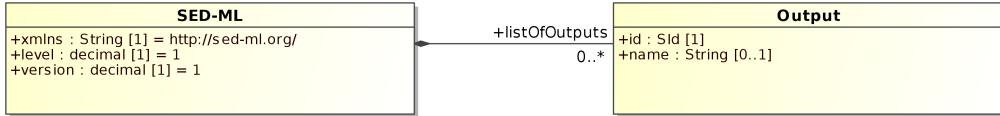

**Figure 2.19:** The SED-ML listOfOutputs container

The output can be defined as either a `report`, a `plot2D` or as a `plot3D`.

Listing 2.32 shows the use of the `listOfOutputs` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema. The `listOfOutputs` is optional and may contain zero to many outputs.

```

1 <listOfOutputs>
2   <report id="report1">
3     [REPORT DEFINITION FOLLOWING]
4   </report>
5   <plot2D id="plot1">
6     [2D PLOT DEFINITION FOLLOWING]
7   </plot2D>
8 </listOfOutputs>

```


**Listing 2.32:** The `listOfOutput` element

## 2.4 SED-ML Components

In this section we describe the major components of SED-ML. We use the UML notation presented in section 2.1.1, and we show the use of SED-ML with XML examples. In addition, we provide a detailed BNMP diagram with explanation of the SED-ML workflow in Appendix 1.2 and an XML Schema in Appendix B.

### 2.4.1 Model

The [Model](#) class defines the models to be used in the simulation experiment (Figure 2.20).

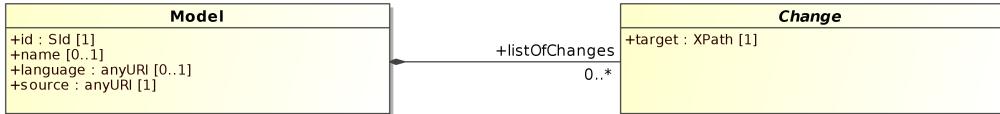

**Figure 2.20:** The SED-ML Model class

Each instance of the **Model** class has an unambiguous and mandatory `id`. An additional, optional `name` may be given to the model.

The `language` may be specified, defining the format the model is encoded in, if such a format exists. Example formats are SBML or CellML.

The [Model](#) class refers to the particular model of interest through the `source` attribute. The restrictions on the model reference are

- The model must be encoded in an XML format.
- To refer to the model encoding language, a reference to a valid definition of that XML format must be given (`language` attribute).
- To refer to a particular model in an external resource, an unambiguous reference must be given (`source` attribute).

A model might need to undergo preprocessing before simulation. Those pre-processings are specified in the SED-ML [Change](#) class.

Table 2.7 shows all attributes and sub-elements for the `model` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
language <sup>o</sup>	<a href="#">page 38</a>
source	<a href="#">page 38</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
change <sup>o</sup>	<a href="#">page 39</a>

**Table 2.7:** Attributes and nested elements for `model`.  $xy^o$  denotes optional elements and attributes.

Listing 2.33 shows the use of the `model` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfModels>
2 <model id="m0001" language="urn:sedml:language:sbml"
  
```

```

3   source="urn:miriam:biomodels.db:BIOMD0000000012">
4   <listOfChanges>
5     <change>
6       [MODEL PRE-PROCESSING]
7     </change>
8   </listOfChanges>
9 </model>
10 <model id="m0002" language="urn:sedml:language:sbml" source="m0001">
11   <listOfChanges>
12     [MODEL PRE-PROCESSING]
13   </listOfChange>
14 </model>
15 <model id="m0003" language="urn:sedml:language:cellml" source="http://models.cellml.org/workspace/
16   leloup_gonze_goldbeter_1999/@@rawfile/d6613d7e1051b3eff2bb1d3d419a445bb8c754ad/
17   leloup_gonze_goldbeter_1999_a.cellml">
18 </model>
19 </listOfModels>

```

**Listing 2.33:** SED-ML model element

The above `listOfModels` contains three models: The first model `m0001` is the Repressilator model taken from BioModels Database. The original model is available from `urn:miriam:biomodels.db: BIOMD0000000012`. For the SED-ML simulation, the model might undergo preprocessing, described in the `change` element (lines 5-7). Based on the description of the first model `m0001`, the second model is built. It refers to the model `m001` in the `source` attribute, that is the modified version of the Repressilator model. `m0002` might then have even further changes applied to it on top of the changes defined in the pre-processing of `m0001`. The third model in the code example above (lines 13-15) is a different model in CellML representation. `m0003` is the model available from the given URL in the `source` attribute. Again, it might have additional pre-processing applied to it before used in the simulation.

#### 2.4.1.1 `language`

The evaluation of a SED-ML document is required in order for software to decide whether or not it can be used for a particular simulation environment. One crucial criterion is the particular model representation language used to encode the model. A simulation software usually only supports a small subset of the representation formats available to model biological systems computationally.

To help software decide whether or not it supports a SED-ML description file, the information on the model encoding for each referenced model can be provided through the `language` attribute, as the description of a language name and version through an unrestricted `String` is error-prone. A prerequisite for a language to be fully supported by SED-ML is that a formalised language definition, e.g. an XML Schema, is provided online. SED-ML also defines a set of standard URIs to refer to particular language definitions. The list of URNs for languages so far associated with SED-ML is available from the SED-ML web site on <http://sed-ml.org/> (Section 2.2.2.2 on page 20). To specify language and version, following the idea of MIRIAM URNs, the SED-ML URN scheme `urn:sedml:language:language name` is used. A model's language being "SBML Level 2 Version 2" can be referred to, for example, through the URN `urn:sedml:language:sbml.level-2.version-2`.

The `language` attribute is optional in the XML representation of a SED-ML file. If it is not explicitly defined in the SED-ML file, the default value for the `language` attribute is `urn:sedml:language:xml`, referring to any XML based model representation.

However, the use of the `language` attribute is strongly encouraged for two reasons. Firstly, it helps a user decide whether or not he is able to run the simulation, that is to parse the model referenced in the SED-ML file. Secondly, the language attribute is also needed to decide how to handle the implicit variables in the `Variable` class, as the interpretation of implicit variables depends on the language of the representation format. The concept of implicit variables has been introduced in Section 2.2.2.3 on page 20.

#### 2.4.1.2 `source`

To make a model available for the execution of a SED-ML file, the model `source` must be specified through either a URI or a reference to an `SId` of an existing Model.

The URI should preferably point to a public, consistent location that provides the model description file and follows the proposed [URI Scheme](#). References to curated, open model bases are recommended, such

as the BioModels Database. However, any resource registered with MIRIAM resources<sup>3</sup> can easily be referenced. Even without a MIRIAM URN, SED-ML can be used (Section 2.2.2.1 on page 19).

An example for the definition of a model, and using the [URI scheme](#) is given in Listing 2.34.

```
1 <model id="m1" name="repressilator" language="urn:sedml:language:sbml"
2   source="urn:miriam:biomodels.db:BIOMD0000000012">
3   <listOfChanges>
4     [MODEL PRE-PROCESSING]
5   </listOfChanges>
6 </model>
```

**Listing 2.34:** The SED-ML `source` element, using the [URI scheme](#)

The example defines one model `m1`. `urn:miriam:biomodels.db:BIOMD0000000012` defines the source of the model code. The MIRIAM URN can be resolved into the SBML model stored in BioModels Database under ID `BIOMD0000000012` using the MIRIAM web service. The resulting URL is <http://www.ebi.ac.uk/biomodels-main/BIOMD0000000012>.

An example for the definition of a model and using a URL is given in Listing 2.35.

```
1 <model id="m1" name="repressilator" language="urn:sedml:language:cellml"
2   source="http://models.cellml.org/exposure/bba4e39f2c7ba8af51fd045463e7bdd3/aguda_b_1999.cellml">
3   <listOfChanges />
4 </model>
```

**Listing 2.35:** The SED-ML `source` element, using a [URL](#)

In the example one model is defined. The `language` of the model is `CellML`. As the CellML model repository currently does not provide a MIRIAM URI for model reference, the `URL` pointing to the model code is used to refer to the model. The URL is given in the `source` attribute.

## 2.4.2 Change


SED-ML not only allows to use the sole model for simulation, but also enables the description of [changes](#) to be made on the model before simulation (Figure 2.21 on the next page). Changes can be of three distinct types:

1. Changes on attributes of the model's XML representation ([ChangeAttribute](#))
2. Changes on any XML snippet of the model's XML representation ([AddXML](#), [ChangeXML](#), [RemoveXML](#))
3. Changes based on mathematical calculations ([ComputeChange](#))

The [Change](#) class is abstract and serves as the container for different types of changes. Therefore, a SED-ML document will only contain the derived classes, i. e. [ChangeAttribute](#), [AddXML](#), [ChangeXML](#), [RemoveXML](#), or [ComputeChange](#).

---

<sup>3</sup><http://www.ebi.ac.uk/miriam/main/>

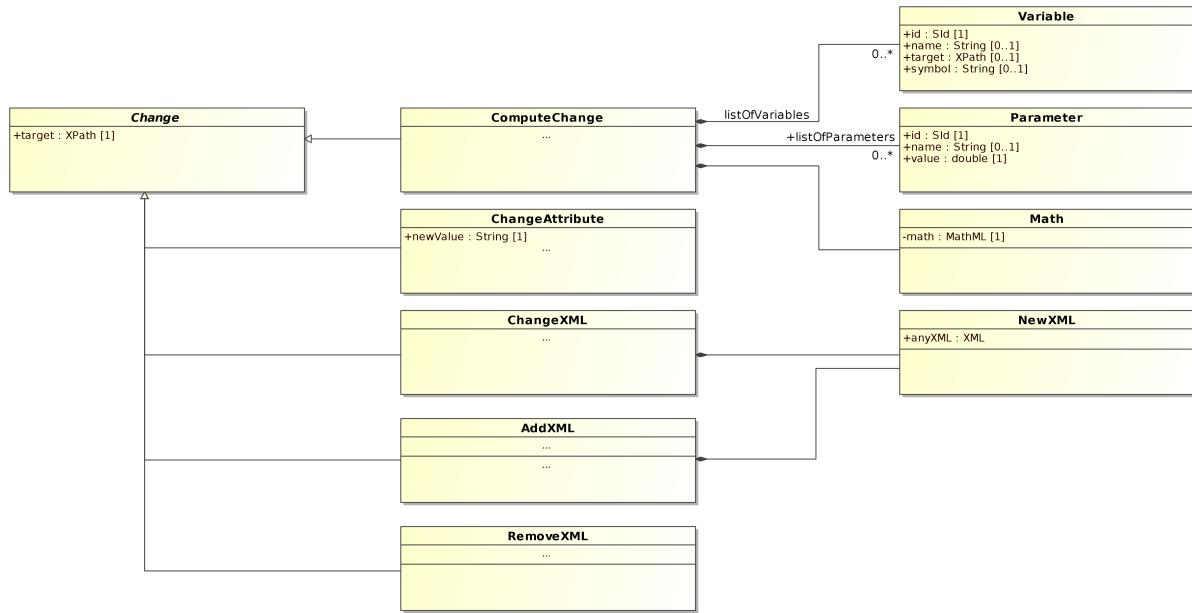

**Figure 2.21:** The SED-ML Change class

Table 2.8 shows all attributes and sub-elements for the `change` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
target	<a href="#">page 30</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
addXML <sup>o</sup>	<a href="#">page 41</a>
changeXML <sup>o</sup>	<a href="#">page 42</a>
removeXML <sup>o</sup>	<a href="#">page 43</a>
changeAttribute <sup>o</sup>	<a href="#">page 43</a>
computeChange <sup>o</sup>	<a href="#">page 44</a>

**Table 2.8:** Attributes and nested elements for `change`.  $xy^o$  denotes optional elements and attributes.

Each Change has a `target` attribute that holds a valid XPath expression pointing to the XML element or XML attribute that is to undergo the defined changes.

#### 2.4.2.1 NewXML

The `newXML` element provides a piece of XML code (Figure 2.21). `NewXML` must hold a valid piece of XML which after insertion into the original model must lead to a valid model file, according to the model language specification (as given by the `language` attribute).

Table 2.9 on the following page shows all attributes and sub-elements for the `newXML` element as defined by the SED-ML Level 1 Version 2 XML Schema.

The `newXML` element is used at two different places inside SED-ML Level 1 Version 2:

1. If it is used as a sub-element of the `addXML` element, then the XML it contains it is to be *inserted as a child* of the XML element addressed by the XPath.

attribute	description
<i>none</i>	
sub-elements	description
<i>anyXML</i>	


**Table 2.9:** Attributes and nested elements for `newXML`.  $xy^o$  denotes optional elements and attributes.

- If it is used as a sub-element of the `changeXML` element, then the XML it contains is to *replace* the XML element addressed by the XPath.

Examples are given in the relevant change class definitions.

#### 2.4.2.2 `AddXML`

The `AddXML` class specifies a snippet of XML that is to be added as a child of the specified XPath `target` attribute (Figure 2.22). The new piece of XML code is provided by the `NewXML` class.

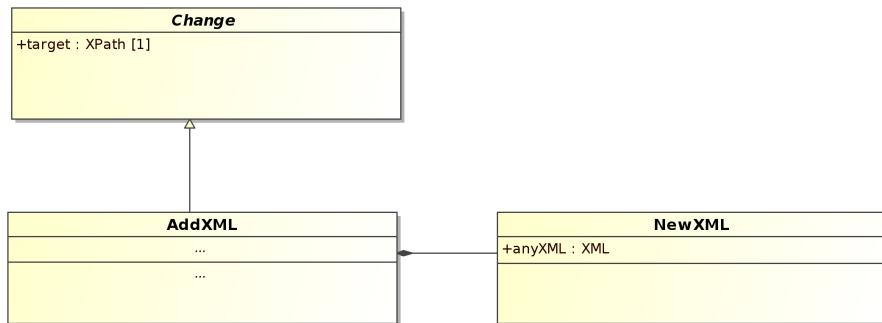

**Figure 2.22:** The SED-ML `AddXML` class

Table 2.10 shows all attributes and sub-elements for the `addXML` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
target	<a href="#">page 30</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
newXML	<a href="#">page 40</a>

**Table 2.10:** Attributes and nested elements for `addXML`.  $xy^o$  denotes optional elements and attributes.

An example for a change that adds an additional parameter to a model is given in listing 2.36.

```


1 <model language="urn:sedml:language:sbml" [...]>
2   <listOfChanges>
3     <addXML target="/sbml:sbml/sbml:model/sbml:listOfParameters" >
4       <newXML>
5         <parameter metaid="metaid_0000010" id="V_mT" value="0.7" />
6       </newXML>
7     </addXML>
8   </listOfChanges>
9 </model>
  
```

**Listing 2.36:** The `addXML` element with its `newXML` sub-element

The code of the model is changed so that a parameter with ID `V_mT` is added to its list of parameters. The `newXML` element adds an additional XML element to the original model. The element's name is `parameter` and it is added to the existing parent element `listOfParameters` that is addressed by the XPath expression in the `target` attribute.

#### 2.4.2.3 ChangeXML

The `ChangeXML` class defines changes of any XML element in the model that can be addressed by a valid XPath expression (Figure 2.23).

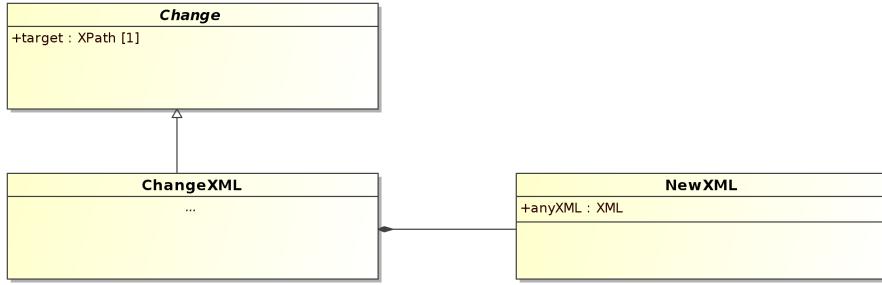

**Figure 2.23:** The `ChangeXML` class

The XPath is specified in the required `target` attribute (Section 2.3.6.1 on page page 30). The change of XML is specified in the `NewXML` class.

Table 2.11 shows all attributes and sub-elements for the `changeXML` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
target	<a href="#">page 30</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
newXML	<a href="#">page 40</a>

**Table 2.11:** Attributes and nested elements for `changeXML`.  $xy^o$  denotes optional elements and attributes.

An example for a change that adds an additional parameter to a model is given in listing 2.37.

```


1 <model [...]>
2   <listOfChanges>
3     <changeXML target="/sbml:	sbml:sbml:	model/sbml:listOfParameters/sbml:parameter[@id='V_mT']">
4       <newXML>
5         <parameter metaid="metaid_0000010" id="V_mT_1" value="0.7" />
6         <parameter metaid="metaid_0000050" id="V_mT_2" value="4.6" />
7       </newXML>
8     </changeXML>
9   </listOfChanges>
10 </model>
  
```

**Listing 2.37:** The `changeXML` element

The code of the model is changed in the way that its parameter with ID `V_mT` is substituted by two other parameters `V_mT_1` and `V_mT_2`. The `target` attribute defines that the parameter with ID `V_mT` is to be changed. The `newXML` element then specifies the XML that is to be exchanged for that parameter.

#### 2.4.2.4 RemoveXML

The [RemoveXML](#) class can be used to delete the XML element of the model that is addressed by the XPath expression (Figure 2.24).

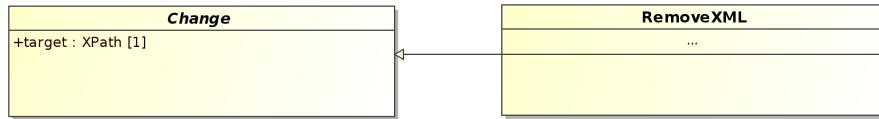

**Figure 2.24:** The [RemoveXML](#) class

The XPath is specified in the required [target](#) attribute.

Table 2.12 shows all attributes and sub-elements for the [removeXML](#) element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
target	<a href="#">page 30</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.12:** Attributes and nested elements for [removeXML](#).  $xy^o$  denotes optional elements and attributes.

An example for the removal of an XML element from a model is given in Listing 2.38.

```


1 <model [...]>
2   <listOfChanges>
3     <removeXML target="/sbml:sbml/sbml:model/sbml:listOfReactions/sbml:reaction[@id='J1']" />
4   </listOfChanges>
5 </model>
  
```

**Listing 2.38:** The [removeXML](#) element

The code of the model is changed by deleting the reaction with ID V\_mT from the model's list of reactions.

#### 2.4.2.5 ChangeAttribute

The [ChangeAttribute](#) class allows to define updates on the XML attribute values of the corresponding model (Figure 2.25).

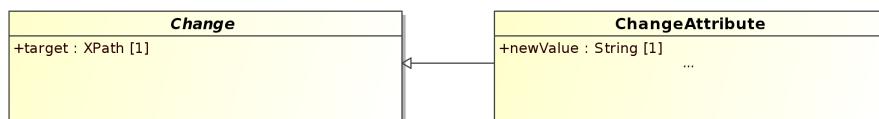

**Figure 2.25:** The [ChangeAttribute](#) class

The [ChangeXML](#) class covers the possibilities provided by the [ChangeAttribute](#) class. That is, everything that can be expressed by a [ChangeAttribute](#) construct can also be expressed by a [ChangeXML](#). However, both concepts exist to allow for being very specific in defining changes. It is recommended to use the [ChangeAttribute](#) for any changes of an XML attribute's value, and to use the more general [ChangeXML](#) for all other cases.

`ChangeAttribute` requires to specify the `target` of change, i.e. the location of the addressed XML attribute, and also the `newValue` of that attribute.

Table 2.13 shows all attributes and sub-elements for the `changeAttribute` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
target	<a href="#">page 30</a>
newValue	<a href="#">page 44</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.13:** Attributes and nested elements for `ChangeAttribute`.  $xy^o$  denotes optional elements and attributes.

#### 2.4.2.5.1 newValue

The mandatory `newValue` attribute assigns a new value to the targeted XML attribute.

The example in Listing 2.39 shows the update of the initial concentration of two parameters inside an SBML model.

```


1 <model id="model1" name="Circadian Chaos" language="urn:sedml:language:sbml"
2   source="urn:miriam:biomodels.db:BIOMD0000000021">
3   <listOfChanges>
4     <changeAttribute target="/sbml:sbml/sbml:model/sbml:listOfParameters/sbml:parameter[@id='V_mT']/@value"
5       newValue="0.28"/>
6     <changeAttribute target="/sbml:sbml/sbml:model/sbml:listOfParameters/sbml:parameter[@id='V_dT']/@value"
7       newValue="4.8"/>
8   </listOfChanges>
9 </model>

```

**Listing 2.39:** The `changeAttribute` element and its `newValue` attribute

#### 2.4.2.6 ComputeChange

The `ComputeChange` class permits to change, prior to the experiment, the value of any element or attribute of a model addressable by an XPath expression, based on a calculation (Figure 2.26).

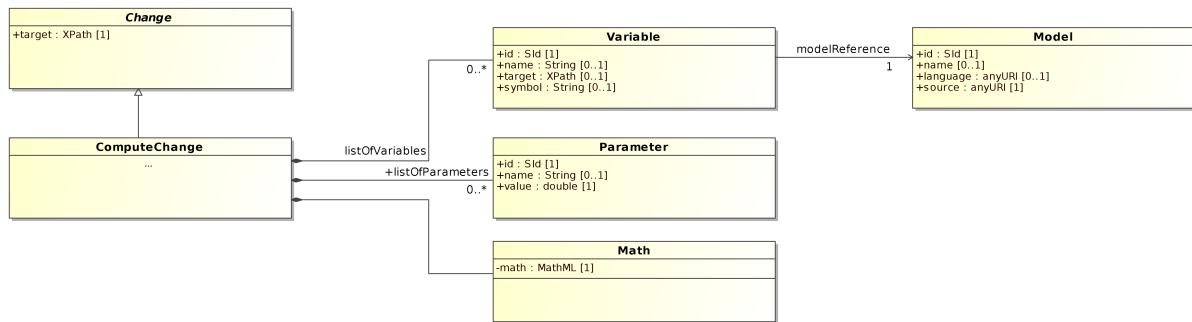

**Figure 2.26:** The `ComputeChange` class

The changes are described by mathematical expressions using a [subset of MathML](#) (see section 2.2.1 on [page 18](#)). The computation can use the value of variables from any model defined in the simulation experiment. Those `variables` need to be defined, and can then be addressed by their ID. A variable used in a `ComputeChange` must carry a `modelReference` attribute ([page 27](#)) but no `taskReference` attribute ([page 28](#)). To carry out the calculation it may be necessary to introduce additional parameters, that

are not defined in any of the model used by the experiment. This is done through the `parameter` class, thereafter referred to by their ID. Finally, the change itself is specified using an instance of the `Math` class.

Table 2.14 shows all attributes and sub-elements for the `computeChange` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	page 23
id	page 22
name <sup>o</sup>	page 22
target	page 30
sub-elements	description
notes <sup>o</sup>	page 23
annotation <sup>o</sup>	page 24
listOfVariables <sup>o</sup>	page 32
listOfParameters <sup>o</sup>	page 32
math	page 45

**Table 2.14:** Attributes and nested elements for `computeChange`.  $xy^o$  denotes optional elements and attributes.

#### 2.4.2.6.1 Math

The `Math` element encodes mathematical functions. If used as an element of the `ComputeChange` class, it computes the change of the element or attribute addressed by the `target` attribute. Level 1 Version 2 supports the subset of MathML 2.0 shown in section 2.2.1.

Listing 2.40 shows the use of the `computeChange` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <model [...]>
2   <computeChange target="/sbml:sbml/sbml:model/sbml:listOfParameters/sbml:parameter[@id='sensor']">
3     <listOfVariables>
4       <variable modelReference="model1" id="R" name="regulator"
5         target="/sbml:sbml/sbml:model/sbml:listOfSpecies/sbml:species[@id='regulator']" />
6       <variable modelReference="model2" id="S" name="sensor"
7         target="/sbml:sbml/sbml:model/sbml:listOfParameters/sbml:parameter[@id='sensor']" />
8     </listOfVariables/>
9     <listOfParameters>
10      <parameter id="n" name="cooperativity" value="2">
11        <parameter id="K" name="sensitivity" value="1e-6">
12      </listOfParameters/>
13      <math xmlns="http://www.w3.org/1998/Math/MathML">
14        <apply>
15          <times />
16          <ci>S</ci>
17          <apply>
18            <divide />
19            <apply>
20              <power />
21              <ci>R</ci>
22              <ci>n</ci>
23            </apply>
24            <apply>
25              <plus />
26              <apply>
27                <power />
28                <ci>K</ci>
29                <ci>n</ci>
30              </apply>
31              <apply>
32                <power />
33                <ci>R</ci>
34                <ci>n</ci>
35              </apply>
36            </apply>
37            </apply>
38          </math>
39        </computeChange>
40      </listOfChanges>
41    </model>
```


**Listing 2.40:** The `computeChange` element

The example in listing 2.40 computes a change of the variable **sensor** of the model **model2**. To do so, it uses the value of the variable **regulator** coming from model **model1**. In addition, the calculation used two additional parameters, the cooperativity **n**, and the sensitivity **K**. The mathematical expression in the mathML then computes the new initial value of **sensor** using the equation:

$$S = S \times \frac{R^n}{K^n + R^n}.$$

### 2.4.3 Simulation

A simulation is the execution of some defined algorithm(s). Simulations are described differently depending on the type of simulation experiment to be performed (Figure 2.27).

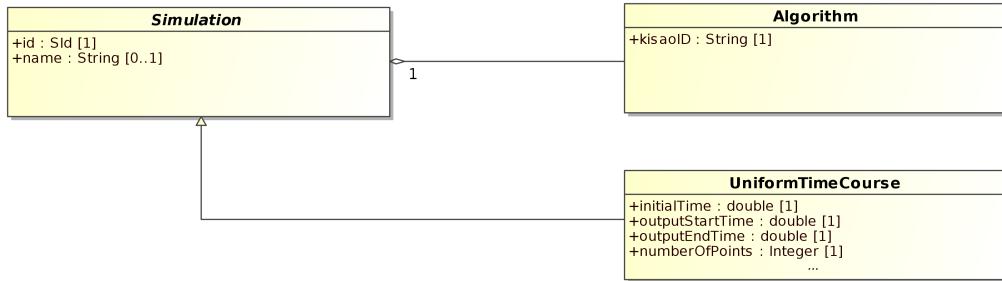

**Figure 2.27:** The SED-ML *Simulation* class

**Simulation** is an abstract class and serves as the container for the different types of simulation experiments. SED-ML Level 1 Version 2 offers the predefined simulation class **UniformTimeCourse**. Further simulation classes are planned for future versions of SED-ML, including simulation classes for bifurcation analysis and parameter scans. Simulation algorithms used for the execution of a simulation setup are defined in the **Algorithm** class.

Table 2.15 shows all attributes and sub-elements for the **simulation** element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
algorithm	<a href="#">page 47</a>

**Table 2.15:** Attributes and nested elements for **simulation**.  $xy^o$  denotes optional elements and attributes.

Listing 2.41 shows the use of the **simulation** element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfSimulations>
2   <uniformTimeCourse [...]>
3     [SIMULATION SPECIFICATION]
4   </uniformTimeCourse>
5   <uniformTimeCourse [...]>
6     [SIMULATION SPECIFICATION]
7   </uniformTimeCourse>
8 </listOfSimulations>

```


**Listing 2.41:** The SED-ML *listOfSimulations* element, defining two different simulations

Two timcourses with uniform range are defined.

#### 2.4.3.1 Algorithm

SED-ML makes use of the [KiSAO ontology](#) (Section 2.2.4 on page 20) to refer to a term in the controlled vocabulary identifying the particular simulation algorithm to be used in the simulation.

Each instance of the [Simulation](#) class must contain one reference to a simulation algorithm (Figure 2.28).

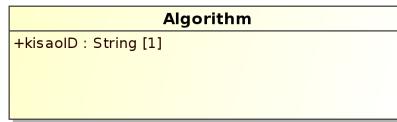

**Figure 2.28:** The `Algorithm` class

Each instance of the [Algorithm](#) class must contain a [KiSAO](#) reference to a simulation algorithm. The reference should define the simulation algorithm to be used in the simulation as precisely as possible, and should be defined in the correct syntax, as defined by the regular expression `KISA0:[0-9]{7}`.

The [Algorithm](#) class contains an optional list of parameters ([algorithmParameter](#)) that are used to parameterize the particular algorithm used in the simulation.

Table 2.16 shows all attributes and sub-elements for the [Algorithm](#) element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
kisaoID	<a href="#">page 20</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
listOfAlgorithmParameters	<a href="#">page 34</a>

**Table 2.16:** Attributes and nested elements for `algorithm`. `xyo` denotes optional elements and attributes.

The example given in code snippet in Listing 2.41, completed by algorithm definitions results in the code given in Listing 2.42.

```

1 <listOfSimulations>
2   <uniformTimeCourse id="s1" name="time course simulation over 100 minutes" [...]>
3     <algorithm kisaoID="KISA0:0000030" />
4   </uniformTimeCourse>
5   <uniformTimeCourse id="s2" name="time course definition for concentration of p" [...]>
6     <algorithm kisaoID="KISA0:0000021" />
7   </uniformTimeCourse>
8 </listOfSimulations>
  
```

**Listing 2.42:** The SED-ML `algorithm` element for two different time course simulations, defining two different algorithms. `KISA0:0000030` refers to the Euler forward method ; `KISA0:0000021` refers to the StochSim nearest neighbor algorithm.

For both simulations, one algorithm is defined. In the first simulation `s1` a deterministic approach has been chosen (Euler forward method), in the second simulation `s2` a stochastic approach is used (Stochsim nearest neighbor).

#### 2.4.3.2 AlgorithmParameter

The [AlgorithmParameter](#) class allows to parameterize a particular simulation algorithm. The set of possible parameters is determined by the algorithm that is referenced by the [kisaoID](#) of the [Algorithm](#) class. Parameters of simulation algorithms are unambiguously referenced by the mandatory [kisaoID](#) attribute. Their value is set in the mandatory [value](#) attribute.

```

1 <algorithm kisaoID="KISA0:0000032">
  
```

```

2 <listOfAlgorithmParameters>
3   <algorithmParameter kisaoID="KISAO:0000211" value="23"/>
4 </listOfAlgorithmParameters>
5 </algorithm>

```

**Listing 2.43:** The SED-ML `algorithmParameter` element setting the parameter value for the simulation algorithm. KISAO:0000032 refers to the explicit fourth-order Runge-Kutta method; KISAO:00000211 refers to the absolute tolerance.

#### 2.4.3.3 UniformTimeCourse



**Figure 2.29:** The `UniformTimeCourse` class

Table 2.17 shows all attributes and sub-elements for the `uniformTimeCourse` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
initialTime	<a href="#">page 48</a>
outputStartTime	<a href="#">page 48</a>
outputEndTime	<a href="#">page 49</a>
numberOfPoints	<a href="#">page 49</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
algorithm	<a href="#">page 47</a>

**Table 2.17:** Attributes and nested elements for `uniformTimeCourse`.  $xy^o$  denotes optional elements and attributes.

Listing 2.44 shows the use of the `uniformTimeCourse` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfSimulations>
2   <uniformTimeCourse id="s1" name="time course simulation of variable v1 over 100 minutes"
3     initialTime="0" outputStartTime="0" outputEndTime="2500" numberOfPoints="1000">
4     <algorithm [...] />
5   </uniformTimeCourse>
6 </listOfSimulations>

```

**Listing 2.44:** The SED-ML `uniformTimeCourse` element, defining a uniform time course simulation over 2500 time units with 1000 simulation points.

##### 2.4.3.3.1 `initialTime`

The attribute `initialTime` of type `double` represents the time from which to start the simulation. Usually this will be `0`. Listing 2.44 shows an example.

##### 2.4.3.3.2 `outputStartTime`

Sometimes a researcher is not interested in simulation results at the start of the simulation (i.e. the initial time). To accommodate this in SED-ML the `uniformTimeCourse` class uses the attribute `outputStartTime` of type `double`. To be valid the `outputStartTime` cannot be before `initialTime`. For an example, see Listing 2.44.

#### 2.4.3.3.3 *outputEndTime*


The attribute **outputEndTime** of type **double** marks the end time of the simulation. See Listing 2.44 for an example.

#### 2.4.3.3.4 *numberOfPoints*

When executed, the **uniformTimeCourse** simulation produces output on a regular grid starting with **outputStartTime** and ending with **outputEndTime**. The attribute **numberOfPoints** of type **integer** describes the number of points expected in the result. Software interpreting the **uniformTimeCourse** is expected to produce a first outputPoint at time **outputStartTime** with the initial values of the model to be simulated, and then **numberOfPoints** output points with the results of the simulation. Thus a total of **numberOfPoints** + 1 output points will be produced.

Just because the output points lie on the regular grid described above, this does not mean that the simulation algorithm has to work with the same step size. Usually the step size the simulator chooses will be adaptive and much smaller than the required output step size. On the other hand a stochastic simulator might not have any new events occurring between two grid points. Nevertheless the simulator has to produce data on this regular grid. For an example, see Listing 2.44.

#### 2.4.3.4 *OneStep*

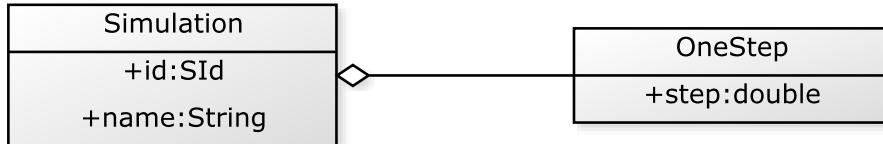

**Figure 2.30:** The *OneStep* class

The SED-ML **oneStep** calculates one further output step for the model from its current state. Note that this does NOT necessarily equate to one integration step. The simulator is allowed to take as many steps as needed. However, after running **oneStep**, the desired output time is reached.

Table 2.18 shows all attributes and sub-elements for the **oneStep** element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
step <sup>o</sup>	<a href="#">page 50</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
algorithm	<a href="#">page 47</a>

**Table 2.18:** Attributes and nested elements for *oneStep*. xy<sup>o</sup> denotes optional elements and attributes.

Listing 2.45 shows the use of the **oneStep** element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfSimulations>
2   <oneStep id="s1" step="0.1">
3     <algorithm kisaoID="KISAO:0000019" />
4   </oneStep>
5 </listOfSimulations>
  
```


**Listing 2.45:** The SED-ML *oneStep* element, specifying to apply the simulation algorithm for another step of size 0.1.

#### 2.4.3.4.1 step

The `oneStep` class has one required attribute `step` of type `double`. It defines the next output step that should be reached by the algorithm. Listing 2.45 shows an example.

#### 2.4.3.5 SteadyState

The `SteadyState` class represents a steady state computation (as for example implemented by NLEQ or Kinsolve).

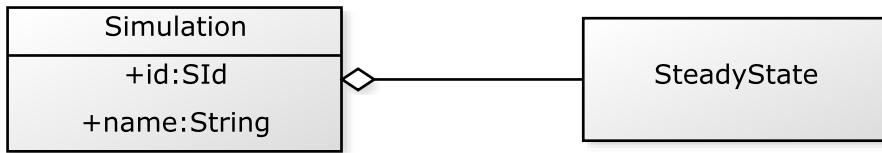

**Figure 2.31:** The `SteadyState` class

Table 2.19 shows all attributes and sub-elements for the `steadyState` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
algorithm	<a href="#">page 47</a>

**Table 2.19:** Attributes and nested elements for `steadyState`.  $xy^o$  denotes optional elements and attributes.


Listing 2.46 shows the use of the `steadyState` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```
1 <listOfSimulations>
2   <steadyState id="steady">
3     <algorithm kisaoID="KISAO:0000282" />
4   </steadyState >
5 </listOfSimulations>
```

**Listing 2.46:** The SED-ML `steadyState` element, defining a steady state simulation with id `steady`.

#### 2.4.4 Abstract Task

An abstract task in SED-ML represents the base class for all SED-ML tasks. It is not meant to be instantiated.

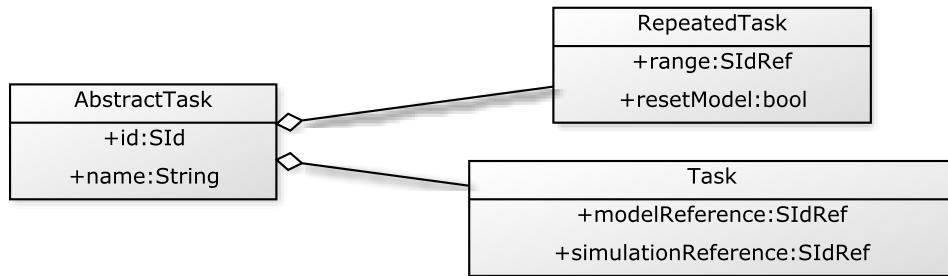

**Figure 2.32:** The SED-ML Abstract Task class


Table 2.20 shows all attributes and sub-elements for the `abstractTask` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.20:** Attributes and nested elements for `abstractTask`.  $xy^o$  denotes optional elements and attributes.

## 2.4.5 Task

A task in SED-ML links a `model` to a certain `simulation` description via their respective identifiers (Figure 2.34 on page 53), using the `modelReference` and the `simulationReference`. The task class receives the `id` and `name` attributes from the `AbstractTask`.

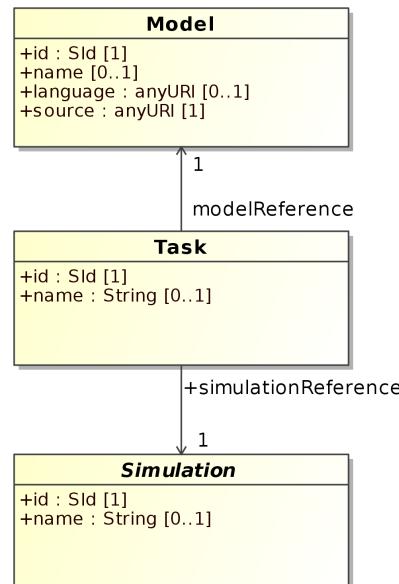

**Figure 2.33:** The SED-ML Task class

In SED-ML Level 1 Version 2 it is only possible to link one simulation description to one model at a time. However, one can define as many tasks as needed within one experiment description. Please note that the tasks may be executed in any order, as XML does not have an ordering concept.

Table 2.21 shows all attributes and sub-elements for the `task` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
modelReference	<a href="#">page 27</a>
simulationReference	<a href="#">page 28</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.21:** *Attributes and nested elements for `task`.  $xy^o$  denotes optional elements and attributes.*

Listing 2.47 shows the use of the `task` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfTasks>
2   <task id="t1" name="task definition" modelReference="model1"
3     simulationReference="simulation 1" />
4   <task id="t2" name="another task definition" modelReference="model2"
5     simulationReference="simulation 1" />
6 </listOfTasks>
```


**Listing 2.47:** *The `task` element*

In the example, a simulation setting *simulation1* is applied first to *model1* and then is applied to *model2*.

#### 2.4.6 Repeated Task

Instead of redefining a large number of simulation types to suite various simulation tasks, the `repeatedTask` breaks down complex tasks into separate steps. The `repeatedTask` performs a specified simulation multiple times (where the exact number is specified through a range construct while allowing specific aspects of the model to change (in the simplest case that would be by advancing the simulation time)). The `repeatedTask` defines a list of subtasks to be carried out sequentially.

The `RepeatedTask` inherits from `AbstractTask`. Additionally it has two required attributes `rangeAttribute` and `resetModel` as well as elements `listOfRanges`, `listOfChanges` and `listOfSubTasks`.

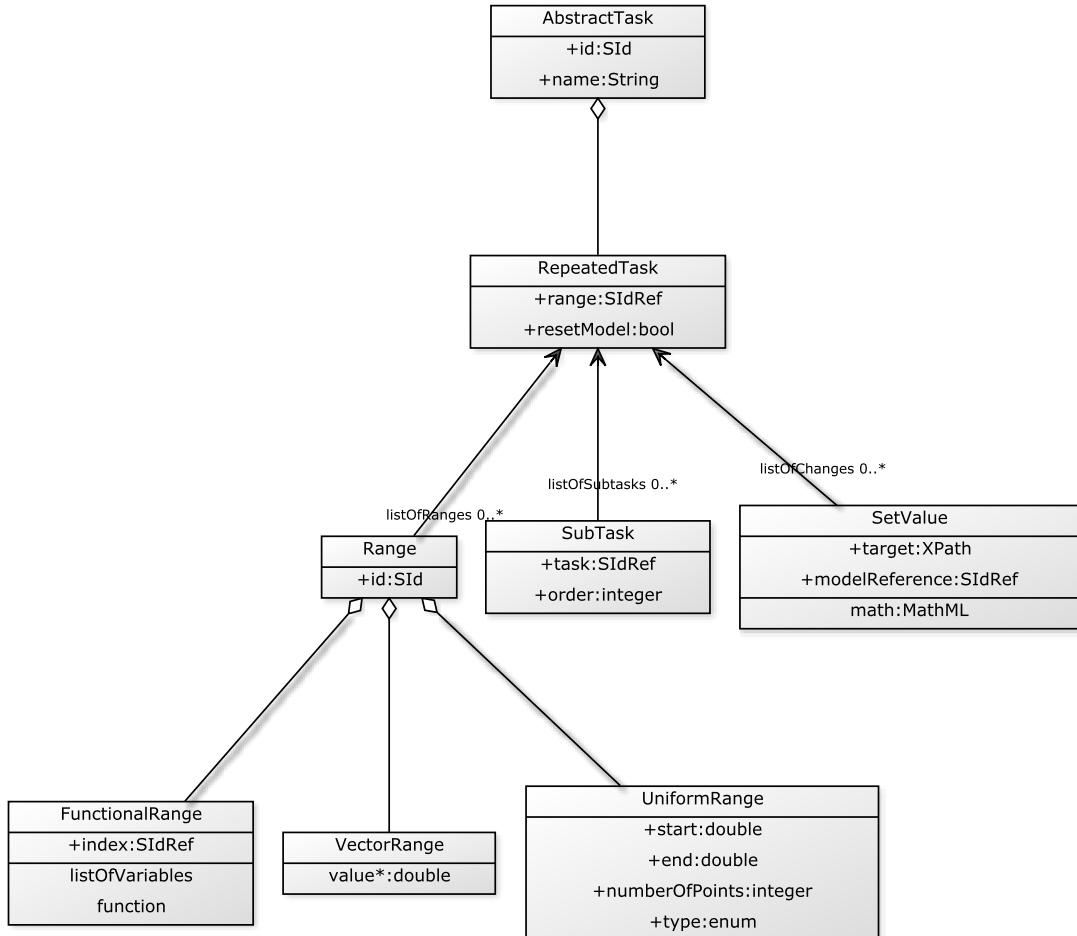

**Figure 2.34:** The SED-ML `RepeatedTask` class

Table 2.22 shows all attributes and sub-elements for the `repeatedTask` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
range <sup>o</sup>	<a href="#">page 54</a>
resetModel <sup>o</sup>	<a href="#">page 54</a>

sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
listOfRanges <sup>o</sup>	<a href="#">page 54</a>
listOfChanges <sup>o</sup>	<a href="#">page 56</a>
listOfSubTasks <sup>o</sup>	<a href="#">page 56</a>

**Table 2.22:** Attributes and nested elements for `repeatedTask`.  $xy^o$  denotes optional elements and attributes.

Listing 2.48 shows the use of the `repeatedTask` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <task id="task1" modelReference="model1" simulationReference="simulation1" />
2 <repeatedTask id="task3" resetModel="false" range="current">
3   <listOfRanges>
  
```

```

4      <vectorRange id="current">
5          <value> 1 </value>
6          <value> 4 </value>
7          <value> 10 </value>
8      </vectorRange>
9  </listOfRanges>
10 <listOfChanges>
11     <setValue target="/sbml/model/listOfParameters/parameter[@id='w']" modelReference="model1" >
12     <listOfVariables>
13         <variable id="val" name="current range value" target="#current" />
14     </listOfVariables>
15     <math>
16         <ci> val </ci>
17     </math>
18     </setValue>
19 </listOfChanges>
20 <listOfSubTasks>
21     <subTask task="task1" />
22 </listOfSubTasks>
23 </repeatedTask>

```

**Listing 2.48:** The `repeatedTask` element

In the example, `task1` is repeated three times, each time with a different value for a model parameter `w`.

#### 2.4.6.1 The `range` attribute

The `repeatedTask` class has a required attribute `range` of type `SIId`. It specifies which range defined in the `listOfRanges` that this repeated task iterates over. Listing 2.48 shows an example of a `repeatedTask` iterating over the values: 1, 4 and 10.

#### 2.4.6.2 The `resetModel` attribute

The `repeatedTask` class has a required attribute `resetModel` of type `boolean`. It specifies whether the model should be reset to the initial state before processing an iteration of the defined `subTasks`. Here initial state refers to the state of the model as given in the `listOfModels`. In the example in Listing 2.48 the repeated task is not to be reset, so between the three executions of `task1`, the model is not to be reset.

#### 2.4.6.3 The `listOfRanges`

Ranges represent the iterative element of the nested simulation experiment that provides the collection of values to iterate over. In order to be able to refer to the current value of a range element, an `id` attribute is added. When the value of the `id` attribute is used in a `listOfVariables` within the repeated task class its value is to be replaced with the current value of the range.

There are three different range types:

##### 2.4.6.3.1 UniformRange

The `UniformRange` is quite similar to what is used in the `UniformTimecourse` simulation class. This range is defined through four attributes: `start`, the start value; `end`, the end value and `numberOfPoints` that contains the number of points the range contains. A fourth attribute `type` that can take the values `linear` or `log` determines whether to draw the values logarithmically or linearly. For example:

```
1      <uniformRange id="current" start="0.0" end="10.0" numberOfPoints="100" type="linear" />
```

**Listing 2.49:** The `UniformRange` element

##### 2.4.6.3.2 VectorRange

A `VectorRange` describes a collection of real values. For example:

```

1      <vectorRange id="current">
2          <value> 1 </value>
3          <value> 4 </value>
4          <value> 10 </value>
5      </vectorRange>

```

**Listing 2.50:** The `VectorRange` element

#### 2.4.6.3.3 FunctionalRange

A `FunctionalRange` constructs a range through evaluations that determine the next value. In this it is quite similar to the `ComputeChange` element. It consists of a required attribute `index`, and the two elements `listOfVariables` and `function`.

The attribute `index` is used to specify the `id` of another Range. This makes it possible for the `FunctionalRange` to be evaluated at different points as specified by that range.

In the `listOfVariables`, analog to the `ComputeChange` class, additional symbols are defined from existing model references so that they can be later used in the function expression.

The `function` encompasses the mathematical expression that is used to compute the values for the functional range at each of the points specified by the range referenced through the `index` attribute.

For example:

```

1   <functionalRange id="current" index="index">
2     <listOfVariables>
3       <variable id="w" name="current parameter value"
4         modelReference="model2"
5         target="/sbml/model/listOfParameters/parameter[@id='w']" />
6     </listOfVariables>
7     <function>
8       <math>
9         <apply>
10        <times/>
11        <ci> w </ci>
12        <ci> index </ci>
13      </apply>
14    </math>
15  </function>
16</functionalRange>
```

**Listing 2.51:** An example of a `FunctionalRange` where a parameter `w` of model `model2` is multiplied with `index` each time it is called.

Here another example of using the values in a piecewise expression:

```

1   <uniformRange id="index" start="0" end="10" numberofPoints="100" />
2   <functionalRange id="current" index="index">
3     <function>
4       <math xmlns="http://www.w3.org/1998/Math/MathML">
5         <piecewise>
6           <piece>
7             <cn> 8 </cn>
8             <apply>
9               <lt />
10              <ci> index </ci>
11              <cn> 1 </cn>
12            </apply>
13          </piece>
14          <piece>
15            <cn> 0.1 </cn>
16            <apply>
17              <and />
18              <apply>
19                <geq />
20                <ci> index </ci>
21                <cn> 4 </cn>
22              </apply>
23              <apply>
24                <lt />
25                <ci> index </ci>
26                <cn> 6 </cn>
27              </apply>
28            </apply>
29          </piece>
30          <otherwise>
31            <cn> 8 </cn>
32          </otherwise>
33        </piecewise>
34      </math>
35    </function>
36  </functionalRange>
```

**Listing 2.52:** A `FunctionalRange` element that returns 8 if `index` is smaller than 1, 0.1 if `index` is between 4 and 6 and returns 8 otherwise.

#### 2.4.6.4 The listOfChanges

The `listOfChanges` element, when present, has to contain one or more `setValue` elements. These elements allow to pre-condition the model that will be used for the next execution of the repeated task.

A `setValue` element inherits from the SED-ML `variable` class, which allows it to refer to a model element either directly using the attributes `modelReference` and `target`, or even implicit model elements using the `symbol` attribute. `setValue` has one additional attribute `range` for referring to the range whose values the specified parameter will take. It also contains a child `math` that contains the expression for the value to set. When the expression contains a `ci` element that contains the value specified in the `range` attribute, the value of the referred range is to be inserted.

```

1   <listOfChanges>
2     <setValue target="/sbml/model/listOfParameters/parameter[@id='w']" range="current" modelReference=""
3       model1" >
4       <math xmlns="http://www.w3.org/1998/Math/MathML">
5         <ci> current </ci>
6       </math>
7     </setValue>
8   </listOfChanges>
```

**Listing 2.53:** A `setValue` element setting `w` to the values of the range with id `current`.

#### 2.4.6.5 The listOfSubTasks

The `listOfSubTasks` contains one or more `subTask` elements that specify what simulations are to be performed by the `RepeatedTask`. All `subTasks` have to be carried out sequentially. The `subTask` itself has one required attribute `task` that references the `id` of another task defined in the `listOfTasks`. The subtasks in the list are un-ordered. In order to prescribe an order explicitly the `order` attribute on the `subTask` is to be used. In order to establish that one subtask should be carried out before another its `order` attribute has to have a lower number(c.f. Listing 2.54).


```

1   <listOfSubTasks>
2     <subTask task="task1" order="2"/>
3     <subTask task="task2" order="1"/>
4   </listOfSubTasks>
```

**Listing 2.54:** The `subTask` element. In the example above the task `task2` has to be carried out before `task1`.

### 2.4.7 DataGenerator

The `DataGenerator` class prepares the raw simulation results for later output (Figure 2.35). It encodes the post-processing to be applied to the simulation data. The post-processing steps could be anything, from simple normalisations of data to mathematical calculations.

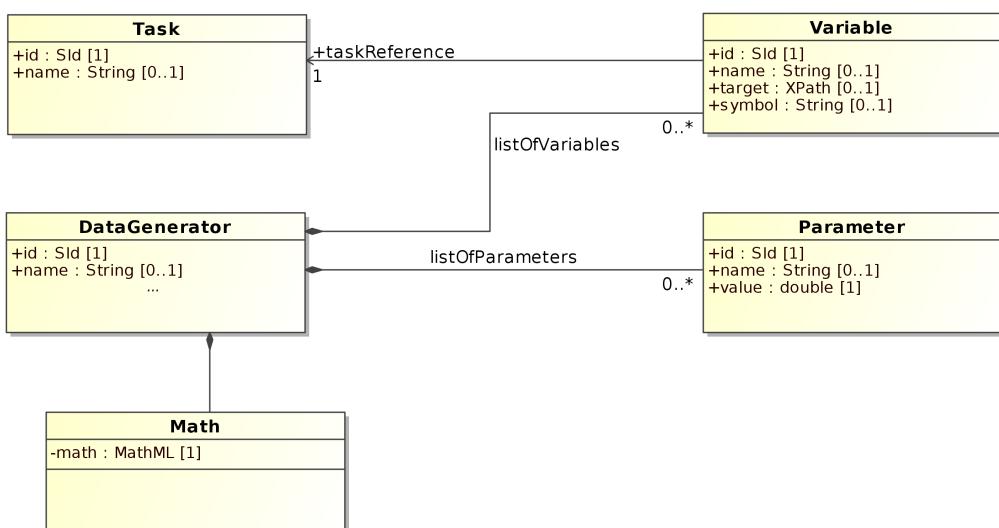

**Figure 2.35:** The SED-ML `DataGenerator` class

Each instance of the `DataGenerator` class is identifiable within the experiment by its unambiguous `id`. It can be further characterised by an optional `name`. The related `Math` class contains a mathML expression for the calculation of the data generator. Mathematical functions available for the specification of data generators are given in Section 2.2.1 on page 18. `Variable` and `Parameter` instances can be used to encode the mathematical expression.

Table 2.23 shows all attributes and sub-elements for the `dataGenerator` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
sub-elements	description
math	<a href="#">page 45</a>
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
variable <sup>o</sup>	<a href="#">page 29</a>
parameter <sup>o</sup>	<a href="#">page 31</a>

**Table 2.23:** *Attributes and nested elements for `dataGenerator`.*  $xy^o$  denotes optional elements and attributes.

Listing 2.55 shows the use of the `dataGenerator` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```


1 <listOfDataGenerators>
2   <dataGenerator id="d1" name="time">
3     <listOfVariables>
4       <variable id="time" taskReference="task1" symbol="urn:sedml:symbol:time" />
5     </listOfVariables >
6     <listOfParameters />
7     <math xmlns="http://www.w3.org/1998/Math/MathML">
8       <ci> time </ci>
9     </math>
10    </dataGenerator>
11   <dataGenerator id="d2" name="LaCI repressor">
12     <listOfVariables>
13       <variable id="v1" taskReference="task1"
14         target="/sbml:sbml/sbml:model/sbml:listOfSpecies/
15           sbml:species[@id='PX']" />
16     </listOfVariables>
17     <math:math>
18       <math:ci>v1</math:ci>
19     </math:math>
20   </dataGenerator>
21 </listOfDataGenerators>
```

**Listing 2.55:** *Definition of two `dataGenerator` elements, time and LaCI repressor*

The `listOfDataGenerator` contains two `dataGenerator` elements. The first one, `d1`, refers to the task definition `t1` (which itself refers to a particular model), and from the corresponding model it reuses the symbol `time`. The second one, `d2`, references a particular species defined in the same model (and referred to via the `taskReference="t1"`). The model species with ID `PX` is reused for the data generator `d2` without further post-processing.

## 2.4.8 Output

The `Output` class describes how the results of a simulation should be presented to the user (Figure 2.36 on the following page).

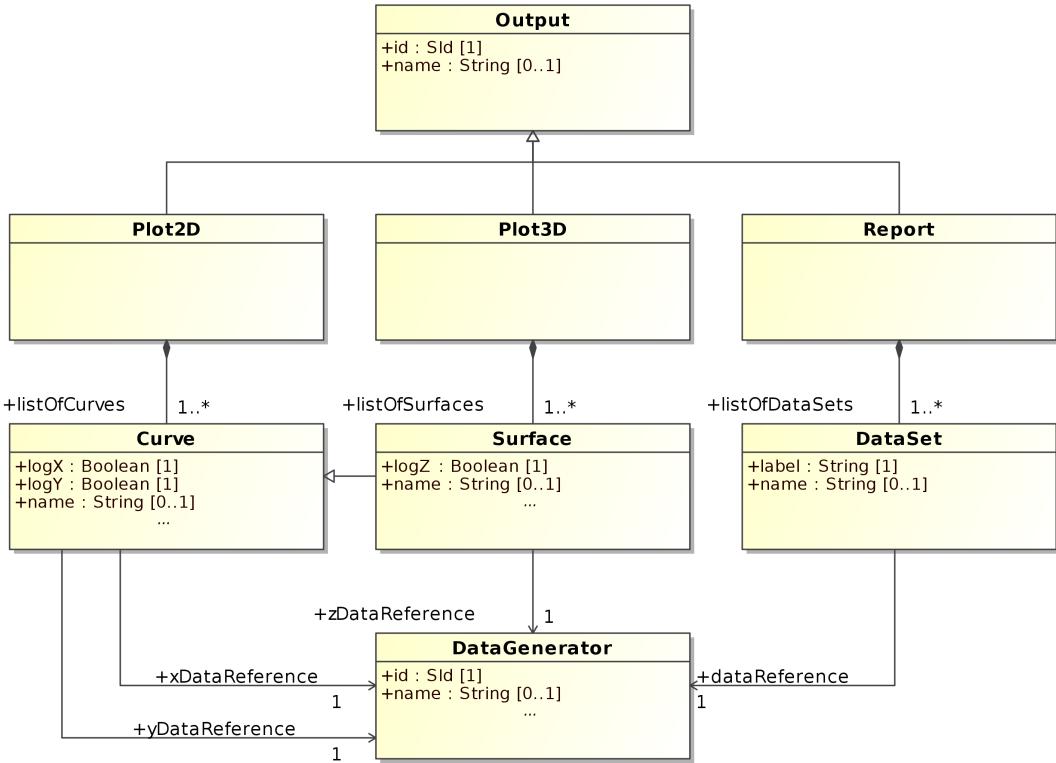

**Figure 2.36:** The SED-ML Output class

It does not contain the data itself, but the type of output and the [data generators](#) used to produce a particular output.

The types of output pre-defined in SED-ML Level 1 Version 2 are plots and [reports](#). The output can be defined as a [2D plot](#) or alternatively as a [3D plot](#).

Note that even though the terms “2D plot” and “3D plot” are used, the exact type of plot is not specified. In other words, whether the 3D plot represents a surface plot, or three dimensional lines in space, cannot be distinguished by SED-ML alone. It is expected that applications use [annotations](#) for this purpose.

Table 2.24 shows all attributes and sub-elements for the [output](#) element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
plot2D <sup>o</sup>	<a href="#">page 58</a>
plot3D <sup>o</sup>	<a href="#">page 59</a>
report <sup>o</sup>	<a href="#">page 60</a>

**Table 2.24:** Attributes and nested elements for [output](#). xy<sup>o</sup> denotes optional elements and attributes.

#### 2.4.8.1 Plot2D

A 2 dimensional plot (Figure 2.37 on the following page) contains a number of [curve](#) definitions.



**Figure 2.37:** The SED-ML Plot2D class

Table 2.25 shows all attributes and sub-elements for the `plot2D` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
curve	<a href="#">page 61</a>

**Table 2.25:** Attributes and nested elements for `plot2D`.  $xy^o$  denotes optional elements and attributes.

Listing 2.56 shows the use of the `listOfCurves` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <plot2D>
2   <listOfCurves>
3     <curve>
4       [CURVE DEFINITION]
5     </curve>
6   [FURTHER CURVE DEFINITIONS]
7 </listOfCurves>
8 </plot2D>


```

**Listing 2.56:** The `plot2D` element with the nested `listOfCurves` element

The listing shows the definition of a 2 dimensional plot containing one `curve` element inside the `listOfCurves`. The curve definition follows in Section 2.4.9.1 on [page 61](#).

#### 2.4.8.2 Plot3D

A 3 dimensional plot (Figure 2.38) contains a number of `surface` definitions.

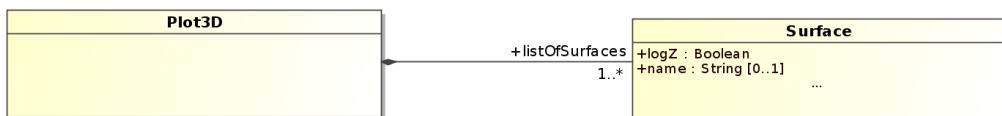

**Figure 2.38:** The SED-ML Plot3D class

Table 2.26 shows all attributes and sub-elements for the `plot3D` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
surface	<a href="#">page 62</a>

**Table 2.26:** Attributes and nested elements for `plot3D`.  $xy^o$  denotes optional elements and attributes.

Listing 2.57 shows the use of the `plot3D` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <plot3D>
2   <listOfSurfaces>
3     <surface>
4       [SURFACE DEFINITION]
5     </surface>
6     [FURTHER SURFACE DEFINITIONS]
7   </listOfSurfaces>
8 </plot3D>
```

**Listing 2.57:** The `plot3D` element with the nested `listOfSurfaces` element

The example defines a `surface` for the 3 dimensional plot. The surface definition follows in Section 2.4.9.2 on page 62.

#### 2.4.8.3 The Report class

The `Report` class defines a data table consisting of several single instances of the `DataSet` class (Figure 2.39). Its output returns the simulation result in actual *numbers*. The particular columns of the report table are defined by creating an instance of the `DataSet` class for each column.



**Figure 2.39:** The SED-ML Report class

Table 2.27 shows all attributes and sub-elements for the `report` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>
dataSet	<a href="#">page 63</a>

**Table 2.27:** Attributes and nested elements for `report`.  $xy^o$  denotes optional elements and attributes.

Listing 2.58 shows the use of the `listOfDataSets` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <report>
2   <listOfDataSets>
3     <dataSet>
4       [DATA REFERENCE]
5     </dataSet>
6   </listOfDataSets>
7 </report>
```

**Listing 2.58:** The `report` element with the nested `listOfDataSets` element


The simulation result itself, i.e. concrete result numbers, are not stored in SED-ML, but the directive how to *calculate* them from the output of the simulator is provided through the `dataGenerator`.

The encoding of simulation results is outside the scope of SED-ML, but other efforts exist, for example the *Systems Biology Result Markup Language* (SBRML, [\[Dada et al., 2010\]](#)).

## 2.4.9 Output components

### 2.4.9.1 Curve

One or more instances of the [Curve](#) class define a 2D plot. A [curve](#) needs a data generator reference to refer to the data that will be plotted on the x-axis, using the [xDataReference](#). A second data generator reference is needed to refer to the data that will be plotted on the y-axis, using the [yDataReference](#).

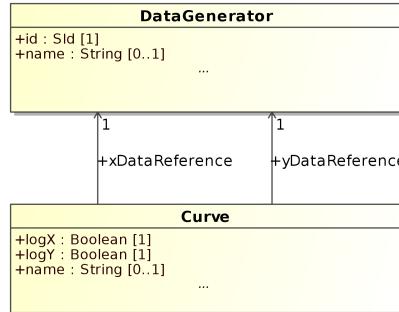

**Figure 2.40:** The SED-ML Curve class

Table 2.28 shows all attributes and sub-elements for the [curve](#) element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
logX	<a href="#">page 61</a>
xDataReference	<a href="#">page 62</a>
logY	<a href="#">page 62</a>
yDataReference	<a href="#">page 62</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.28:** Attributes and nested elements for [curve](#). xy<sup>o</sup> denotes optional elements and attributes.

Listing 2.59 shows the use of the [curve](#) element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfCurves>
2   <curve id="c1" name="v1 / time" xDataReference="dg1" yDataReference="dg2" logX="true" logY="false" />
3 </listOfCurves>
  
```

**Listing 2.59:** The SED-ML [curve](#) element, defining the output curve showing the result of simulation for the referenced dataGenerators

Here, only one curve is created, results shown on the x-axis are generated by the data generator [dg1](#), results shown on the y-axis are generated by the data generator [dg2](#). Both [dg1](#) and [dg2](#) need to be already defined in the [listOfDataGenerators](#). The x-axis is plotted logarithmically.

#### 2.4.9.1.1 logX

[logX](#) is a required attribute of the [Curve](#) class and defines whether or not the data output on the x-axis is logarithmic. The data type of [logX](#) is [boolean](#). To make the output on the x-axis of a plot logarithmic, [logX](#) must be set to “true”, as shown in the sample Listing 2.59.

[logX](#) is also used in the definition of a [Surface](#) output.

#### 2.4.9.1.2 `logY`

`logY` is a required attribute of the `Curve` class and defines whether or not the data output on the y-axis is logarithmic. The data type of `logY` is `boolean`. To make the output on the y-axis of a plot logarithmic, `logY` must be set to “true”, as shown in the sample Listing 2.59.

`logY` is also used in the definition of a `Surface` output.

#### 2.4.9.1.3 `xDataReference`

The `xDataReference` is a mandatory attribute of the `Curve` object. Its content refers to a dataGenerator ID which denotes the `DataGenerator` object that is used to generate the output on the x-axis of a `Curve` in a `2D Plot`. The `xDataReference` data type is `string`. However, the valid values for the `xDataReference` are restricted to the IDs of already defined `DataGenerator` objects.

An example for the definition of a curve is given in Listing 2.59. `xDataReference` is also used in the definition of the x-axis of a `Surface` in a `3D Plot`.

#### 2.4.9.1.4 `yDataReference`

The `yDataReference` is a mandatory attribute of the `Curve` object. Its content refers to a dataGenerator ID which denotes the `DataGenerator` object that is used to generate the output on the y-axis of a `Curve` in a `2D Plot`. The `yDataReference` data type is `string`. However, the number of valid values for the `yDataReference` is restricted to the IDs of already defined `DataGenerator` objects.

An example for the definition of a curve is given in listing 2.59. `yDataReference` is also used in the definition of the y-axis of a `Surface` in a `3D Plot`.

### 2.4.9.2 `Surface`

A `surface` is a three-dimensional figure representing a simulation result (Figure 2.41).

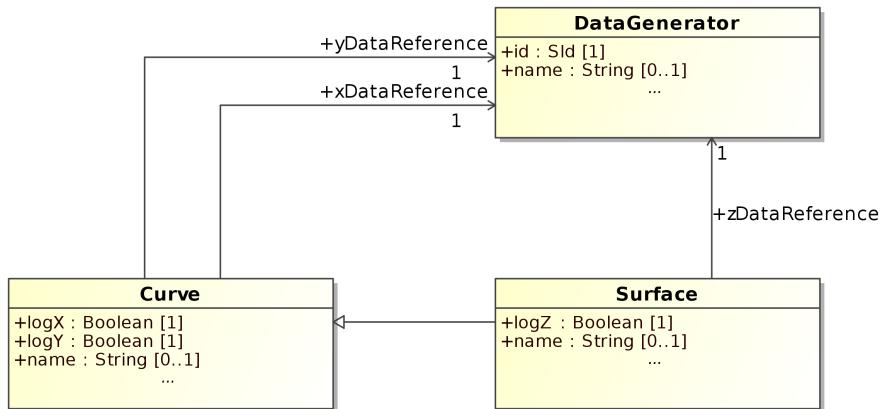


Figure 2.41: The SED-ML `Surface` class

Creating an instance of the `Surface` class demands the definition of three different axes, that is which data to plot on which axis and in which way. The aforementioned `xDataReference` and `yDataReference` attributes define the according `data generators` for both the x- and y-axis of a surface. In addition, the `zDataReference` attribute defines the output for the z-axis. All axes might be logarithmic or not. This can be specified through the `logX`, `logY`, and the `logZ` attributes in the according `dataReference` elements.

Table 2.29 on the following page shows all attributes and sub-elements for the `surface` element as defined by the SED-ML Level 1 Version 2 XML Schema. Listing 2.60 shows the use of the `surface` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```

1 <listOfSurfaces>
2   <surface id="s1" name="surface" xDataReference="dg1" yDataReference="dg2" zDataReference="dg3"
3     logX="true" logY="false" logZ="false" />
4   [FURTHER SURFACE DEFINITIONS]

```

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
logX	<a href="#">page 61</a>
xDataReference	<a href="#">page 62</a>
logY	<a href="#">page 62</a>
yDataReference	<a href="#">page 62</a>
logZ	<a href="#">page 63</a>
zDataReference	<a href="#">page 63</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.29:** Attributes and nested elements for [surface](#). xy<sup>o</sup> denotes optional elements and attributes.

```
5 </listOfSurfaces>
```

**Listing 2.60:** The SED-ML `surface` element, defining the output showing the result of the referenced task

Here, only one surface is created, results shown on the x-axis are generated by the data generator `dg1`, results shown on the y-axis are generated by the data generator `dg2`, and results shown on the z-axis are generated by the data generator `dg3`. All `dg1`, `dg2` and `dg3` need to be already defined in the [listOfDataGenerators](#).

#### 2.4.9.2.1 `logZ`

`logZ` is a required attribute of the [Surface](#) class and defines whether or not the data output on the z-axis is logarithmic. The data type of `logZ` is `boolean`. To make the output on the z-axis of a surface plot logarithmic, `logZ` must be set to “true”, as shown in the sample Listing 2.60.


#### 2.4.9.2.2 `zDataReference`

The `zDataReference` is a mandatory attribute of the [Surface](#) object. Its content refers to a `DataGenerator` ID which denotes the [DataGenerator](#) object that is used to generate the output on the z-axis of a [3D Plot](#). The `zDataReference` data type is `string`. However, the valid values for the `zDataReference` are restricted to the IDs of already defined [DataGenerator objects](#).

An example using the `zDataReference` is given in Listing 2.60 on [page 62](#).

#### 2.4.9.3 `DataSet`

The [DataSet](#) class holds definitions of data to be used in the [Report](#) class (Figure 2.42).

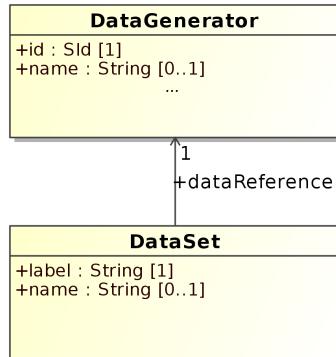

**Figure 2.42:** The SED-ML `DataSet` class

Data sets are labeled references to instances of the `DataGenerator` class.

Table 2.30 shows all attributes and sub-elements for the `DataSet` element as defined by the SED-ML Level 1 Version 2 XML Schema.

attribute	description
metaid <sup>o</sup>	<a href="#">page 23</a>
id	<a href="#">page 22</a>
name <sup>o</sup>	<a href="#">page 22</a>
dataReference	<a href="#">page 64</a>
label	<a href="#">page 64</a>
sub-elements	description
notes <sup>o</sup>	<a href="#">page 23</a>
annotation <sup>o</sup>	<a href="#">page 24</a>

**Table 2.30:** Attributes and nested elements for `DataSet`.  $xy^o$  denotes optional elements and attributes.

#### 2.4.9.3.1 `label`

Each data set in a `Report` does have to carry an unambiguous `label`. A label is a human readable descriptor of a data set for use in a `report`. For example, for a tabular data set of time series results, the label could be the column heading.

#### 2.4.9.3.2 `dataReference`

The `dataReference` attribute contains the ID of a `DataGenerator` element and as such represents a link to it. The data produced by that particular data generator fills the according data set in the `report`. Listing 2.61 shows the use of the `DataSet` element in a SED-ML file as defined by the SED-ML Level 1 Version 2 XML Schema.

```
1 <listOfDataSets>
2   <DataSet id="d1" name="v1 over time" dataReference="dg1" label="_1">
3 </listOfDataSets>
```

**Listing 2.61:** The SED-ML `DataSet` element, defining a data set containing the result of the referenced task

## **3. Acknowledgements**


The SED-ML specification has been developed with the input of many people. Main contributors of the current specification include Richard Adams, Frank Bergmann, Stefan Hoops, Nicolas Le Novère, Ion Moraru, Sven Sahle, Henning Schmidt and Dagmar Waltmath.

Thanks to David Nickerson for feedback and help with Example C2.

Moreover, we would like to thank all the participants of the meetings where SED-ML has been discussed as well as the subscribers of the sed-ml-discuss mailing list.

# A. SED-ML UML Overview

Figure A.1 shows the complete UML diagram of the SED-ML. It gives the full picture of all implemented classes (see the XML Schema definition on page 67).

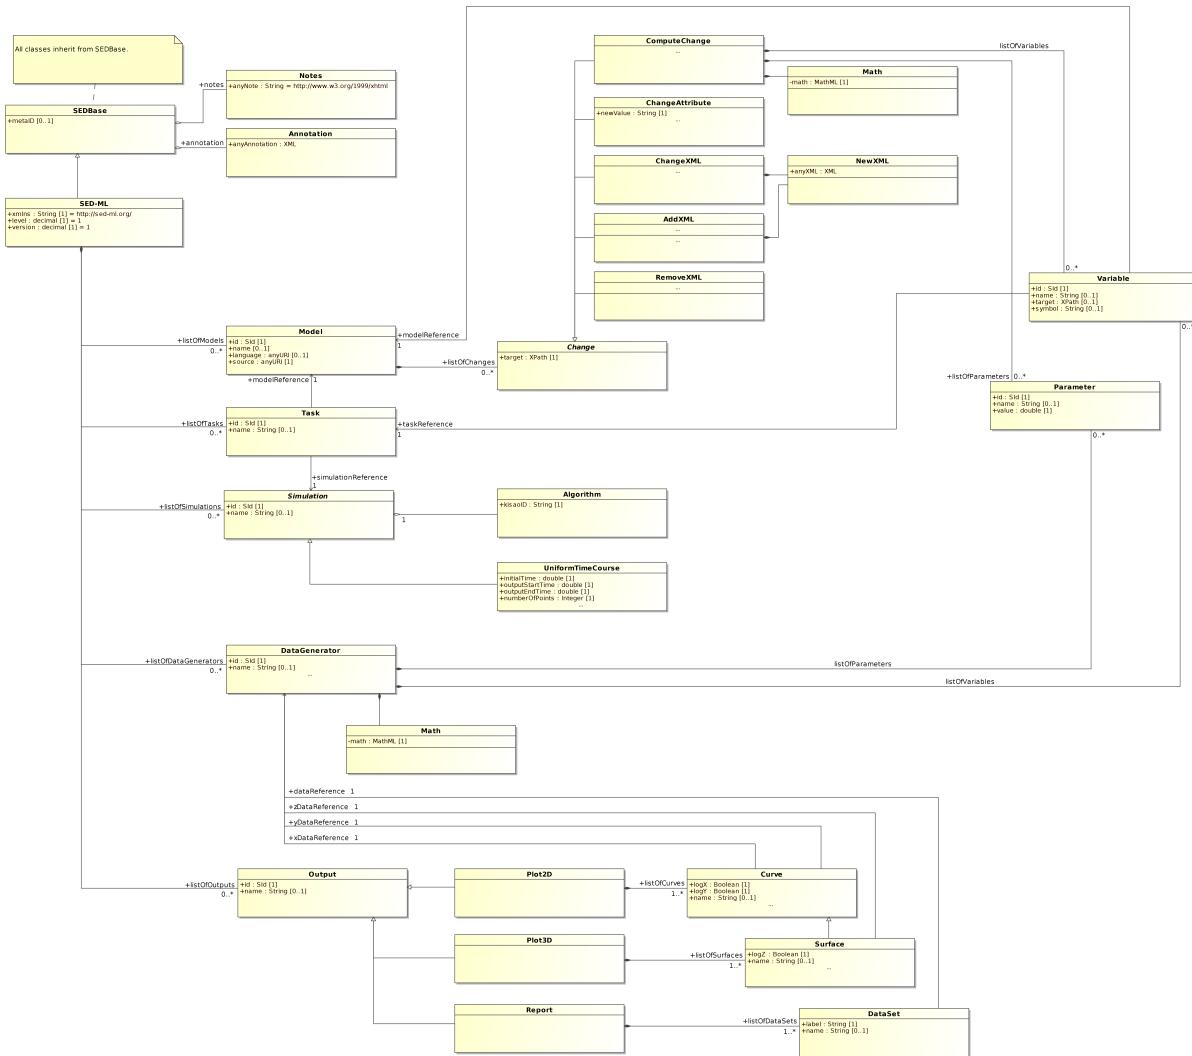

**Figure A.1:** The SED-ML UML class diagram

## B. XML Schema

Listing B.1 shows the full SED-ML XML Schema. The code is commented inline.

```
1 <xs:schema targetNamespace="http://sed-ml.org/" xmlns="http://sed-ml.org/"
2   xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:math="http://www.w3.org/1998/Math/MathML"
3   <xs:import namespace="http://www.w3.org/1998/Math/MathML"
4     schemaLocation="sedml-mathml.xsd" />
5
6
7   <xs:simpleType name="SId">
8     <xs:annotation>
9       <xs:documentation>
10         The type SId is used throughout SED-ML as the
11           type
12             of the 'id' attributes on model elements.
13           </xs:documentation>
14         </xs:annotation>
15         <xs:restriction base="xs:string">
16           <xs:pattern value="(_|[a-z]|[A-Z])(_|[a-z]|[A-Z]|[_0-9])*" />
17         </xs:restriction>
18       </xs:simpleType>
19
20      <!-- attribute group for elements with ID/name att -->
21      <xs:attributeGroup name="idGroup">
22        <xs:attribute name="id" use="required" type="SId"></xs:attribute>
23        <xs:attribute name="name" use="optional" type="xs:string"></xs:attribute>
24      </xs:attributeGroup>
25
26
27
28      <!-- SED Base class -->
29      <xs:complexType name="SEDBase">
30        <xs:annotation>
31          <xs:documentation xml:lang="en">
32            The SEDBase type is the
33              base type of all main types in SED-ML. It
34                serves as a container for
35                  the annotation of any part of the
36                    experiment description.
37          </xs:documentation>
38        </xs:annotation>
39        <xs:sequence>
40          <xs:element ref="notes" minOccurs="0" />
41          <xs:element ref="annotation" minOccurs="0" />
42        </xs:sequence>
43        <!--
44          This must be a variable-type identifier ,i.e., (Letter | '_')
45          (NCNameChar)* that is unique in the document.
46        -->
47        <xs:attribute name="metaid" type="xs:ID" use="optional"></xs:attribute>
48      </xs:complexType>
49      <xs:element name="sedML">
50        <xs:complexType>
51          <xs:complexContent>
52            <xs:extension base="SEDBase">
53              <xs:sequence>
54                <xs:element ref="listOfSimulations" minOccurs="0" />
55                <xs:element ref="listOfModels" minOccurs="0" />
56                <xs:element ref="listOfTasks" minOccurs="0" />
57                <xs:element ref="listOfDataGenerators" minOccurs="0" />
58                <xs:element ref="listOfOutputs" minOccurs="0" />
59              </xs:sequence>
60              <xs:attribute name="level" type="xs:decimal" use="required"
61                fixed="1" />
62              <xs:attribute name="version" type="xs:decimal" use="required"
63                fixed="1" />
64            </xs:extension>
65          </xs:complexContent>
66        </xs:complexType>
67      </xs:element>
68      <!-- notes and annotations -->
69      <xs:element name="notes">
```

```

70      <xs:complexType>
71          <xs:sequence>
72              <xs:any namespace="http://www.w3.org/1999/xhtml"
73                  processContents="skip" minOccurs="0" maxOccurs="unbounded" />
74          </xs:sequence>
75      </xs:complexType>
76  </xs:element>
77  <xs:element name="annotation">
78      <xs:complexType>
79          <xs:sequence>
80              <xs:any processContents="skip" minOccurs="0" maxOccurs="unbounded" />
81          </xs:sequence>
82      </xs:complexType>
83  </xs:element>
84  <!-- KiSAO ID type -->
85  <xs:simpleType name="KisaoType">
86      <xs:restriction base="xs:string">
87          <xs:pattern value="KISA0:[0-9][0-9][0-9][0-9][0-9][0-9]" />
88      </xs:restriction>
89  </xs:simpleType>
90
91  <!-- global element declarations -->
92  <xs:element name="variable">
93      <xs:complexType>
94          <xs:complexContent>
95              <xs:extension base="SEDBase">
96                  <!-- at least one of taskReference or modelReference must be set -->
97                  <xs:attribute name="taskReference" type="SId" use="optional" />
98                  <xs:attribute name="modelReference" type="SId" use="optional" />
99
100                 <!--
101                     either target or symbol have to be used in the variable definition
102                 -->
103                  <xs:attribute name="target" type="xs:token" use="optional" />
104                  <xs:attribute name="symbol" type="xs:string" use="optional" />
105                  <xs:attributeGroup ref="idGroup" />
106              </xs:extension>
107          </xs:complexContent>
108      </xs:complexType>
109  </xs:element>
110  <xs:element name="parameter">
111      <xs:complexType>
112          <xs:complexContent>
113              <xs:extension base="SEDBase">
114                  <xs:attributeGroup ref="idGroup" />
115                  <xs:attribute name="value" type="xs:double" use="required" />
116              </xs:extension>
117          </xs:complexContent>
118      </xs:complexType>
119  </xs:element>
120  <xs:element name="algorithm">
121      <xs:complexType>
122          <xs:complexContent>
123              <xs:extension base="SEDBase">
124                  <xs:attribute name="kisaoID" type="KisaoType" use="required" />
125              </xs:extension>
126          </xs:complexContent>
127      </xs:complexType>
128  </xs:element>
129  <xs:element name="uniformTimeCourse">
130      <xs:complexType>
131          <xs:complexContent>
132              <xs:extension base="SEDBase">
133                  <xs:sequence>
134                      <xs:element ref="algorithm" />
135                  </xs:sequence>
136                  <xs:attributeGroup ref="idGroup" />
137                  <xs:attribute name="outputStartTime" type="xs:double"
138                      use="required" />
139                  <xs:attribute name="outputEndTime" type="xs:double"
140                      use="required" />
141                  <xs:attribute name="numberOfPoints" type="xs:integer"
142                      use="required" />
143                  <xs:attribute name="initialTime" type="xs:double" use="required" />
144              </xs:extension>
145          </xs:complexContent>
146      </xs:complexType>
147  </xs:element>
148  <xs:element name="task">
149      <xs:complexType>
150          <xs:complexContent>
151              <xs:extension base="SEDBase">
152                  <xs:attribute name="simulationReference" type="SId"
153                      use="required" />
154
155                  <xs:attribute name="modelReference" type="SId" use="required" />
156                  <xs:attributeGroup ref="idGroup" />
157              </xs:extension>
158          </xs:complexContent>

```

```

159      </xs:complexType>
160    </xs:element>
161  <xs:element name="plot2D">
162    <xs:complexType>
163      <xs:complexContent>
164        <xs:extension base="SEDBase">
165          <xs:sequence>
166            <xs:element ref="listOfCurves" minOccurs="0" />
167          </xs:sequence>
168          <xs:attributeGroup ref="idGroup" />
169        </xs:extension>
170      </xs:complexContent>
171    </xs:complexType>
172  <xs:element name="plot3D">
173    <xs:complexType>
174      <xs:complexContent>
175        <xs:extension base="SEDBase">
176          <xs:sequence>
177            <xs:element ref="listOfSurfaces" minOccurs="0" />
178          </xs:sequence>
179          <xs:attributeGroup ref="idGroup" />
180        </xs:extension>
181      </xs:complexContent>
182    </xs:complexType>
183  </xs:element>
184  <xs:element name="report">
185    <xs:complexType>
186      <xs:complexContent>
187        <xs:extension base="SEDBase">
188          <xs:sequence>
189            <xs:element ref="listOfDataSets" minOccurs="0" />
190          </xs:sequence>
191          <xs:attributeGroup ref="idGroup" />
192        </xs:extension>
193      </xs:complexContent>
194    </xs:complexType>
195  </xs:element>
196  <xs:element name="model">
197    <xs:complexType>
198      <xs:complexContent>
199        <xs:extension base="SEDBase">
200          <xs:sequence>
201            <xs:element ref="listOfChanges" minOccurs="0" />
202          </xs:sequence>
203          <xs:attribute name="language" type="xs:anyURI" use="optional"
204            default="urn:sedml:language:xml" />
205          <xs:attribute name="source" type="xs:anyURI" use="required" />
206          <xs:attributeGroup ref="idGroup" />
207        </xs:extension>
208      </xs:complexContent>
209    </xs:complexType>
210  </xs:element>
211
212  <!-- listOf elements -->
213  <xs:element name="listOfVariables">
214    <xs:complexType>
215      <xs:complexContent>
216        <xs:extension base="SEDBase">
217          <xs:sequence>
218            <xs:element ref="variable" minOccurs="0" maxOccurs="unbounded" />
219          </xs:sequence>
220        </xs:extension>
221      </xs:complexContent>
222    </xs:complexType>
223  </xs:element>
224  <xs:element name="listOfParameters">
225    <xs:complexType>
226      <xs:complexContent>
227        <xs:extension base="SEDBase">
228          <xs:sequence>
229            <xs:element ref="parameter" minOccurs="0" maxOccurs="unbounded" />
230          </xs:sequence>
231        </xs:extension>
232      </xs:complexContent>
233    </xs:complexType>
234  </xs:element>
235  <xs:element name="listOfTasks">
236    <xs:complexType>
237      <xs:complexContent>
238        <xs:extension base="SEDBase">
239          <xs:sequence>
240            <xs:element ref="task" minOccurs="0" maxOccurs="unbounded" />
241          </xs:sequence>
242        </xs:extension>
243      </xs:complexContent>
244    </xs:complexType>
245  </xs:element>
246  <xs:element name="listOfSimulations">

```

```

248      <xs:complexType>
249          <xs:complexContent>
250              <xs:extension base="SEDBase">
251                  <xs:sequence>
252                      <xs:element ref="uniformTimeCourse" minOccurs="0"
253                          maxOccurs="unbounded" />
254                  </xs:sequence>
255              </xs:extension>
256          </xs:complexContent>
257      </xs:complexType>
258  </xs:element>
259  <xs:element name="listOfOutputs">
260      <xs:complexType>
261          <xs:complexContent>
262              <xs:extension base="SEDBase">
263                  <xs:sequence minOccurs="0">
264                      <xs:choice minOccurs="0" maxOccurs="unbounded">
265                          <xs:element ref="plot2D" minOccurs="0" maxOccurs="unbounded" />
266                          <xs:element ref="plot3D" minOccurs="0" maxOccurs="unbounded" />
267                          <xs:element ref="report" minOccurs="0" maxOccurs="unbounded" />
268                      </xs:choice>
269                  </xs:sequence>
270              </xs:extension>
271          </xs:complexContent>
272      </xs:complexType>
273  </xs:element>
274  <xs:element name="listOfModels">
275      <xs:complexType>
276          <xs:complexContent>
277              <xs:extension base="SEDBase">
278                  <xs:sequence>
279                      <xs:element ref="model" minOccurs="0" maxOccurs="unbounded" />
280                  </xs:sequence>
281              </xs:extension>
282          </xs:complexContent>
283      </xs:complexType>
284  </xs:element>
285  <xs:element name="listOfDataGenerators">
286      <xs:complexType>
287          <xs:complexContent>
288              <xs:extension base="SEDBase">
289                  <xs:sequence>
290                      <xs:element ref="dataGenerator" minOccurs="0"
291                          maxOccurs="unbounded" />
292                  </xs:sequence>
293              </xs:extension>
294          </xs:complexContent>
295      </xs:complexType>
296  </xs:element>
297  <xs:element name="listOfCurves">
298      <xs:complexType>
299          <xs:complexContent>
300              <xs:extension base="SEDBase">
301                  <xs:sequence>
302                      <xs:element ref="curve" maxOccurs="unbounded" />
303                  </xs:sequence>
304              </xs:extension>
305          </xs:complexContent>
306      </xs:complexType>
307  </xs:element>
308  <xs:element name="listOfSurfaces">
309      <xs:complexType>
310          <xs:complexContent>
311              <xs:extension base="SEDBase">
312                  <xs:sequence>
313                      <xs:element ref="surface" maxOccurs="unbounded" />
314                  </xs:sequence>
315              </xs:extension>
316          </xs:complexContent>
317      </xs:complexType>
318  </xs:element>
319  <xs:element name="listOfDataSets">
320      <xs:complexType>
321          <xs:complexContent>
322              <xs:extension base="SEDBase">
323                  <xs:sequence>
324                      <xs:element ref="dataSet" maxOccurs="unbounded" />
325                  </xs:sequence>
326              </xs:extension>
327          </xs:complexContent>
328      </xs:complexType>
329  </xs:element>
330  <!-- change -->
331  <xs:element name="listOfChanges">
332      <xs:complexType>
333          <xs:complexContent>
334              <xs:extension base="SEDBase">
335                  <xs:sequence minOccurs="0">
336                      <xs:choice minOccurs="0" maxOccurs="unbounded">

```

```

337             <xs:element ref="changeAttribute" minOccurs="0"
338                 maxOccurs="unbounded" />
339             <xs:element ref="changeXML" minOccurs="0" maxOccurs="unbounded" />
340             <xs:element ref="addXML" minOccurs="0" maxOccurs="unbounded" />
341             <xs:element ref="removeXML" minOccurs="0" maxOccurs="unbounded" />
342             <xs:element ref="computeChange" minOccurs="0"
343                 maxOccurs="unbounded" />
344         </xs:choice>
345     </xs:sequence>
346 </xs:extension>
347 </xs:complexContent>
348 </xs:complexType>
349 </xs:element>
350 <xs:element name="newXML">
351     <xs:complexType>
352         <xs:sequence>
353             <xs:any processContents="skip" minOccurs="1" maxOccurs="unbounded" />
354         </xs:sequence>
355     </xs:complexType>
356 </xs:element>
357 <xs:element name="changeAttribute">
358     <xs:complexType>
359         <xs:complexContent>
360             <xs:extension base="SEDBase">
361                 <xs:attribute name="target" use="required" type="xs:token" />
362                 <xs:attribute name="newValue" type="xs:string" use="required" />
363             </xs:extension>
364         </xs:complexContent>
365     </xs:complexType>
366 </xs:element>
367 <xs:element name="changeXML">
368     <xs:complexType>
369         <xs:complexContent>
370             <xs:extension base="SEDBase">
371                 <xs:sequence>
372                     <xs:element ref="newXML" />
373                 </xs:sequence>
374                 <xs:attribute name="target" use="required" type="xs:token" />
375             </xs:extension>
376         </xs:complexContent>
377     </xs:complexType>
378 </xs:element>
379 <xs:element name="addXML">
380     <xs:complexType>
381         <xs:complexContent>
382             <xs:extension base="SEDBase">
383                 <xs:sequence>
384                     <xs:element ref="newXML" />
385                 </xs:sequence>
386                 <xs:attribute name="target" use="required" type="xs:token" />
387             </xs:extension>
388         </xs:complexContent>
389     </xs:complexType>
390 </xs:element>
391 <xs:element name="removeXML">
392     <xs:complexType>
393         <xs:complexContent>
394             <xs:extension base="SEDBase">
395                 <xs:attribute name="target" use="required" type="xs:token" />
396             </xs:extension>
397         </xs:complexContent>
398     </xs:complexType>
399 </xs:element>
400 <xs:element name="computeChange">
401     <xs:complexType>
402         <xs:complexContent>
403             <xs:extension base="SEDBase">
404                 <xs:sequence>
405                     <xs:element ref="listOfVariables" minOccurs="0" />
406                     <xs:element ref="listOfParameters" minOccurs="0" />
407                     <xs:element ref="math:math" />
408                 </xs:sequence>
409                 <xs:attribute name="target" use="required" type="xs:token" />
410             </xs:extension>
411         </xs:complexContent>
412     </xs:complexType>
413 </xs:element>
414 <!-- data generator -->
415 <xs:element name="dataGenerator">
416     <xs:complexType>
417         <xs:complexContent>
418             <xs:extension base="SEDBase">
419                 <xs:sequence>
420                     <xs:element ref="listOfVariables" minOccurs="0" />
421                     <xs:element ref="listOfParameters" minOccurs="0" />
422                     <xs:element ref="math:math" />
423                 </xs:sequence>
424                 <xs:attributeGroup ref="idGroup" />
425             </xs:extension>

```

```

426         </xs:complexContent>
427     </xs:complexType>
428   </xs:element>
429   <xs:element name="curve">
430     <xs:complexType>
431       <xs:complexContent>
432         <xs:extension base="SEDBase">
433           <xs:attributeGroup ref="idGroup" />
434           <xs:attribute name="yDataReference" type="SId" use="required" />
435           <xs:attribute name="xDataReference" type="SId" use="required" />
436
437           <xs:attribute name="logY" use="required" type="xs:boolean" />
438           <xs:attribute name="logX" use="required" type="xs:boolean" />
439         </xs:extension>
440       </xs:complexContent>
441     </xs:complexType>
442   </xs:element>
443   <xs:element name="surface">
444     <xs:complexType>
445       <xs:complexContent>
446         <xs:extension base="SEDBase">
447           <xs:attributeGroup ref="idGroup" />
448           <xs:attribute name="yDataReference" type="SId" use="required" />
449           <xs:attribute name="xDataReference" type="SId" use="required" />
450           <xs:attribute name="zDataReference" type="SId" use="required" />
451           <xs:attribute name="logY" use="required" type="xs:boolean" />
452           <xs:attribute name="logX" use="required" type="xs:boolean" />
453           <xs:attribute name="logZ" use="required" type="xs:boolean" />
454         </xs:extension>
455       </xs:complexContent>
456     </xs:complexType>
457   </xs:element>
458   <xs:element name="dataSet">
459     <xs:complexType>
460       <xs:complexContent>
461         <xs:extension base="SEDBase">
462           <xs:attribute name="dataReference" type="SId" use="required" />
463           <xs:attribute name="label" use="required" type="xs:string" />
464           <xs:attributeGroup ref="idGroup" />
465         </xs:extension>
466       </xs:complexContent>
467     </xs:complexType>
468   </xs:element>
469 </xs:schema>

```

**Listing B.1:** The SED-ML XML Schema definition

## C. Examples

This appendix present a few examples SED-ML uses. These examples are only illustrative and do not intend to demonstrate the full capabilities of SED-ML. Please read the specification for a for a more comprehensive view (Chapter 2).

The current examples make use of models encoded in SBML and CellML. It is important to remember that SED-ML is not restricted to those formats, but can be used with models encoded in many formats, so long as they are serialized in XML. A list of formats known to have been used, at least tentatively, with SED-ML is available on <http://sed-ml.org/>.

## C.1 Le Loup Model (SBML)

The following example provides a SED-ML description for the simulation of the model based on the publication by Leoup, Gonze and Goldbeter “Limit Cycle Models for Circadian Rhythms Based on Transcriptional Regulation in Drosophila and Neurospora” (PubMed ID: 10643740).


This model is referenced by its SED-ML ID `model1` and refers to the model with the MIRIAM URN [urn:miriam:biomodels.db:BIOMD0000000021](#). Software applications interpreting this example know how to dereference this URN and access the model in BioModels Database [Le Novère et al., 2006].

A second model is defined in l. 11 of the example, using `model1` as a source and applying even further changes to it, in this case updating two model parameters.

One simulation setup is defined in the `listOfSimulations`. It is a `uniformTimeCourse` over 380 time units, providing 1000 output points. The algorithm used is the CVODE solver, as denoted by the KiSAO ID `KiSAO:0000019`.

A number of `dataGenerators` are defined in ll. 23-62. Those are the prerequisite for defining the outputs of the simulation. The first dataGenerator named `time` collects the simulation time. `tim1` in l. 31 maps on the `Mt` entity in the model that is used in `task1` which here is the model with ID `model1`. The dataGenerator named `per-tim1` in l. 39 maps on the `Cn` entity in `model1`. Finally the fourth and fifth dataGenerators map on the `Mt` and `per-tim` entity respectively in the updated model with ID `model2`.

The `output` defined in the experiment consists of three 2D plots. The first plot has two different curves (ll. 65-70) and provides the time course of the simulation using the `tim` mRNA concentrations from both simulation experiments. The second plot shows the `per-tim` concentration against the `tim` concentration for the oscillating model. And the third plot shows the same plot for the chaotic model. The resulting three plots are shown in Figure C.1.

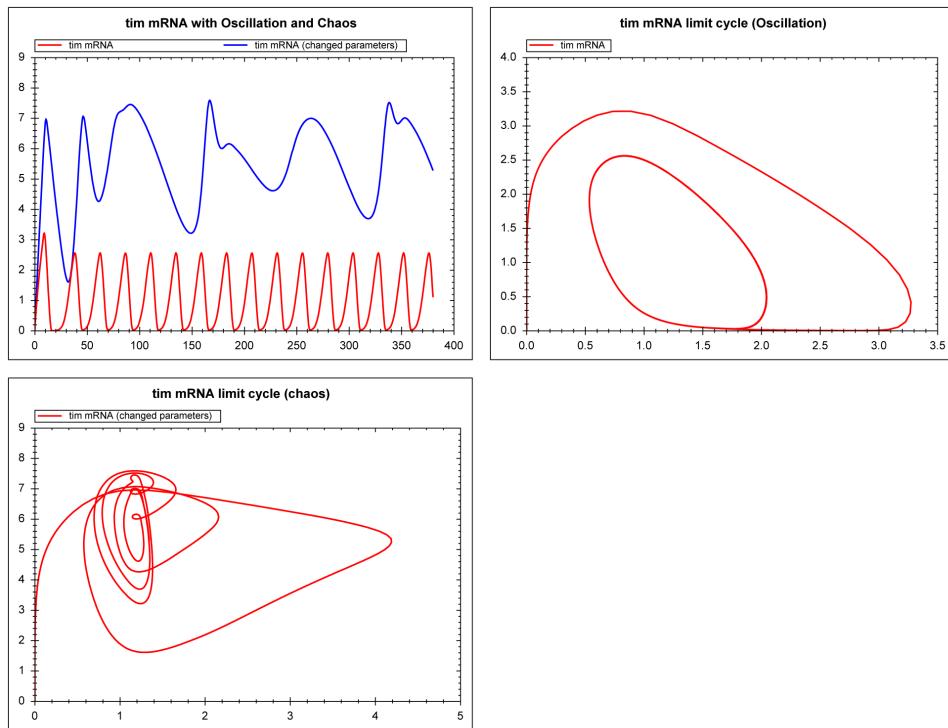

**Figure C.1:** The simulation result gained from the simulation description given in listing C.1

```

1 <?xml version="1.0" encoding="utf-8"?>
2 <!-- Written by libSedML v1.1.4092.21172 see http://libsedml.sf.net -->
3 <sedML xmlns="http://sed-ml.org/" level="1" version="1">
4   <listOfSimulations>
5     <uniformTimeCourse id="simulation1" initialTime="0" outputStartTime="0" outputEndTime="380"
        numberofPoints="1000">
6       <algorithm kisaoID="KiSAO:0000019" />

```

```

7      </uniformTimeCourse>
8  </listOfSimulations>
9  <listOfModels>
10     <model id="model1" name="Circadian Oscillations" language="urn:sedml:language:sbml" source=""
11         urn:miriam:biomodels.db:BIOMD0000000021" />
12     <model id="model2" name="Circadian Chaos" language="urn:sedml:language:sbml" source="model1">
13         <listOfChanges>
14             <changeAttribute target="/sbml:sbml:sbml:model/sbml:listOfParameters/sbml:parameter[@id=&quot;
15                 V_mT&quot;]@value" newValue="0.28" />
16             <changeAttribute target="/sbml:sbml:sbml:model/sbml:listOfParameters/sbml:parameter[@id=&quot;
17                 V_dT&quot;]@value" newValue="4.8" />
18         </listOfChanges>
19     </model>
20 </listOfModels>
21 <listOfTasks>
22     <task id="task1" modelReference="model1" simulationReference="simulation1" />
23     <task id="task2" modelReference="model2" simulationReference="simulation1" />
24 </listOfTasks>
25 <listOfDataGenerators>
26     <dataGenerator id="time" name="time">
27         <listOfVariables>
28             <variable id="t" taskReference="task1" symbol="urn:sedml:symbol:time" />
29         </listOfVariables>
30         <math xmlns="http://www.w3.org/1998/Math/MathML">
31             <ci> t </ci>
32         </math>
33     </dataGenerator>
34     <dataGenerator id="tim1" name="tim mRNA">
35         <listOfVariables>
36             <variable id="v1" taskReference="task1" target="/sbml:sbml:sbml:model/sbml:listOfSpecies/
37                 sbml:species[@id='Mt']" />
38         </listOfVariables>
39         <math xmlns="http://www.w3.org/1998/Math/MathML">
40             <ci> v1 </ci>
41         </math>
42     </dataGenerator>
43     <dataGenerator id="per_tim1" name="nuclear PER-TIM complex">
44         <listOfVariables>
45             <variable id="via" taskReference="task1" target="/sbml:sbml:sbml:model/sbml:listOfSpecies/
46                 sbml:species[@id='Cn']" />
47         </listOfVariables>
48         <math xmlns="http://www.w3.org/1998/Math/MathML">
49             <ci> via </ci>
50         </math>
51     </dataGenerator>
52     <dataGenerator id="tim2" name="tim mRNA (changed parameters)">
53         <listOfVariables>
54             <variable id="v2" taskReference="task2" target="/sbml:sbml:sbml:model/sbml:listOfSpecies/
55                 sbml:species[@id='Mt']" />
56         </listOfVariables>
57         <math xmlns="http://www.w3.org/1998/Math/MathML">
58             <ci> v2 </ci>
59         </math>
60     </dataGenerator>
61     <dataGenerator id="per_tim2" name="nuclear PER-TIM complex">
62         <listOfVariables>
63             <variable id="v2a" taskReference="task2" target="/sbml:sbml:sbml:model/sbml:listOfSpecies/
64                 sbml:species[@id='Cn']" />
65         </listOfVariables>
66         <math xmlns="http://www.w3.org/1998/Math/MathML">
67             <ci> v2a </ci>
68         </math>
69     </dataGenerator>
70 </listOfDataGenerators>
71 <listOfOutputs>
72     <plot2D id="plot1" name="tim mRNA with Oscillation and Chaos">
73         <listOfCurves>
74             <curve id="c1" logX="false" logY="false" xDataReference="time" yDataReference="tim1" />
75             <curve id="c2" logX="false" logY="false" xDataReference="time" yDataReference="tim2" />
76         </listOfCurves>
77     </plot2D>
78     <plot2D id="plot2" name="tim mRNA limit cycle (Oscillation)">
79         <listOfCurves>
80             <curve id="c3" logX="false" logY="false" xDataReference="per_tim1" yDataReference="tim1" />
81         </listOfCurves>
82     </plot2D>
83     <plot2D id="plot3" name="tim mRNA limit cycle (chaos)">
84         <listOfCurves>
85             <curve id="c4" logX="false" logY="false" xDataReference="per_tim2" yDataReference="tim2" />
86         </listOfCurves>
87     </plot2D>
88 </listOfOutputs>
89 </sedML>
```

**Listing C.1:** LeLoup Model Simulation Description in SED-ML

## C.2 Le Loup Model (CellML)

The following example provides a SED-ML description for the simulation of the model based on the publication by Leloup, Gonze and Goldbeter “Limit Cycle Models for Circadian Rhythms Based on Transcriptional Regulation in Drosophila and Neurospora” (PubMed ID: 10643740). Whereas the previous example used SBML to encode the simulation experiment, here the model is taken from the CellML Model Repository [Lloyd et al., 2008].


The original model used in the simulation experiment is referred to using a URL ([http://models.cellml.org/workspace/leloup\\_gonze\\_goldbeter\\_1999/@@rawfile/7606a47e222bc3b3d9117baa08d2e7246d67eedd/leloup\\_gonze\\_goldbeter\\_1999\\_a.cellml](http://models.cellml.org/workspace/leloup_gonze_goldbeter_1999/@@rawfile/7606a47e222bc3b3d9117baa08d2e7246d67eedd/leloup_gonze_goldbeter_1999_a.cellml), ll. 14).

A second model is defined in l. 15 of the example, using `model1` as a source and applying even further changes to it, in this case updating two model parameters.

One simulation setup is defined in the `listOfSimulations`. It is a `uniformTimeCourse` over 380 time units, using 1000 simulation points. The algorithm used is the CVODE solver, as denoted by the KiSAO ID `KiSAO:0000019`.

A number of `dataGenerators` are defined in ll. 27-73. Those are the prerequisite for defining the output of the simulation. The dataGenerator named `tim1` in l. 37 maps on the `Mt` entity in the model that is used in `task1`, which here is the model with ID `model1`. The dataGenerator named `per-tim` in l. 46 maps on the `CN` entity in `model1`. Finally the fourth and fifth dataGenerators map on the `Mt` and `per-tim` entity respectively in the updated model with ID `model2`.

The `output` defined in the experiment consists of three 2D plots (ll. 74-91). They reproduce the same output as the previous example.

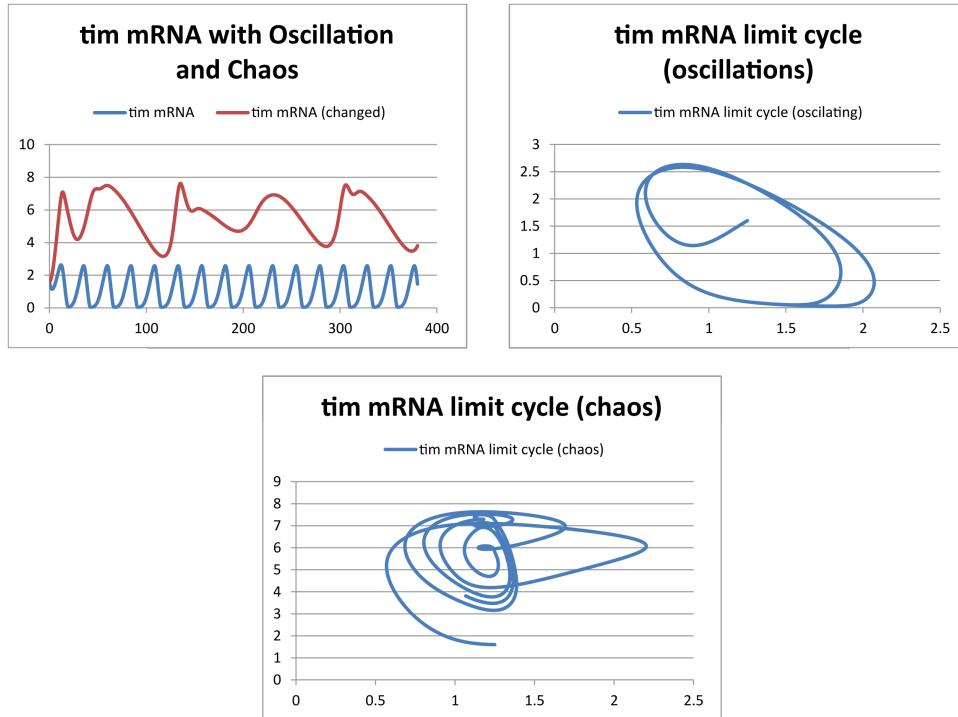

**Figure C.2:** The simulation result gained from the simulation description given in listing C.2

```

1 <?xml version="1.0" encoding="utf-8"?>
2 <sedML xmlns="http://sed-ml.org/">
3   xmlns:math="http://www.w3.org/1998/Math/MathML" level="1" version="1">
4   <notes><p xmlns="http://www.w3.org/1999/xhtml">Comparing Limit Cycles and strange attractors for
5     oscillation in Drosophila</p></notes>
6   <listOfSimulations>
7     <uniformTimeCourse id="simulation1"
8       initialTime="0" outputStartTime="0" outputEndTime="380"
9       numberOfPoints="1000" >
10      <algorithm kisaoID="KiSAO:0000019"/>

```

```

11      </uniformTimeCourse>
12  </listOfSimulations>
13  <listOfModels>
14    <model id="model1" name="Circadian Oscillations" language="urn:sedml:language:cellml" source="http://
15      models.cellml.org/workspace/leloup_gonze_goldbeter_1999@/rawfile/7606
16      a47e222bc3b3d9117baa08d2e7246d67eedd/leloup_gonze_goldbeter_1999_a.cellml"/>
17    <model id="model2" name="Circadian Chaos" language="urn:sedml:language:cellml" source="model1">
18      <listOfChanges>
19        <changeAttribute target="/cellml:model/cellml:component[@name='MT']/cellml:variable[@name='vMT']/
20          @initial_value" newValue="0.28"/>
21        <changeAttribute target="/cellml:model/cellml:component[@name='T2']/cellml:variable[@name='vdT']/
22          @initial_value" newValue="4.8"/>
23      </listOfChanges>
24    </model>
25  </listOfModels>
26
27  <listOfTasks>
28    <task id="task1" name="Limit Cycle" modelReference="model1" simulationReference="simulation1"/>
29    <task id="task2" name="Strange attractors" modelReference="model2" simulationReference="simulation1"/
30    >
31  </listOfTasks>
32  <listOfDataGenerators>
33    <dataGenerator id="time" name="time">
34      <listOfVariables>
35        <variable id="t" taskReference="task1" target="/cellml:model/cellml:component[@name='environment
36          ']/cellml:variable[@name='time']" />
37      </listOfVariables>
38      <math:math>
39        <math:ci>t</math:ci>
40      </math:math>
41    </dataGenerator>
42
43    <dataGenerator id="tim1" name="tim mRNA">
44      <listOfVariables>
45        <variable id="v0" taskReference="task1" target="/cellml:model/cellml:component[@name='MT']/
46          cellml:variable[@name='MT']" />
47      </listOfVariables>
48      <math:math>
49        <math:ci>v0</math:ci>
50      </math:math>
51    </dataGenerator>
52
53    <dataGenerator id="per_tim" name="nuclear PER-TIM complex">
54      <listOfVariables>
55        <variable id="v1" taskReference="task1" target="/cellml:model/cellml:component[@name='CN']/
56          cellml:variable[@name='CN']" />
57      </listOfVariables>
58      <math:math>
59        <math:ci>v1</math:ci>
60      </math:math>
61    </dataGenerator>
62
63    <dataGenerator id="tim2" name="tim mRNA (changed parameters)">
64      <listOfVariables>
65        <variable id="v2" taskReference="task2" target="/cellml:model/cellml:component[@name='MT']/
66          cellml:variable[@name='MT']" />
67      </listOfVariables>
68      <math:math>
69        <math:ci>v2</math:ci>
70      </math:math>
71    </dataGenerator>
72  </listOfDataGenerators>
73
74  <listOfOutputs>
75    <plot2D id="plot1" name="tim mRNA with Oscillation and Chaos">
76      <listOfCurves>
77        <curve id="c1" logX="false" logY="false" xDataReference="time" yDataReference="tim1" />
78        <curve id="c2" logX="false" logY="false" xDataReference="time" yDataReference="tim2" />
79      </listOfCurves>
80    </plot2D>
81    <plot2D id="plot2" name="tim mRNA limit cycle (Oscillation)">
82      <listOfCurves>
83        <curve id="c3" logX="false" logY="false" xDataReference="per_tim" yDataReference="tim1" />
84      </listOfCurves>
85    </plot2D>
86    <plot2D id="plot3" name="tim mRNA limit cycle (chaos)">
87      <listOfCurves>
88        <curve id="c4" logX="false" logY="false" xDataReference="per_tim2" yDataReference="tim2" />
89      </listOfCurves>

```

```
90      </plot2D>
91    </listOfOutputs>
92  </sedML>
```

**Listing C.2:** *LeLoup Model Simulation Description in SED-ML*


### C.3 The IkappaB-NF-kappaB signaling module (SBML)

The following example provides a SED-ML description for the simulation of the IkappaB-NF-kappaB signaling module based on the publication by Hoffmann, Levchenko, Scott and Baltimore “The IkappaB-NF-kappaB signaling module: temporal control and selective gene activation.” (PubMed ID: 12424381)

This model is referenced by its SED-ML ID `model1` and refers to the model with the MIRIAM URN [urn:miriam:biomodels.db:BIOMD0000000140](#). Software applications interpreting this example know how to dereference this URN and access the model in BioModels Database [Le Novère et al., 2006].

The simulation description specifies one simulation `simulation1`, which is a uniform timecourse simulation that simulates the model for 41 hours. `task1` then applies this simulation to the model.

As output this simulation description collects four parameters: `Total_NFkBn`, `Total_IkBbeta`, `Total_IkBeps` and `Total_IkBalpa`. These variables are to be plotted against the simulation time and displayed in four separate plots, as shown in Figure C.3.

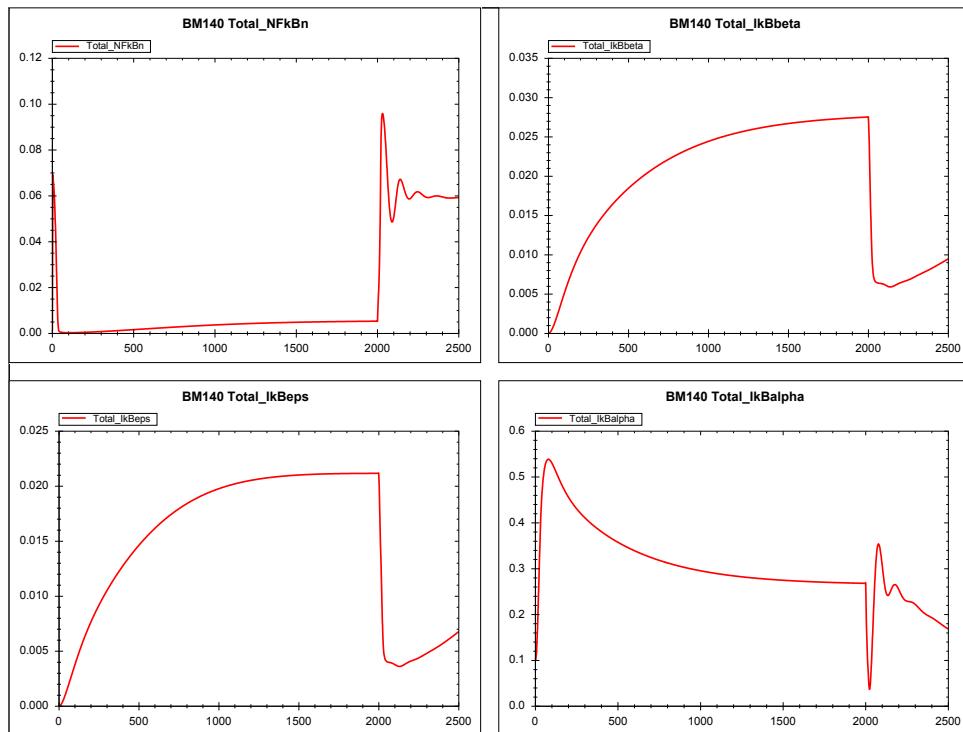

**Figure C.3:** The simulation result gained from the simulation description given in listing C.3

The SED-ML description of the simulation experiment is given in listing C.3.

```

1 <?xml version="1.0" encoding="utf-8"?>
2 <sedML xmlns="http://sed-ml.org/" level="1" version="1">
3   <listOfSimulations>
4     <uniformTimeCourse id="simulation1"
5       initialTime="0" outputStartTime="0" outputEndTime="2500"
6       numberOfPoints="1000" >
7       <algorithm kisaoID="KISAO:0000019"/>
8     </uniformTimeCourse>
9   </listOfSimulations>
10  <listOfModels>
11    <model id="model1" language="urn:sedml:language:sbml" source="urn:miriam:biomodels.db:BIOMD0000000140
12      "/>
13  </listOfModels>
14  <listOfTasks>
15    <task id="task1" modelReference="model1"
16      simulationReference="simulation1"/>
17  </listOfTasks>
18  <listOfDataGenerators>
19    <dataGenerator id="time" name="time">
20      <listOfVariables>
21        <variable id="time1" taskReference="task1" symbol="urn:sedml:symbol:time"/>
22      </listOfVariables>
```

```

22      <math xmlns="http://www.w3.org/1998/Math/MathML">
23          <ci>time1</ci>
24      </math>
25  </dataGenerator>
26  <dataGenerator id="Total_NFkBn" name="Total_NFkBn">
27      <listOfVariables>
28          <variable id="Total_NFkBn1" taskReference="task1"
29              target="/sbml:sbml:model:sbml:listOfParameters/sbml:parameter[@id='Total_NFkBn1']"/>
30      </listOfVariables>
31      <math xmlns="http://www.w3.org/1998/Math/MathML">
32          <ci>Total_NFkBn1</ci>
33      </math>
34  </dataGenerator>
35  <dataGenerator id="Total_IkBbeta" name="Total_IkBbeta">
36      <listOfVariables>
37          <variable id="Total_IkBbeta1" taskReference="task1"
38              target="/sbml:sbml:model:sbml:listOfParameters/sbml:parameter[@id='Total_IkBbeta1']"/>
39      </listOfVariables>
40      <math xmlns="http://www.w3.org/1998/Math/MathML">
41          <ci>Total_IkBbeta1</ci>
42      </math>
43  </dataGenerator>
44  <dataGenerator id="Total_IkBeps" name="Total_IkBeps">
45      <listOfVariables>
46          <variable id="Total_IkBeps1" taskReference="task1"
47              target="/sbml:sbml:model:sbml:listOfParameters/sbml:parameter[@id='Total_IkBeps1']"/>
48      </listOfVariables>
49      <math xmlns="http://www.w3.org/1998/Math/MathML">
50          <ci>Total_IkBeps1</ci>
51      </math>
52  </dataGenerator>
53  <dataGenerator id="Total_IkBalpha" name="Total_IkBalpha">
54      <listOfVariables>
55          <variable id="Total_IkBalpha1" taskReference="task1"
56              target="/sbml:sbml:model:sbml:listOfParameters/sbml:parameter[@id='Total_IkBalpha1']"/>
57      </listOfVariables>
58      <math xmlns="http://www.w3.org/1998/Math/MathML">
59          <ci>Total_IkBalpha1</ci>
60      </math>
61  </dataGenerator>
62 </listOfDataGenerators>
63 <listOfOutputs>
64     <plot2D id="plot1" name="BM140 Total_NFkBn">
65         <listOfCurves>
66             <curve id="c1" logX="false" logY="false" xDataReference="time"
67                 yDataReference="Total_NFkBn" />
68         </listOfCurves>
69     </plot2D>
70     <plot2D id="plot2" name="BM140 Total_IkBbeta">
71         <listOfCurves>
72             <curve id="c2" logX="false" logY="false" xDataReference="time"
73                 yDataReference="Total_IkBbeta" />
74         </listOfCurves>
75     </plot2D>
76     <plot2D id="plot3" name="BM140 Total_IkBeps">
77         <listOfCurves>
78             <curve id="c3" logX="false" logY="false" xDataReference="time"
79                 yDataReference="Total_IkBeps" />
80         </listOfCurves>
81     </plot2D>
82     <plot2D id="plot4" name="BM140 Total_IkBalpha">
83         <listOfCurves>
84             <curve id="c4" logX="false" logY="false" xDataReference="time"
85                 yDataReference="Total_IkBalpha" />
86         </listOfCurves>
87     </plot2D>
88 </listOfOutputs>
89 </sedML>

```

**Listing C.3:** *IkappaB-NF-kappaB signaling Model Simulation Description in SED-ML*

## D. The COMBINE archive

A COMBINE archive is a single file containing the various documents (and in the future, references to documents), necessary for the description of a model and all associated data and procedures. This includes for instance, but not limited to, simulation experiment descriptions in SED-ML, all models needed to run the simulations in SBML and their graphical representations in SBGN-ML. It is a convenient alternative if a model source URI cannot be resolved, or if an end-user is offline.

The SED-ML archive described in appendix D of the SED-ML Level 1 Version 1 specification formed the basis for the COMBINE archive with contributions from the SED-ML and COMBINE communities.

The COMBINE archive is described at: <http://combine.org/documents/archive>

# Bibliography

- D. A. Beard, R. Britten, M. T. Cooling, A. Gurny, M. D. Halstead, P. J. Hunter, J. Lawson, C. M. Lloyd, J. Marsh, A. Miller, D. P. Nickerson, P. M. Nielsen, T. Nomura, S. Subramanium, S. M. Wimalaratne, and T. Yu. CellML metadata standards, associated tools and repositories. *Philosophical transactions. Series A, Mathematical, physical, and engineering sciences*, 367(1895):1845–1867, May 2009. ISSN 1364-503X. doi: 10.1098/rsta.2008.0310.
- D. Bell. UML basics, Part III: The class diagram. IBM, the rational edge, 2003. [http://download.boulder.ibm.com/ibmdl/pub/software/dw/rationaleedge/nov03/t\\_modelinguml\\_db.pdf](http://download.boulder.ibm.com/ibmdl/pub/software/dw/rationaleedge/nov03/t_modelinguml_db.pdf).
- T. Berners-Lee, R. Fielding, and L. Masinter. Uniform Resource Identifier (URI): Generic Syntax, 2005. URL <http://www.ietf.org/rfc/rfc3986.txt>.
- T. Bray, J. Paoli, C.M. Sperberg-McQueen, E. Maler, F. Yergeau, and J. Cowan. Extensible Markup Language (XML) 1.1 (Second Edition), 2006. URL <http://www.w3.org/TR/xml11/>.
- Business Process Technology group. BPMN – business process modeling notation. poster, 2009. URL <http://bpt.hpi.uni-potsdam.de/Public/BPMNCorner>.
- D. Carlisle, P. Ion, R. Miner, and N. Popelier. Mathematical Markup Language (MathML) version 2.0. *W3C Recommendation*, 21, 2001.
- J. Clarke and S. DeRose. XML Path Language (XPath) Version 1.0, 1999. URL <http://www.w3.org/TR/xpath/>.
- Melanie Courtot, N. Juty, Christian Knüpfer, D. Waltemath, A. Dräger, A. andFinney, M. Golebiewski, S. Hoops, S. Keating, D.B. Kell, S. Kerrien, J. Lawson, A. Lister, J. Lu, R. Machne, P. Mendes, M. Pocock, N. Rodriguez, A. Villeger, S. Wimalaratne, C. Laibe, M. Hucka, and N. Le Novère. Controlled vocabularies and semantics in systems biology. 2011.
- J.O. Dada, I. Spasić, N.W. Paton, and P. Mendes. SBRML: a markup language for associating systems biology data with models. *Bioinformatics (Oxford, England)*, 26(7):932–938, April 2010. ISSN 1367-4811. doi: 10.1093/bioinformatics/btq069.
- M.B. Elowitz and S. Leibler. A synthetic oscillatory network of transcriptional regulators. *Nature*, 403(6767):335–338, January 2000.
- D.C. Fallside, P. Walmsley, et al. XML schema part 0: Primer. *W3C recommendation*, 2, 2001.
- N. Goddard, M. Hucka, F. Howell, H. Cornelis, K. Skankar, and D. Beeman. Towards NeuroML: Model Description Methods for Collaborative Modeling in Neuroscience. *Phil. Trans. Royal Society series B*, 356:1209–1228, 2001.
- S. Hoops, S. Sahle, C. Lee, J. Pahle, N. Simus, M. Singhal, L. Xu, P. Mendes, and U. Kummer. COPASI - a COmplex PAthway SImlator. *Bioinformatics (Oxford, England)*, 22(24):3067–3074, December 2006. ISSN 1460-2059. doi: 10.1093/bioinformatics/btl485.
- M. Hucka, A. Finney, H. M. Sauro, H. Bolouri, J. C. Doyle, H. Kitano, A. P. Arkin, B. J. Bornstein, D. Bray, A. Cornish-Bowden, A. A. Cuellar, S. Dronov, E. D. Gilles, M. Ginkel, V. Gor, I. I. Goryanin, W. J. Hedley, T. C. Hodgman, J. H. Hofmeyr, P. J. Hunter, N. S. Juty, J. L. Kasberger, A. Kremling, U. Kummer, N. Le Novere, L. M. Loew, D. Lucio, P. Mendes, E. Minch, E. D. Mjolsness, Y. Nakayama, M. R. Nelson, P. F. Nielsen, T. Sakurada, J. C. Schaff, B. E. Shapiro, T. S. Shimizu, H. D. Spence, J. Stelling, K. Takahashi, M. Tomita, J. Wagner, and J. Wang. The systems biology markup language (SBML): a medium for representation and exchange of biochemical network models. *Bioinformatics*, 19(4):524–531, March 2003. ISSN 1367-4803. doi: 10.1093/bioinformatics/btg015.

- M. Hucka, F.T. Bergmann, S. Hoops, S. Keating, S. Sahle, and D.J. Wilkinson. The Systems Biology Markup Language (SBML): Language Specification for Level 3 Version 1 Core (Release 1 Candidate). *Nature Precedings*, January 2010. ISSN 1756-0357. doi: 10.1038/npre.2010.4123.1.
- N. Le Novère, B. Bornstein, A. Broicher, M. Courtot, M. Donizelli, H. Dharuri, L. Li, H. Sauro, M. Schilstra, B. Shapiro, J. L. Snoep, and M. Hucka. BioModels Database: a free, centralized database of curated, published, quantitative kinetic models of biochemical and cellular systems. *Nucleic Acids Res*, 34(Database issue), January 2006. ISSN 1362-4962.
- C. Li, M. Donizelli, N. Rodriguez, H. Dharuri, L. Endler, V. Chelliah, L. Li, E. He, A. Henry, M. Stefan, J. Snoep, M. Hucka, N. Le Novère, and C. Laibe. BioModels Database: An enhanced, curated and annotated resource for published quantitative kinetic models. *BMC Systems Biology*, 4(1):92+, June 2010. ISSN 1752-0509. doi: 10.1186/1752-0509-4-92.
- C.M. Lloyd, M.D.B. Halstead, and P.F. Nielsen. CellML: its future, present and past. *Prog Biophys Mol Biol*, 85:433–450, 2004.
- C.M. Lloyd, J.R. Lawson, P.J. Hunter, and P.F. Nielsen. The CellML model repository. *Bioinformatics*, 24(18):2122, 2008.
- OMG. *UML 2.2 Superstructure and Infrastructure*, February 2009. URL <http://www.omg.org/spec/UML/2.2/>.
- S. Pemberton et al. XHTML 1.0: The Extensible HyperText Markup Language—W3C Recommendation 26 January 2000. *World Wide Web Consortium (W3C)(August 2002)*, 2002.
- W3C. XML Schema Part 1: Structures Second Edition. W3C Recommendation, October 2004. URL <http://www.w3.org/TR/xmlschema-1/>.
- D. Waltemath, R. Adams, D.A. Beard, F.T. Bergmann, U.S. Bhalla, R. Britten, V. Chelliah, M.T. Cooling, J. Cooper, E. Crampin, A. Garny, S. Hoops, M. Hucka, P. Hunter, E. Klipp, C. Laibe, A. Miller, I. Moraru, D. Nickerson, P. Nielsen, M. Nikolski, S. Sahle, H. Sauro, H. Schmidt, J.L. Snoep, D. Tolle, O. Wolkenhauer, and N. Le Novère. Minimum information about a simulation experiment (MIASE). *PLoS Comput Biol*, page in the press, 2011.
- S.A. White et al. Business process modeling notation (BPMN) version 1.0. *Business Process Management Initiative, BPMI. org*, 2004.