EX NO :14
.

AIM:

   To implement a K - Means clustering technique using python language.

EXPLANATION:

- Import KMeans from sklearn.cluster
- Assign X and Y.
- Call the function KMeans().
- Perform scatter operation and display the output.

SOURCE CODE:

```
Import numpy as np
import pandas as pd
from matplotlib import pyplot as plt
from sklearn.datasets.samples_generator import make_blobs
from sklearn.cluster import KMeans
X, y = make_blobs(n_samples=300, centers=4, cluster_std=0.60, random_state=0)
plt.scatter(X[:,0], X[:,1])
wcss = []
for i in range(1, 11):
        kmeans = KMeans(n_clusters=i, init='k-means++', max_iter=300, n_init=10,
random_state=0)
        kmeans.fit(X)
        wcss.append(kmeans.inertia_)
plt.plot(range(1, 11), wcss)
plt.title('Elbow Method')
plt.xlabel('Number of clusters')
plt.ylabel('WCSS')
plt.show()
kmeans = KMeans(n_clusters=4, init='k-means++', max_iter=300, n_init=10,
random_state=0)
pred_y = kmeans.fit_predict(X)
plt.scatter(X[:,0], X[:,1])
plt.scatter(kmeans.cluster_centers_[:, 0], kmeans.cluster_centers_[:, 1], s=300, c='red')
plt.show()
```

*   SEENUVASAN S

OUTPUT :
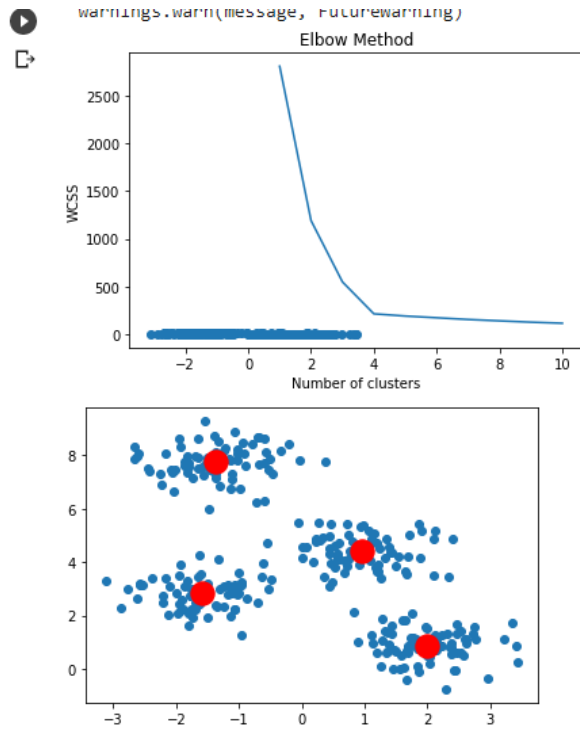
RESULT: Thus the above execution of the algorithm has been successfully executed.