

DAY 12 MY SQL ASSIGNMENT

USE slatask;

CREATE TABLE students (

id INT PRIMARY KEY,

class VARCHAR(10),

name VARCHAR(50),

marks INT

);

INSERT INTO students VALUES

(1,'A','Arun',85),

(2,'A','Bala',78),

(3,'A','Charan',92),

(4,'A','Divya',85),

(5,'B','Esha',88),

(6,'B','Farhan',75),

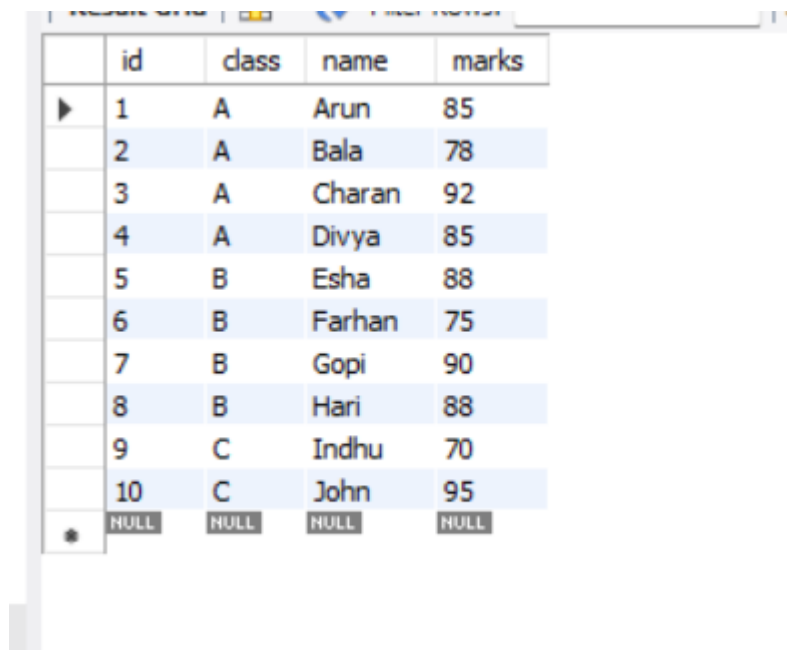
(7,'B','Gopi',90),

(8,'B','Hari',88),

(9,'C','Indhu',70),

(10,'C','John',95);

select * from students ;



The screenshot shows a database query result in a table format. The table has four columns: 'id', 'class', 'name', and 'marks'. There are 10 rows of data, each representing a student. The first row has id 1, class A, name Arun, and marks 85. The second row has id 2, class A, name Bala, and marks 78. The third row has id 3, class A, name Charan, and marks 92. The fourth row has id 4, class A, name Divya, and marks 85. The fifth row has id 5, class B, name Esha, and marks 88. The sixth row has id 6, class B, name Farhan, and marks 75. The seventh row has id 7, class B, name Gopi, and marks 90. The eighth row has id 8, class B, name Hari, and marks 88. The ninth row has id 9, class C, name Indhu, and marks 70. The tenth row has id 10, class C, name John, and marks 95. Below the table, there is a row with four NULL values.

	id	class	name	marks
▶	1	A	Arun	85
	2	A	Bala	78
	3	A	Charan	92
	4	A	Divya	85
	5	B	Esha	88
	6	B	Farhan	75
	7	B	Gopi	90
	8	B	Hari	88
	9	C	Indhu	70
	10	C	John	95
•	NULL	NULL	NULL	NULL

-- Not null constraint

```
CREATE TABLE student_notnull(  
id INT,  
name VARCHAR(50) NOT NULL,  
marks INT  
);
```

```
INSERT INTO student_notnull VALUES(1,NULL,80);
```

A screenshot of a database error message. On the left, a red 'x' icon is next to the text '131 09:45:18 INSERT INTO student_notnull VALUES(1,NULL,80)'. On the right, the text 'Error Code: 1048. Column 'name' cannot be null' is displayed.


131 09:45:18 INSERT INTO student_notnull VALUES(1,NULL,80) Error Code: 1048. Column 'name' cannot be null

■ UNIQUE Constraint

```
CREATE TABLE student_unique(  
id INT,  
email VARCHAR(50) UNIQUE,  
marks INT  
);
```

```
INSERT INTO student_unique VALUES(1,'a@gmail.com',80);
```

```
INSERT INTO student_unique VALUES(2,'a@gmail.com',90);
```

A screenshot of a database error message. On the left, a red 'x' icon is next to the text '135 09:48:29 INSERT INTO student_unique VALUES(2,'a@gmail.com',90)'. On the right, the text 'Error Code: 1062. Duplicate entry 'a@gmail.com' for key 'student_unique.email'' is displayed.


135 09:48:29 INSERT INTO student_unique VALUES(2,'a@gmail.com',90) Error Code: 1062. Duplicate entry 'a@gmail.com' for key 'student_unique.email'

CHECK CONSTRAINT

```
CREATE TABLE student_check(  
id INT,  
name VARCHAR(50),  
marks INT CHECK(marks >= 0 AND marks <= 100)  
);
```

```
INSERT INTO student_check VALUES(1,'Arun',90);
```

```
INSERT INTO student_check VALUES(2,'Bala',150);
```

A screenshot of a database error message. On the left, a red 'x' icon is next to the text '138 09:50:22 INSERT INTO student_check VALUES(2,'Bala',150)'. On the right, the text 'Error Code: 3819. Check constraint 'student_check_chk_1' is violated.' is displayed.

138 09:50:22 INSERT INTO student_check VALUES(2,'Bala',150) Error Code: 3819. Check constraint 'student_check_chk_1' is violated.

-- DEFAULT Constraint

```
CREATE TABLE student_default(  

```

```
id INT,  
name VARCHAR(50),  
city VARCHAR(20) DEFAULT 'Chennai'  
);  
  
INSERT INTO student_default(id,name)  
VALUES(1,'Arun');
```