

Authors

Please complete the following fields with your group (stream) number and you name with ISU ID number.

[GROUP (STREAM) ID] Computer Vision

Name, ISU id

The task and guidelines were prepared by Andrei Zhdanov and Sergei Shavetov, ITMO University, 2025.

Practical Assignment No 2. Hough Transform

Study of the Hough transform to find geometric primitives.

To implement the current practical assignment task we would need OpenCV, scikit-image and NumPy libraries along with image display functions we wrote during the Image Processing class. We import OpenCV's `cv2` library as `cv` for easier use.

```
In [1]: # Import OpenCV library as both cv2 and cv
import cv2
import cv2 as cv
# Import NumPy library as np
import numpy as np
# Import math for, yes we just need math
import math
# Import scikit-image transform library for Hough transformation
import skimage.transform
# Import functions from our utility library
from pa_utils import ShowImages, exit
```

Introduction

In the current practical assignment, we will learn some basic object detection methods that allow searching for objects on an image using the common locus method.

Common Locus of Points

The main principle of the Hough transform [1] is to find a common *locus of points*. For example, this approach is used when designing a triangle along three given sides. At first

one side of the triangle is laid off, after that the ends of the segment are considered as the centers of circles with radii equal to the lengths of the second and third segments. The intersection of the two circles is the common locus of points, from where the segments are drawn to the ends of the first segment. In other words, a *voting* of two points was held in favor of the probable location of the third vertex of the triangle. As a result of *voting* the *winner* was the point that got two *votes* (the points on the circles got one vote each, and outside them, they got zero), see Fig. 1.

[1]: Hough, P. V. C. (1962, December 18). Method and means for recognizing complex patterns (U.S. Patent No. 3,069,654). Google Patents.

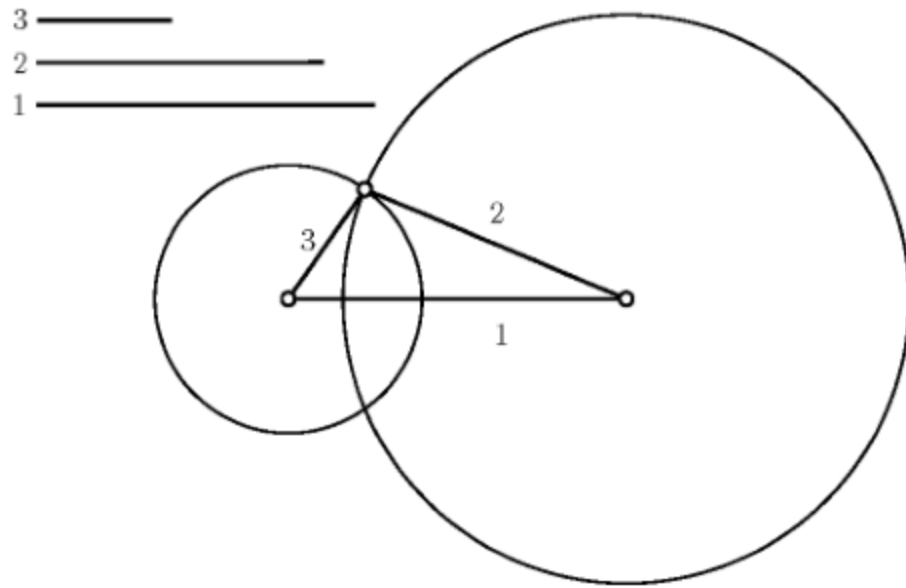


Fig. 1. Finding a triangle by the given three sides.

Let's generalize this idea for working with real data when the image has a large number of special feature points participating in the vote. Let us assume that it is necessary to search a circle of known radius in a binary point set, and in this set, there may also be false points that do not lie on the desired circle. The set of possible circle centers for the desired radius around each characteristic point forms a circle of radius , see Fig. 2 below. Thus, the point corresponding to the maximum intersection of the number of circles will be the center of the required radius circle.

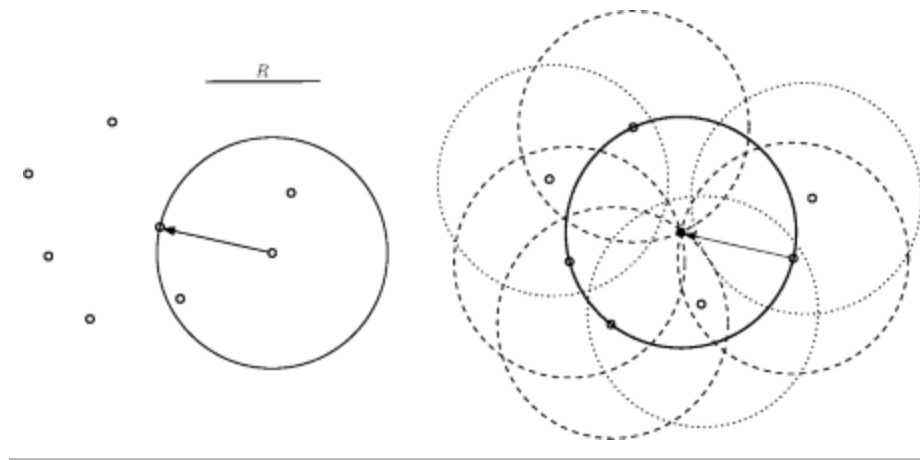


Fig. 2. Searching a circle of known radius in a point set.

Classic Hough Transform

The classic Hough transform is based on the considered point voting idea. It was originally designed to select lines on binary images. The Hough transform uses the parameter space to search for geometric primitives. The most well-known parametric equation of lines is:

This equation has a problem as it can not be used to define lines that are parallel to the y axis, so the Hough transform uses another common parametric equation of a line by a point and an inclination angle:

where

- ρ is the radius vector drawn from the origin to the line;
- θ is the inclination angle of the radius vector.

Let the straight line in the Cartesian coordinate system be given by the given equation, from which it is easy to calculate the radius vector ρ and angle θ . Then we can define the Hough parameter space with coordinated ρ and θ . As a result, each line of the source Cartesian space will be represented by a single point with coordinates ρ_0 θ_0 in the Hough parameter space, see Fig. 3.

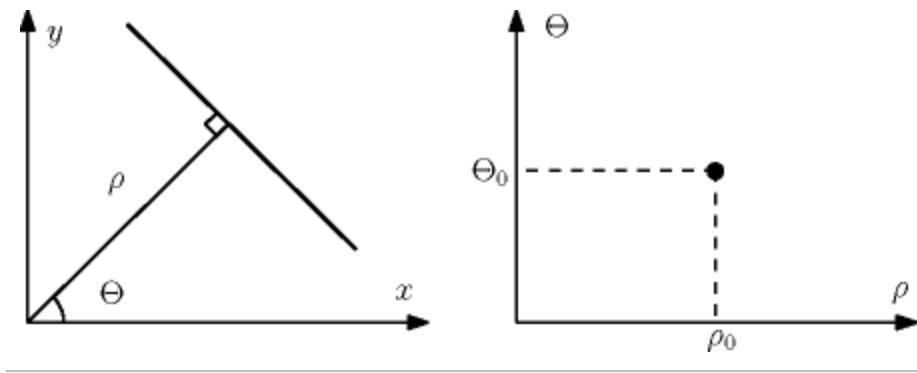


Fig. 3. Representation of a straight line in Hough space.

During the Hough transform all lines that pass via points in the source Cartesian space are converted to points in the Hough parameter space and vote for corresponding lines. As a result, the parameter space sums upvotes given for various lines. In general, the parameter space is continuous, however, in a digital form, it is stored as a matrix. Therefore, in the Hough transform the Hough space is called *accumulator* and is a matrix that stores voting information.

An infinite number of straight lines can be drawn passing through any of the points in the source Cartesian coordinate space and they will generate a sinusoidal response function in the parameter space. Thus, any two sinusoidal response functions in the parameter space will intersect at the point only if the points originating them in the source Cartesian space lie on a single straight line, see Fig. 4. Based on this, we can conclude that to find straight lines in the source space, it is necessary to find all the local maxima of the accumulator matrix.

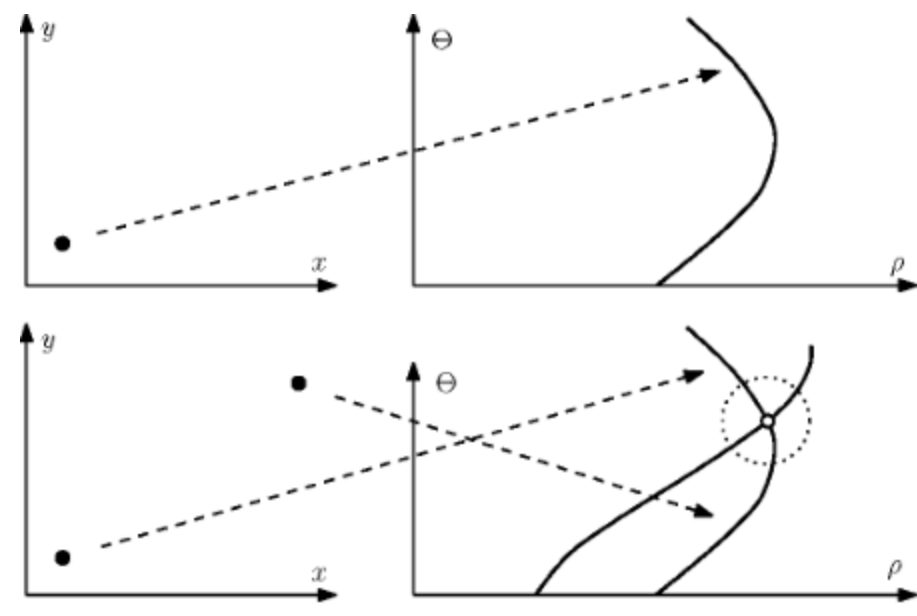


Fig. 4. Voting in the Hough parameter space.

The considered line search algorithm can be used in the same way to search for any other curve described in space by some function with a certain number of parameters

$1 \leq n \leq 255$, which will only affect the dimension of the parameter space.

Let us use the Hough transform to search for circles of a given radius r . It is known that a circle on a plane is described by the formula:

$$(x - x_0)^2 + (y - y_0)^2 = r^2$$

The set of centers of all possible circles of radius r passing through a feature point forms a circle of radius r around that point. Due to this the response function in the Hough transform for finding circles is a circle of the same size centered at the voting point, see Fig. 2. Then, similarly to the previous case, it is necessary to find the local maxima of the accumulator function $A(x, y)$ in the space of parameters (x, y) , which will be the centers of the required circles.

The Hough transform is invariant to shift, scaling, and rotation. Taking into account that under projective transformations of three-dimensional space, straight lines always go only to straight lines (in the degenerate case, to points), the Hough transform makes it possible to detect lines invariantly not only to affine transformations of the plane but also to the group of projective transformations in space.

Task 1. Search for Lines

Take three arbitrary images containing lines. Search for straight lines using various implementations of the Hough transform. Plot the found lines on the original image. Mark the start and end points of the lines. Determine the lengths of the shortest and longest lines, and calculate the number of lines found.

1.1 Hough Transform for Lines with OpenCV

OpenCV library provides two implementations for the Hough transform algorithm for search of the straight lines:

- `cv2.HoughLines(image, rho, theta, threshold) -> lines` function performs the classic Hough line transform of an `image` and searches for straight lines. The `rho` and `theta` parameters define the subdivision of Hough parameter space for the corresponding axis. The `threshold` parameter defines the threshold, i.e., the number of votes that a line should get to be added to the returned `lines` array. Each line in returned `lines` array is an infinite line which is defined by `rho` () and `theta` () parameters.
- `cv2.HoughLinesP(image, rho, theta, threshold, minLineLength, maxLineGap) -> lines` function performs the probabilistic Hough line transform of an `image` and searches for straight lines. The main function parameters are the same, however, two extra are added: these are `minLineLength` for a minimum

line length, so no line shorter than this won't be selected, and `maxLineGap` for a maximum gap between two segments of the line to consider them to be the same line instead of two separate ones. The returned 2-dimensional `lines` array contains the start and end points of each of the found line segments as arrays of four: `1 1 2 2`.

1.1.1 Classic Hough Transform for Lines with OpenCV

To execute the Hough line transform in OpenCV first have to preprocess an image to get edges by executing the Canny algorithm.

```
In [2]: # Read an image from a file in BGR
fn = "images/barcode.png"
I1 = cv.imread(fn, cv.IMREAD_COLOR)
if not isinstance(I1, np.ndarray) or I1.data == None:
    print("Error reading file \"{}\"".format(fn))
    exit()

# Preprocess with Canny algorithm
I1edge = cv.Canny(I1, 50, 200, None, 3)
# Display it
ShowImages([("Source image", I1),
            ("Edges", I1edge)], 2)
```



Then run the Hough line transform to get line parameters.

```
In [3]: # Find lines with Hough transform
# Distance resolution: 1 pix
# Angle resolution: 1 deg in rad
# Accumulator threshold: 100
I1classic = cv.HoughLines(I1edge, 1, np.pi / 180, 100)
```

Finally, we can draw infinite lines by returned parameters with the help of the `cv2.line()` function.

```

In [4]: # Create output images
I1classic_out = I1.copy()
I1classic_lines = np.zeros_like(I1)
h, w = I1.shape[:2]
l = math.sqrt(h ** 2 + w ** 2)


# Go through all found lines and display them
if I1classic is not None:
    for i in range(0, len(I1classic)):
        rho = I1classic[i][0][0]
        theta = I1classic[i][0][1]
        a, b = math.cos(theta), math.sin(theta)
        x0, y0 = a * rho, b * rho
        pt1 = np.int32((x0 - l * b, y0 + l * a))
        pt2 = np.int32((x0 + l * b, y0 - l * a))
        cv.line(I1classic_out, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)
        cv.line(I1classic_lines, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)

# Display it
print("Found {} lines".format(len(I1classic)))
ShowImages([("OpenCV lines", I1classic_lines),
             ("OpenCV lines highlighted", I1classic_out)], 2)


```

Found 61 lines

OpenCV lines

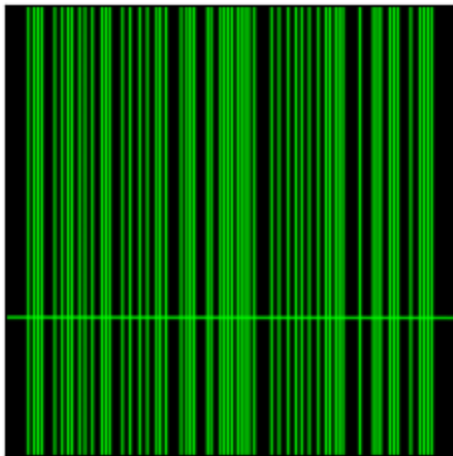

OpenCV lines highlighted

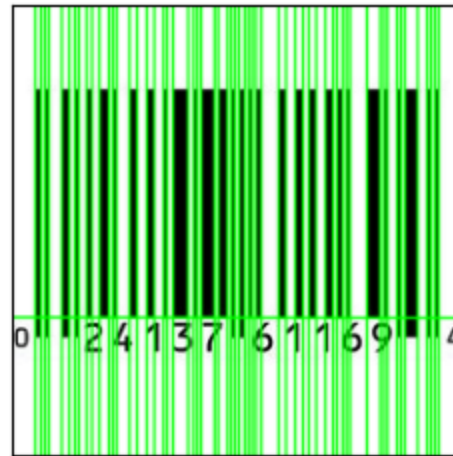

1.1.2 Self-work

Self-work

Take **three** arbitrary images and execute the classic Hough transform with OpenCV. Display the found lines and print their number.

Notes.

1. You may have to change the Hough transform parameters to match your images.

```
In [5]: files = ["images/barcode.png", "images/pa2_fig4.png", "images/pa2_fig1.png"]

for fn in files:
    I = cv.imread(fn, cv.IMREAD_COLOR)
    if not isinstance(I, np.ndarray) or I.data == None:
        print("Error reading file {}".format(fn))
        exit()


    Iedge = cv.Canny(I, 50, 200, None, 3)
    lines = cv.HoughLines(Iedge, 1, np.pi / 180, 110)

    Iout = I.copy()
    Ilines = np.zeros_like(I)
    h, w = I.shape[:2]
    l = math.sqrt(h ** 2 + w ** 2)


    if lines is not None:
        for i in range(len(lines)):
            rho, theta = lines[i][0][0], lines[i][0][1]
            a, b = math.cos(theta), math.sin(theta)
            x0, y0 = a * rho, b * rho
            pt1 = np.int32((x0 - l * b, y0 + l * a))
            pt2 = np.int32((x0 + l * b, y0 - l * a))
            cv.line(Iout, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)
            cv.line(Ilines, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)

    print("{}: found {} lines".format(fn, 0 if lines is None else len(lines)))
    ShowImages([("Lines", Ilines), ("Lines on the source", Iout)], 2)
```

images/barcode.png: found 60 lines

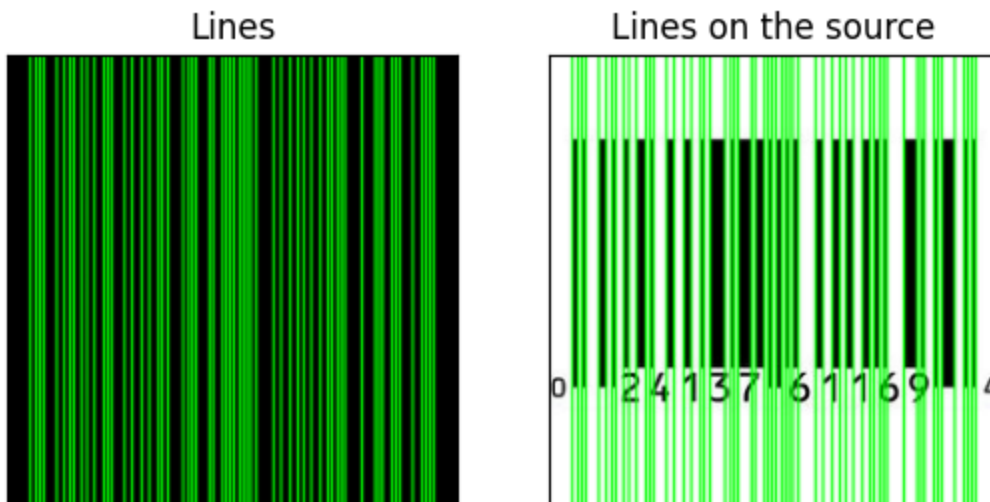

images/pa2_fig4.png: found 24 lines

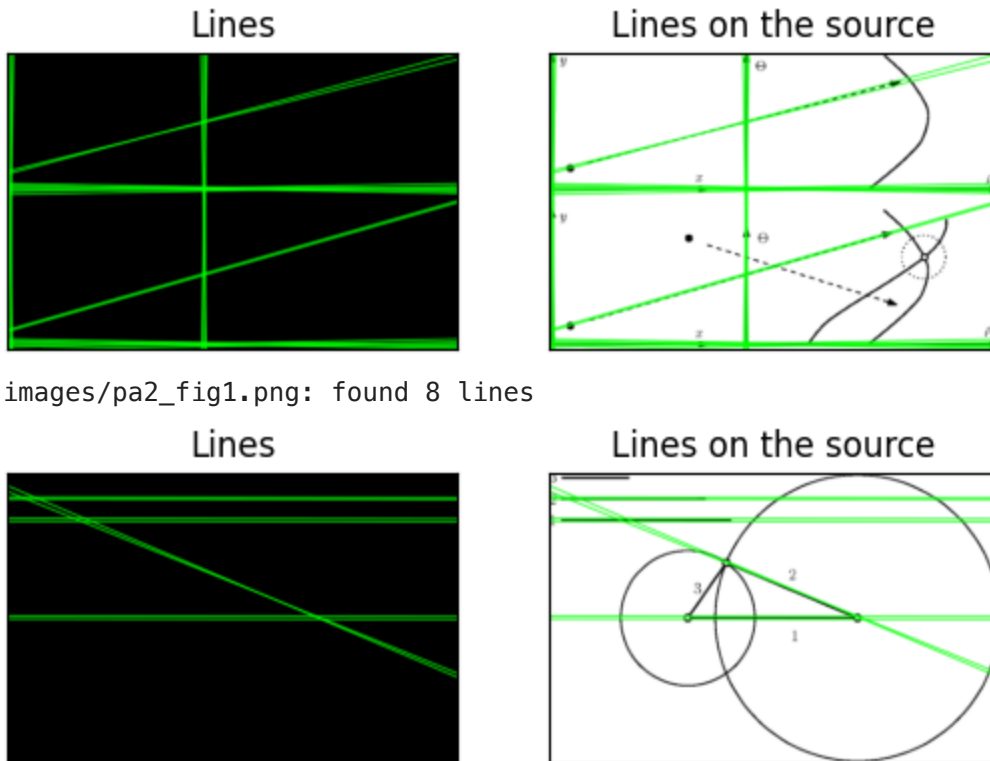

images/pa2_fig1.png: found 8 lines

1.1.3 Probabilistic Hough Transform for Lines with OpenCV

The probabilistic Hough line transform is executed similarly:

```
In [6]: # Find lines with Probabilistic Hough transform
# Distance resolution: 1 pix
# Angle resolution: 1 deg in rad
# Accumulator threshold: 50
# Minimum line length: 50
# Maximum line gap: 4
I1prob = cv.HoughLinesP(I1edge, 1, np.pi / 180, 50, None, 50, 4)
```

The probabilistic Hough transform will return an array of pairs of the endpoints of the found line segments which we can use to draw them on top of the source image:

```
In [7]: # Create and output image
I1prob_out = I1.copy()
I1prob_lines = np.zeros_like(I1)

# Go through all found lines and display them
if I1prob is not None:
    min_line = max_line = I1prob[0][0]
    min_line_len = max_line_len = math.sqrt((min_line[0] - min_line[2]) ** 2 +
    for i in range(1, len(I1prob)):
        l = I1prob[i][0]
        line_len = math.sqrt((l[0] - l[2]) ** 2 + (l[1] - l[3]) ** 2)
        if line_len < min_line_len:
            min_line_len = line_len
            min_line = l
```

```

if line_len > max_line_len:
    max_line_len = line_len
    max_line = l
cv.line(I1prob_out, (l[0], l[1]), (l[2], l[3]), (0, 255, 0), 1, cv.LINE_
cv.line(I1prob_lines, (l[0], l[1]), (l[2], l[3]), (0, 255, 0), 1, cv.LIN

# Draw min and max lines
cv.line(I1prob_out, (min_line[0], min_line[1]), (min_line[2], min_line[3])
cv.line(I1prob_lines, (min_line[0], min_line[1]), (min_line[2], min_line[3]
cv.line(I1prob_out, (max_line[0], max_line[1]), (max_line[2], max_line[3])
cv.line(I1prob_lines, (max_line[0], max_line[1]), (max_line[2], max_line[3]

# Display it
print("Found {} lines".format(len(I1prob)))
print("The shortest found line length is {}".format(min_line_len))
print("The shortest found line is ({} , {}) - ({} , {})".format(min_line[0],
print("The longest found line length is {}".format(max_line_len))
print("The longest found line is ({} , {}) - ({} , {})".format(max_line[0],
ShowImages([("OpenCV lines", I1prob_lines),
            ("OpenCV lines highlighted", I1prob_out)], 2)

```

Found 60 lines


The shortest found line length is 118.0

The shortest found line is (175, 165) - (175, 47)

The longest found line length is 140.0

The longest found line is (179, 185) - (179, 45)

OpenCV lines

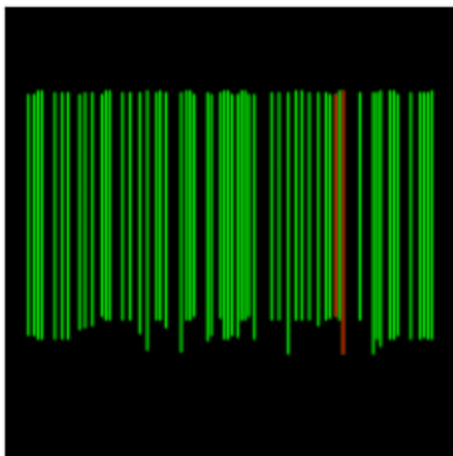

OpenCV lines highlighted



1.1.4 Self-work

Self-work

Take **three** arbitrary images and execute the probabilistic Hough transform with OpenCV. Display the found lines, print their number, and print the shortest and the longest line parameters.

Notes.

1. You may have to change the Hough transform parameters to match your images.

```
In [8]: files = ["images/barcode.png", "images/pa2_fig4.png", "images/pa2_fig1.png"]

for fn in files:
    I = cv.imread(fn, cv.IMREAD_COLOR)
    if not isinstance(I, np.ndarray) or I.data == None:
        print("Error reading file {}".format(fn))
        exit()

    Iedge = cv.Canny(I, 50, 200, None, 3)
    lines = cv.HoughLinesP(Iedge, 1, np.pi / 180, 60, None, 40, 5)

    Iout = I.copy()
    Ilines = np.zeros_like(I)


    if lines is not None:
        min_line = max_line = lines[0][0]
        min_len = max_len = math.sqrt((min_line[0] - min_line[2]) ** 2 + (min_line[1] - min_line[3]) ** 2)
        for i in range(len(lines)):
            s = lines[i][0]
            sl = math.sqrt((s[0] - s[2]) ** 2 + (s[1] - s[3]) ** 2)
            if sl < min_len:
                min_len, min_line = sl, s
            if sl > max_len:
                max_len, max_line = sl, s
            cv.line(Iout, (s[0], s[1]), (s[2], s[3]), (0, 255, 0), 1, cv.LINE_AA)
            cv.line(Ilines, (s[0], s[1]), (s[2], s[3]), (0, 255, 0), 1, cv.LINE_AA)

        for img in (Iout, Ilines):
            cv.line(img, (min_line[0], min_line[1]), (min_line[2], min_line[3]), (0, 255, 0), 1, cv.LINE_AA)
            cv.line(img, (max_line[0], max_line[1]), (max_line[2], max_line[3]), (0, 255, 0), 1, cv.LINE_AA)

        print("{}: found {} lines".format(fn, len(lines)))
        print("shortest {:.1f} px: ({}, {}) - ({}, {})".format(min_len, min_line[0], min_line[1], min_line[2], min_line[3]))
        print("longest {:.1f} px: ({}, {}) - ({}, {})".format(max_len, max_line[0], max_line[1], max_line[2], max_line[3]))
        ShowImages(["Segments", Ilines), ("Segments on the source", Iout)], 2)
```

```
images/barcode.png: found 60 lines
shortest 118.0 px: (175, 165) - (175, 47)
longest 140.0 px: (179, 185) - (179, 45)
```

Segments

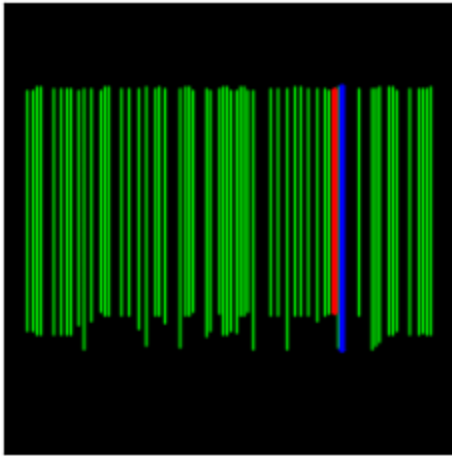


Segments on the source




images/pa2_fig4.png: found 30 lines
 shortest 41.2 px: (38, 108) – (78, 98)
 longest 243.0 px: (195, 289) – (438, 289)

Segments

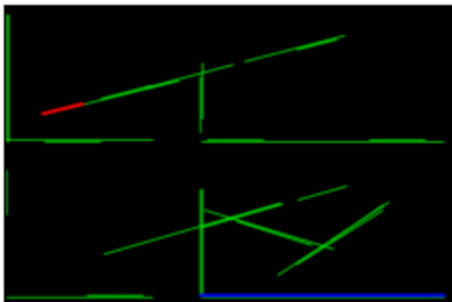


Segments on the source

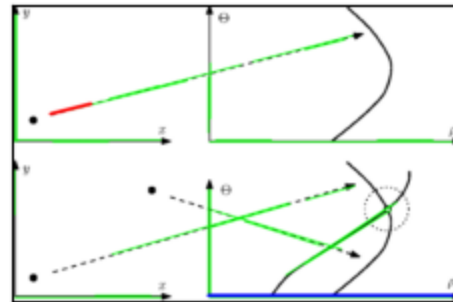


images/pa2_fig1.png: found 12 lines
 shortest 73.0 px: (6, 5) – (79, 5)
 longest 177.0 px: (134, 147) – (311, 147)

Segments

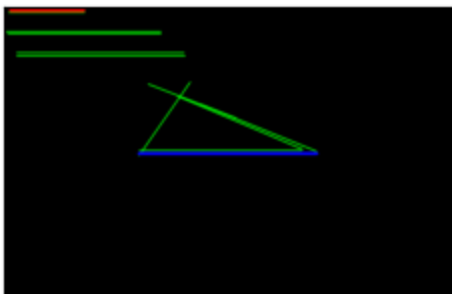

Segments on the source

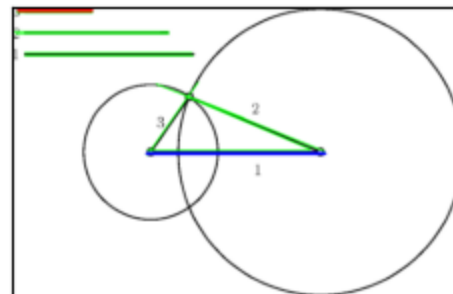

1.2 Hough Transform for Lines with scikit-image

Unfortunately, OpenCV does not provide the functionality to obtain the Hough accumulator matrix. However, the scikit-image library also provides functions that we can use to perform the Hough transform, and opposite to OpenCV, scikit-image executes it in several steps thus allowing us to process and display the Hough parameter space.

Same as OpenCV, scikit-image provides two implementations for the Hough transform algorithm for search of the straight lines. These are classic and probabilistic approaches. The main difference between OpenCV and scikit-image libraries is that in the classic approach the Hough transform contains two steps:

1. Calculation of the Hough parameter space;
2. Search for peaks in the Hough parameter space to find lines.

The following functions for Hough transform for lines are provided in scikit-image:

- `skimage.transform.hough_line(image, thetas) -> hspace, angles, distances` function performs the classic Hough line transform of an `image` and calculates the Hough accumulator matrix (parameter space). The `thetas` parameter defines an array of angles in radians to subdivide the Hough parameter space (defaults to 180 values in the range `(0, pi)`). It returns a tuple with three items, which are `hspace` with the Hough transform accumulator matrix; `angles` with the array of angles in radians which define the Hough parameter space; and `distances` with the array of distances which define the Hough parameter space.
- `skimage.transform.hough_line_peaks(hspace, angles, distances, min_distance, min_angle, threshold, num_peaks) -> accum, theta, rho` function performs the search for peak values in the Hough parameter space acquired at the previous step. The input parameters list contains the data acquired from `skimage.transform.hough_line()` function with additional parameters for minimum distance and angle between two lines to consider them separate lines (`min_distance` and `min_angle` parameters, defined in the accumulator matrix dimensions), the minimum peak value `threshold` to choose (defaults to the half of the maximum `hspace` value) and the maximum number of peaks to search for (`num_peaks` parameter). It returns a tuple of three items (`accum`, `theta`, `rho`) corresponding to peak values in the Hough accumulator matrix. Each line in the returned arrays is an infinite line which is defined by a pair of `rho` () and `theta` () parameters with the same array indices that scored the corresponding `accum` votes.
- `skimage.transform.probabilistic_hough_line(image, threshold, line_length, line_gap, theta) -> lines` function performs the probabilistic Hough line transform of an `image` and searches for straight lines. The main function parameters are similar to the ones used in OpenCV. They are the `threshold` for the minimum required peak value, the minimum line length to consider (`line_length` parameter), the maximum gap between two segments of the same line (`line_gap` parameter), and an array `theta` of angles to use during transformation. The returned 3-dimensional `lines` array contains the start

and end points of each of the found line segments as 2D arrays with four elements:

1 1 2 2 .

1.2.1 Classic Hough Transform for Lines with scikit-image

Same with the OpenCV library, to execute the Hough line transform in scikit-image first we have to preprocess an image to get edges by executing the Canny algorithm.

```
In [9]: # Read an image from file in BGR
fn = "images/barcode.png"
I1 = cv.imread(fn, cv.IMREAD_COLOR)
if not isinstance(I1, np.ndarray) or I1.data == None:
    print("Error reading file \"{ }\".format(fn))
    exit()


# Preprocess with Canny algorithm
I1edge = cv.Canny(I1, 50, 200, None, 3)
# Display it
ShowImages([("Source image", I1),
            ("Edges", I1edge)], 2)
```



Then run the Hough line transform to get the Hough parameter space accumulator matrix. Since now we have the accumulator matrix we can display it as well to see how the parameter space is formed.

```
In [10]: # Do Hough transform
# We will use 360 angles instead of the default 180
thetas = np.linspace(-np.pi / 2, np.pi / 2, 360, endpoint = False)
I1h, angles, distances = skimage.transform.hough_line(I1edge, theta = thetas
# Show Hough parameter space
# We will resize it to make square for a better display
ShowImages([("Parameter space", cv.resize(I1h.astype(np.float32) / np.max(I1
```

Parameter space

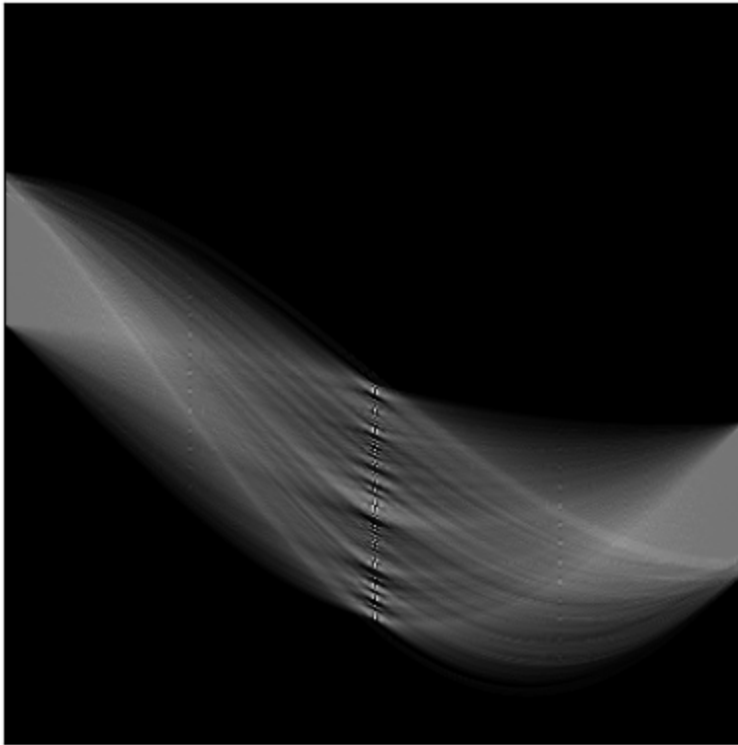

Now we can search for the maxima values in the Hough parameter space.

```
In [11]: # Find lines with Hough transform
# Minimum distance between lines: 0
# Minimum angle between lines: 0
I1accum, I1theta, I1rho = skimage.transform.hough_line_peaks(I1h, angles, di
```

Finally, we can draw the infinite lines found by the scikit-image Hough transform implementation with subsequent calls to the `cv2.line()` function.


```
In [12]: # Create output images
I1classic_out = I1.copy()
I1classic_lines = np.zeros_like(I1)
h, w = I1.shape[:2]
l = math.sqrt(h ** 2 + w ** 2)

# Go through all found lines and display them
if I1theta is not None and I1rho is not None:
    for i in range(0, len(I1theta)):
        a, b = math.cos(I1theta[i]), math.sin(I1theta[i])
        x0, y0 = a * I1rho[i], b * I1rho[i]
        pt1 = np.int32((x0 - l * b, y0 + l * a))
        pt2 = np.int32((x0 + l * b, y0 - l * a))
        cv.line(I1classic_out, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)
        cv.line(I1classic_lines, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)

# Display it
print("Found {} lines".format(len(I1theta)))
```

```
ShowImages(["scikit-image Lines", I1classic_lines),
            ("SkImage Lines on the source", I1classic_out)], 2)
```

Found 238 lines

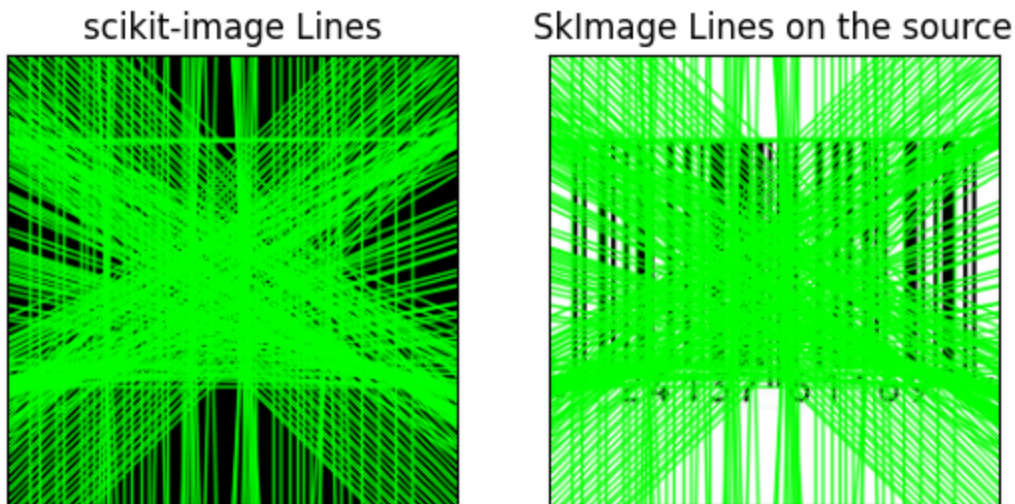

1.2.2 Self-work

Self-work

Take **three** arbitrary images and execute the classic Hough transform with the scikit-image library. Display the Hough parameter space and found lines. Print the found lines their number.

Notes.

1. You may have to change the Hough transform parameters to match your images.

```
In [13]: files = ["images/barcode.png", "images/pa2_fig4.png", "images/pa2_fig1.png"]
          thetas = np.linspace(-np.pi / 2, np.pi / 2, 360, endpoint = False)

          for fn in files:
              I = cv.imread(fn, cv.IMREAD_COLOR)
              if not isinstance(I, np.ndarray) or I.data == None:
                  print("Error reading file \"{}\"".format(fn))
                  exit()

              Iedge = cv.Canny(I, 50, 200, None, 3)
              Ih, angles, distances = skimage.transform.hough_line(Iedge, theta = thetas
              accum, theta, rho = skimage.transform.hough_line_peaks(Ih, angles, distance

              Iout = I.copy()
              Ilines = np.zeros_like(I)
              h, w = I.shape[:2]
              l = math.sqrt(h ** 2 + w ** 2)

              for i in range(len(thetas)):
                  a, b = math.cos(thetas[i]), math.sin(thetas[i])
```



```

x0, y0 = a * rho[i], b * rho[i]
pt1 = np.int32((x0 - l * b, y0 + l * a))
pt2 = np.int32((x0 + l * b, y0 - l * a))
cv.line(Iout, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)
cv.line(Ilines, pt1, pt2, (0, 255, 0), 1, cv.LINE_AA)


```

```


space = cv.resize(Ih.astype(np.float32) / np.max(Ih), (Ih.shape[1], Ih.shape[0]))
print("{}: found {} lines".format(fn, len(theta)))
ShowImages([("Parameter space", space), ("Lines", Ilines), ("Lines on the source", Iout)])

```


images/barcode.png: found 57 lines

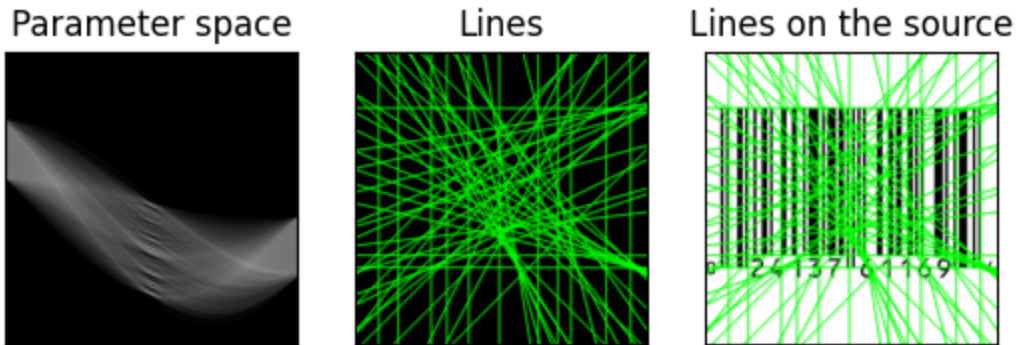

images/pa2_fig4.png: found 5 lines

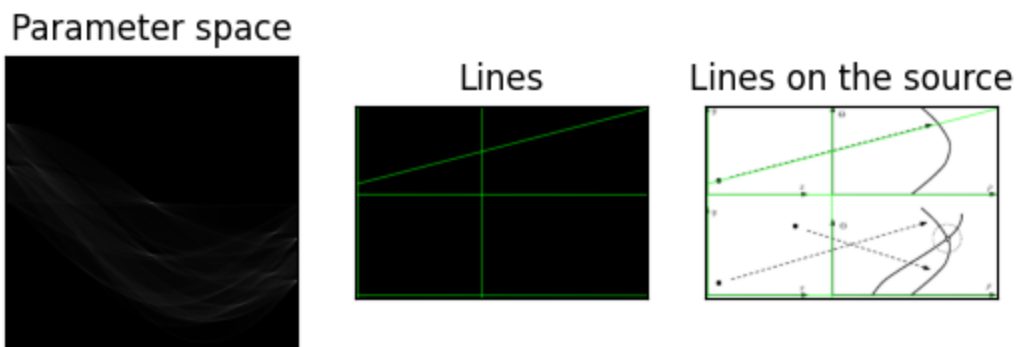

images/pa2_fig1.png: found 6 lines

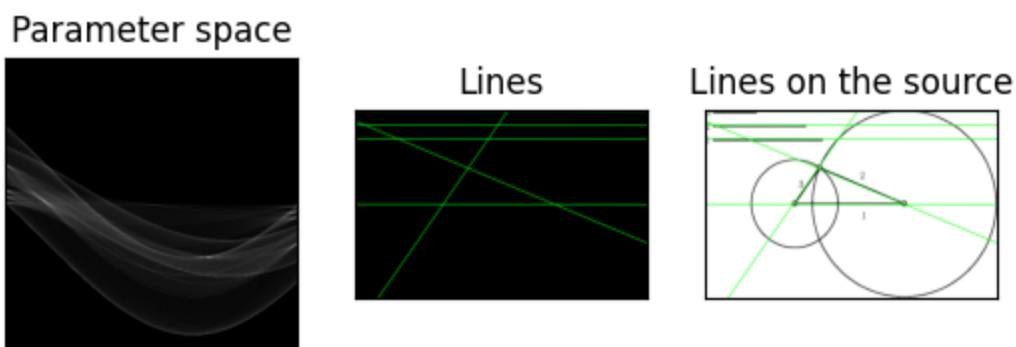

1.2.3 Probabilistic Hough Transform for Lines with scikit-image

The probabilistic Hough line transform with scikit-image is executed in a way similar to OpenCV. The only two differences are that now you have to use the

```

skimage.transform.probabilistic_hough_line(image, threshold,
line_length, line_gap, theta) -> lines

```

parameters are in 3D array instead of 2D array in OpenCV. So, the line length calculation will be as follows:

```
line = lines[i]
line_len = math.sqrt((line[0][0] - line[1][0]) ** 2 + (line[0][1] -
line[1][1]) ** 2)
```

And the line drawing will be as follows:

```
color = (0, 0, 255) # Color in OpenCV is defined in BGR, so this
will be the Red color
cv.line(Iout, lines[i][0], lines[i][1], color, 1, cv.LINE_AA)
```

1.2.4 Self-work

Self-work

Take **three** arbitrary images and execute the probabilistic Hough transform with the scikit-image library. Display the found lines, print their number, and print the shortest and the longest line parameters.

Notes.

1. You may have to change the Hough transform parameters to match your images.

```
In [14]: files = ["images/barcode.png", "images/pa2_fig4.png", "images/pa2_fig1.png"]
thetas = np.linspace(-np.pi / 2, np.pi / 2, 360, endpoint = False)

for fn in files:
    I = cv.imread(fn, cv.IMREAD_COLOR)
    if not isinstance(I, np.ndarray) or I.data == None:
        print("Error reading file {}".format(fn))
        exit()

    Iedge = cv.Canny(I, 50, 200, None, 3)
    lines = skimage.transform.probabilistic_hough_line(Iedge, threshold = 40,

    Iout = I.copy()
    Ilines = np.zeros_like(I)


    if len(lines) > 0:
        lengths = [math.sqrt((p0[0] - p1[0]) ** 2 + (p0[1] - p1[1]) ** 2) for p0, p1 in lines]
        imin, imax = int(np.argmin(lengths)), int(np.argmax(lengths))
        for p0, p1 in lines:
            cv.line(Iout, p0, p1, (0, 255, 0), 1, cv.LINE_AA)
            cv.line(Ilines, p0, p1, (0, 255, 0), 1, cv.LINE_AA)
        for img in (Iout, Ilines):
            cv.line(img, lines[imin][0], lines[imin][1], (0, 0, 255), 2, cv.LINE_AA)
            cv.line(img, lines[imax][0], lines[imax][1], (255, 0, 0), 2, cv.LINE_AA)

        print("{}: found {} lines".format(fn, len(lines)))
        print("shortest {:.1f} px: {} - {}".format(lengths[imin], lines[imin][0], lines[imin][1]))
```

```
print("longest {:.1f} px: {} - {}".format(lengths[imax], lines[imax][0],
ShowImages(["Segments", Ilines), ("Segments on the source", Iout)], 2)
```

images/barcode.png: found 76 lines
 shortest 40.0 px: (154, 85) – (154, 45)
 longest 139.0 px: (42, 185) – (42, 46)

Segments

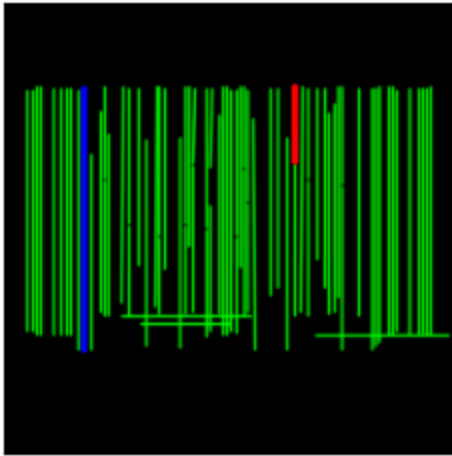


Segments on the source




images/pa2_fig4.png: found 44 lines
 shortest 41.5 px: (38, 109) – (78, 98)
 longest 321.4 px: (38, 110) – (349, 29)

Segments

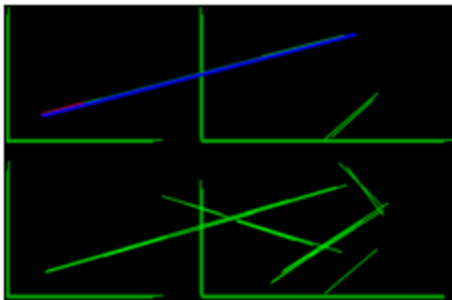


Segments on the source

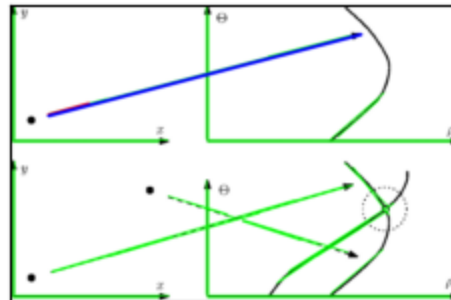


images/pa2_fig1.png: found 35 lines
 shortest 43.1 px: (182, 211) – (166, 171)
 longest 177.0 px: (311, 147) – (134, 147)

Segments

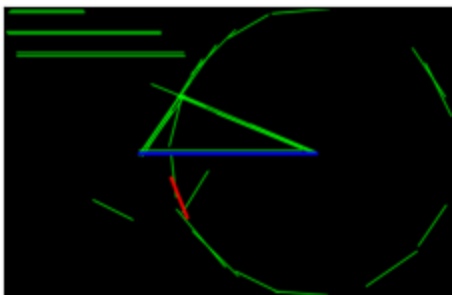

Segments on the source

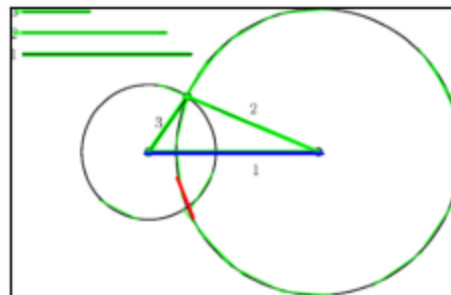

Task 2. Search for Circles

Take three arbitrary images containing circles. Search for circles of a known radius range using the Hough transform. Plot the found circles on the original image and print the number of found circles.

When searching for circles, the Hough parameter space becomes 3-dimensional. The third dimension here is added for the circle radius. Since the circle radius can be of an infinite range, it is required to define this range when executing the Hough transform operations to create the correct accumulator space 3D matrix.

2.1 Hough Transform for Circles with OpenCV

The search for circles with OpenCV is rather straightforward. You don't need to do any image preprocessing as the Canny algorithm is built into a Hough transform implementation. To run Hough transform for circles with OpenCV you have to use the following function:

- `cv.HoughCircles(image, method, dp, minDist, param1, param2, minRadius, maxRadius) -> circles` function is used to execute the Hough transform for Circles on a **grayscale image**. It returns a 2-dimensional array of circles where each circle has three parameters: x_0 y_0 - for the center of the circle and its radius. The Hough transform for circles is parameterized in the following way:
 - `method` parameter defines one of two possible methods for this transformation, it can be either `cv2.HOUGH_GRADIENT` or `cv2.HOUGH_GRADIENT_ALT`. These methods are almost similar, however the second one should give a bit better accuracy.
 - `dp` parameter defines the scale ratio of the accumulator matrix. The resolution of the accumulator matrix is `dp` times smaller than the resolution of the source image. In most cases, `dp` would fit well.
 - `minDist` parameter defines the minimum distance between circle centers to be detected.
 - `param1` is a high threshold that is passed to the Canny edge detector, while the low threshold would be equal to half of `param1`.
 - `param2` parameter defines the threshold for the circle detection. In the case of the `cv2.HOUGH_GRADIENT` method, it is the accumulator matrix value, while for the `cv2.HOUGH_GRADIENT_ALT` method it is the circle quality measure defined in `range` where `is` a perfect circle.
 - `minRadius` and `maxRadius` parameters define the circle radius search range. This will define the third dimension of the Hough parameter space accumulator matrix range.

To display the found circles the `cv2.circle(image, center, radius, color, thickness, lineType)` function may be used to draw a circle on the `image` with

the given `center` point, `radius`, and `thickness`. The `lineType` parameter is used to define the type of the line, which can be set to `cv2.LINE_AA` for an antialiased line.

For example, drawing a circle on an image `Iout` with center `(50, 50)` and radius `10` and thickness `3` with blue color would be written as follows:

```
cv2.circle(Iout, (50, 50), 10, (255, 0, 0), 1)
```

2.1.1 Self-work

Self-work

Implement the search for circles with the Hough transform and OpenCV.

Take **three** arbitrary images and execute the Hough transform for circles with OpenCV. Display the found circles, and print their number.

Note. You may have to change the Hough transform parameters to match your images.

```
In [15]: def make_circles(h, w, specs):
img = np.full((h, w, 3), 245, np.uint8)
for (cx, cy, r) in specs:
    cv.circle(img, (cx, cy), r, (50, 50, 50), 3)
return img

img_coins = cv.imread("images/coins.jpg", cv.IMREAD_COLOR)
img_targets = make_circles(360, 360, [(95, 95, 52), (265, 100, 38), (110, 27
img_rings = make_circles(300, 520, [(110, 150, 62), (270, 150, 46), (410, 15

sources = [("coins.jpg", img_coins, dict(dp=1.2, minDist=55, param1=180, par
        ("targets", img_targets, dict(dp=1.2, minDist=60, param1=150, par
        ("rings", img_rings, dict(dp=1.2, minDist=70, param1=150, param2=


results = []
for name, I, p in sources:
    gray = cv.medianBlur(cv.cvtColor(I, cv.COLOR_BGR2GRAY), 5)
    circles = cv.HoughCircles(gray, cv.HOUGH_GRADIENT, p["dp"], p["minDist"]
    Iout = I.copy()
    n = 0
    if circles is not None:
        circles = np.uint16(np.around(circles))
        n = circles.shape[1]
        for c in circles[0]:
            cv.circle(Iout, (c[0], c[1]), c[2], (0, 255, 0), 2)
            cv.circle(Iout, (c[0], c[1]), 2, (0, 0, 255), 3)
        print("{}: found {} circles".format(name, n))
        results.append("{}: {} circles".format(name, n), Iout)
ShowImages(results, 3)
```

coins.jpg: found 5 circles


targets: found 4 circles

rings: found 3 circles

coins.jpg: 5 circles

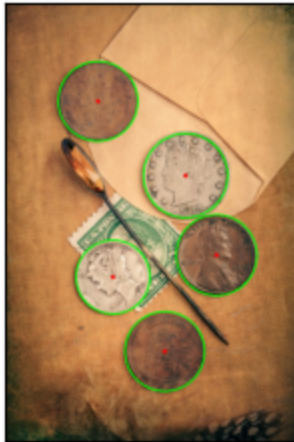

targets: 4 circles



rings: 3 circles



2.2 Hough Transform for Circles with scikit-image

When implementing the Hough transform for circles with scikit-image library you have to do the same two steps as you did for lines. These are:

1. Calculation of the Hough parameter space;
2. Search for peaks in the Hough parameter space to find circles.

Since the Hough transform is split into two steps it means that with scikit-image we can check the Hough parameter space as well.

The following functions for Hough transform for lines are provided in scikit-image:

- `skimage.transform.hough_circle(image, radius, normalize, full_output) -> hspaces` function performs the Hough circle transform of an `image` and calculates the 3-dimensional Hough accumulator matrix. The `radius` parameter is either a scalar to search for a single radius or an array of radii. Two optional parameters allow to `normalize` the output accumulator spaces by the number of pixels required to draw a circle to make different radii circles to have the same weight in the accumulator (*True* by default) and to increase the size of the accumulator by two maximum radii to be able to get `full_output` and find circles with centers at outside of the image (*False* by default). It returns a 3D accumulator Hough parameter space matrix (an array of 2D Hough parameter spaces for each of the radii from the `radius` list).
- `skimage.transform.hough_circle_peaks(hspaces, radii, min_xdistance, min_ydistance, threshold, num_peaks, total_num_peaks, normalize) -> accum, cx, cy, rad` function performs the search for peak values in the 3D Hough parameter space `hspaces` acquired at

the previous step with an array of `radii`. Optional parameters allow specifying the minimum distances between picked circle centers (`min_xdistance` along and `min_ydistance` along), the `threshold` parameter for peaks (half of the maximum `hspaces` value by default), the maximum number of peaks selected in a single layer Hough parameter space and all spaces total (`num_peaks` and `total_num_peaks` parameters correspondingly). Also, it's possible to `normalize` peaks by the radius as otherwise the peaks of the higher radius would be preferred over the the smaller radius (default behavior).

It should be noted that scikit-image also provides a function for the Hough transform for ellipses which is out of the current practical assignment scope. If you are interested, you may try it as well. The arguments are similar to the one used for circles, however, it also allows searching for ellipses with the specified parameters range and returns an array of tuples with found ellipses: `skimage.transform.hough_ellipse(image, threshold = 4, accuracy = 1, min_size = 4, max_size = None) -> [(accumulator, yc, xc, a, b, orientation)]`

Let us take an image with coins and try finding them by the Hough transform. Since scikit-image libraries work with black-and-white images, we have to preprocess it with Canny algorithm to find edges first.

```
In [16]: # Read an image from file in BGR
fn = "images/coins.jpg"
I2 = cv.imread(fn, cv.IMREAD_COLOR)
if not isinstance(I2, np.ndarray) or I2.data == None:
    print("Error reading file \"{0}\"".format(fn))
    exit()

# Preprocess with Canny algorithm
I2edge = cv.Canny(I2, 200, 250)
# Display it
ShowImages([("Source image", I2),
             ("Edges", I2edge)], 2)
```

Source image



Edges




Now we can run the Hough circles transform. Since we know that we are searching for circles in the range from to pixels, so we will define it as our radii range with step

.

```
In [17]: # Find circles with Hough transform
# Detect circles with radii in range from 40 to 60 with step 5
radii = np.arange(58, 99, 5)
I2h = skimage.transform.hough_circle(I2edge, radii)

# Show Hough parameter space
# We will resize it to make square for a better display
spaces = []
for i in range(len(radii)):
    spaces.append(("Radius {}".format(radii[i]), cv.resize(I2h[i].astype(np.float32), (300, 300))))
ShowImages(spaces, 3)
```

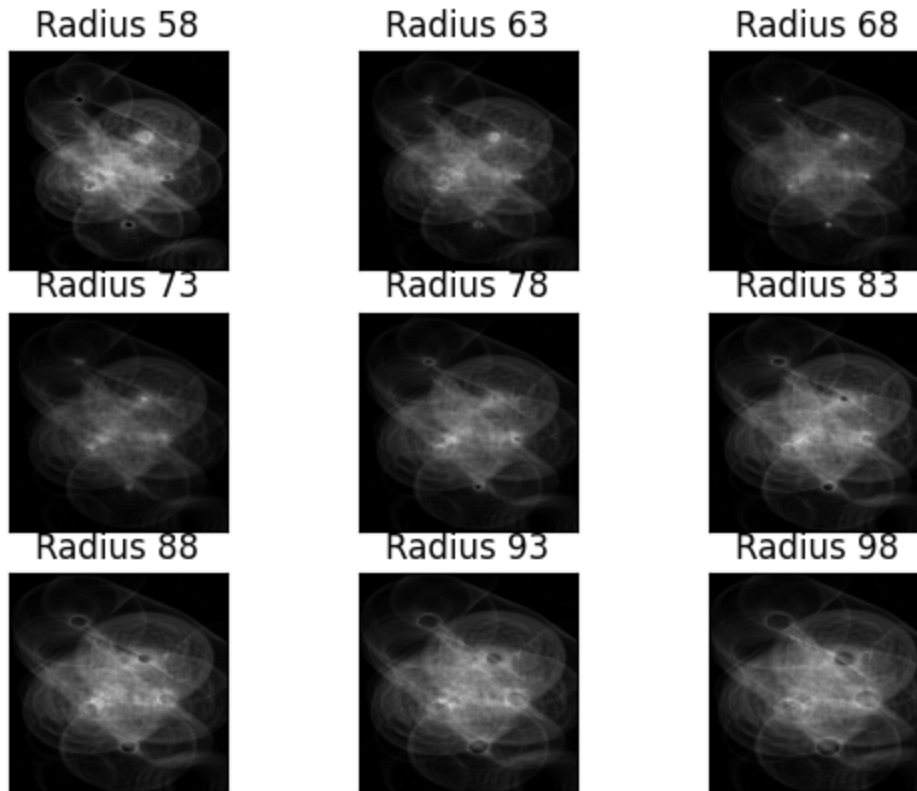Now we can search for maxima values in the Hough parameter spaces and draw the found circles with subsequent calls to the `cv2.circle()` function.

```
In [18]: # Select the most prominent 10 circles
# Minimum distance between centers along X: 30
# Minimum distance between centers along Y: 30
I2accum, I2cx, I2cy, I2radii = skimage.transform.hough_circle_peaks(I2h, rac


# Create output images
I2out = I2.copy()
I2circles = np.zeros_like(I2)

# Go through all found circles and display them
if I2cx is not None and I2cy is not None and I2radii is not None:
    for i in range(0, len(I2cx)):
        center = np.int32((I2cx[i], I2cy[i]))
        radius = int(I2radii[i])
        cv.circle(I2out, center, 1, (0, 255, 0), 1)
        cv.circle(I2out, center, radius, (0, 255, 0), 1)
        cv.circle(I2circles, center, 1, (0, 255, 0), 1)
        cv.circle(I2circles, center, radius, (0, 255, 0), 1)

# Display it
print("Found {} circles".format(len(I2cx)))
ShowImages(["scikit-image Circles", I2circles),
            ("scikit-image Circles on the source", I2out)], 2)
```

Found 6 circles

scikit-image Circles

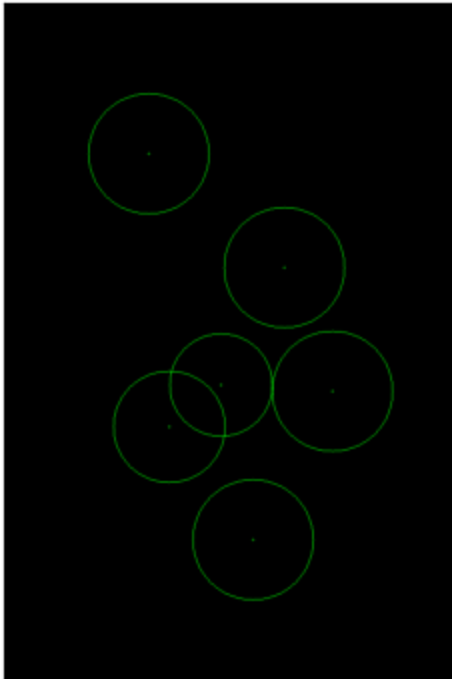

scikit-image Circles on the source



2.2.1 Self-work

Self-work

Take **three** arbitrary images and execute the Hough transform for circles with the scikit-image library. Display the found circles and print their number.

Notes.

1. You may have to change the Hough transform parameters to match your images.

```
In [19]: sk_sources = [("coins.jpg", img_coins, np.arange(58, 99, 5), 48, 6),
                      ("targets", img_targets, np.arange(28, 62, 4), 40, 4),
                      ("rings", img_rings, np.arange(28, 64, 4), 40, 3)]

results = []
for name, I, radii, mind, npeaks in sk_sources:
    edges = cv.Canny(I, 200, 250)
    H = skimage.transform.hough_circle(edges, radii)
    accum, cx, cy, rad = skimage.transform.hough_circle_peaks(H, radii, min_
    Iout = I.copy()
    for i in range(len(cx)):
        center = (int(cx[i]), int(cy[i]))
        r = int(rad[i])
        cv.circle(Iout, center, r, (0, 255, 0), 2)
        cv.circle(Iout, center, 2, (0, 0, 255), 3)
    print("{}: found {} circles".format(name, len(cx)))
```


```
results.append("{}: {} circles".format(name, len(cx)), Iout))
ShowImages(results, 3)
```

coins.jpg: found 6 circles


targets: found 4 circles

rings: found 3 circles

coins.jpg: 6 circles

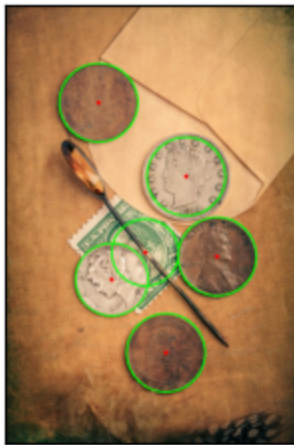

targets: 4 circles



rings: 3 circles



Task 3. Optional

Implement the classic Hough transform algorithms for lines by yourself. Compare your implementation results with the ones obtained in the first parts of the assignment. Highlight the selected points in the Hough parameter space.

To implement the Hough transform for straight lines you have to allocate an accumulator matrix manually and implement the classic algorithm for the Hough transform to fill the accumulator matrix:

For each point of the source space (x, y)

For $\theta = 0$ to 180

$\rho = x \cos \theta + y \sin \theta$

$H(\theta, \rho) = H(\theta, \rho) + 1$

end

end

After the accumulator matrix is filled you should select maxima. The simplest way to do it is to use the thresholding method you learned in the previous class.

Notes.

1. Python implementation for this algorithm would be very slow so consider taking the low-resolution input image.
2. Don't forget to run the Canny algorithm before the Hough transform to filter the edge points.

Self-work (optional)

Implement the Hough transform for straight lines. Display the result.

In [20]: `# TODO Place your solution here`

Questions

Please answer the following questions:

- *What is the main principle of the Hough transform?*

Каждая краевая точка голосует за все примитивы, которые через неё проходят. Голоса копятся в аккумуляторе — для прямой это ячейка (ρ, θ) , для окружности (x_0, y_0, R) . Точки одной реальной линии дают пересечение откликов в одной ячейке, и там вырастает пик. Найти примитивы — значит найти максимумы аккумулятора.

- *May the Hough transform be used to find arbitrary contours that cannot be described analytically?*

Да — обобщённым преобразованием Хафа. Форму без формулы задают эталоном: строят R-таблицу, где для каждого направления градиента на контуре записаны векторы до опорной точки. Краевая точка по своему градиенту откладывает эти векторы и голосует за положение опорной точки. Так ловят любые заданные шаблоном контуры.

- *What are the recurrent and generalized Hough transforms?*

Обобщённое — это и есть метод с R-таблицей для произвольных форм, куда можно добавить оси масштаба и поворота. Рекуррентное преобразование уменьшает параметрическое пространство поэтапно: сначала грубо находят часть параметров, фиксируют их и доуточняют остальные, чтобы не раздувать многомерный аккумулятор.

- *What are the other ways of line parametrization in the Hough transform?*

Кроме нормальной формы (ρ, θ) прямую можно задавать наклоном и сдвигом $y = kx + b$. Но k уходит в бесконечность для вертикалей, поэтому по умолчанию берут (ρ, θ) с ограниченными диапазонами. Иногда прямую описывают двумя точками пересечения с границами кадра.

Conclusion

What have you learned with this task? Don't forget to conclude it.

Разобрался с преобразованием Хафа и погонял его на прямых и окружностях двумя библиотеками — OpenCV и scikit-image. Линии искал на штрихкоде и схемах из методички, окружности — на трёх картинках: фото монет и двух собранных вручную изображениях с кольцами и мишенями.

Главное, что вынес: всё держится на Canny и на порогах. Классический HoughLines выдаёт бесконечные прямые, и порог аккумулятора задаёшь руками; вероятностный HoughLinesP сразу даёт отрезки с концами — удобно мерить длины. scikit-image ценен тем, что показывает сам аккумулятор: видно, как точки голосуют и где набираются максимумы.

Для окружностей в OpenCV хватает одного вызова с диапазоном радиусов, а в scikit-image радиусы перебираешь списком, зато получаешь трёхмерный аккумулятор. Под каждое изображение пороги, радиусы и минимальные расстояния пришлось подбирать отдельно — в этом и состоит основная возня.