

# Source Code for the Project For Portales Theater Reservations System

By: Vern Watkins

Date: 05/11/2022

## The Welcome Page (index.php)

CS 472 Software Engineering Project: Theatre booking system  
By Team: Walker Monaghan, Vern Watkins, Zachary Dowding

**Welcome to the Los Portales Theatre**

**Plays Available**

Play Number	Title	Day and Time	Description
1			
2			
3			

username  
 password

**Log in to View the Seats Available for these plays**

(not to show on this welcome page: the 'Plays Enabled' Home page)

(not to show on this welcome page: the theatre.html page)

(not to show on this welcome page: the administrator page)

(not to show on this welcome page: the login info page)

(not to show on this welcome page: a page that uses a small 'testsqltable' table, just for testing)

Connected successfully

```
<html>
<head>
<style> body { border: solid 5px; border-style: double;} </style>
</head>
<body background="Tan%20Southwest.JPG">
<p align="center">&nbsp;</p>
<p align="center"><font size="4">CS 472 Software Engineering Project: Theatre
booking system<br>
By Team: Walker Monaghan, Vern Watkins, Zachary Dowding<br>
<br>
</font><font size="5"><b>Welcome to the Los Portales Theatre</b></font></p>
<p align="center"><b><font size="5">Plays Available</font></b></p>
<div align="center">
<center>
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse" bordercolor="#111111"
width="70%" id="AutoNumber3">
```

```

<tr>
  <td width="25%" align="center">Play Number</td>
  <td width="25%" align="center">Title</td>
  <td width="25%" align="center">Day and Time</td>
  <td width="25%" align="center">Description</td>
</tr>
<tr>
  <td width="25%" align="center"><font size="4"><b>1</b></font></td>
  <td width="25%" align="center">&nbsp;</td>
  <td width="25%" align="center">&nbsp;</td>
  <td width="25%" align="center">&nbsp;</td>
</tr>
<tr>
  <td width="25%" align="center"><font size="4"><b>2</b></font></td>
  <td width="25%" align="center">&nbsp;</td>
  <td width="25%" align="center">&nbsp;</td>
  <td width="25%" align="center">&nbsp;</td>
</tr>
<tr>
  <td width="25%" align="center"><font size="4"><b>3</b></font></td>
  <td width="25%" align="center">&nbsp;</td>
  <td width="25%" align="center">&nbsp;</td>
  <td width="25%" align="center">&nbsp;</td>
</tr>
</table>
</center>
</div>
<p align="center">&nbsp;</p>
<div align="center">

  <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse" bordercolor="#111111"
width="21%" id="AutoNumber1">
    <tr>
      <td width="50%" align="center">
<font size="4"><b>

      <input type="text" name="username" value="" size="20" style="font:bold; background-
color:#DEB887;"></b></font></td>
      <td width="50%" align="center">&nbsp;username</td>
    </tr>
    <tr>
      <td width="50%" align="center">
<font size="4"><b>

      <input type="text" name="password" value="" size="20" style="font:bold; background-
color:#DEB887;"></b></font></td>
      <td width="50%" align="center">&nbsp;password</td>
    </tr>
  </table>

</div>
<b>

<font size="1">

```

```

<br>

</font>
<font size="4">
<div align="center">
  <center>
    <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse" bordercolor="#111111"
width="60%" id="AutoNumber2">
      <tr>
        <td width="34%" align="right">
<font size="4"><b>

```

```

<input type="submit" name="submitbutton" class="submit" value="Log in"
style="font:bold"></a></b></font></td>
  <td width="86%" align="left"><b>&nbsp; Log in to View the Seats Available for these plays</b></td>
</tr>
</table>
</center>
</div>
</font>

```

```

</b></p>
<p align="center"><b><font size="4"><a href="register.php"><input type="submit" name="submitbutton"
class="submit" value="Register to Log in" style="font:bold"></a></font></b></p>

```

```

<p align="center">
<br><br>
<a href="enabledindex.php">(not to show on this welcome page: the 'Plays Enabled' Home page)</a>
<br><br>
<a href="theatre.html">(not to show on this welcome page: the theatre.html page)</a>
<br><br>
<a href="admin.html">(not to show on this welcome page: the administrator page)</a>
<br><br>
<a href="logininfo.html">(not to show on this welcome page: the login info page)</a>
<br><br>
<a href="sqltest.php">(not to show on this welcome page: a page that uses a small 'testsqltable' table, just for
testing)</a>
</p>

```

```

<?php
/*--- When a regiatered customer logs in:
1. Check that the entered username is in the login table, if not, to show an error message.
while loop through rows of the login table
Does the entered username == a table username?
If so, the password in that row -> $passfromtable

2. If it is in the login table, to store the associated password into a variable, then to check if the entered
password matches the variable: if not, to show an error message.
the entered password in that row -> $passtocheck

3. If it does match, to show a message "You can now click on any play to select seats" (causing them to see the
theatre.html for that play when they click on that play)
if ($passfromtable == $passtocheck) {
  show the message
  reveal a section where the plays LINK to their theatre pages

```

```

}

--*/

// connect to maindb
$servername = "localhost";
$username = "id18453831_sespr22wmd";
$password = "Welcome123cs472*";
$dbname = "id18453831_maindb";

try {
    $con = new PDO("mysql:host=$servername;dbname=$dbname", $username, $password);
    // set the PDO error mode to exception
    $con->setAttribute(PDO::ATTR_ERRMODE, PDO::ERRMODE_EXCEPTION);
    echo "Connected successfully";
    echo '<body>';
    } catch(PDOException $e) {
    echo "Connection failed: " . $e->getMessage();
    }
?>
<br><br><br><br>
</body>
</html>


```

---



---

## The Modified Welcome Page (enabledindex.php)

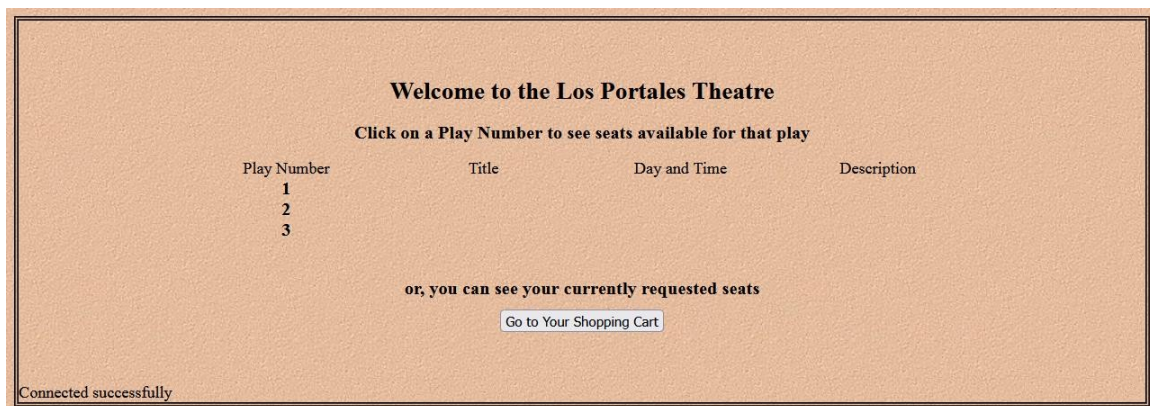

```

<html>
<head>
<style> body { border: solid 5px; border-style: double;} </style>
</head>
<body background="Tan%20Southwest.JPG">
<p align="center">&nbsp;</p>
<p align="center"><font size="4">
<br>
</font><font size="5"><b>Welcome to the Los Portales Theatre</b></font></p>
<p align="center"><b><font size="4">Click on a Play Number to see seats
available for that play</font></b></p>
<div align="center">
<center>

```

```
<table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse" bordercolor="#111111" width="70%" id="AutoNumber3">
```

```
<tr>
```

```
<td width="25%" align="center">Play Number</td>
```

```
<td width="25%" align="center">Title</td>
```

```
<td width="25%" align="center">Day and Time</td>
```

```
<td width="25%" align="center">Description</td>
```

```
</tr>
```

```
<tr>
```

```
<td width="25%" align="center"><font size="4"><b>1</b></font></td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
</tr>
```

```
<tr>
```

```
<td width="25%" align="center"><font size="4"><b>2</b></font></td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
</tr>
```

```
<tr>
```

```
<td width="25%" align="center"><font size="4"><b>3</b></font></td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
<td width="25%" align="center">&nbsp;</td>
```

```
</tr>
```

```
</table>
```

```
<br>
```

```
<br><b><font size="4">or, you can see your currently requested seats<br>
```

```
</font><font size="1">&nbsp;</font></b><br>
```

```
<a href="cart.html">
```

```
<input type="submit" name="" style="font:bold" value="Go to Your Shopping Cart"></a>
```

```
</center>
```

```
</div>
```

```
<p align="center">&nbsp;</p>
```

```
</body>
```

```
</html>
```

```
<?php
```

```
// connect to maindb
```

```
$servername = "localhost";
```

```
$username = "id18453831_sespr22wmd";
```

```
$password = "Welcome123cs472*";
```

```
$database = "id18453831_maindb";
```

```
try {
```

```
$con = new PDO("mysql:host=$servername;dbname=$database", $username, $password);
```

```
// set the PDO error mode to exception
```

```
$con->setAttribute(PDO::ATTR_ERRMODE, PDO::ERRMODE_EXCEPTION);
```

```
echo "Connected successfully";
```

```
echo '<body>';
```

```
} catch(PDOException $e) {
```

```
echo "Connection failed: " . $e->getMessage();
```



}  
?>

## The Registration Page (register.php)

**Registration Page**

First name:

Last name:

Address:

City:

State:

Zip Code:

Telephone (use the format xxx-xxx-xxxx):

Email:

Age:

[Go to the login info page](#)

(note to team: after a successful login (may require registration), the play titles become actively linked to their respective theatre pages  
(or else, after login is successful, we could cause a 'copy' of the theatre page to open,  
with one difference, being that the play titles are actively linked to their respective theatre pages)

**View the Seats Available for these plays**

1 {Title}

2 {Title}

3 {Title}

```
<html>
<head>
<style> body { border: solid 5px; border-style: double;} </style>
</head>
<body background="Tan%20Southwest.JPG">
<p align="center">&nbsp;</p>
<p align="center"><b><font size="5">Registration Page<br>
&nbsp;</font></b></p>

<form method = "post">
<div align="center">
  <center>
    <table border="0" cellpadding="0" cellspacing="0" style="border-collapse: collapse" bordercolor="#111111"
width="36%" id="AutoNumber1">
      <tr>
        <td width="36%" align="right">First name: </td>
        <td width="3%">&nbsp;</td>
        <td width="61%"> <input type="text" name="first_name" value="" size="20" style="font:bold;
background-color:#DEB887;" autofocus></td>
      </tr>
```

```

<tr>
  <td width="36%" align="right">Last name:</td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="last_name" value="" size="20" style="font:bold;
background-color:#DEB887;"></td>
</tr>
<tr>
  <td width="36%" align="right">Address: </td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="address" value="" size="20" style="font:bold; background-
color:#DEB887;"></td>
</tr>
<tr>
  <td width="36%" align="right">City:</td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="city" value="" size="20" style="font:bold; background-
color:#DEB887;"></td>
</tr>
<tr>
  <td width="36%" align="right">State: </td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="state" value="" size="20" style="font:bold; background-
color:#DEB887;"></td>
</tr>
<tr>
  <td width="36%" align="right">Zip Code:</td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="zip_code" value="" size="20" style="font:bold; background-
color:#DEB887;"></td>
</tr>
<tr>
  <td width="36%" align="right">Telephone (use the format xxx-xxx-xxxx): </td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="telephone" value="" size="20" style="font:bold; background-
color:#DEB887;"></td>
</tr>
<tr>
  <td width="36%" align="right">Email: </td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="email" value="" size="20" style="font:bold; background-
color:#DEB887;"></td>
</tr>
<tr>
  <td width="36%" align="right">Age: </td>
  <td width="3%">&nbsp;</td>
  <td width="61%"> <input type="text" name="age" value="" size="20" style="font:bold; background-
color:#DEB887;"></td>
</tr>
</table>
</center>
</div>
<p align="center">
<input type="submit" name="submitbutton" value="Register" style="font:bold;"></a></p>

<!-- style="visibility:hidden" -->

```

```
</form>
```

```
<?php
```

```
$con = mysqli_connect("localhost", "id18453831_sespr22wmd",  
"Welcome123cs472*", "id18453831_maindb");
```

```
if (!$con) {  
    die("Connection failed: " . mysqli_connect_error());  
}
```

```
// INSERT
```

```
if (isset($_POST['submitbutton'])) {  
    $first_name = $_POST["first_name"];  
    $last_name = $_POST["last_name"];  
    $address = $_POST["address"];  
    $city = $_POST["city"];  
    $state = $_POST["state"];  
    $zip_code = $_POST["zip_code"];  
    $telephone = $_POST["telephone"];  
    $email = $_POST["email"];  
    $age = $_POST["age"];
```

```
$gotologinsetup = false;
```

```
// Check if any of the fields are empty
```

```
if (empty($_POST['first_name']) || empty($_POST['last_name']) || empty($_POST['address'])  
    || empty($_POST['city']) || empty($_POST['state']) || empty($_POST['zip_code'])  
    || empty($_POST['telephone']) || empty($_POST['email']) || empty($_POST['age']))  
    { echo 'You haven't filled out all fields correctly. Please go back and try again.'; die; }
```

```
$query = "INSERT INTO customers (first_name, last_name, address, city, state, zip_code, telephone, email,  
age) VALUES ('$first_name', '$last_name', '$address', '$city', '$state', '$zip_code', '$telephone', '$email',  
'$age')";
```

```
// Apply the Insert
```

```
mysqli_query($con, $query);
```

```
//save the customer id into $custid for the logininfo to use
```

```
// SELECT
```

```
$sqlget = "SELECT customer_id FROM customers WHERE email = '$email'";  
$sqldata = mysqli_query($con, $sqlget) or die('error getting the data');
```

```
foreach ($sqldata as $row) {  
    //while($row = mysqli_fetch_array($sqldata)) {  
        $custid = $row['customer_id'];  
    }  
}
```

```
    echo "Welcome $first_name", " Your Member Number is " . $custid . "Click Go to the login info page to set  
up your login info";
```

```
    $gotologinsetup = true;
```

```
// Now make the login info page to open so that the customer can enter the username and password they want
```

```
} // end isset
```

```
?>
```



```
<p align="center">
<a href="logininfo.html">Go to the login info page</a>
</p>
```

(note to team: after a successful login (may require registration), the play titles become actively linked to their respective theatre pages  
(or else, after login is successful, we could cause a 'copy' of the theatre page to open,  
with one difference, being that the play titles are actively linked to their respective theatre pages)

[illegible]

## The Login Info Page (logininfo.html)

## Los Portales Theatre Login Setup

Enter a username:

Enter a password:

Submit

```
<html>
<head>
<style> body { border: solid 5px; border-style: double;} </style>
</head>
<body background="Tan%20Southwest.JPG">
```

```
// I would like to bring $custid in from the registration page, but for now, just make $custid = 99 (as above)
```


```
echo "Hello $user", "Your Member Number is " . $custid;

$sqlget = "INSERT INTO login (customer_id, username, password) VALUES ('$custid', '$user', '$pass')";
mysqli_query($con,$sqlget)

// echo "Login Data Accepted for $user", "\n"; <-- "Syntax Error"

} // end isset
?>
</body>
</html>
```

The Theatre version 1 Page (theatre.html)

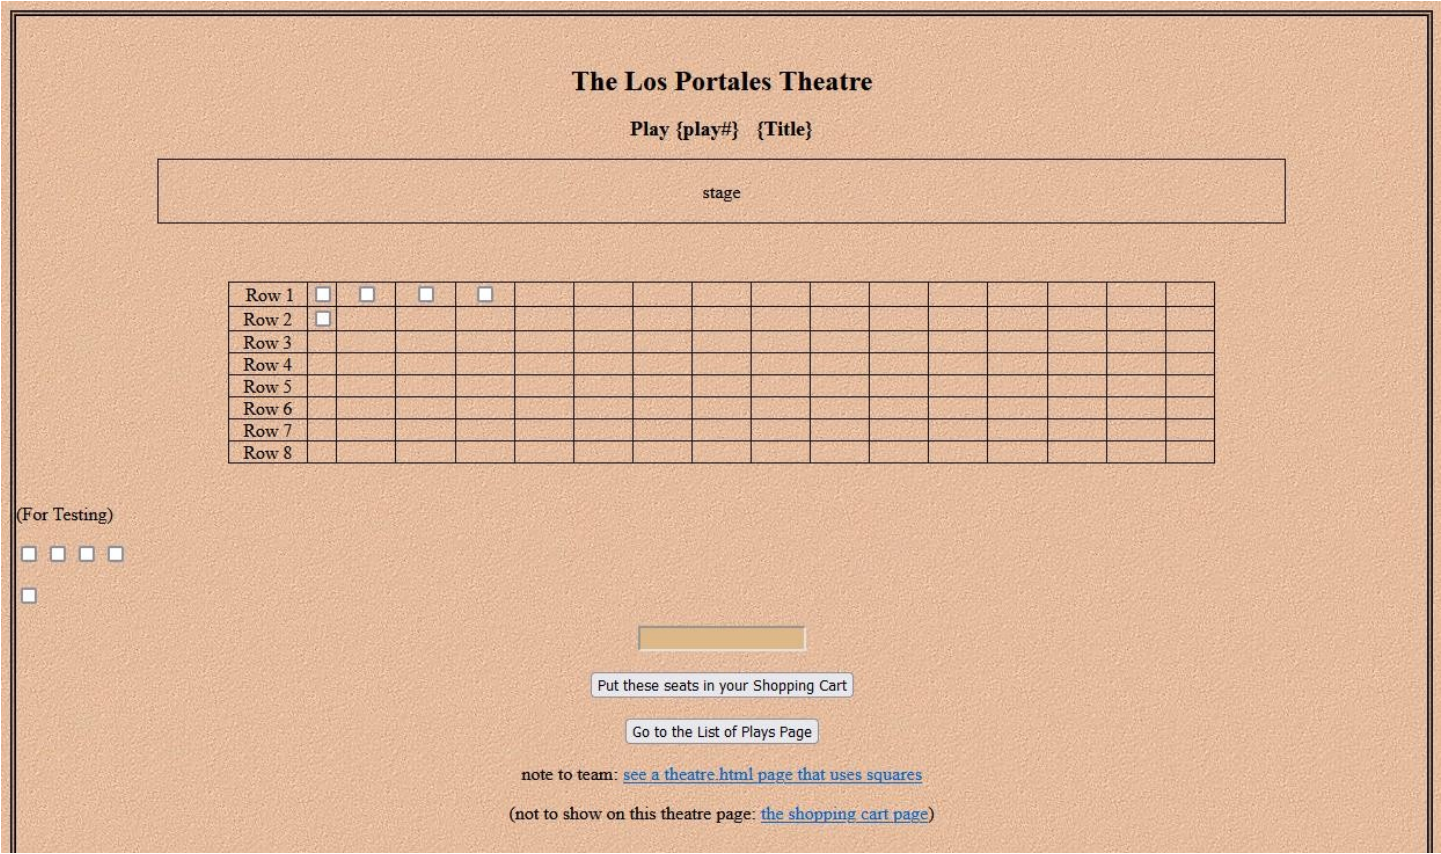

```
<html>
<head>
<style> body { border: solid 5px; border-style: double;} </style>
</head>
<body background="Tan%20Southwest.JPG">
<p align="center"><font size="4"><br>
<br>
</font><font size="5"><b>The Los Portales Theatre</b></font></p>
<p align="center"><font size="4"><b>Play {play#} &nbsp;&nbsp;&nbsp; {Title}</b></font></p>
<div align="center">
<center>
```



Row 3			
Row 4			
Row 5			



--	--	--	--	--	--

|
[illegible]|
[illegible]|

Row 8								
-------	--	--	--	--	--	--	--	--



```

        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
    </tr>
</table>
</center>
</div>
<p align="left">
<br>
<script>
function myFunctionb1A() {
    // Get the checkbox
    var checkBox1A = document.getElementById("myCheck1A");
    // Get the output text
    var text1A = document.getElementById("text1A");

    // If the checkbox1A is checked, display the output text
    if (checkBox1A.checked == true){
        text1A.style.display = "block";
    } else {
        text1A.style.display = "none";
    }
}

function myFunctionb1B() {
    // Get the checkbox
    var checkBox1B = document.getElementById("myCheck1B");
    // Get the output text
    var text1B = document.getElementById("text1B");

    // If the checkbox1B is checked, display the output text
    if (checkBox1B.checked == true){
        text1B.style.display = "block";
    } else {
        text1B.style.display = "none";
    }
}

function myFunctionb1C() {
    // Get the checkbox
    var checkBox1C = document.getElementById("myCheck1C");
    // Get the output text
    var text1C = document.getElementById("text1C");

    // If the checkbox1C is checked, display the output text
    if (checkBox1C.checked == true){
        text1C.style.display = "block";
    } else {
        text1C.style.display = "none";
    }
}

function myFunctionb1D() {

```

```

// Get the checkbox
var checkBox1D = document.getElementById("myCheck1D");
// Get the output text
var text1D = document.getElementById("text1D");

// If the checkBox1D is checked, display the output text
if (checkBox1D.checked == true){
    text1D.style.display = "block";
} else {
    text1D.style.display = "none";
}
}
function myFunctionb2A() {
// Get the checkbox
var checkBox2A = document.getElementById("myCheck2A");
// Get the output text
var text2A = document.getElementById("text2A");

// If the checkBox2A is checked, display the output text
if (checkBox2A.checked == true){
    text2A.style.display = "block";
    //myCheck2A.style.background-color = "red";
} else {
    text2A.style.display = "none";
    //myCheck2A.style.background-color = "green";
}
}
}
</script>

```

(For Testing)</p>

```

<form>
<input type="checkbox" id="myCheck1A" onclick="myFunctionb1A()" value="ON">
<input type="checkbox" id="myCheck1B" onclick="myFunctionb1B()" value="ON">
<input type="checkbox" id="myCheck1C" onclick="myFunctionb1C()" value="ON">
<input type="checkbox" id="myCheck1D" onclick="myFunctionb1D()" value="ON">
<a id="text1A" style="display:none">You have requested seat 1A</a>
<a id="text1B" style="display:none">You have requested seat 1B</a>
<a id="text1C" style="display:none">You have requested seat 1C</a>
<a id="text1D" style="display:none">You have requested seat 1D</a>
</form>

```

```

<form>
<input type="checkbox" id="myCheck2A" onclick="myFunctionb2A()" value="ON"
style="background-color:green">
<a id="text2A" style="display:none">You have requested seat 2A</a>
</form>

```

```

<p align="center">
<input type="text" name="seatsselected" value="" size="20" style="background-color:#DEB887;"><br>

<br>
<a href="cart.html">
<input type="submit" name="submitbutton" class="submit" value="Put these seats in your Shopping
Cart"></a>

```

```
<br><br>

<a href="enabledindex.php">
<input type="submit" name="" value="Go to the List of Plays Page"></a></a>
</p>


<style>
.submit {
  font: bold }
</style>

<p>
</p>
<p align="center">
note to team:
<a align="center" target="_blank" href="theatre2.html">see a theatre.html page that uses squares</a></p>
<p align="center">(not to show on this theatre page: <a href="cart.html">the shopping cart page</a>)</p>
<p align="center">&nbsp;</p>
</p>
</body>
</html>
```

---

---

The Theatre version 2 Page (theatre2.html)

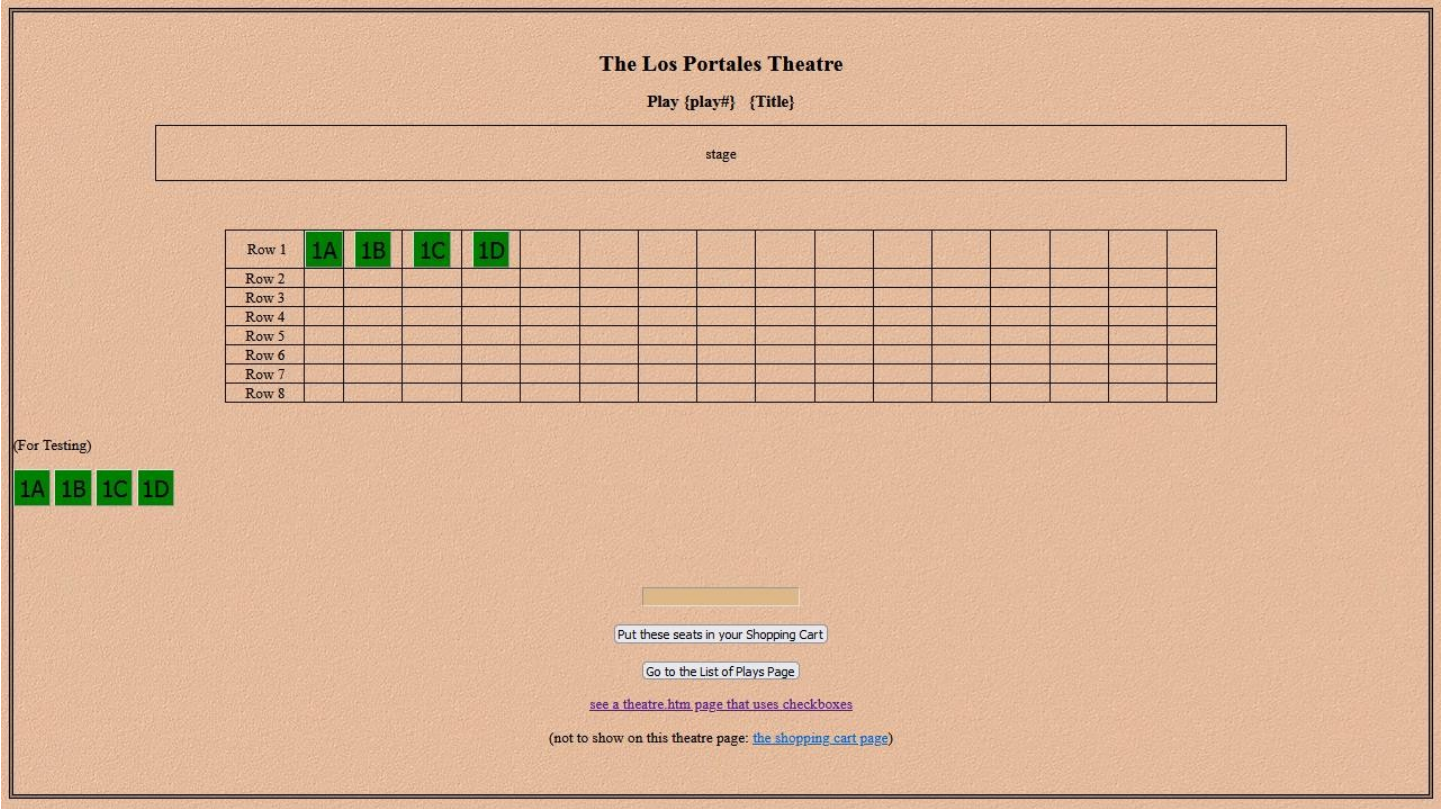

```
<html>
<head>
<style> body { border: solid 5px; border-style: double;} </style>
```

```
</head>
<body background="Tan%20Southwest.JPG">
<p align="center"><font size="4"><br>
<br>
</font><font size="5"><b>The Los Portales Theatre</b></font></p>
<p align="center"><font size="4"><b>Play {play#}&nbsp;&nbsp;  {Title}</b></font></p>
<div align="center">
  <center>
    <table border="1" cellpadding="0" cellspacing="0" style="border-collapse: collapse" bordercolor="#111111"
width="80%" id="AutoNumber2">
      <tr>
        <td width="100%">
          <p align="center"><br>
            stage<br>
&nbsp;   </td>
        </tr>
      </table>
    </center>
  </div>
<p align="center">&nbsp;  </p>
<div align="center">
  <center>
    <table border="1" cellpadding="0" cellspacing="0" style="border-collapse: collapse" bordercolor="#111111"
width="70%" id="AutoNumber3">
      <tr>
        <td width="8%" align="center">&nbsp;  Row 1 </td>
        <td width="3%" align="center">
          <input type="button" class="b1" value="1A" id="button5" onclick="myFunction1()"></td>
        <td width="6%" align="center">
          <input type="button" class="b2" value="1B" id="button6" onclick="myFunction2()"></td>
        <td width="6%" align="center">
          <input type="button" class="b3" value="1C" id="button7" onclick="myFunction3()"></td>
        <td width="6%" align="center">
          <input type="button" class="b4" value="1D" id="button8" onclick="myFunction4()"></td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
      </tr>
      <tr>
        <td width="8%" align="center">Row 2</td>
        <td width="3%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
        <td width="6%" align="center">&nbsp;  </td>
      </tr>
    </table>
  </center>
</div>
```







```

        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
        <td width="6%" align="center">&nbsp;</td>
    </tr>
</table>
</center>
</div>
<p align="left">
<br>
<script>
function myFunctionb1A() {
    // Get the checkbox
    var checkBox1A = document.getElementById("myCheck1A");
    // Get the output text
    var text1A = document.getElementById("text1A");

    // If the checkbox1A is checked, display the output text
    if (checkBox1A.checked == true){
        text1A.style.display = "block";
    } else {
        text1A.style.display = "none";
    }
}

function myFunctionb1B() {
    // Get the checkbox
    var checkBox1B = document.getElementById("myCheck1B");
    // Get the output text
    var text1B = document.getElementById("text1B");

    // If the checkbox1B is checked, display the output text
    if (checkBox1B.checked == true){
        text1B.style.display = "block";
    } else {
        text1B.style.display = "none";
    }
}

function myFunctionb1C() {
    // Get the checkbox
    var checkBox1C = document.getElementById("myCheck1C");
    // Get the output text
    var text1C = document.getElementById("text1C");

    // If the checkbox1C is checked, display the output text
    if (checkBox1C.checked == true){

```

```

    text1C.style.display = "block";
} else {
    text1C.style.display = "none";
}
}
function myFunctionb1D() {
    // Get the checkbox
    var checkBox1D = document.getElementById("myCheck1D");
    // Get the output text
    var text1D = document.getElementById("text1D");

    // If the checkbox1D is checked, display the output text
    if (checkBox1D.checked == true){
        text1D.style.display = "block";
    } else {
        text1D.style.display = "none";
    }
}
function myFunctionb2A() {
    // Get the checkbox
    var checkBox2A = document.getElementById("myCheck2A");
    // Get the output text
    var text2A = document.getElementById("text2A");

    // If the checkbox2A is checked, display the output text
    if (checkBox2A.checked == true){
        text2A.style.display = "block";
        //myCheck2A.style.background-color = "red";
    } else {
        text2A.style.display = "none";
        //myCheck2A.style.background-color = "green";
    }
}
</script>

```

(For Testing)</p>

```

<form>
    <p>
        <input type="button" class="b1" value="1A" id="button1" onclick="myFunction1()">
        <input type="button" class="b2" value="1B" id="button2" onclick="myFunction2()">
        <input type="button" class="b3" value="1C" id="button3" onclick="myFunction3()">
        <input type="button" class="b4" value="1D" id="button4" onclick="myFunction4()">
        <a id="text1" style="display:none">You have requested seat 1A</a>
        <a id="text2" style="display:none">You have requested seat 1B</a>
        <a id="text3" style="display:none">You have requested seat 1C</a>
        <a id="text4" style="display:none">You have requested seat 1D</a> </p>
    </form>

```

```

<style>
.b1 { background-color:green;
    height:40px;
    width:40px;
    font-size: 24px;
    cursor:pointer; }
.b1:focus { background-color:red; }

```

```
.b2 { background-color:green;
      height:40px;
      width:40px;
      font-size: 24px;
      cursor:pointer; }
.b2:focus { background-color:red; }
```

```
.b3 { background-color:green;
      height:40px;
      width:40px;
      font-size: 24px;
      cursor:pointer; }
.b3:focus { background-color:red; }
```

```
.b4 { background-color:green;
      height:40px;
      width:40px;
      font-size: 24px;
      cursor:pointer; }
.b4:focus { background-color:red; }
```

</style>

<br>

<p>

<br>

</p>

<p>

</p>

<p align="center">

<input type="text" name="seatsselected" value="" size="20" style="background-color:#DEB887;"><br>

<br>

<a href="cart.html">

<input type="submit" name="submitbutton" class="submit" value="Put these seats in your Shopping Cart"></a>

<br><br>

<a href="enabledindex.php">

<input type="submit" name="" value="Go to the List of Plays Page"></a></a>

</p>

<style>

```
.submit {
  font: bold }
```

</style>

<p align="center">

<a href="theatre.html">see a theatre.htm page that uses checkboxes</a></p>

<p align="center">(not to show on this theatre page: <a href="cart.html">the shopping cart page</a></p>

<p align="center">&nbsp;</p>

</body>

</html>

---

---

---

Los Portales Theatre Shopping Cart

For:

Requested seats for play {play#}

Cost:

Remove This Play

Requested seats for play {play#}

Cost:

Remove This Play

Requested seats for play {play#}

Cost:

Remove This Play

Total Cost for all seats for all plays:

Credit Card Number

Pay Now

[illegible]



## The Administrator Page (admin.html)



```
<html>
<head>
<style> body { border: solid 5px; border-style: double;} </style>
</head>
<body background="Tan%20Southwest.JPG">
<p align="center">&nbsp;</p>

<p align="center"><font size="5"><b>The Los Portales Theatre</b></font></p>
<p align="center"><font size="5">Administrator page</font><p align="center"><button type="button"
class="button2">Add a Play</button>
<p align="center"><button type="button" class="button2">Assign seat prices for Plays</button></p>
<p align="center"><button type="button" class="button2">Remove Plays</button> <font
size="4"><br></font></p>
<p align="center"><button type="button" class="button2">Create a Report</button> <font
size="4"><br></font></p>

<p align="center">
<a href="enabledindex.php">
<input type="submit" name="" value="Go to the List of Plays Page"></a>
</p>
<br><br>
</body>
</html>
```

---

---

---

---

---

---

---