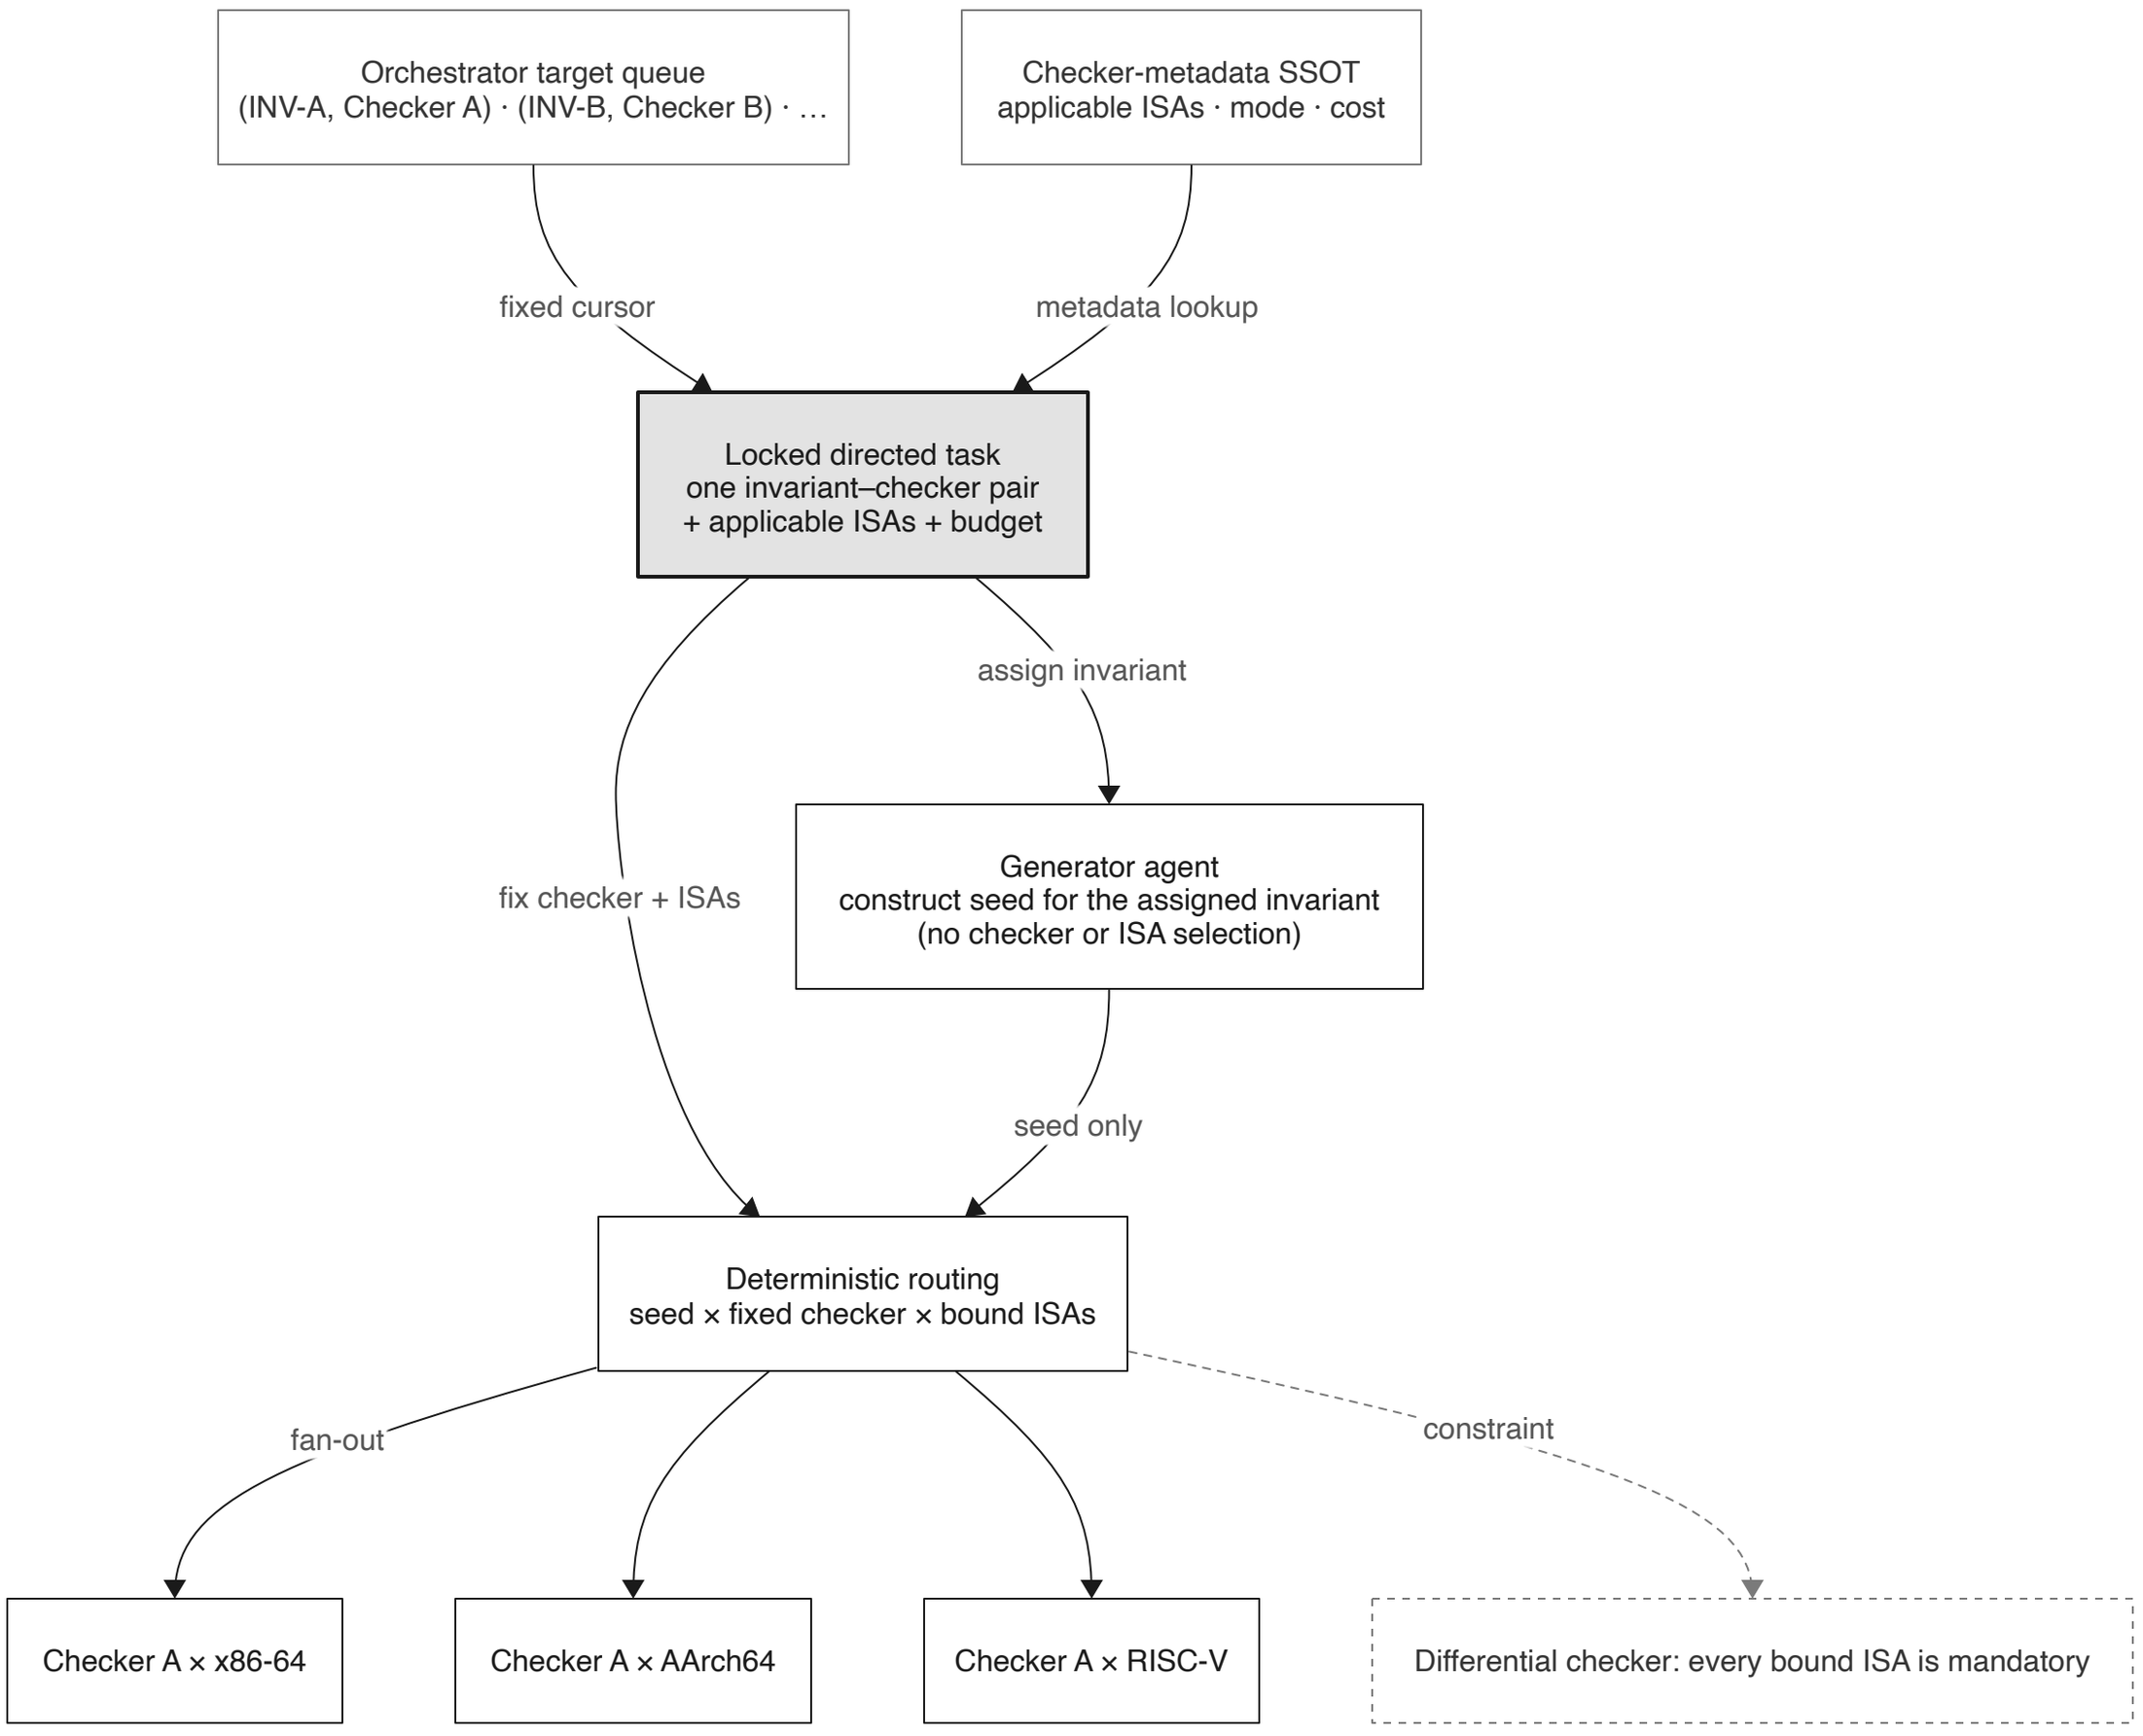

Orchestrator target queue
(INV-A, Checker A) · (INV-B, Checker B) · …
Checker-metadata SSOT
applicable ISAs · mode · cost
fixed cursor
metadata lookup
Locked directed task
one invariant–checker pair
+ applicable ISAs + budget
assign invariant
fix checker + ISAs
Generator agent
construct seed for the assigned invariant
(no checker or ISA selection)
seed only
Deterministic routing
seed × fixed checker × bound ISAs
fan-out
constraint
Checker A × x86-64
Checker A × AArch64
Checker A × RISC-V
Differential checker: every bound ISA is mandatory