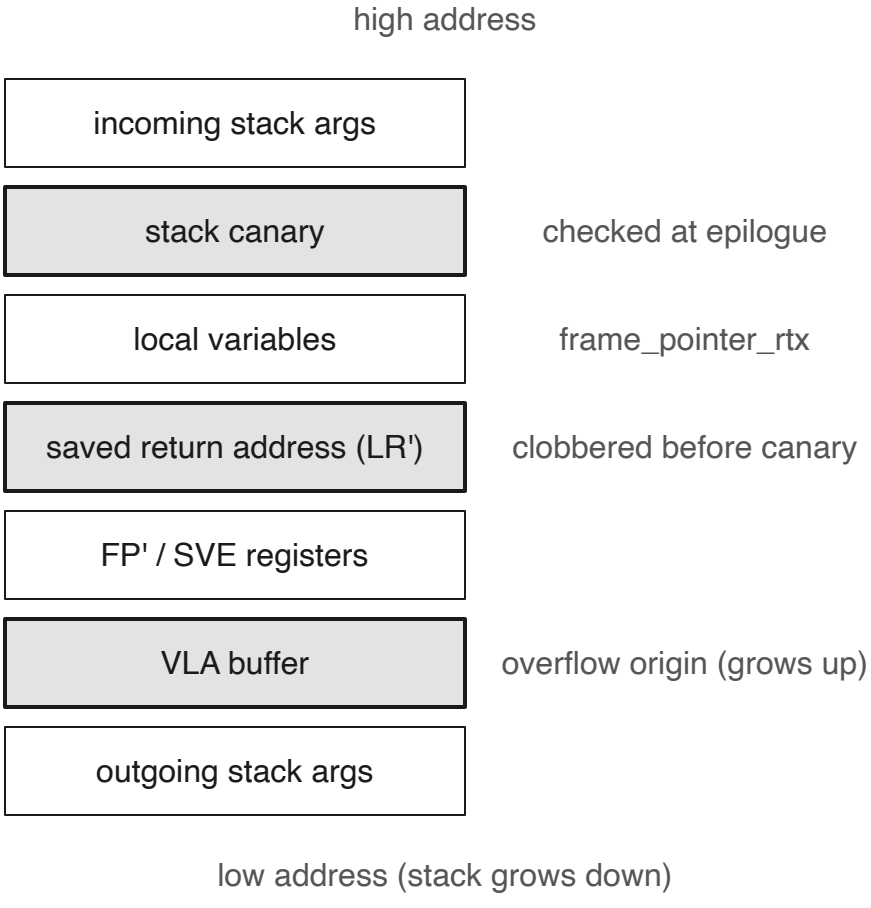
high address
incoming stack args
stack canary
checked at epilogue
local variables
frame_pointer_rtx
saved return address (LR')
clobbered before canary
FP' / SVE registers
VLA buffer
overflow origin (grows up)
outgoing stack args
low address (stack grows down)