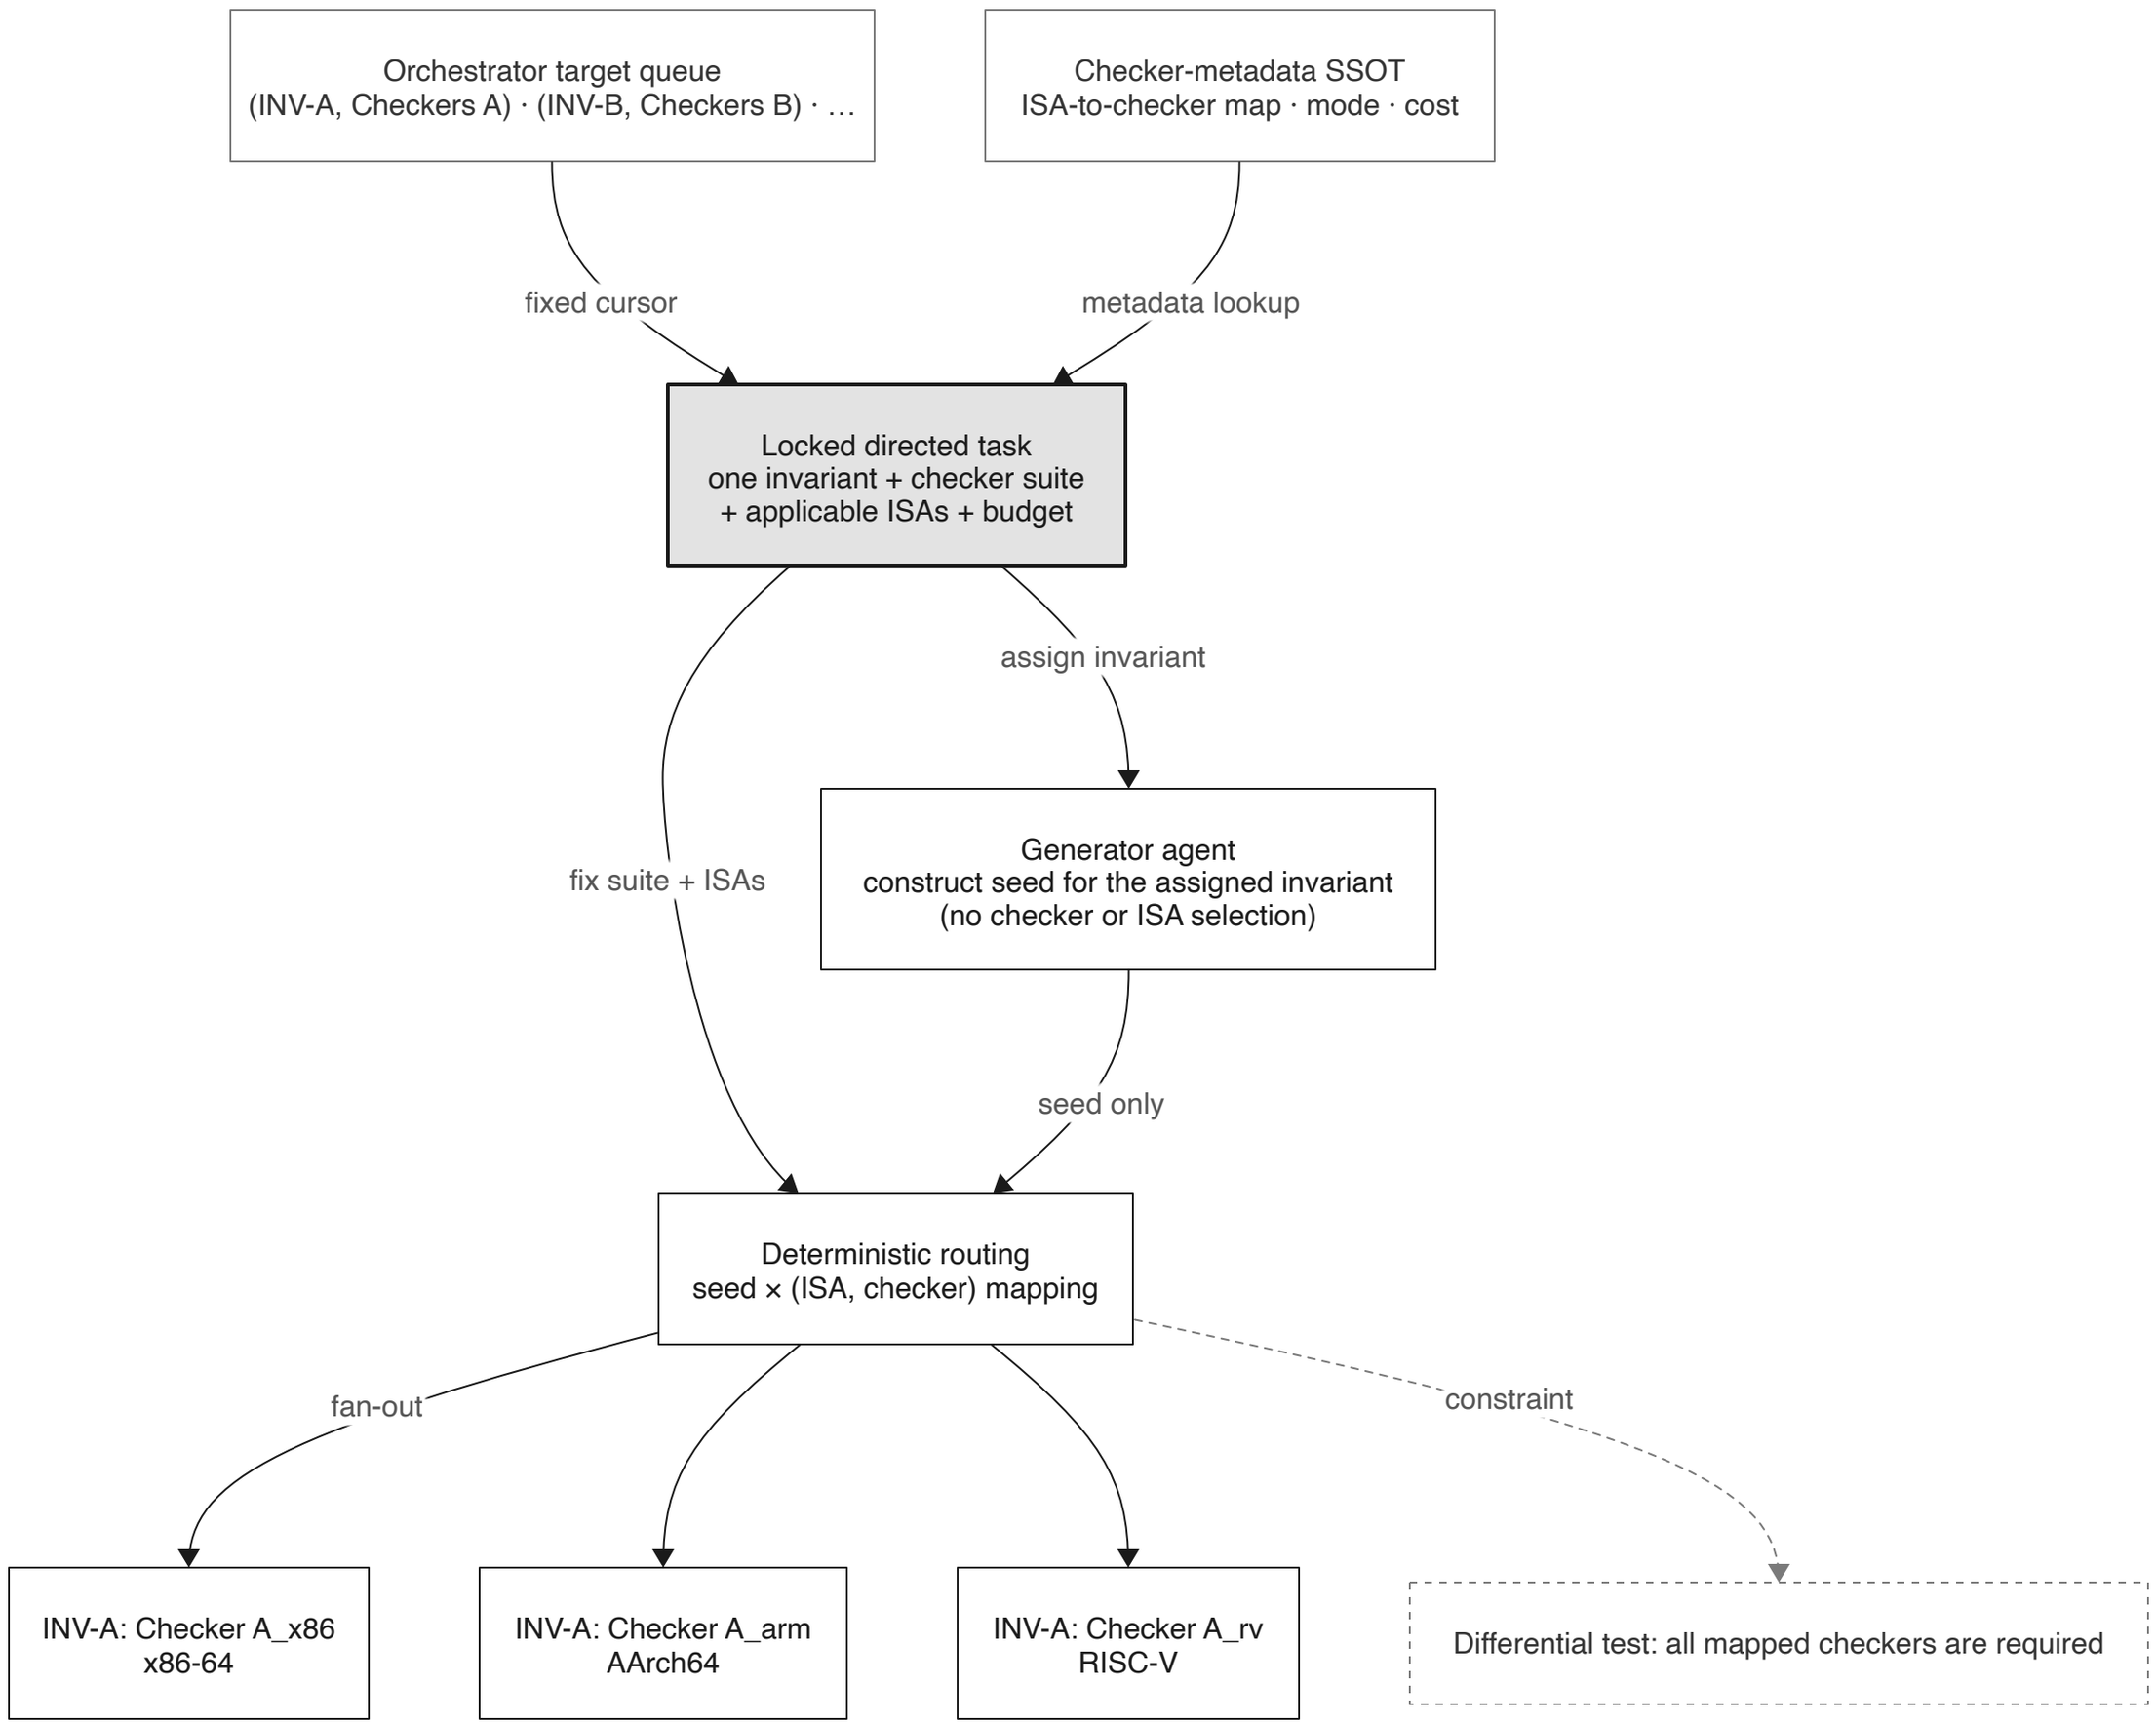

Orchestrator target queue
(INV-A, Checkers A) · (INV-B, Checkers B) · …
Checker-metadata SSOT
ISA-to-checker map · mode · cost
fixed cursor
metadata lookup
Locked directed task
one invariant + checker suite
+ applicable ISAs + budget
assign invariant
fix suite + ISAs
Generator agent
construct seed for the assigned invariant
(no checker or ISA selection)
seed only
Deterministic routing
seed × (ISA, checker) mapping
fan-out
constraint
INV-A: Checker A_x86
x86-64
INV-A: Checker A_arm
AArch64
INV-A: Checker A_rv
RISC-V
Differential test: all mapped checkers are required