

A spatial agent based model for simulating and optimizing networked eco-industrial systems

J. Raimbault^{1*}, J. Broere², M. Somveille³, J.M. Serna⁴, E. Strombom⁵, C. Moore⁶, B. Zhu⁷, L. Sugar⁸

*j.raimbault@ucl.ac.uk


(1) CASA, UCL; (2) Utrecht University, Centre for Complex Systems Studies; (3) University of Oxford, Edward Grey Institute; (4) Université de Paris, CRPMS; (5) University of Minnesota, CBS Ecology; (6) University of Oxford, Environmental Change Institute; (7) Delft University of Technology, Department of Engineering Systems and Services; (8) University of Toronto, Department of Civil Engineering

Workshop on Geo-industrial clusters
February 17th 2020

FIGURE 1

Global resource extraction is expected to grow to 82 billion tonnes in 2020

Global resource extraction¹
BILLION TONNES

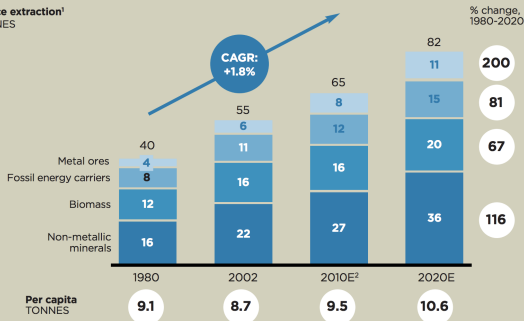


¹ Resource used: amount of extracted resources that enters the economic system for further processing or direct consumption. All materials used are transformed within the economic system, incl. material used to generate energy and other material used in the production process

² Forecasted from 2002 OECD figures and OECD extraction scenario for 2020

SOURCE: OECD; Behrens (2007); WMM Global Insight; Ellen MacArthur Foundation circular economy team

FIGURE 2

We are still losing enormous tonnages of material
billion tonnes, EU27, 2010E

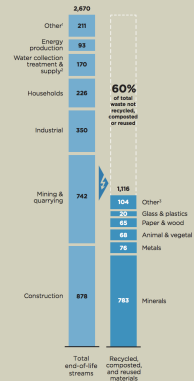

¹ Includes services and agriculture, forestry & fishing


² Also includes sewerage and other waste management activities

³ Includes used oils, rubber, textiles, household waste, chemical waste, and other non-specified

SOURCE: Eurostat waste statistics (2010)

MacArthur, E. (2013). Towards the circular economy. Journal of Industrial Ecology, 2, 23-44.

FIGURE 6 The circular economy—an industrial system that is restorative by design

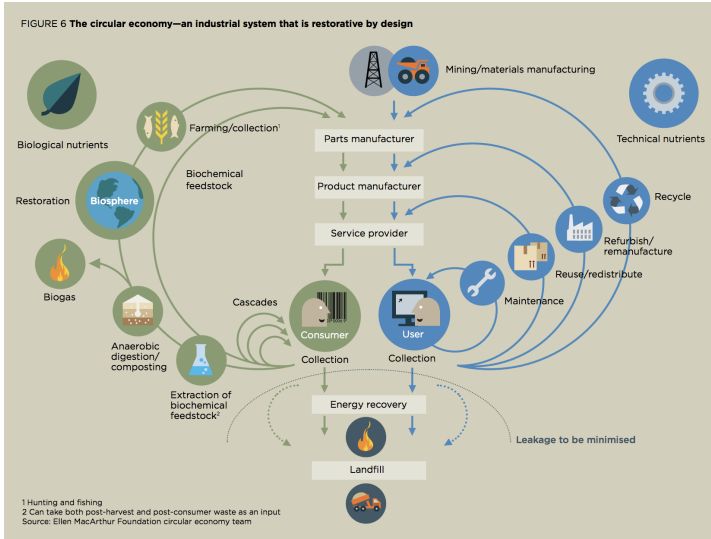

Industrial symbiosis as an approach to cycle by-products and energy between industries [Chertow, 2000], such as in eco-industrial parks [Gibbs and Deutz, 2007]

Systems perspective necessary to understand and optimize these processes [Chertow and Ehrenfeld, 2012]

Spatial structure of the system plays a crucial role [Desrochers, 2001]

Agent-based modeling as a privileged modeling approach but never applied at regional scales from an urban system perspective [Kraines and Wallace, 2006]

- A simple agent-based model to study the effects of geographical proximity on industrial symbiosis network, and the role of cluster policies.
- Integrates geography, ecology and economy concepts, from a generative social science perspective.
- Can be applied to understand the interplay between different processes, and to optimize policies for a circular economy

Resources, Conservation & Recycling 155 (2020) 104538



Contents lists available at [ScienceDirect](https://www.sciencedirect.com)

Resources, Conservation & Recycling

journal homepage: www.elsevier.com/locate/resconrec





Full length article

A spatial agent based model for simulating and optimizing networked eco-industrial systems



Juste Raimbault^a, Joris Broere^{b,*}, Marius Somveille^c, Jesus Mario Serna^d, Evelyn Strombom^e, Christine Moore^f, Ben Zhu^g, Lorraine Sugar^h

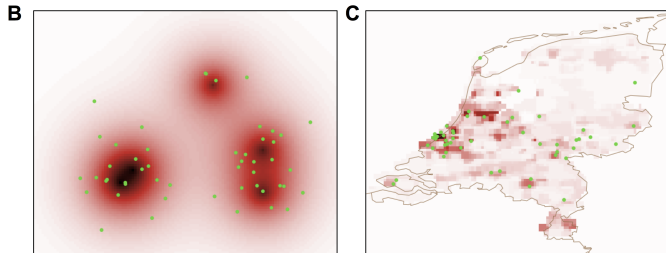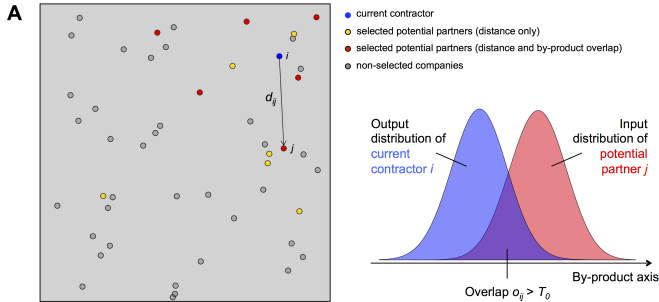

Setup: Companies located into space (synthetic or real setup), with input/output product distribution (Probabilistic Niche Model) which average is correlated with a clustering parameter α


Network growth: At each time step,

- 1 A current contractor is drawn among companies with minimal number of links.
- 2 Spatial interaction model (span d_0) determines potential partners.
- 3 Partner with the best utility (linear in product overlap and transportation cost) is chosen, link created and distributions updated.

Iterate until the network stabilizes.

Indicators: Total remaining waste (non exchanged products) and relative cost (network length weighted by flows).

Parameter	Notation	Process	Range	Value
Number of firms	N	Economic system	$[2; 10^6]$	$N = 50$
Hierarchy of city system	γ	City system	$[0.5; 2.0]$	$\gamma = 1.3$
Density-to-firms exponent	α_P	Economic system	$[0.1; 4.0]$	$\alpha_P = 1.5$
Number of centers	p	City system	$[1; 10]$	$p = 5$
Gravity decay	d_0	Spatial interactions	$[1; 200]$	$d_0 = 50km$
Distribution width	σ	Industrial structure	$[0.01; 0.1]$	$\sigma = 0.05$
Overlap threshold	T_0	Industrial structure	$[0.01; 0.1]$	$T_0 = 0.1$
Transportation cost	c	Urban system	$[0.1; 4.0]$	$c = 0.5$
Correlation level	α	Industrial clusters	$[0; 20.0]$	$\alpha = 5$

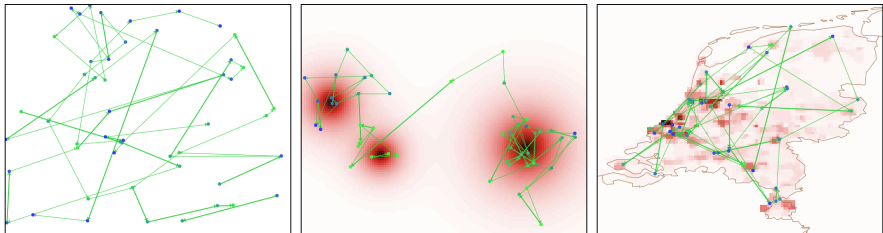

Random company positions, synthetic urban system (scaling law of population), and real population distribution.

Spatial model with several parameters

→ model implemented in NetLogo for its compromise between performance and interactivity

Consequent number of parameters and processes

→ integration into the OpenMOLE model exploration open source software [Reuillon et al., 2013]



<https://next.openmole.org>




Enables seamlessly (i) model embedding; (ii) access to HPC resources; (iii) exploration and optimization algorithms

Running grid sampling on synthetic urban systems with no correlation process:

- Statistical consistency of indicators, $n=100$ replications fixed for following experiments.
- Expected effect of some parameters, in particular company product span σ (decreases waste) and transportation cost c (increases waste and decreases relative cost).
- Emerging behaviors: congestion effect with T_0 exchange threshold; U-shaped behavior of cost as a function of σ .
- Different qualitative patterns between synthetic and real system for company position setup.

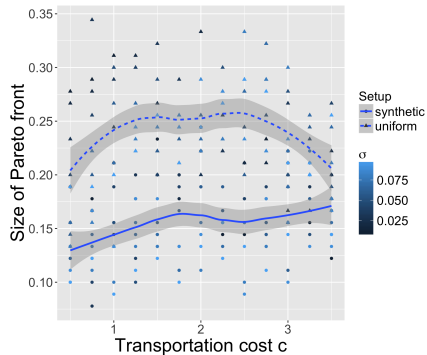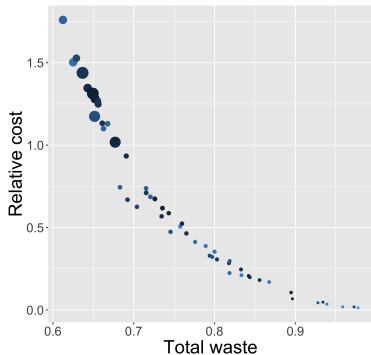


(Left) At fixed exogenous parameters c and σ , bi-objective optimization of cost and waste; (Right) Size of Pareto fronts (number of alternatives for policy optimization) as a function of c and σ .

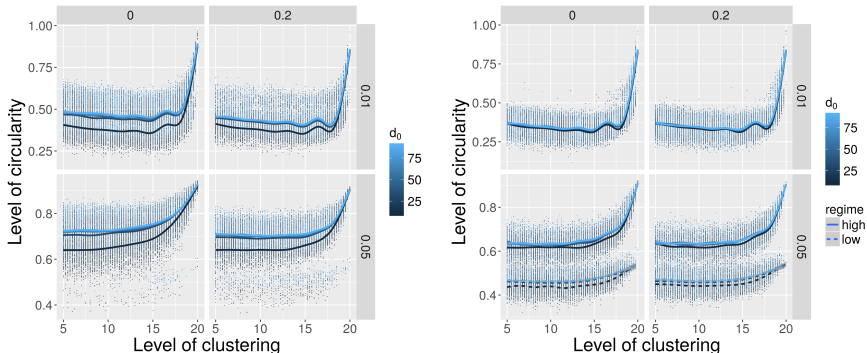

Influence of level of clustering on the circularity of the final network, for low (resp. high) transportation cost (Left, resp. Right), for different thresholds T_0 (columns), distribution width σ (rows) and gravity decay d_0 (color).

→ In practice, the spatial correlation policy must be strictly enforced to have an effect.

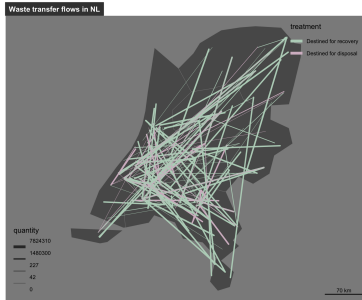

Real-world application of the model by calibration on the EPRT database to reproduce network structure (number of links, average link length, relative cost); yield medium range interactions but high propensity to exchange.

Implications

- Importance of spatial configuration; Eco-industrial park policies must be strictly applied.
- Real-world application of the model shown as a proof-of-concept with good model fit

Developments

- Data-driven approach in link with interactive application.
- Refinement of economic processes.
- Comparison of multiple possible processes and levels of policies.

→ A simple agent-based model to understand and optimize industrial symbiosis.




→ Important role of spatial structure and spatial correlations.

Git repository:

<https://github.com/SFICSSS16-CircularEconomy/CircularEconomy>

Simulation data: <https://doi.org/10.7910/DVN/7XCWTN>

Acknowledgments: thanks to the *European Grid Infrastructure* for access to the infrastructure.

-  Chertow, M. and Ehrenfeld, J. (2012).
Organizing self-organizing systems: Toward a theory of industrial symbiosis.
Journal of industrial ecology, 16(1):13–27.
-  Chertow, M. R. (2000).
Industrial symbiosis: literature and taxonomy.
Annual review of energy and the environment, 25(1):313–337.
-  Desrochers, P. (2001).
Cities and industrial symbiosis: Some historical perspectives and policy implications.
Journal of industrial ecology, 5(4):29–44.

-  Gibbs, D. and Deutz, P. (2007).
Reflections on implementing industrial ecology through
eco-industrial park development.
Journal of Cleaner Production, 15(17):1683–1695.
-  Kraines, S. and Wallace, D. (2006).
Applying agent-based simulation in industrial ecology.
Journal of Industrial Ecology, 10(1-2):15–18.
-  MacArthur, E. (2013).
Towards the circular economy.
Journal of Industrial Ecology, pages 23–44.



Reuillon, R., Leclaire, M., and Rey-Coyrehourcq, S. (2013).
Openmole, a workflow engine specifically tailored for the distributed
exploration of simulation models.
Future Generation Computer Systems, 29(8):1981–1990.