Figure 10 | Refit-seed sensitivity

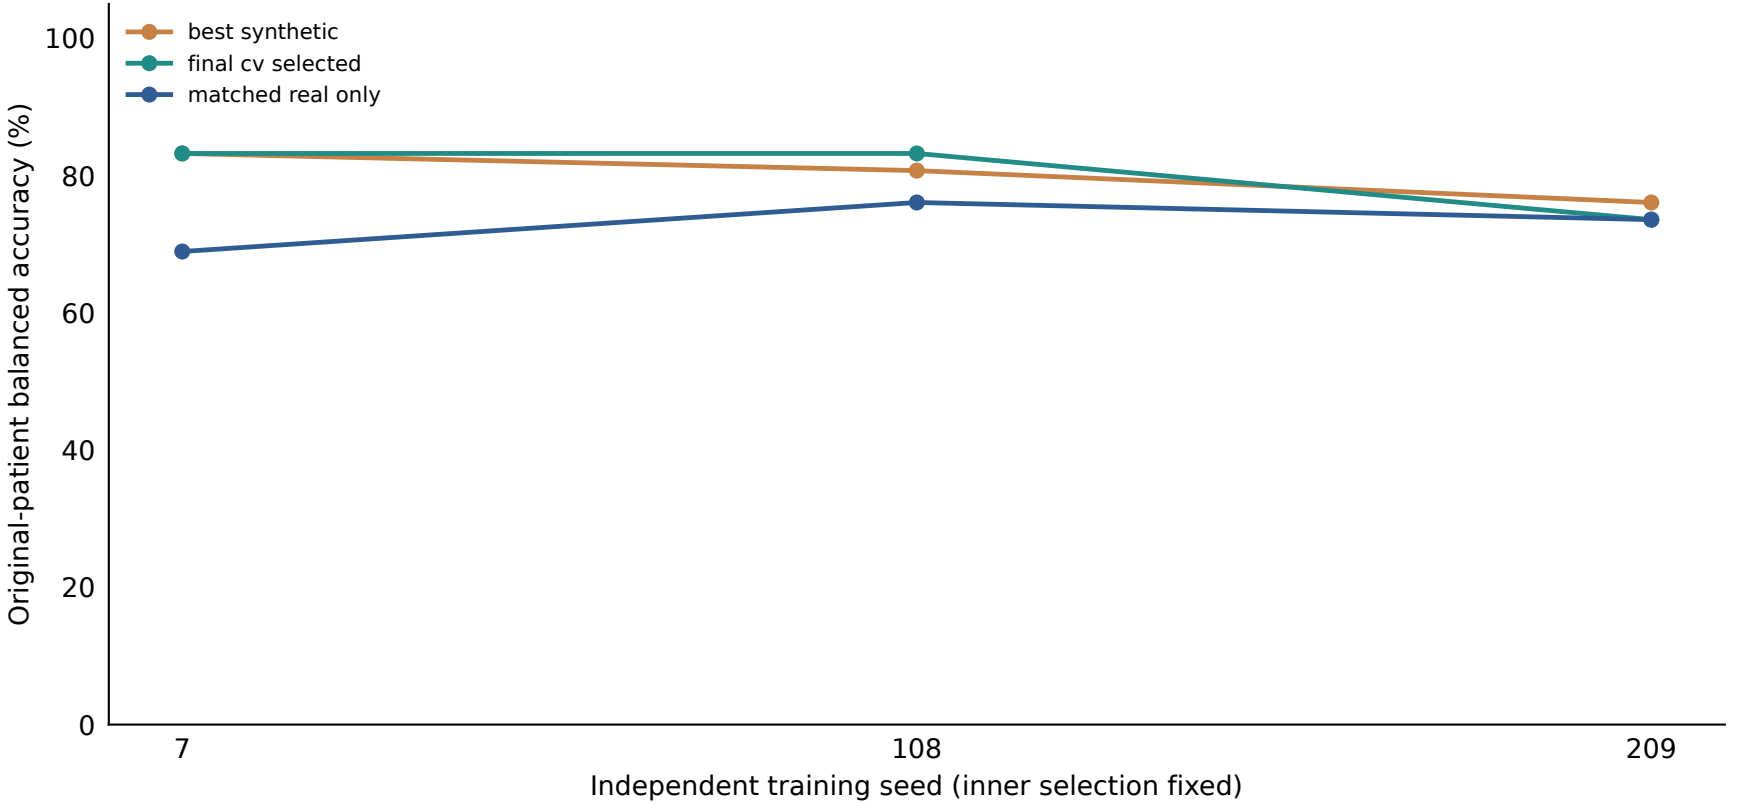

Inner-selected candidate pairs and generators are held fixed from the base run. This assesses random initialization, NOT repeated nested hyperparameter selection.