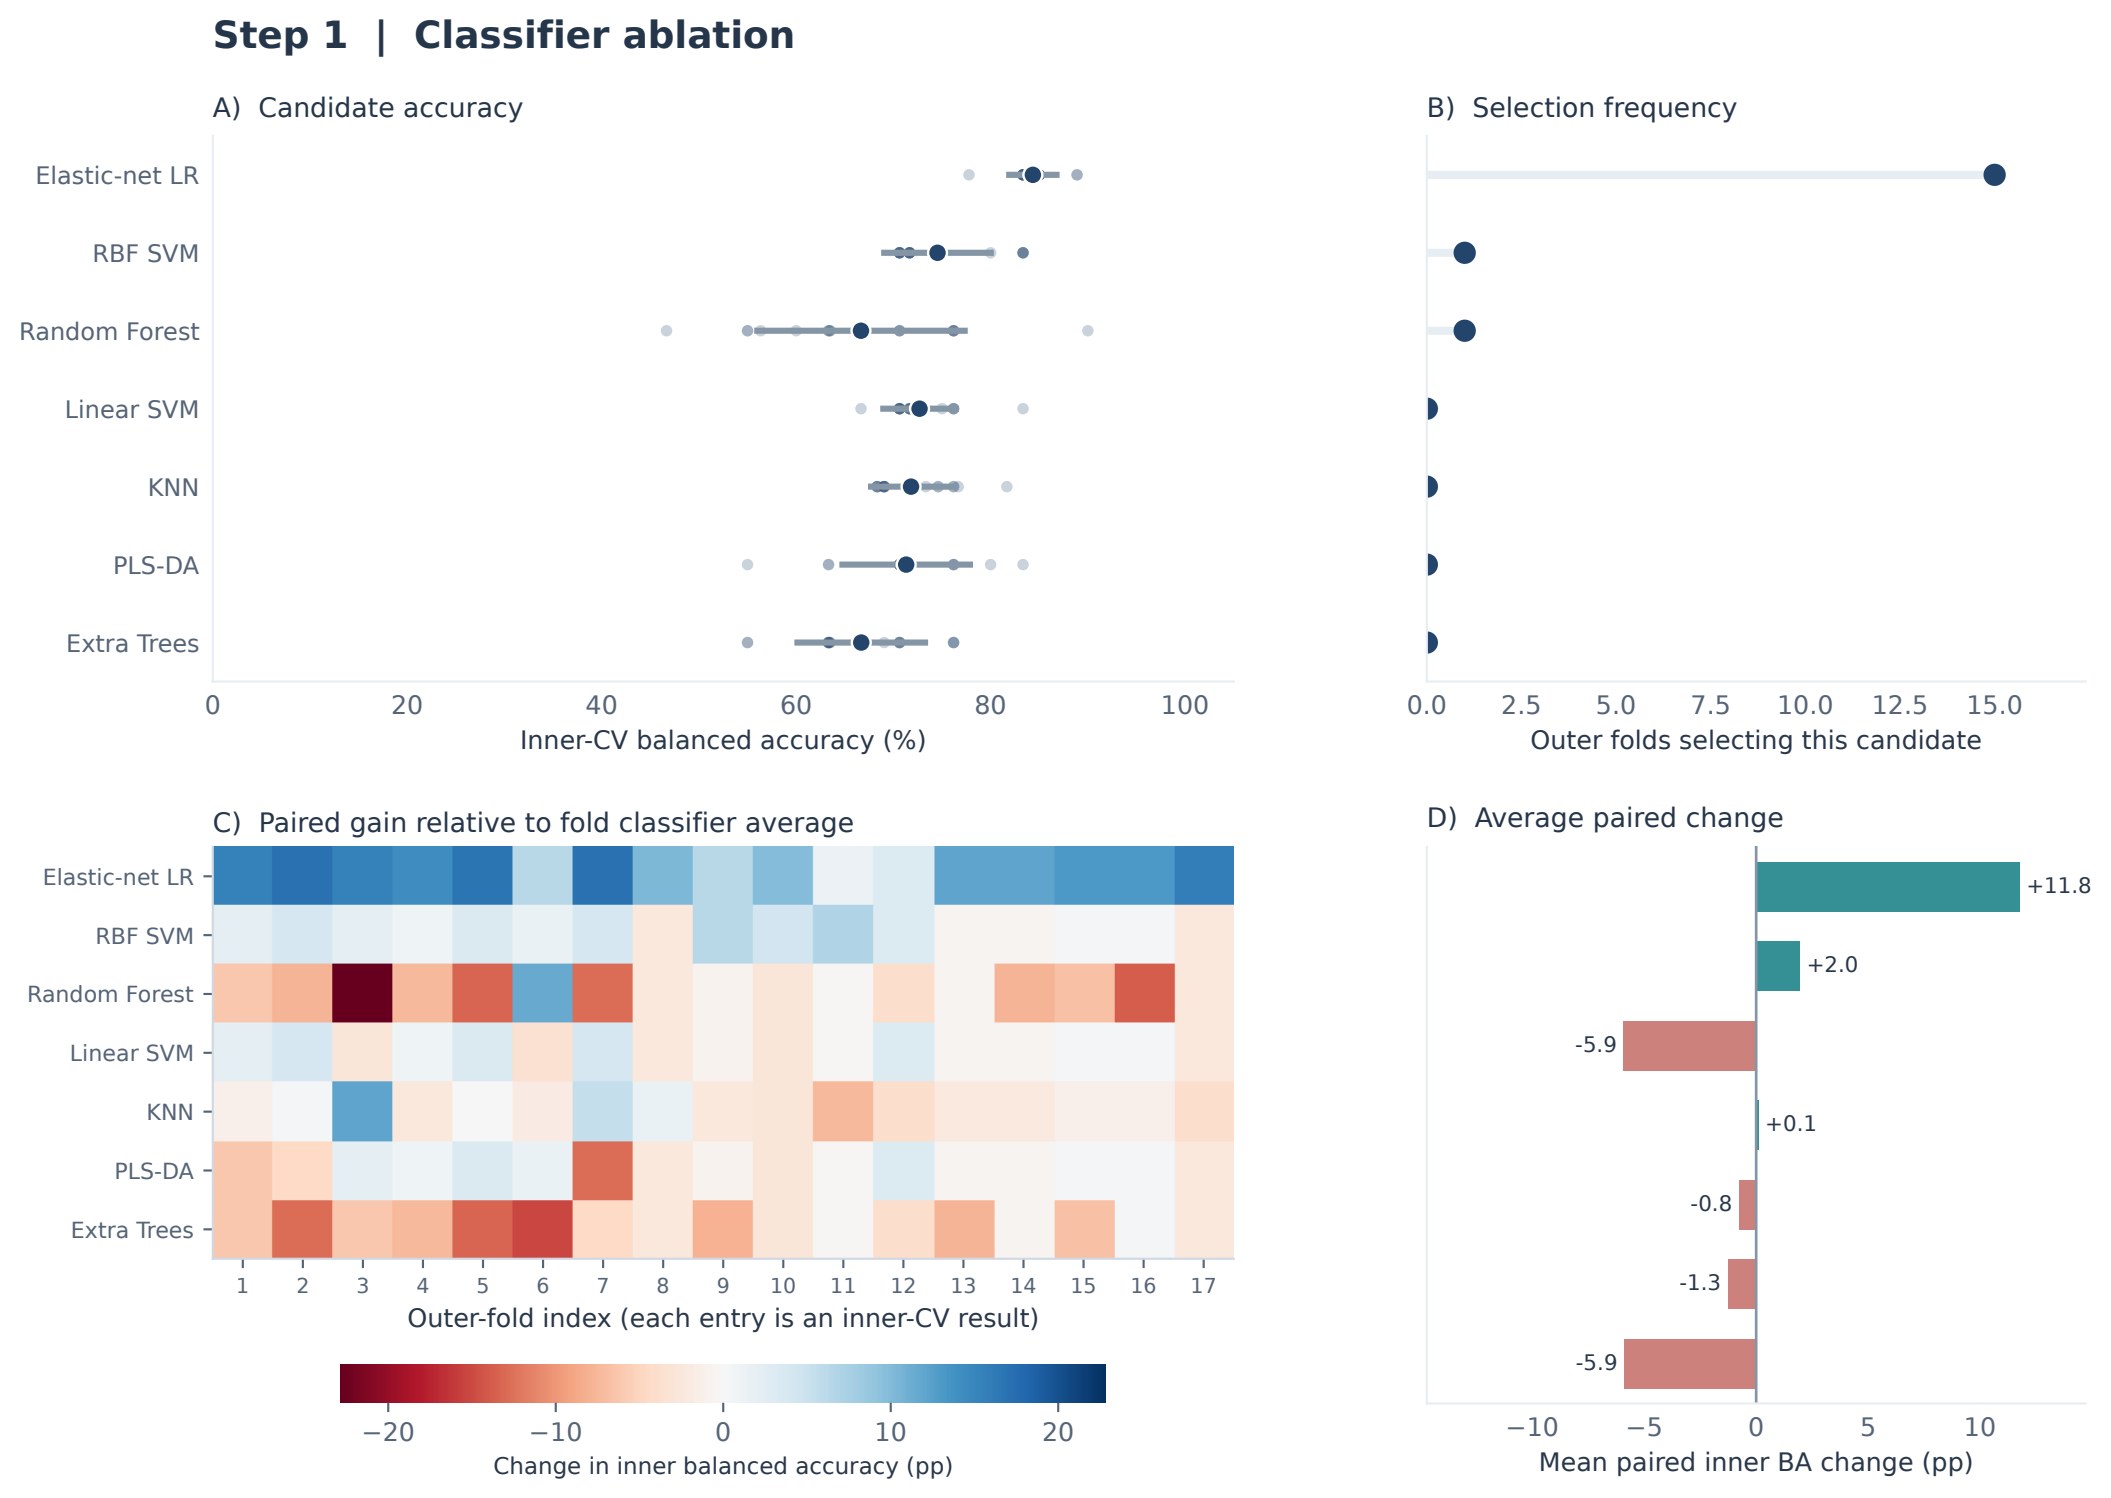
Step 1 | Classifier ablation
A) Candidate accuracy
Elastic-net LR
RBF SVM
Random Forest
Linear SVM
KNN
PLS-DA
Extra Trees
0
20
40
60
80
100
Inner-CV balanced accuracy (%)
B) Selection frequency
0.0
2.5
5.0
7.5
10.0
12.5
15.0
Outer folds selecting this candidate
C) Paired gain relative to fold classifier average
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
Outer-fold index (each entry is an inner-CV result)
−20
−10
0
10
20
Change in inner balanced accuracy (pp)
D) Average paired change
+11.8
+2.0
-5.9
+0.1
-0.8
-1.3
-5.9
−10
−5
0
5
10
Mean paired inner BA change (pp)