SQLite and DataGrip Installation Guide

Databases - La Salle URL


1 Introduction

This guide aims to describe the step-by-step installation of the SQLite database as well as the connection to SQLite using both DataGrip and DBeaver.


2 SQLite installation

For the SQLite installation on Windows, follow the next steps:


1. Go to the SQLite Download Page and download the precompiled binaries for your corresponding architecture in the *Precompiled Binaries for Windows* section. The name of the file should follow the nomenclature `sqlite-tools-win%.zip`

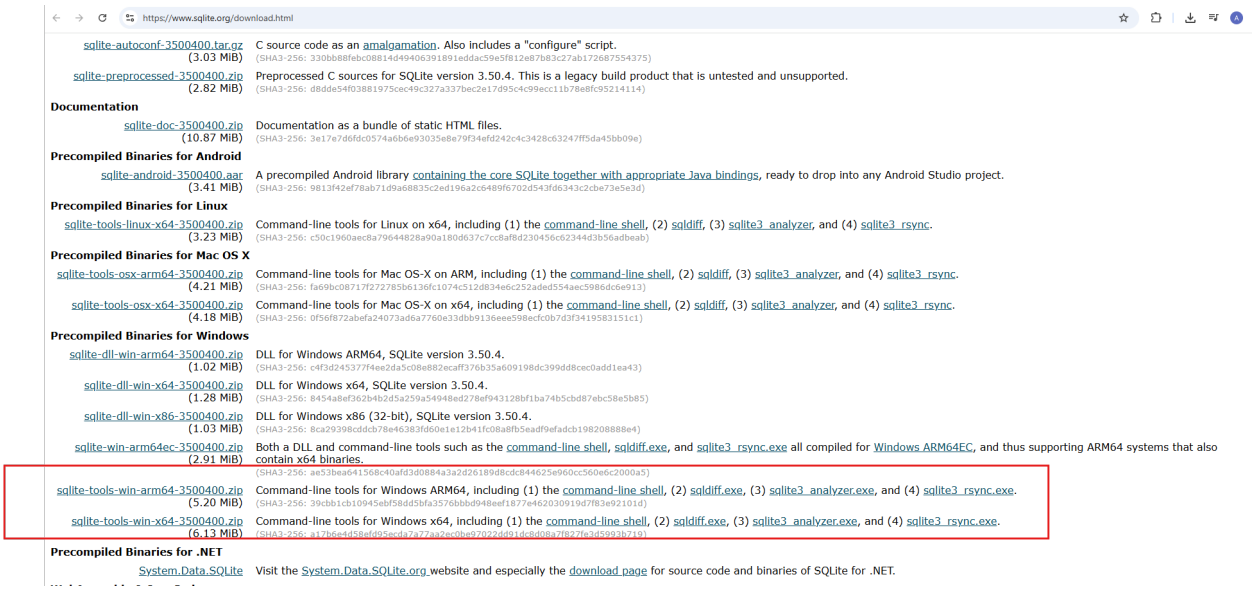


2. Once the zip file has been downloaded, create the folder `C:\sqlite` and extract the files into the folder we just created.

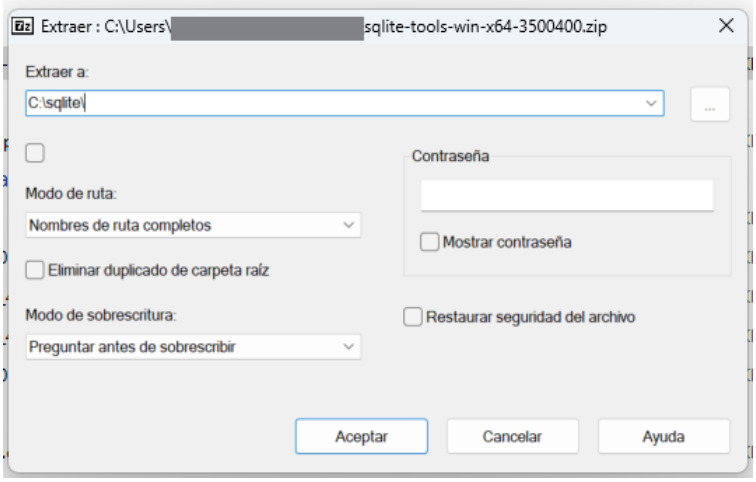

3. Copy the path of the folder and add it to your environment variables. In the Windows search field, search for environment variables and click on **Edit the system environment variables**.

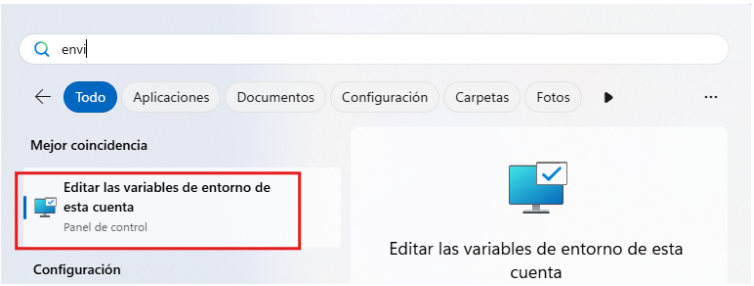

In the *Environment Variables* window, double click on the **Path** variable. In the *Edit environment variable* window, click on **New** and paste the sqlite folder path.

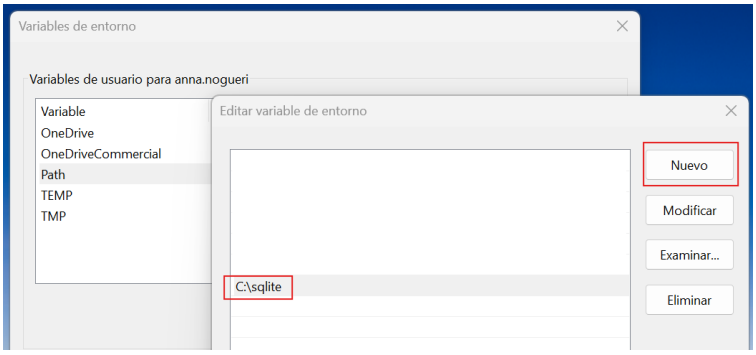


Click on **Accept**.

4. To check whether the installation has been successful, open the cmd and type `sqlite3`. Press **Enter**. You should be able to connect to a *transient in-memory database*.

Once the installation has been successful, we will create a new database that we are going to use along the subject.

1. Create a new folder for the database in the path chosen for this purpose.
2. Open a new terminal in the new folder and type `sqlite3 <db_name>`, where *<db_name>* is the name for the new database.
3. Press **Enter**.

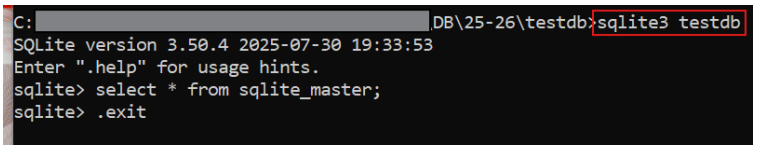

You will see that the database has been created in the selected folder.

Once you have successfully installed SQLite and created the database, we will show you how to connect to your database by using **DataGrip** or **DBeaver**, which are both very powerful database client tools.

3 Connection using DataGrip


DataGrip is a JetBrains cross-platform IDE for relational and NoSQL databases.

JetBrains offers students free access to their IDEs and other tools. You can request your free license here. You will need to use your university email address for the registration process. Once your request is accepted, you will receive an email with the confirmation, and you will be able to download the JetBrains software by using your free license.


To install DataGrip, download the `datagrip-2025.2.2.exe` file here and run the file to open the Installation Wizard and follow the on-screen prompts to sign in with your JetBrains Account. You can also install the tool by using the **JetBrains Toolbox App**.

Once DataGrip has been successfully installed, we will connect to our SQLite database by following the next steps:


1. Go to *File* and then click on **Data Sources and Drivers**. Alternatively, you can use the keyboard shortcut Ctrl+Alt+Mayús+S.

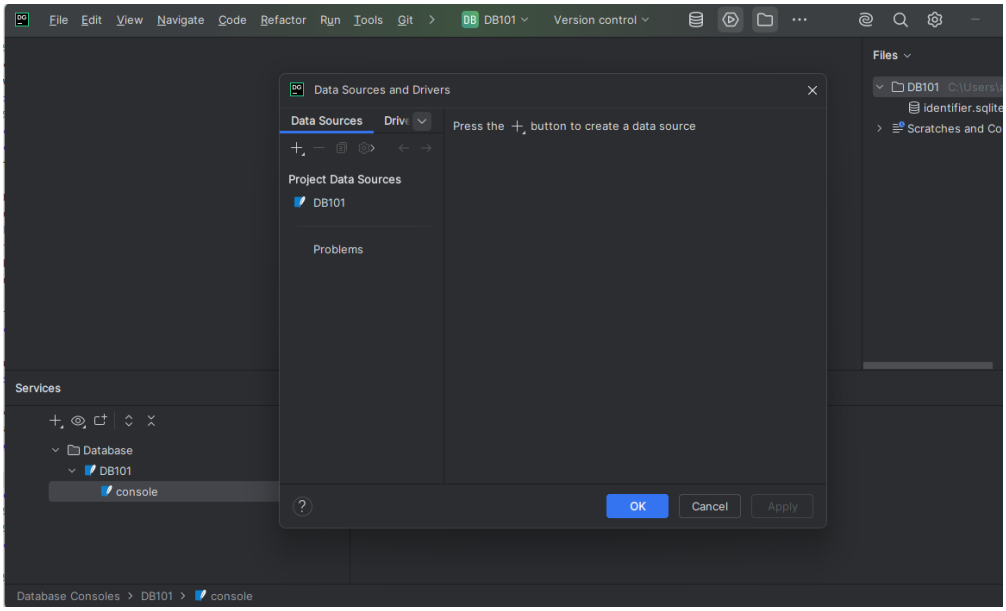

2. Click on the + icon to add a new Data Source.
3. In the list of supported data sources, select **SQLite**.

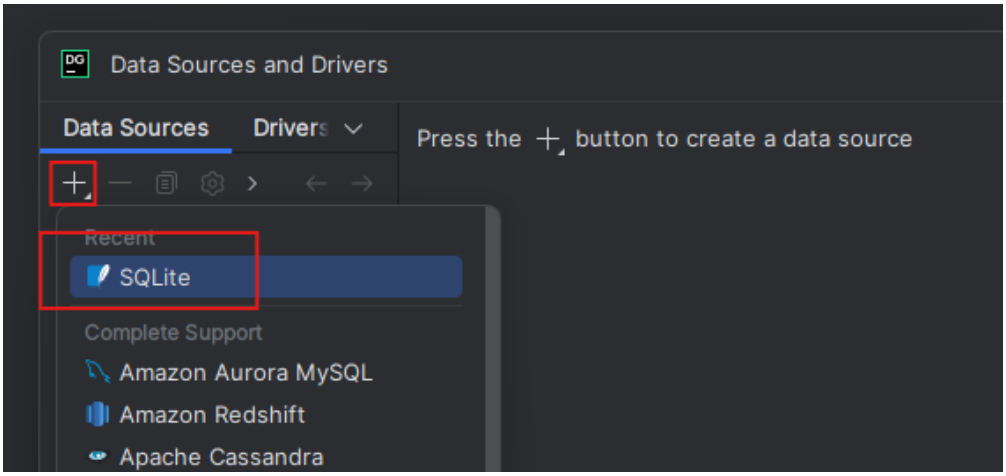


4. In the **Name** field, select the name for your Data Source.
5. In the *General* tab of Data Source configuration, leave the default values for the *Connection type* and *Driver*.
6. In the file field, click on the three dots icon on the right and, in the File Explorer, select the database file created earlier. The URL field should be updated accordingly.

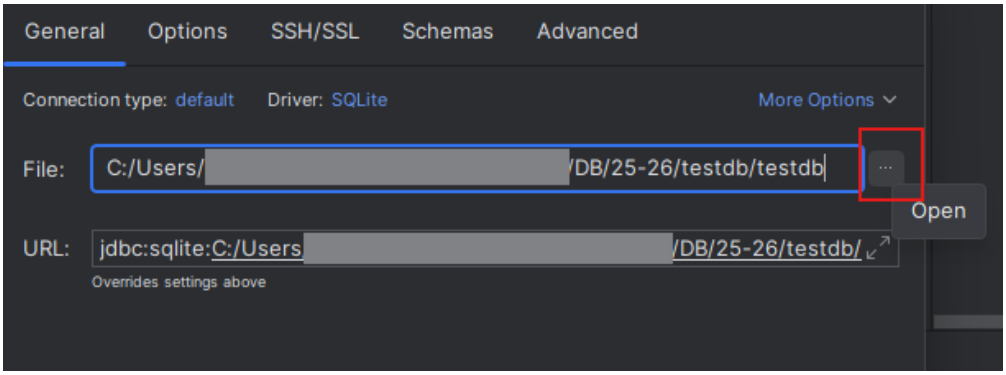


7. If the drivers are missing, a link will appear at the bottom of the connection settings area. Check if there is a **Download missing driver files** link at the bottom of the connection settings area and click this link to download drivers that are required to interact with a database.

8. Once everything has been configured, you can test the connection to the database by clicking on the **Test connection** button at the bottom.

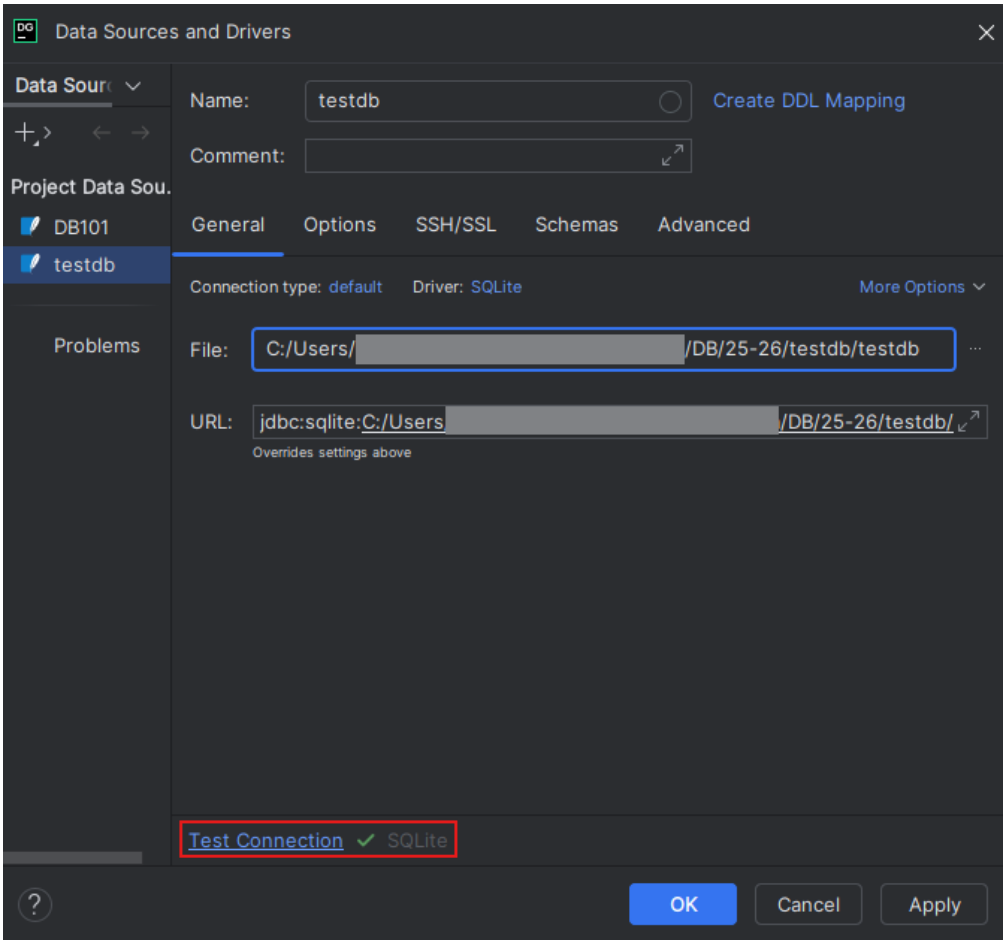

9. Click **OK** to create the Data Source.


Once the Data Source is created, you will be able to find it in the **Database Explorer**.

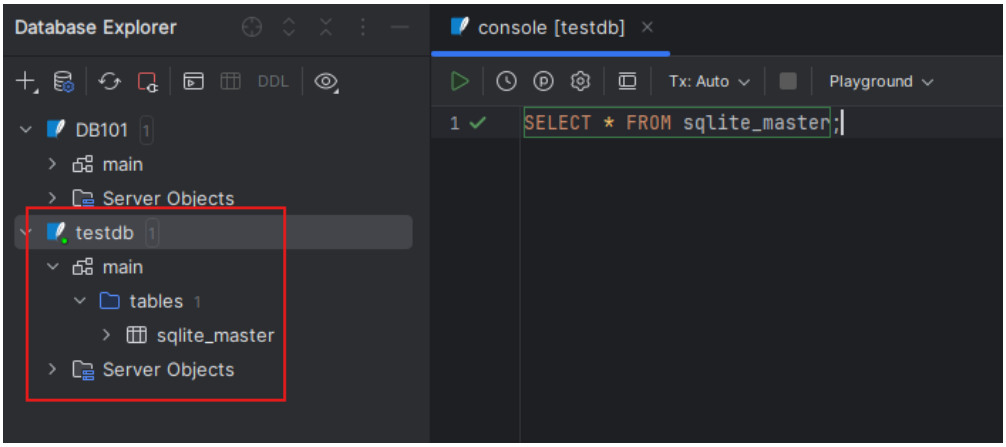


4 Connection using DBeaver

To install DBeaver:

1. Download the Windows installer here.

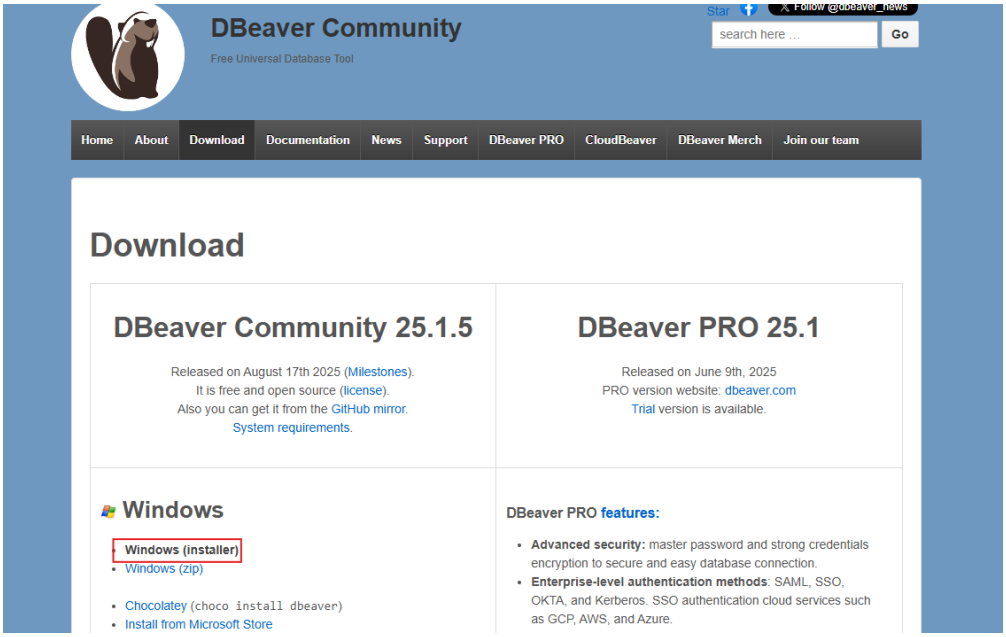

2. Once the installer has been downloaded, run the installer and follow the instructions.
3. In the *Component selection* section, you can choose to associate SQLite database files by checking the corresponding box.

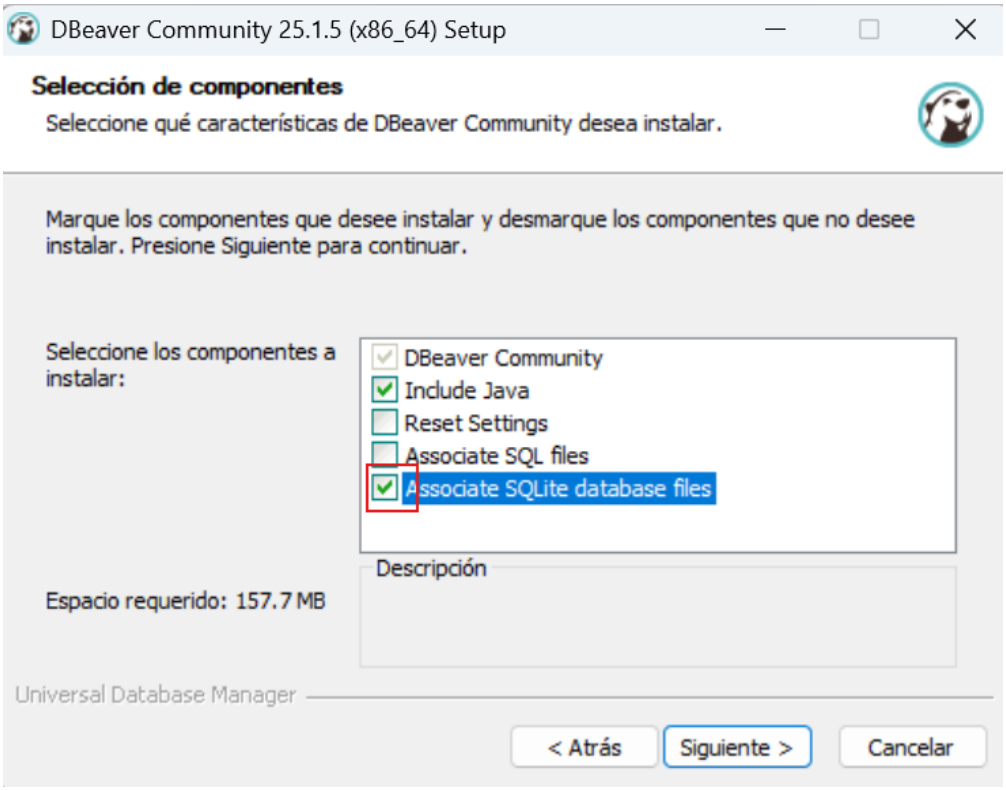


4. Choose the installation path and click on **Next**.
5. Once the installation has been completed, click on **Finish**.




Once DBeaver has been successfully installed, we will connect to the SQLite database created earlier.


1. Open DBeaver and click on the **New Connection** button. You can also use the `Ctrl+Mayús+N` shortcut.

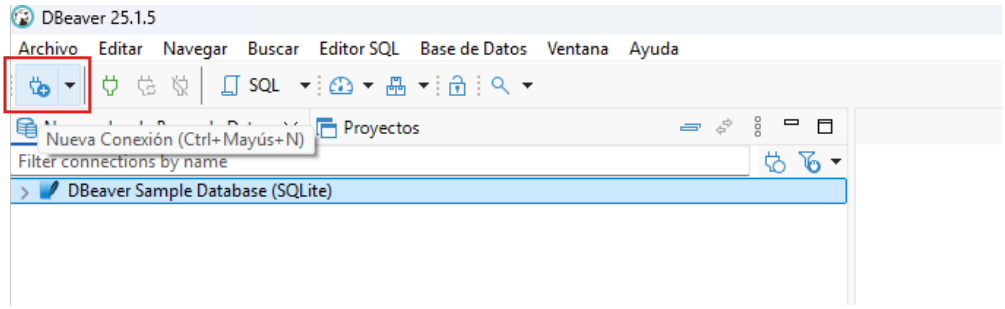


2. Once the New Connection window pops up, select **SQLite** as the database and click on **Next**.

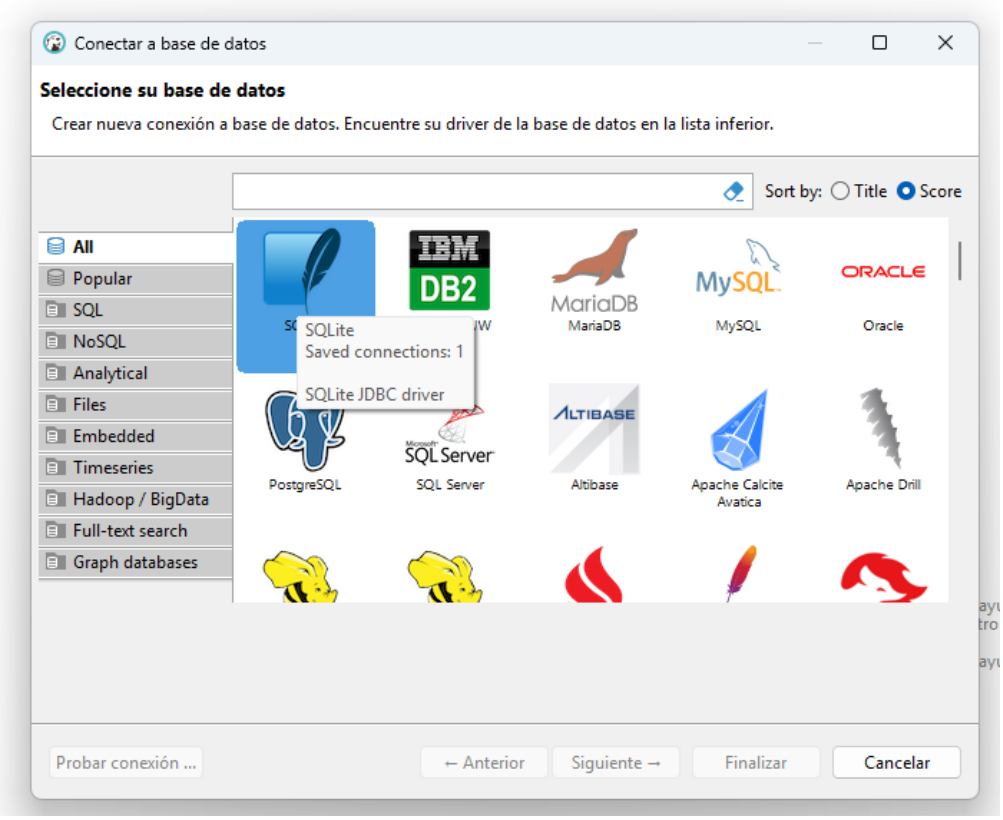

3. In the *General* section, select the database path. Click on **Open** and in the File Explorer, select the SQLite database we created earlier.

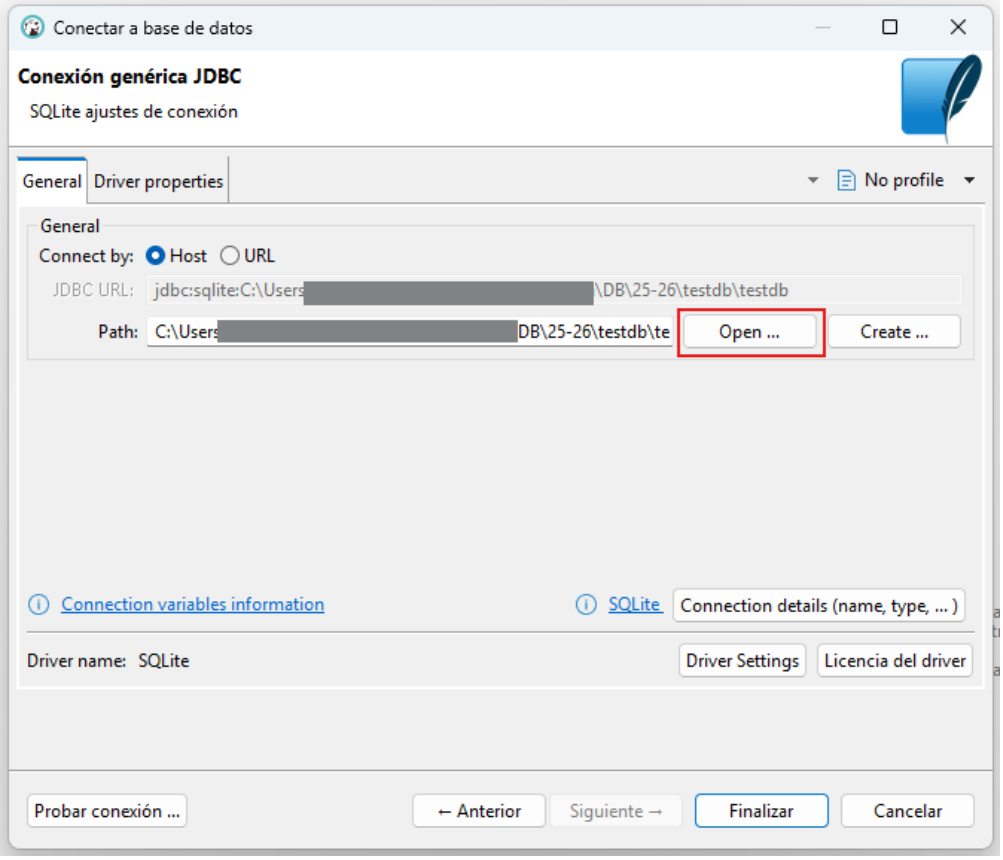

4. To test the connection, click on **Test connection** at the bottom. If any driver is missing, you will be prompted to download the driver files. In that case, click on **Download** to download the files.

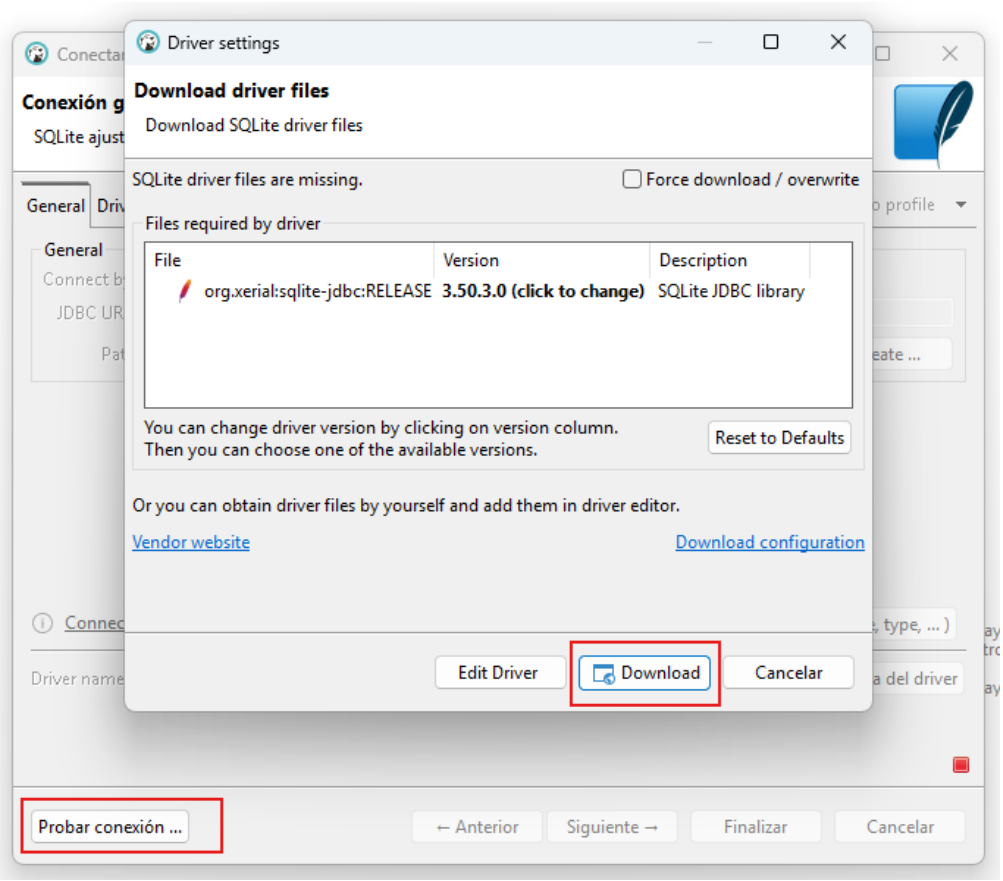

5. Once everything has been configured, the connection test should be successful.

