

Seaborn Function Syntax & Visuals Reference

```
sns.barplot(x=df['ColOne'], y=df['ColTwo'], estimator='sum')
```

Aggregates numerical values (e.g., sum/mean) per category using bars.



```
sns.countplot(x=df['ColOne'])
```

Counts and displays raw observation frequencies per category.




```
sns.histplot(x=df['ColOne'], kde=True)
```

Plots frequency distribution bins with an optional density curve.



```
sns.boxplot(x=df['ColOne'], y=df['ColTwo'])
```

Displays data spread through quartiles, medians, and outliers.




```
sns.scatterplot(x=df['ColOne'], y=df['ColTwo'])
```

Maps 2D coordinates to examine relationships between variables.



`sns.lineplot(x=df[ 'ColOne' ], y=df[ 'ColTwo' ])`

Connects sequential data trajectories with trend paths.

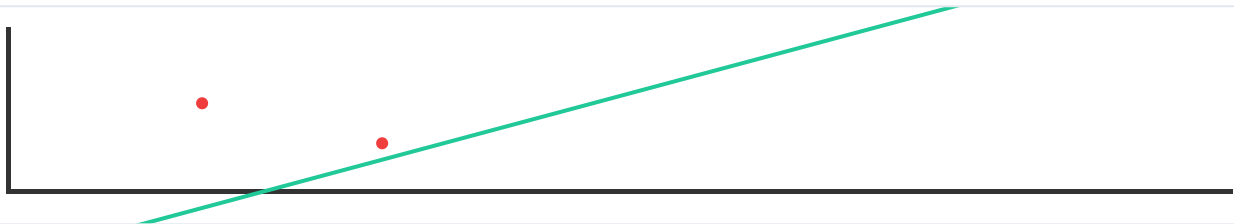

`sns.heatmap(data=corr_matrix)`

Renders 2D matrix values using a color gradient map.

0.9	0.2	0.5
0.1	0.8	0.6


`sns.pairplot(data=df)`

Generates a grid of pairwise relationships across columns.

KDE	Scatter
Scatter	KDE

`sns.violinplot(x=df[ 'ColOne' ], y=df[ 'ColTwo' ])`

Combines box plot stats with kernel density profiles.

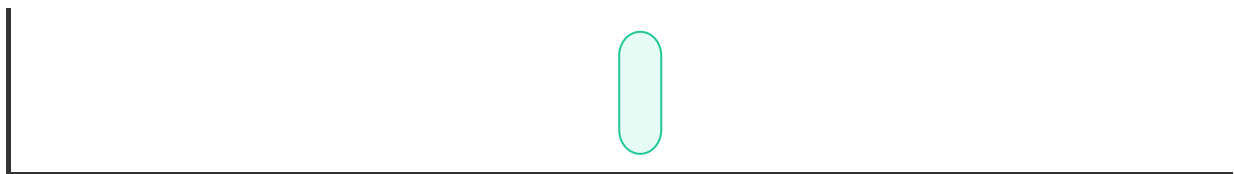

```
sns.regplot(x=df['ColOne'], y=df['ColTwo'])
```

Fits a linear or polynomial trendline with confidence bands.

