MODULE 2 — Conditional Statements and Operators

Question: Conditional Statements in C

Platform: HackerRank

Problem Link: Conditional Statements in C

C Source Code:

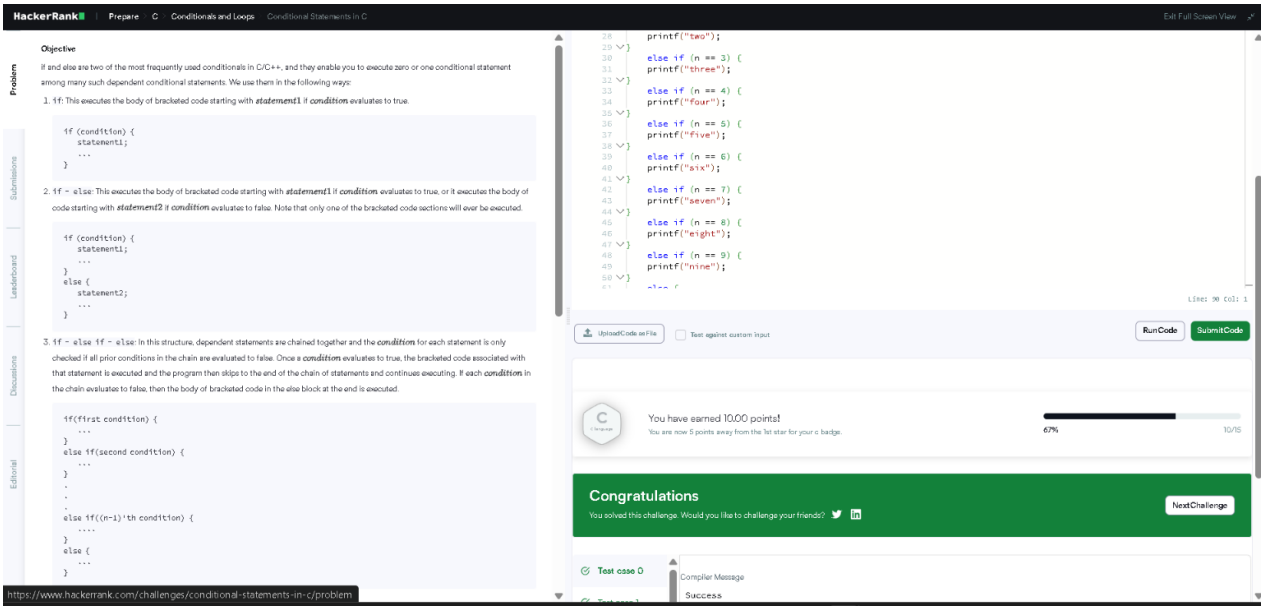
```
#include <stdio.h>

int main() {
    int n;
    scanf("%d", &n);

    if (n == 1) {
        printf("one");
    }
    else if (n == 2) {
        printf("two");
    }
    else if (n == 3) {
        printf("three");
    }
    else if (n == 4) {
        printf("four");
    }
    else if (n == 5) {
        printf("five");
    }
    else if (n == 6) {
        printf("six");
    }
    else if (n == 7) {
        printf("seven");
    }
    else if (n == 8) {
        printf("eight");
    }
    else if (n == 9) {
        printf("nine");
    }
    else {
        printf("Greater than 9");
    }

    return 0;
}
```

screenshot:


HackerRank
Prepare / C / Conditionals and Loops / Conditional Statements In C
Exit Full Screen View
Problem
Submissions
Leaderboard
Discussions
Editorial
Objective
If and else are two of the most frequently used conditionals in C/C++, and they enable you to execute zero or one conditional statement among many such dependent conditional statements. We use them in the following ways:
1. if: This executes the body of bracketed code starting with statement1 if condition evaluates to true.
if (condition) {
statement1;
...
}
2. if - else: This executes the body of bracketed code starting with statement1 if condition evaluates to true, or it executes the body of code starting with statement2 if condition evaluates to false. Note that only one of the bracketed code sections will ever be executed.
if (condition) {
statement1;
...
}
else {
statement2;
...
}
3. if - else if - else: In this structure, dependent statements are chained together and the condition for each statement is only checked if all prior conditions in the chain are evaluated to false. Once a condition evaluates to true, the bracketed code associated with that statement is executed and the program then skips to the end of the chain of statements and continues executing. If each condition in the chain evaluates to false, then the body of bracketed code in the else block at the end is executed.
if(first condition) {
...
}
else if(second condition) {
...
}
.
.
.
else if((n-1)'th condition) {
....
}
else {
...
}
printf("two");
}
else if (n == 3) {
printf("three");
}
else if (n == 4) {
printf("four");
}
else if (n == 5) {
printf("five");
}
else if (n == 6) {
printf("six");
}
else if (n == 7) {
printf("seven");
}
else if (n == 8) {
printf("eight");
}
else if (n == 9) {
printf("nine");
}
Line: 90 Col: 1
Upload Code as File
Test against custom input
Run Code
Submit Code
You have earned 10.00 points!
You are now 5 points away from the 1st star for your c badge.
67%
10/15
Congratulations
You solved this challenge. Would you like to challenge your friends?
Next Challenge
Test case 0
Compiler Message
Success
https://www.hackerrank.com/challenges/conditional-statements-in-c/problem