



# Application Programming Interface

Estimated time needed: **15** minutes

## Objectives

After completing this lab you will be able to:

- Create and Use APIs in Python

## Introduction

An API lets two pieces of software talk to each other. Just like a function, you don't have to know how the API works only its inputs and outputs. An essential type of API is a REST API that allows you to access resources via the internet. In this lab, we will review the Pandas Library in the context of an API, we will also review a basic REST API

## Table of Contents

- Pandas is an API
- REST APIs Basics
- Quiz on Tuples

---

In [1]:

```
!pip install pycoingecko
!pip install plotly
!pip install mplfinance
!pip install --upgrade nbformat
```

```
Collecting pycoingecko
  Downloading pycoingecko-3.1.0-py3-none-any.whl (8.8 kB)
Requirement already satisfied: requests in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from pycoingecko) (2.28.1)
Requirement already satisfied: charset-normalizer<3,>=2 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from requests->pycoingecko) (2.1.1)
Requirement already satisfied: certifi>=2017.4.17 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from requests->pycoingecko) (2022.9.24)
Requirement already satisfied: urllib3<1.27,>=1.21.1 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from requests->pycoingecko) (1.26.13)
Requirement already satisfied: idna<4,>=2.5 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from requests->pycoingecko) (3.4)
Installing collected packages: pycoingecko
Successfully installed pycoingecko-3.1.0
Requirement already satisfied: plotly in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (5.11.0)
Requirement already satisfied: tenacity>=6.2.0 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from plotly) (8.1.0)
Collecting mplfinance
  Downloading mplfinance-0.12.9b7-py3-none-any.whl (73 kB)
  ━━━━━━━━━━━━━━━━━━━━━━━━━━━━ 73.1/73.1 kB 5.4 MB/s eta 0:00:00
Requirement already satisfied: matplotlib in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from mplfinance) (3.5.3)
Requirement already satisfied: pandas in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from mplfinance) (1.3.5)
Requirement already satisfied: python-dateutil>=2.7 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (2.8.2)
Requirement already satisfied: numpy>=1.17 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (1.21.6)
Requirement already satisfied: cycler>=0.10 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (0.11.0)
Requirement already satisfied: packaging>=20.0 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (21.3)
Requirement already satisfied: pyparsing>=2.2.1 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (3.0.9)
Requirement already satisfied: pillow>=6.2.0 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (8.1.0)
Requirement already satisfied: kiwisolver>=1.0.1 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (1.4.4)
Requirement already satisfied: fonttools>=4.22.0 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from matplotlib->mplfinance) (4.38.0)
Requirement already satisfied: pytz>=2017.3 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from pandas->mplfinance) (2022.6)
Requirement already satisfied: typing-extensions in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from kiwisolver>=1.0.1->matplotlib->mplfinance) (4.4.0)
Requirement already satisfied: six>=1.5 in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from python-dateutil>=2.7->matplotlib->mplfinance) (1.16.0)
Installing collected packages: mplfinance
Successfully installed mplfinance-0.12.9b7
Requirement already satisfied: nbformat in /home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (5.7.0)
Collecting nbformat
  Downloading nbformat-5.8.0-py3-none-any.whl (77 kB)
  ━━━━━━━━━━━━━━━━━━━━━━━━━━━━ 77.4/77.4 kB 12.8 MB/s eta 0:00:00
```

```

Requirement already satisfied: jupyter-core in /home/jupyterlab/conda/envs/python/
lib/python3.7/site-packages (from nbformat) (4.12.0)
Requirement already satisfied: traitlets>=5.1 in /home/jupyterlab/conda/envs/pytho
n/lib/python3.7/site-packages (from nbformat) (5.6.0)
Requirement already satisfied: fastjsonschema in /home/jupyterlab/conda/envs/pytho
n/lib/python3.7/site-packages (from nbformat) (2.16.2)
Requirement already satisfied: jsonschema>=2.6 in /home/jupyterlab/conda/envs/pyth
on/lib/python3.7/site-packages (from nbformat) (4.17.3)
Requirement already satisfied: importlib-metadata>=3.6 in /home/jupyterlab/conda/e
nvs/python/lib/python3.7/site-packages (from nbformat) (4.11.4)
Requirement already satisfied: typing-extensions>=3.6.4 in /home/jupyterlab/conda/
envs/python/lib/python3.7/site-packages (from importlib-metadata>=3.6->nbformat)
(4.4.0)
Requirement already satisfied: zipp>=0.5 in /home/jupyterlab/conda/envs/python/li
b/python3.7/site-packages (from importlib-metadata>=3.6->nbformat) (3.11.0)
Requirement already satisfied: importlib-resources>=1.4.0 in /home/jupyterlab/cond
a/envs/python/lib/python3.7/site-packages (from jsonschema>=2.6->nbformat) (5.10.
1)
Requirement already satisfied: attrs>=17.4.0 in /home/jupyterlab/conda/envs/pytho
n/lib/python3.7/site-packages (from jsonschema>=2.6->nbformat) (22.1.0)
Requirement already satisfied: pkgutil-resolve-name>=1.3.10 in /home/jupyterlab/co
nda/envs/python/lib/python3.7/site-packages (from jsonschema>=2.6->nbformat) (1.3.
10)
Requirement already satisfied: pyrsistent!=0.17.0,!>=0.17.1,!>=0.17.2,>=0.14.0 in /h
ome/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from jsonschema>=2.6
->nbformat) (0.19.2)
Installing collected packages: nbformat
  Attempting uninstall: nbformat
    Found existing installation: nbformat 5.7.0
    Uninstalling nbformat-5.7.0:
      Successfully uninstalled nbformat-5.7.0
Successfully installed nbformat-5.8.0

```

## Pandas is an API

Pandas is actually set of software components , much of which is not even written in Python.

```
In [4]: import pandas as pd
import numpy as np
import plotly.graph_objects as go
from plotly.offline import plot
import matplotlib.pyplot as plt
import datetime
from pycoingecko import CoinGeckoAPI
from mplfinance.original_flavor import candlestick2_ohlc
```


You create a dictionary, this is just data.

```
In [5]: dict_= {'a':[11,21,31], 'b':[12,22,32]}
```

When you create a Pandas object with the Dataframe constructor in API lingo, this is an "instance". The data in the dictionary is passed along to the pandas API. You then use the dataframe to communicate with the API.

```
In [6]: df=pd.DataFrame(dict_)
type(df)
```

```
Out[6]: pandas.core.frame.DataFrame
```

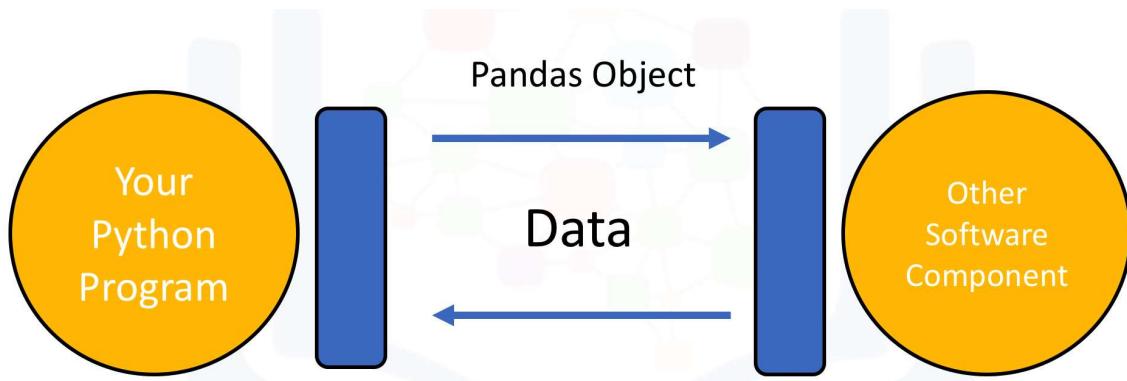

When you call the method head the dataframe communicates with the API displaying the first few rows of the dataframe.

```
In [7]: df.head()
```

```
Out[7]:   a   b
          0   11  12
          1   21  22
          2   31  32
```

When you call the method mean, the API will calculate the mean and return the value.

```
In [8]: df.mean()
```

```
Out[8]: a    21.0
        b    22.0
       dtype: float64
```


## REST APIs

Rest API's function by sending a request, the request is communicated via HTTP message. The HTTP message usually contains a JSON file. This contains instructions for what operation we would like the service or resource to perform. In a similar manner, API returns a response, via an HTTP message, this response is usually contained within a JSON.

In cryptocurrency a popular method to display the movements of the price of a currency.



Here is a description of the candle sticks.

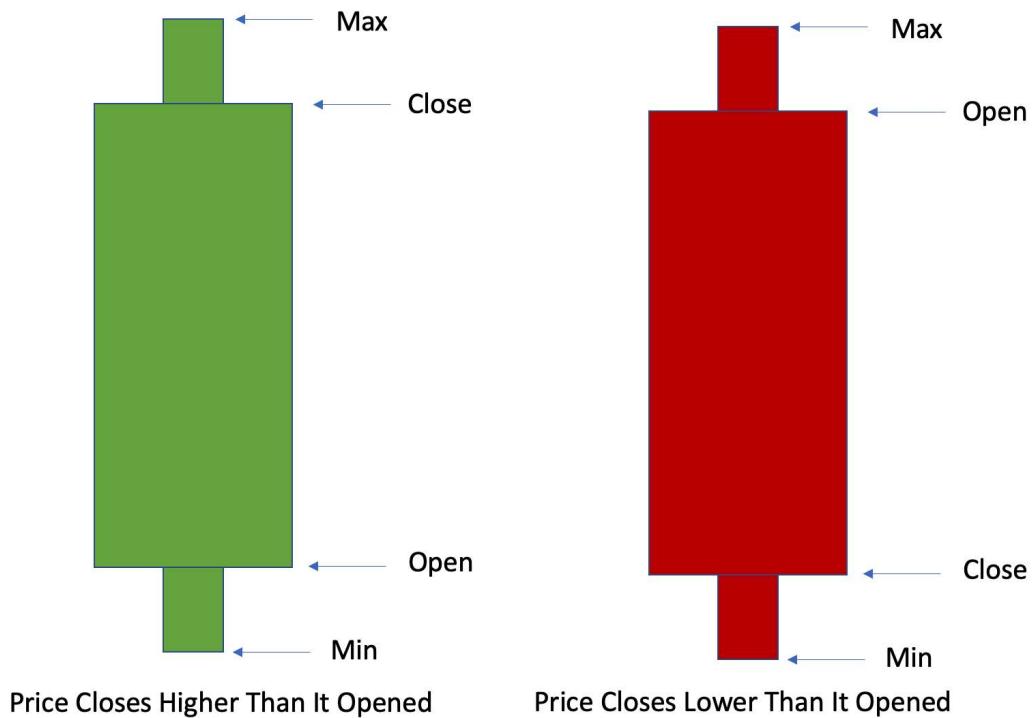

In this lab, we will be using the <a href="https://www.coingecko.com/en/api?utm\_medium=Exinfluencer&utm\_source=Exinfluencer&utm\_content=000026UJ&utm\_term=100SkillsNetwork-Channel-SkillsNetworkCoursesIBMDriverSkillsNetworkPY0101ENSkillsNetwork1005-2022-01-01%3ECoinGecko API to create one of these candlestick graphs for Bitcoin. We will use the

API to get the price data for 30 days with 24 observation per day, 1 per hour. We will find the max, min, open, and close price per day meaning we will have 30 candlesticks and use that to generate the candlestick graph. Although we are using the CoinGecko API we will use a Python client/wrapper for the API called [PyCoinGecko](#). PyCoinGecko will make performing the requests easy and it will deal with the endpoint targeting.

Lets start off by getting the data we need. Using the `get_coin_market_chart_by_id(id, vs_currency, days)`. `id` is the name of the coin you want, `vs_currency` is the currency you want the price in, and `days` is how many days back from today you want.

```
In [ ]: cg = CoinGeckoAPI()

bitcoin_data = cg.get_coin_market_chart_by_id(id='bitcoin', vs_currency='usd', days=30)

In [ ]: type(bitcoin_data)
```

The response we get is in the form of a JSON which includes the price, market caps, and total volumes along with timestamps for each observation. We are focused on the prices so we will select that data.

```
In [ ]: bitcoin_price_data = bitcoin_data['prices']

bitcoin_price_data[0:5]
```

Finally lets turn this data into a Pandas DataFrame.

```
In [ ]: data = pd.DataFrame(bitcoin_price_data, columns=['TimeStamp', 'Price'])
```

Now that we have the DataFrame we will convert the timestamp to datetime and save it as a column called `Date`. We will map our `unix_to_datetime` to each timestamp and convert it to a readable datetime.

```
In [ ]: data['date'] = data['TimeStamp'].apply(lambda d: datetime.date.fromtimestamp(d/1000))
```

Using this modified dataset we can now group by the `Date` and find the min, max, open, and close for the candlesticks.

```
In [ ]: candlestick_data = data.groupby(data.date, as_index=False).agg({"Price": ['min', 'max', 'open', 'close']})
```

Finally we are now ready to use plotly to create our Candlestick Chart.

```
In [ ]: fig = go.Figure(data=[go.Candlestick(x=candlestick_data['date'],
                                             open=candlestick_data['Price']['first'],
                                             high=candlestick_data['Price']['max'],
                                             low=candlestick_data['Price']['min'],
                                             close=candlestick_data['Price']['last'])])
```

```
fig.update_layout(xaxis_rangeslider_visible=False)

fig.show()
```

## Authors:

## Change Log

Date (YYYY-MM-DD)	Version	Changed By	Change Description
2020-11-23	3.0	Azim Hirjani	New API
2020-09-09	2.1	Malika Singla	Spell Check
2020-08-26	2.0	Lavanya	Moved lab to course repo in GitLab

© IBM Corporation 2020. All rights reserved.

In [ ]: