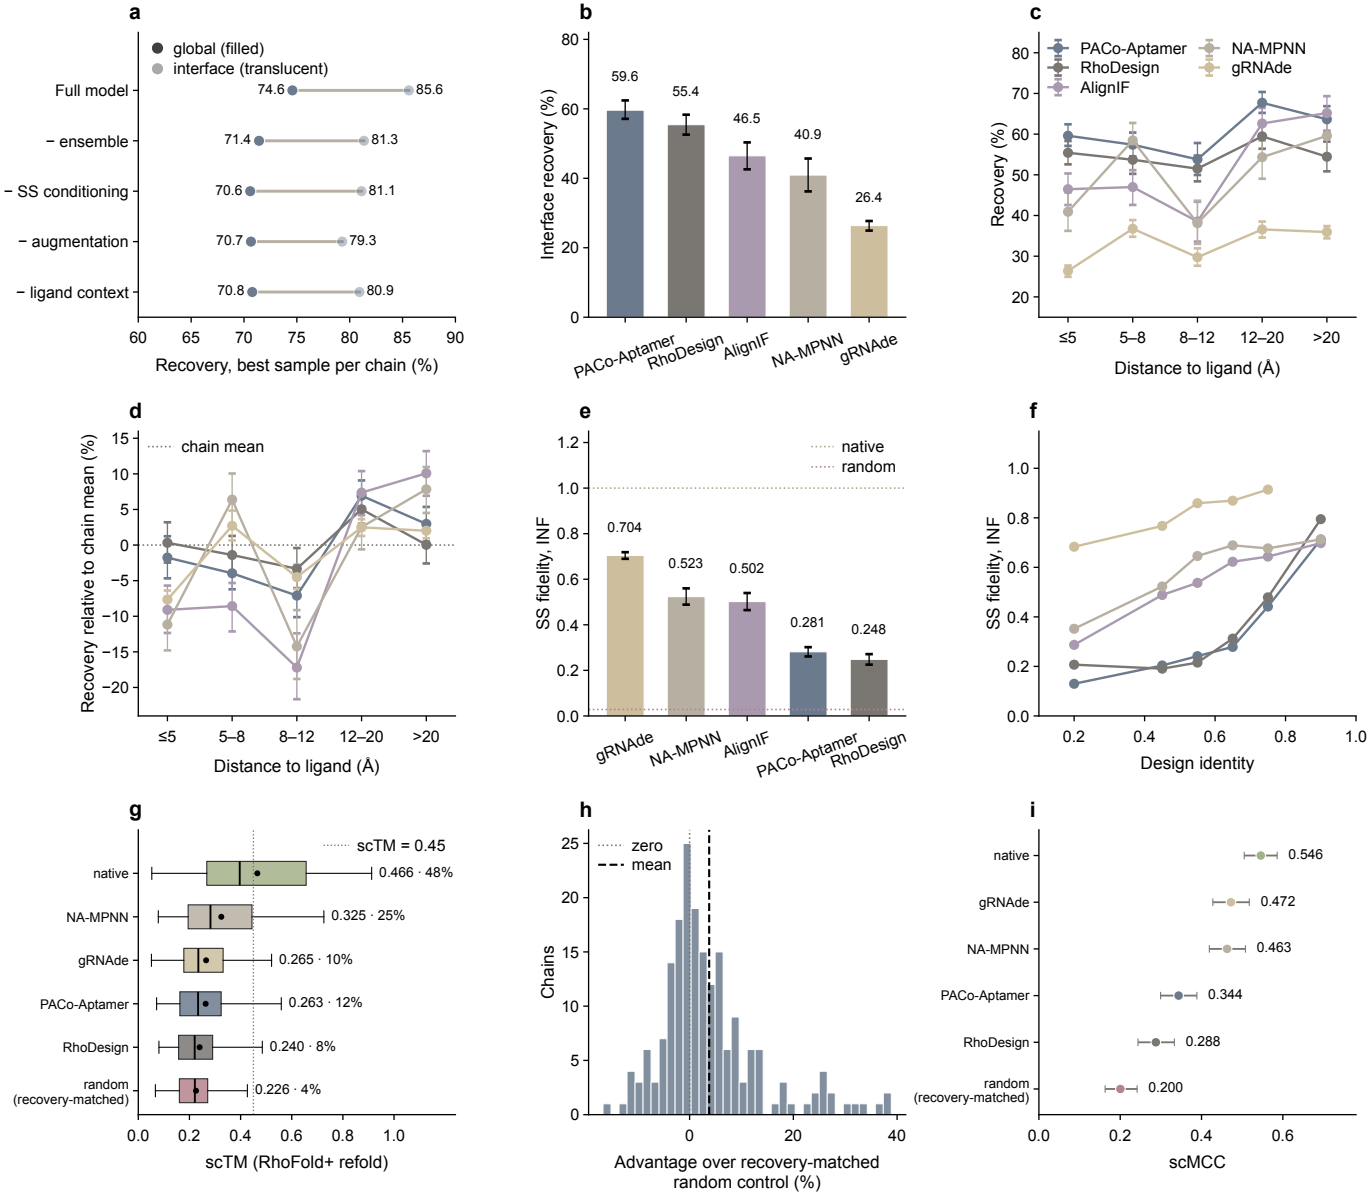
a
global (filled)
interface (translucent)
Full model
− ensemble
− SS conditioning
− augmentation
− ligand context
74.6
85.6
71.4
81.3
70.6
81.1
70.7
79.3
70.8
80.9
60
65
70
75
80
85
90
Recovery, best sample per chain (%)
b
Interface recovery (%)
59.6
55.4
46.5
40.9
26.4
PACo-Aptamer
RhoDesign
AlignIF
NA-MPNN
gRNAde
c
PACo-Aptamer
RhoDesign
AlignIF
NA-MPNN
gRNAde
Recovery (%)
≤5
5–8
8–12
12–20
>20
Distance to ligand (Å)
d
chain mean
Recovery relative to chain mean (%)
≤5
5–8
8–12
12–20
>20
Distance to ligand (Å)
e
native
random
SS fidelity, INF
0.704
0.523
0.502
0.281
0.248
gRNAde
NA-MPNN
AlignIF
PACo-Aptamer
RhoDesign
f
SS fidelity, INF
Design identity
g
scTM = 0.45
native
0.466 · 48%
NA-MPNN
0.325 · 25%
gRNAde
0.265 · 10%
PACo-Aptamer
0.263 · 12%
RhoDesign
0.240 · 8%
random
(recovery-matched)
0.226 · 4%
scTM (RhoFold+ refold)
h
zero
mean
Chains
Advantage over recovery-matched
random control (%)
i
native
0.546
gRNAde
0.472
NA-MPNN
0.463
PACo-Aptamer
0.344
RhoDesign
0.288
random
(recovery-matched)
0.200
scMCC