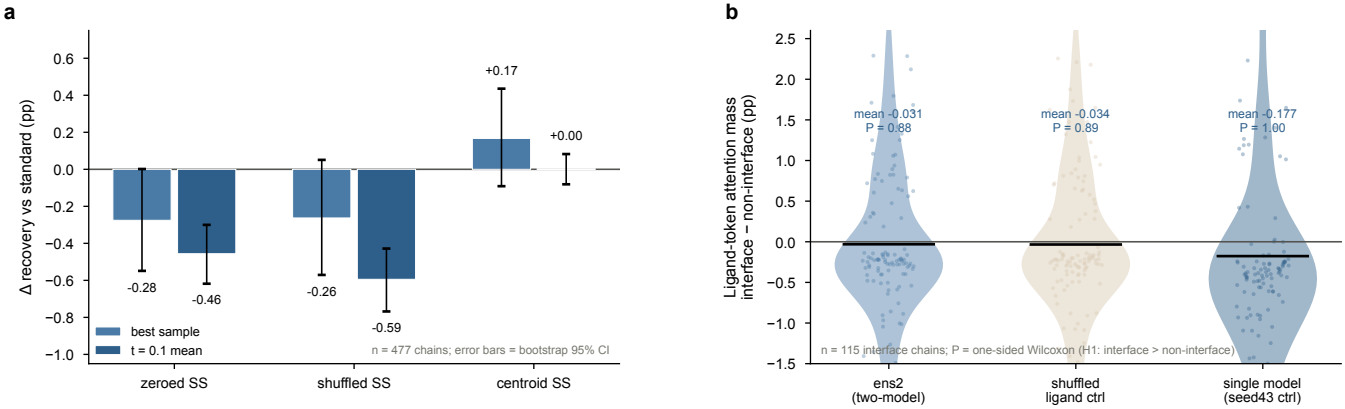
a
Δ recovery vs standard (pp)
0.6
0.4
0.2
0.0
−0.2
−0.4
−0.6
−0.8
−1.0
-0.28
-0.46
-0.26
-0.59
+0.17
+0.00
best sample
t = 0.1 mean
n = 477 chains; error bars = bootstrap 95% CI
zeroed SS
shuffled SS
centroid SS
b
Ligand-token attention mass
interface − non-interface (pp)
2.5
2.0
1.5
1.0
0.5
0.0
−0.5
−1.0
−1.5
mean -0.031
P = 0.88
mean -0.034
P = 0.89
mean -0.177
P = 1.00
n = 115 interface chains; P = one-sided Wilcoxon (H1: interface > non-interface)
ens2
(two-model)
shuffled
ligand ctrl
single model
(seed43 ctrl)