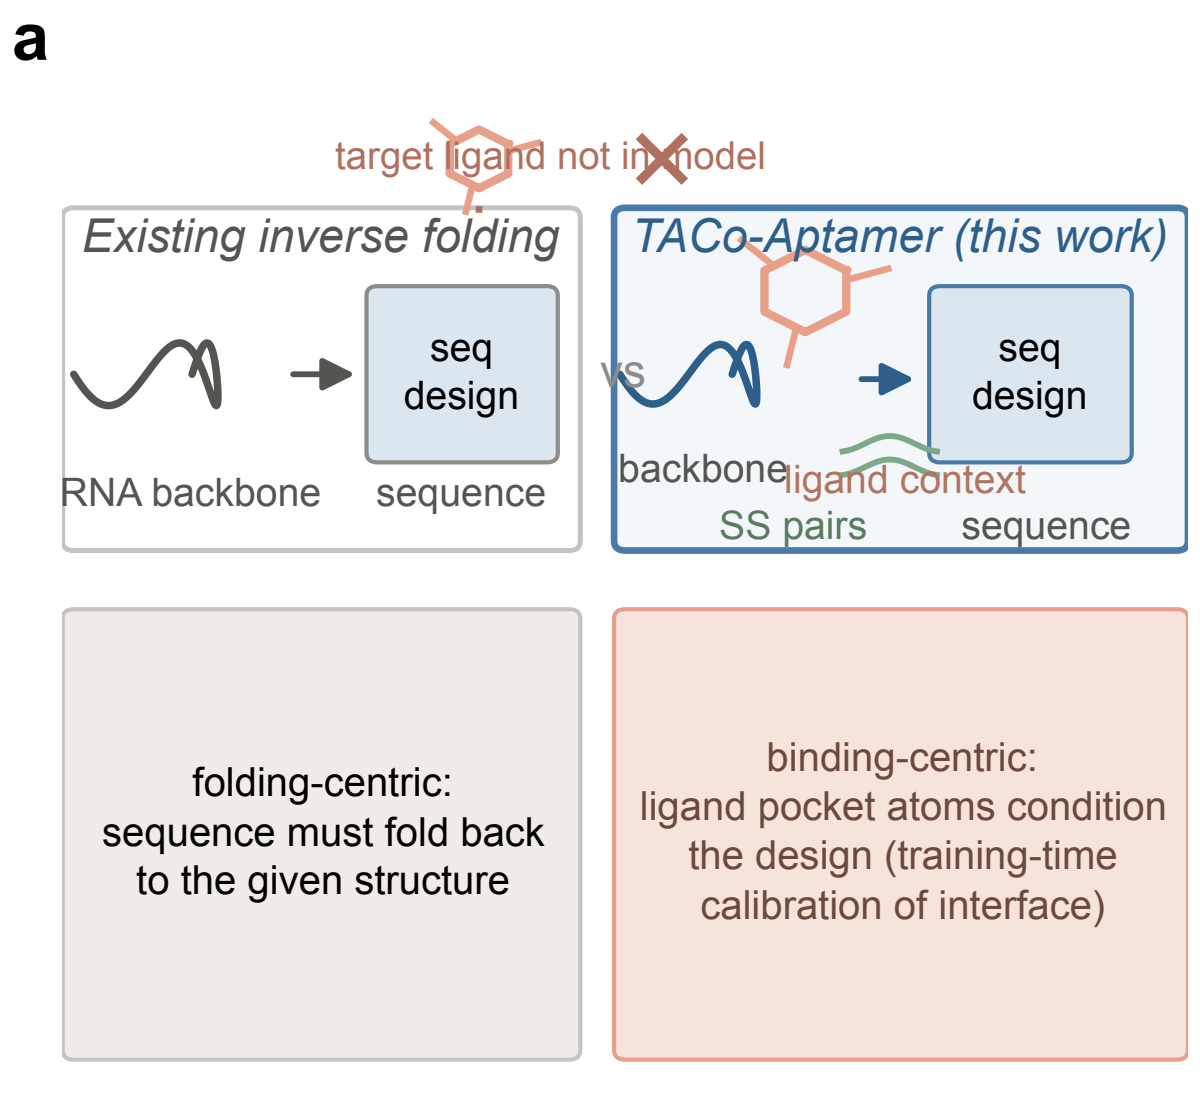
a
target ligand not in model
Existing inverse folding
seq design
RNA backbone
sequence
TACo-Aptamer (this work)
vs
seq design
backbone
ligand context
SS pairs
sequence
folding-centric:
sequence must fold back
to the given structure
binding-centric:
ligand pocket atoms condition
the design (training-time
calibration of interface)