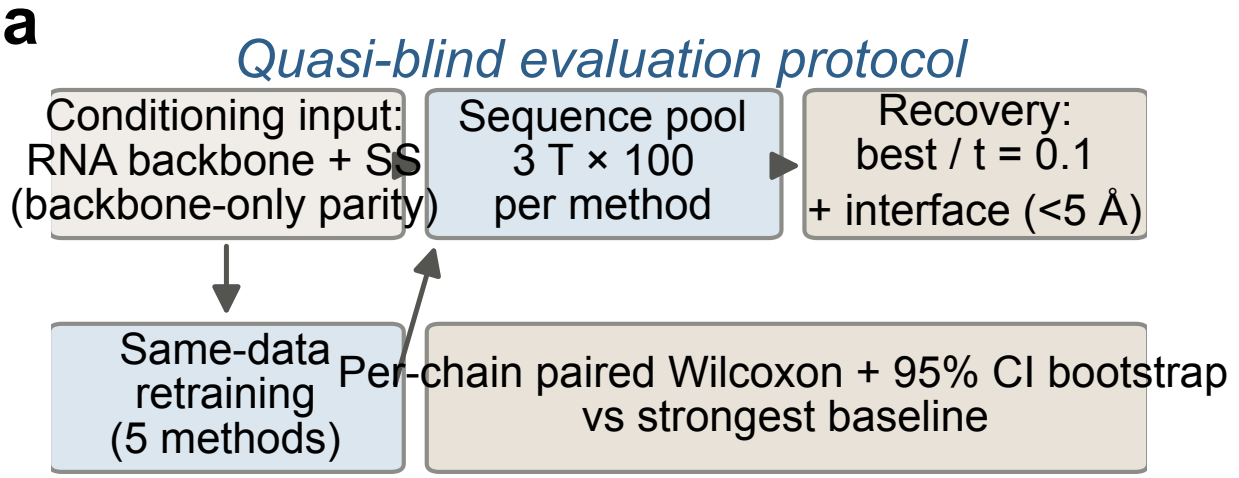
a
Quasi-blind evaluation protocol
Conditioning input:
RNA backbone + SS
(backbone-only parity)
Sequence pool
3 T × 100
per method
Recovery:
best / t = 0.1
+ interface (<5 Å)
Same-data
retraining
(5 methods)
Per-chain paired Wilcoxon + 95% CI bootstrap
vs strongest baseline