

Ubuntu 설치 매뉴얼


1. VM웨어 설치

1) VM웨어 New Virtual Machine Wizard



기본설정으로!

2)ISO 이미지 다운로드(live-server이라고 적힌게 서버용)

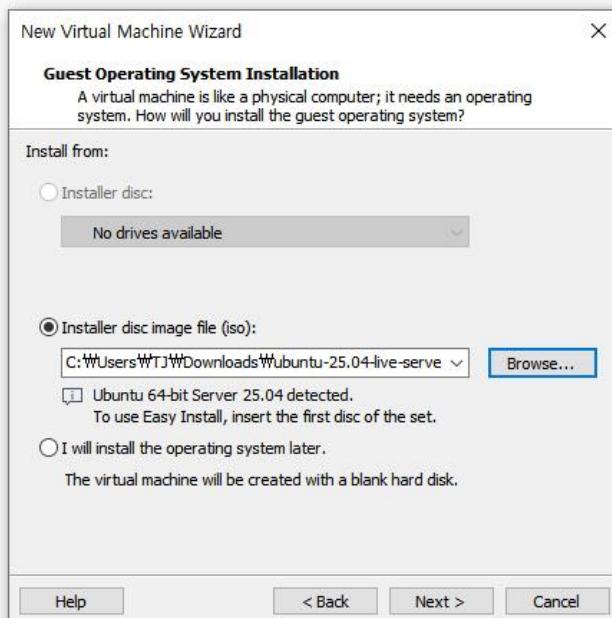


ubuntu-25.04-live-server-amd64

2025-04-30 오후 2:19


디스크 이미지 파일

1,974,366...

3) VM이름, 용량 설정 - 디폴트값으로

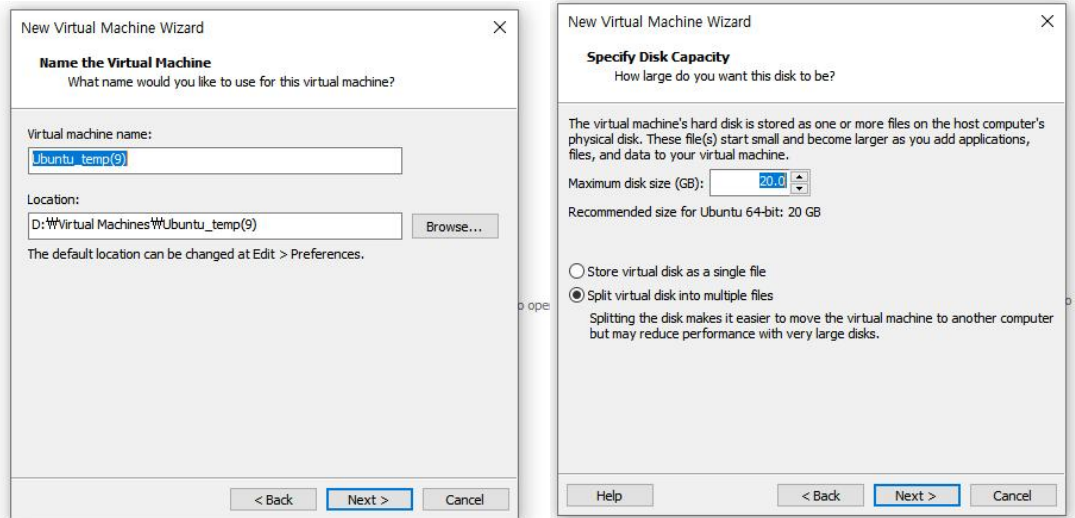

4) 하드웨어 Customize - 세팅값 바꾸기

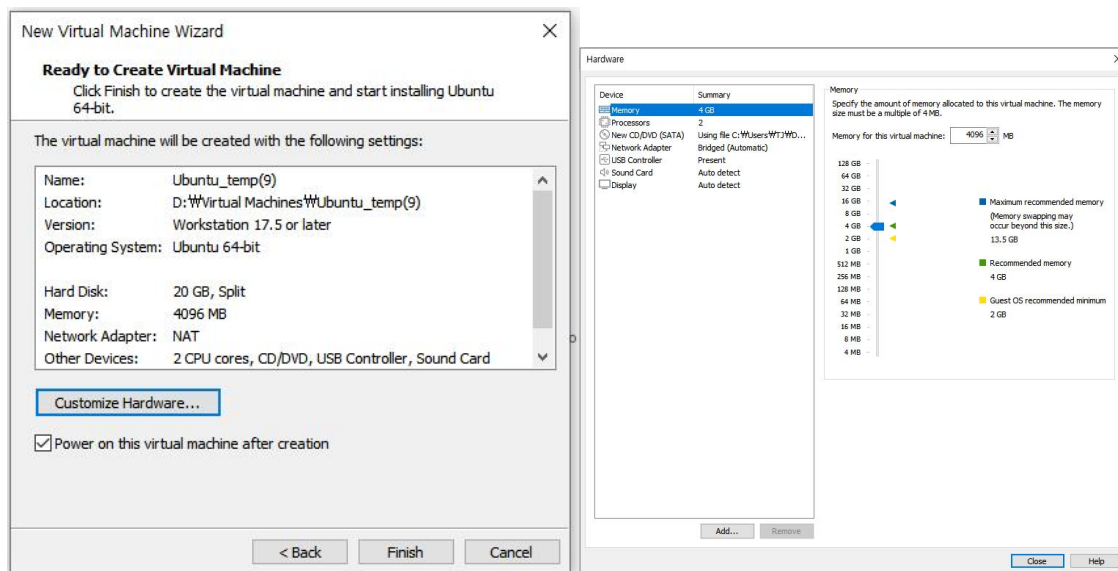



(수정사항) 메모리 - 4GB / Network Adapter - Bridged(Automatic)

ip는 설치완료 후 세팅


2. Ubuntu 설치

1) 설치화면 : Try or Install Ubuntu 선택하고 엔터

2) 언어설정 English - English

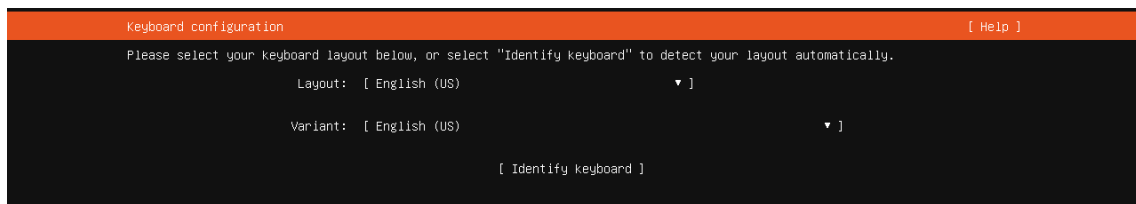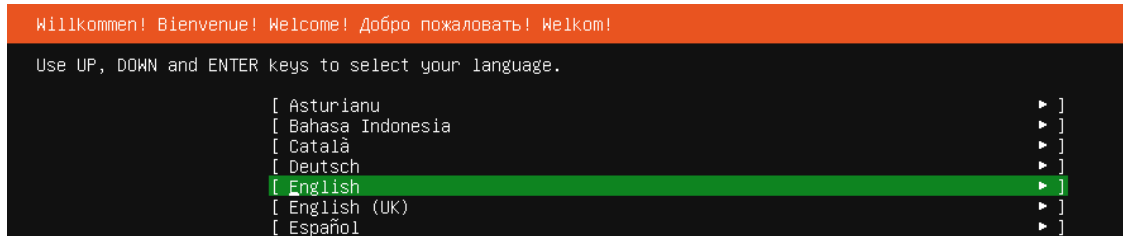


그대로 English 두고 다음으로 넘어가기

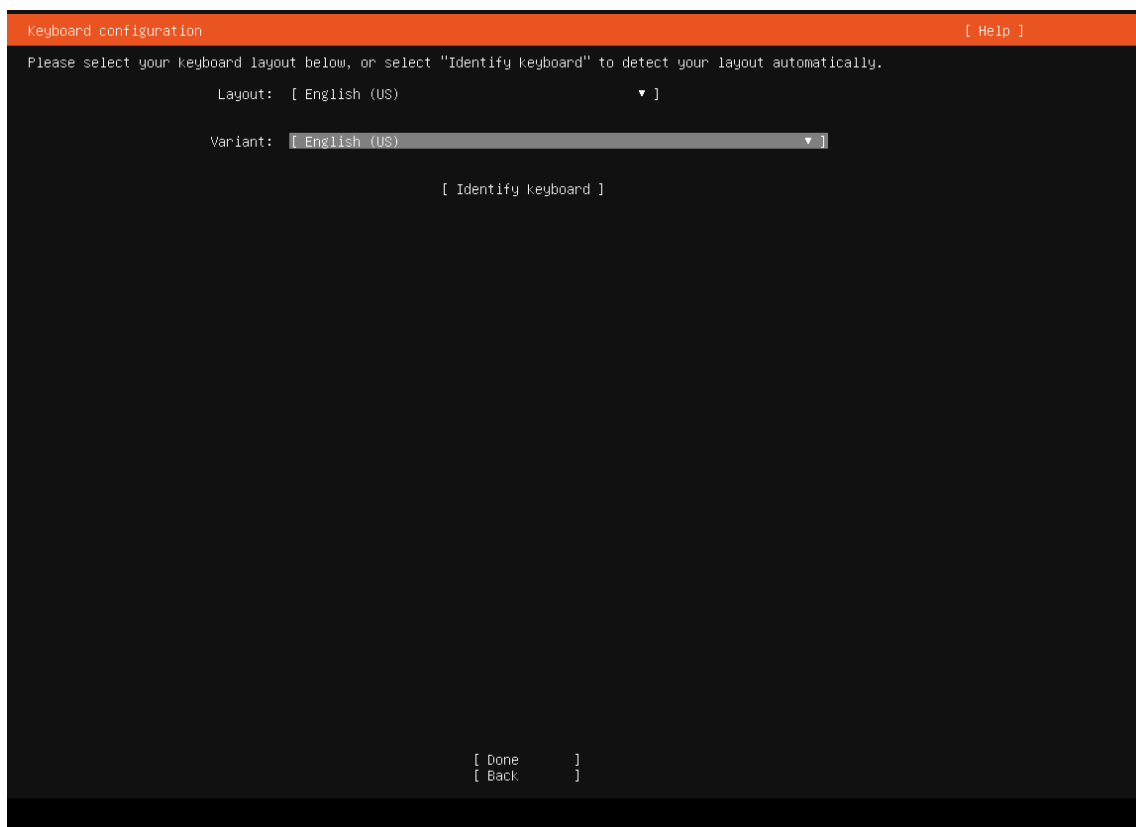


Done 누르기


3) type - 미니멀설치

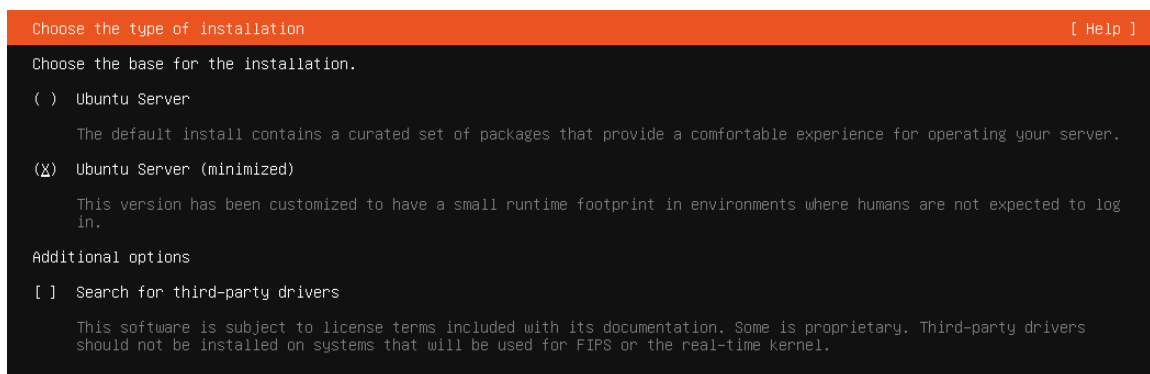


4) Network configuration - IPv4 및 ens33 설정

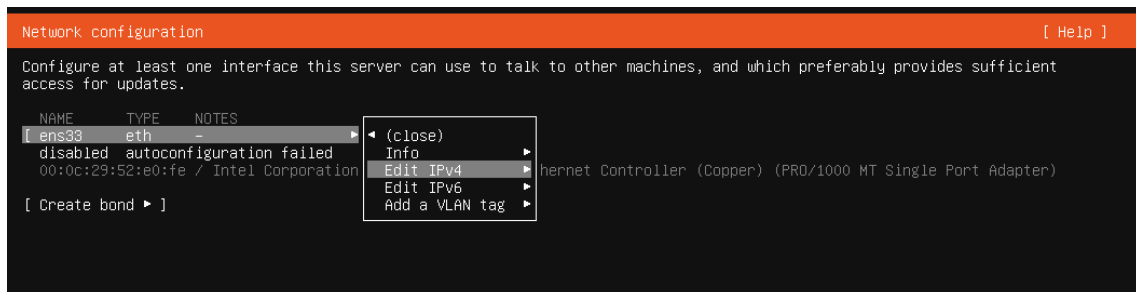

- IPv4 선택 후, 경우에 따라 Automatic/Manual중에 고르기.

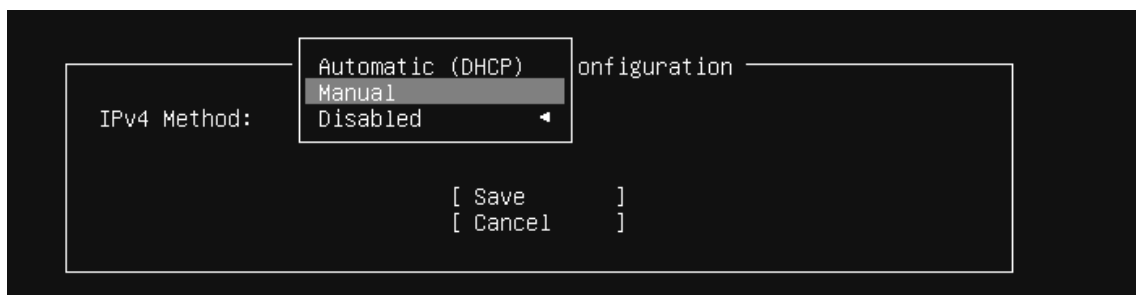

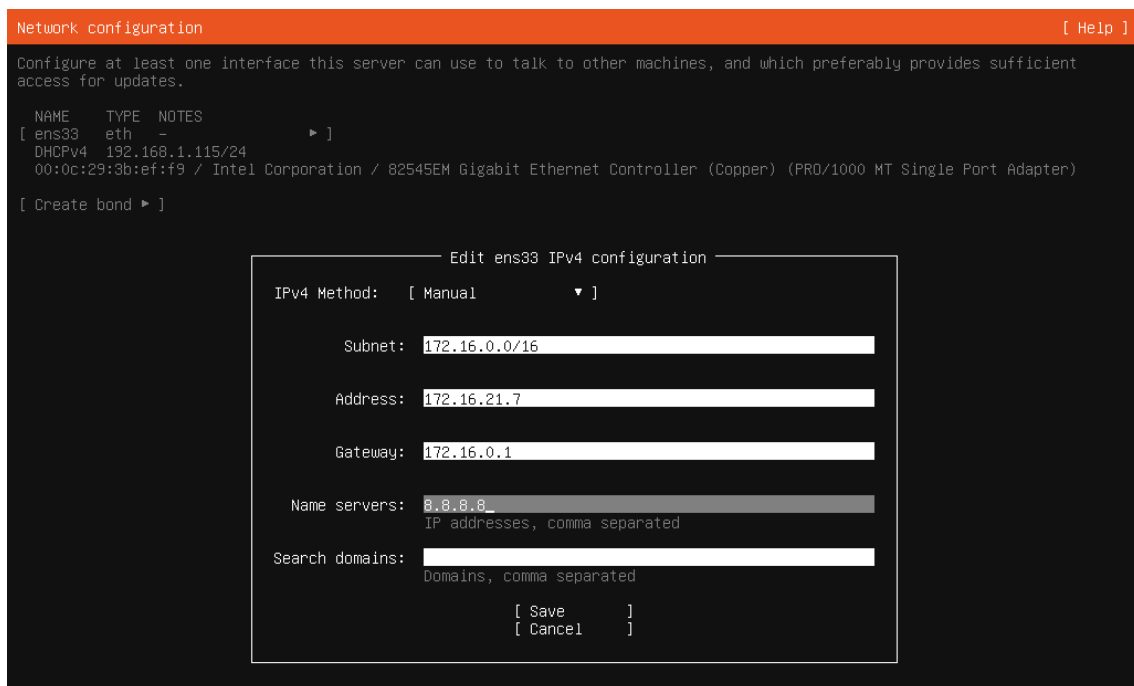


<설치유의사항>

ip는 ipv4 눌러서 바꿔주고

subnet은 255아니고 172.16.0.0/16

nameserver 8.8.8.8

5) Proxy Configuration - 프록시 설정할 때 입력. 기본적으로는 넘어가기.

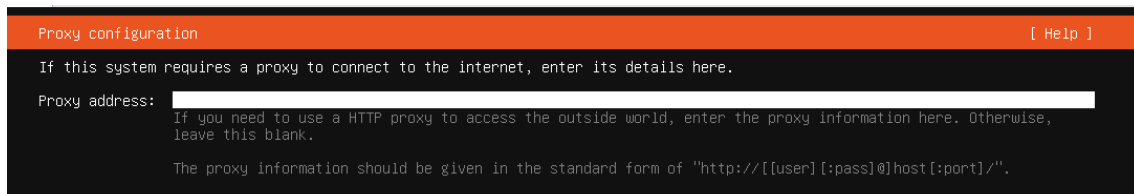

6) Mirror address - 그대로 두기

```
Ubuntu archive mirror configuration [ Help ]

If you use an alternative mirror for Ubuntu, enter its details here.

Mirror address: http://kr.archive.ubuntu.com/ubuntu/
You may provide an archive mirror to be used instead of the default.

This mirror location passed tests.

Get:1 http://kr.archive.ubuntu.com/ubuntu plucky InRelease [265 kB]
Get:2 http://kr.archive.ubuntu.com/ubuntu plucky-updates InRelease [126 kB]
Get:3 http://kr.archive.ubuntu.com/ubuntu plucky-backports InRelease [126 kB]
Fetched 517 kB in 0s (2,786 kB/s)
Reading package lists...
```

7) Storage Configuration - 그대로 두기

```
Guided storage configuration [ Help ]

Configure a guided storage layout, or create a custom one:

(✓) Use an entire disk
    [ /dev/sda local disk 20.000G ▼ ]
[X] Set up this disk as an LVM group
    [ ] Encrypt the LVM group with LUKS
        Passphrase:
        Confirm passphrase:

    [ ] Also create a recovery key
        The key will be stored as ~/recovery-key.txt in the live system and will be copied to
        /var/log/installer/ in the target system.

( ) Custom storage layout
```

```
Storage configuration

FILE SYSTEM SUMMARY

MOUNT POINT    SIZE    TYPE    DEVICE TYPE
[ /             10.000G new ext4 new LVM logical volume ▶ ]
[ /boot         1.771G  new ext4 new partition of local disk ▶ ]

AVAILABLE DEVICES

DEVICE                                TYPE                                SIZE
[ ubuntu-vg (new)                     LVM volume group                   18.222G ▶ ]
free space                             8.222G ▶

[ Create software RAID (md) ▶ ]
[ Create volume group (LVM) ▶ ]

USED DEVICES

DEVICE
[ ubuntu-vg (new)
  ubuntu-lv    new, to

[ /dev/sda
  partition 1  new, BIO
  partition 2  new, to
  partition 3  new, PV

Confirm destructive action

Selecting Continue below will begin the installation process and
result in the loss of data on the disks selected to be formatted.

You will not be able to return to this or a previous screen once the
installation has started.

Are you sure you want to continue?

[ No ]
[ Continue ]
```

8) 계정설정

처음 로그인은 root가 아니라 설치때 만든 사용자 계정명으로 들어가야하므로 잘 설정!!

Profile configuration
[Help]

Enter the username and password you will use to log in to the system. You can configure SSH access on a later screen, but a password is still needed for sudo.

Your name:

Your servers name:
The name it uses when it talks to other computers.

Pick a username:

Choose a password:

Confirm your password:

6) ssh 설정

SSH configuration

You can choose to install the OpenSSH server package to enable secure remote access to your server.

☒ Install OpenSSH server

☒ Allow password authentication over SSH

[Import SSH key ▶]

AUTHORIZED KEYS

No authorized key


7) 기본 설정된 설치내역 - 그대로 두기

Featured server snaps
[Help]

These are popular snaps in server environments. Select or deselect with SPACE, press ENTER to see more details of the package, publisher and versions available.


☐ microk8s	canonical✓	Kubernetes for workstations and appliances	▶
☐ nextcloud	nextcloud✓	Nextcloud Server - A safe home for all your data	▶
☐ wekan	xet7	Open-Source kanban	▶
☐ kata-containers	katacontainers✓	Build lightweight VMs that seamlessly plug into the containers ecosystem	▶
☐ docker	canonical✓	Docker container runtime	▶
☒ canonical-livepatch	canonical✓	Canonical Livepatch Client	▶
☐ rocketchat-server	rocketchat✓	Rocket.Chat server	▶
☐ mosquitto	mosquitto✓	Eclipse Mosquitto MQTT broker	▶
☐ etcd	canonical✓	Resilient key-value store by CoreOS	▶
☐ powershell	canonical✓	PowerShell for every system!	▶
☐ sabnzbd	safihre	SABnzbd	▶
☐ wormhole	snappcrafters	get things from one computer to another, safely	▶
☐ aws-cli	aws✓	Universal Command Line Interface for Amazon Web Services	▶
☐ google-cloud-sdk	google-cloud-sdk✓	Google Cloud SDK	▶
☐ slic3r	softlayer	Python based SoftLayer API Tool.	▶
☐ doctl	digitalocean✓	The official DigitalOcean command line interface	▶
☐ postgresql10	cmd✓	PostgreSQL is a powerful, open source object-relational database system.	▶
☐ keepalived	keepalived-project✓	High availability VRRP/BFD and load-balancing for Linux	▶
☐ prometheus	canonical✓	The Prometheus monitoring system and time series database	▶
☐ lxd	canonical✓	LXD - container and VM manager	▶

8) 설치 완료 화면

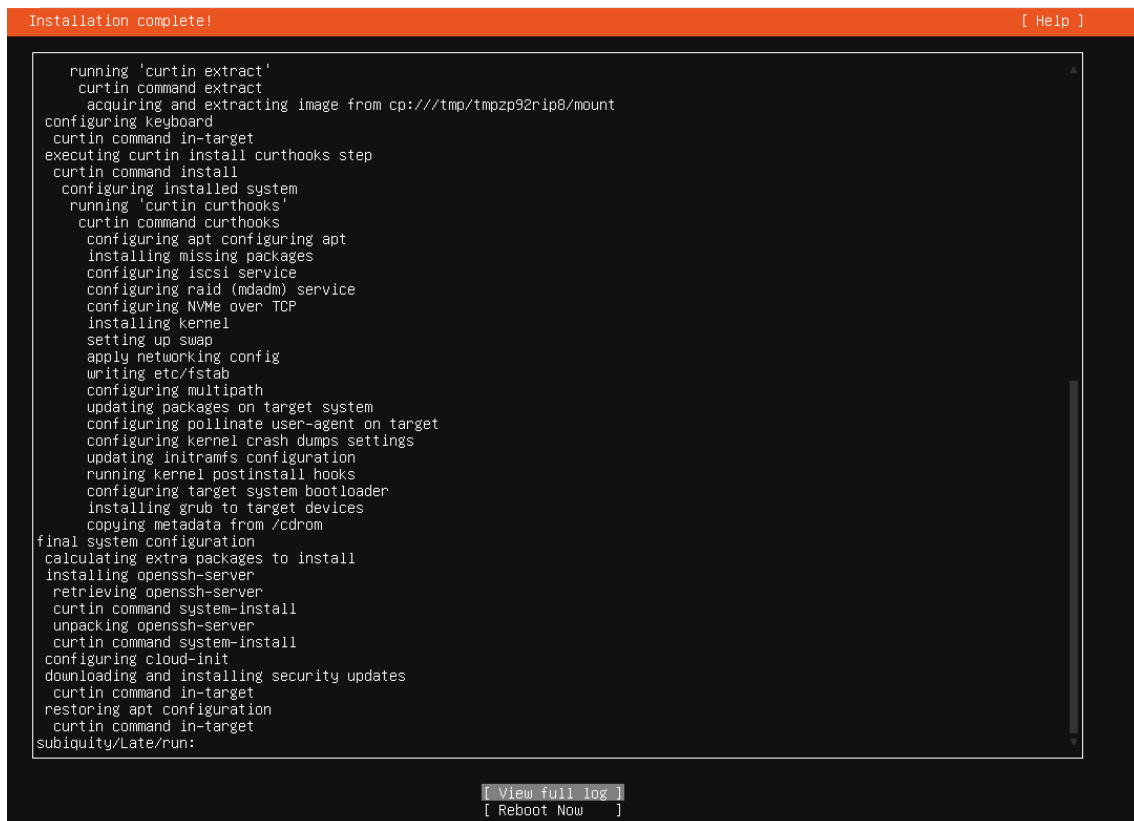


=> 기다렸다가 Reboot Now 뜨면 선택후 엔터

9. Reboot Now 누른후 아래와 같이 뜨면 정상적인 것!



(설치 미디어(CD)를 제거한 다음, ENTER 키를 누르세요.) 라는 의미.

-> VMware 창 오른쪽 아래에 있는 [I Finished Installing] 버튼을 누르고 “엔터키” 누르기!



2. root계정 생성

1) 최초 로그인은 user계정으로 들어가야함. (로그인 문구가 안뜰 때 엔터 누르면 뜬다.)

```

[ 12.904376] cloud-init[626]: +-- [ED25519 256] --+
[ 12.904428] cloud-init[626]: |           o           |
[ 12.904478] cloud-init[626]: |           O .           |
[ 12.904548] cloud-init[626]: |       . + @           |
[ 12.904607] cloud-init[626]: |       . o @ o           |
[ 12.904657] cloud-init[626]: |       o ..S.*           |
[ 12.904708] cloud-init[626]: |       . ..oo= =Eo .           |
[ 12.904757] cloud-init[626]: |       .. ..O.= =           |
[ 12.904807] cloud-init[626]: |       . B.+ o.+ o           |
[ 12.904856] cloud-init[626]: |       .+ *O=...O..           |
[ 12.904905] cloud-init[626]: +---- [SHA256] ----+
[ 12.905824] sh[1338]: Completed socket interaction for boot stage final

Ubuntu 25.04 ubuntutemp tty1

ubuntutemp login: hj_

```

- 2) 우분투는 기본적으로 root계정 x → 최초 루트계정 비밀번호 설정 및 활성화
- 로그인 후 `sudo passwd root`
 - 비번 2번 입력하라고 나오고 엔터치면 root계정 활성화됨

```

hj@ubuntutemp:~$ sudo passwd root
[sudo] password for hj:
New password:
Retype new password:
passwd: password updated successfully
hj@ubuntutemp:~$ _

```

3. root계정으로 옮기기(계정을 바꾸는 개념임, 상위/하위로 가는게 x)

`su root`

(다른계정으로 가는 명령어: `su 계정명`)

```

hj@ubuntutemp:~$ su -
Password:
root@ubuntutemp:~#

```

4. 아무것도 없으니 문서편집기부터 설치

nano편집기 설치: `sudo apt -y install nano`

(참고 : 로키9에서 `dnf` = 우분투 `apt`)

5. ssh 사용할 때 root 계정 설정하는법 (원격 파이썬으로 사용하기 위해 설정)

→ 보안에 취약하므로 실무에서는 안씀. 테스트라서 사용!

설정 파일

`nano /etc/ssh/sshd_config`

내용 수정

`PermitRootLogin yes`

SSH 서비스 재시작

`systemctl restart ssh`

```

root@ubuntutemp:~# sudo apt -y install nano
The following packages were automatically installed and are no longer required:
  linux-headers-6.14.0-15 linux-modules-6.14.0-15-generic linux-tools-6.14.0-15
  linux-headers-6.14.0-15-generic linux-modules-extra-6.14.0-15-generic linux-tools-6.14.0-15-generic
Use 'sudo apt autoremove' to remove them.

Installing:
  nano

Suggested packages:
  hunspell

Summary:
  Upgrading: 0, Installing: 1, Removing: 0, Not Upgrading: 42
  Download size: 312 kB
  Space needed: 942 kB / 7141 MB available

Get:1 http://kr.archive.ubuntu.com/ubuntu plucky/main amd64 nano amd64 8.3-1 [312 kB]
Fetched 312 kB in 0s (1517 kB/s)
debconf: unable to initialize frontend: Dialog
debconf: (No usable dialog-like program is installed, so the dialog based frontend cannot be used. at /usr/share/perl5/Debconf/FrontEnd/Dialog
N> line 1.)
debconf: falling back to frontend: Readline
Selecting previously unselected package nano.
(Reading database ... 114754 files and directories currently installed.)
Preparing to unpack .../archives/nano_8.3-1_amd64.deb ...
Unpacking nano (8.3-1) ...
Setting up nano (8.3-1) ...
update-alternatives: using /bin/nano to provide /usr/bin/editor (editor) in auto mode
update-alternatives: warning: skip creation of /usr/share/man/man1/editor.1.gz because associated file /usr/share/man/man1/nano.1.gz (of link gr
n't exist
update-alternatives: using /bin/nano to provide /usr/bin/pico (pico) in auto mode
update-alternatives: warning: skip creation of /usr/share/man/man1/pico.1.gz because associated file /usr/share/man/man1/nano.1.gz (of link gr
exist
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
root@ubuntutemp:~#

```

1) DNS 확인

명령어: cat /etc/resolv.conf # DNS 설정 확인

2) DNS 설정 수정

<dns서버 설정 안됐을 때 (nameserver가 dns서버임 8.8.8.8)>

root@ubuntu21:~# vi /etc/resolv.conf (vI없으면 nano)

sudo nano /etc/resolv.conf #DNS 편집

(편집기 하나도없을때)

echo "nameserver 8.8.8.8" >> /etc/resolv.conf

설정값저장 : Ctrl + O → Enter → Ctrl + X

5. 패키지 받기

sudo apt install vim -y

sudo apt update && sudo apt upgrade -y :시스템 최신화

sudo apt install net-tools

6. ping안될때

sudo apt install iputils-ping

※Ubuntu는 명령어 오류 나는 경우가 많은데, 다시 쳐보면 되는 경우가 많습니다.

에러나도 당황하지 말고 sudo apt update 한번 다시 쳐보고 설치명령 해보세요!

7. 스크립트 작성 후 실행

<설치 스크립트 up.sh>

```
echo "=== 1. 패키지 업데이트 ==="
```

```
sudo apt update && sudo apt upgrade -y
```

```
echo "=== 2. 필수 패키지 설치 (vim 포함) ==="
```

```
sudo apt install -y build-essential net-tools curl wget git vim htop unzip
```

<build-essential>을 설치하면 다음과 같은 필수 도구들이 함께 설치됩니다:

- gcc - C 언어 컴파일러
- g++ - C++ 컴파일러
- make - 컴파일 자동화 도구
- libc6-dev - C 표준 라이브러리 개발용 헤더 파일
- 기타 개발에 꼭 필요한 기본 라이브러리와 툴

```
echo "=== 3. SSH 설치 및 시작 ==="
```

```
sudo apt install -y openssh-server
```

```
sudo systemctl enable ssh
```

```
sudo systemctl start ssh
```

```
echo "=== 4. 방화벽(UFW) 설정 ==="
```

```
sudo apt install -y ufw
```

```
sudo ufw allow ssh
```

```
sudo ufw --force enable
```

```
echo "=== 5. 컴퓨터 재시작 ==="
```

```
sudo shutdown -r now
```

(참고)

sh실행시 chmod +x up.sh

그 후 ./up.sh

"vi" 말고 "nano"로 해야됨

nano <이름.sh>