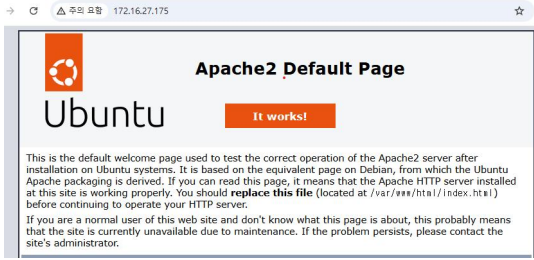
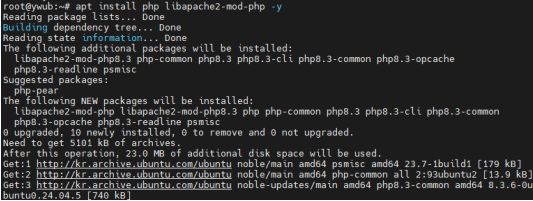
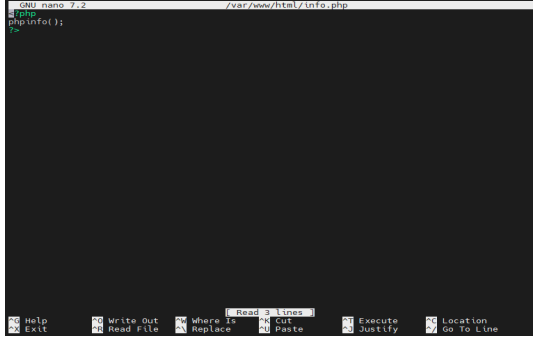


우분투 apache 설치

<pre>root@yub:~# apt install apache2 -y Reading package lists... Done Building dependency tree... Done Reading state information... Done The following additional packages will be installed: apache2-bin apache2-data apache2-utils libapr1t64 libaprutil1-dbd-sqlite3 libaprutil1-ldap libaprutil1t64 liblua5.4-0 Suggested packages: apache2-doc apache2-suexec-pristine apache2-suexec-custom www-browser ufw The following NEW packages will be installed: apache2 apache2-bin apache2-data apache2-utils libapr1t64 libaprutil1-dbd-sqlite3 libaprutil1-ldap libaprutil1t64 liblua5.4-0 0 upgraded, 9 newly installed, 0 to remove and 0 not upgraded. Need to get 2056 kB of archives. After this operation, 8022 kB of additional disk space will be used. Get:1 http://kr.archive.ubuntu.com/ubuntu noble-updates/main amd64 libapr1t64 amd64 1.7.2-3.1ub untu.1 [198 kB] Get:2 http://kr.archive.ubuntu.com/ubuntu noble/main amd64 libaprutil1t64 amd64 1.6.3-1.1ubuntu 7 [91.9 kB]</pre>	1. 아파치 설치 → apt install apache2 -y
<pre>root@yub:~# systemctl start apache2 root@yub:~# systemctl enable apache2 Synchronizing state of apache2.service with SysV service script with /usr/lib/systemd/systemd-s ysv-install. Executing: /usr/lib/systemd/systemd-sysv-install enable apache2 root@yub:~# systemctl status apache2 ● apache2.service - The Apache HTTP Server Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled) Active: active (running) since Mon 2025-10-27 06:52:04 UTC; 3min 29s ago Docs: https://httpd.apache.org/docs/2.4/ Main PID: 59947 (apache2) Tasks: 55 (limit: 4548) Memory: 5.2M (peak: 5.4M) CPU: 45ms CGroup: /system.slice/apache2.service └─59947 /usr/sbin/apache2 -k start 59948 /usr/sbin/apache2 -k start 59951 /usr/sbin/apache2 -k start Oct 27 06:52:04 yub systemd[1]: Starting apache2.service - The Apache HTTP Server... Oct 27 06:52:04 yub apachectl[59948]: AH00558: apache2: Could not reliably determine the serv Oct 27 06:52:04 yub systemd[1]: Started apache2.service - The Apache HTTP Server. lines 1-12/12 (END)</pre>	2. 아파치 상태 확인 → systemctl start apache2 → systemctl enable apache2 → systemctl status apache2
	3. 홈페이지 소스 수정 파일 경로 → nano /var/www/html/index.html
	4. 브라우저에서 http://localhost 접속 → Apache 기본 페이지 나오면 OK


PHP 설치

	1. PHP 설치 → apt install php libapache2-mod-php php-mysql -y # libapache2-mod-php = Apache에서 PHP를 해석할 수 있게 해주는 모듈 1-1. 설치 확인 → php -v [PHP 8.3.6 (cli) (built: Jul 14 2025 18:30:55) (NTS) Copyright (c) The PHP Group Zend Engine v4.3.6, Copyright (c) Zend Technologies with Zend OPcache v8.3.6, Copyright (c), by Zend Technologies]
	2. 재시작 → sudo systemctl restart apache2 파일 경로 → nano /var/www/html/info.php ** 확장자를 꼭 php로 해야함. 대괄호 안의 소스 붙여넣기 [<?php phpinfo(); ?>]
	3. 브라우저에서 http://localhost/info.php 접속 → PHP 정보 페이지 확인


MariaDB/MySQL 설치

(phpMyAdmin 설치 시 필요)

<pre>root@ywub:~# apt install mariadb-server mariadb-client -y Reading package lists... Done Building dependency tree... Done Reading state information... Done The following additional packages will be installed: galera-4 libcgi-fast-perl libcgi-pm-perl libclone-perl libco</pre> <pre>Otherwise, you should probably choose this option. Configure database for phpmyadmin with dbconfig-common? [yes/no] n</pre>	1. mariadb 설치 -> apt install mariadb-server mariadb-client -y 1-1. Configure database for phpmyadmin with dbconfig-common? [yes/no] n 선택 # phpMyAdmin용 DB를 자동으로 생성할래?
<pre>root@ywub:~# mysql_secure_installation NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB SERVERS IN PRODUCTION USE! PLEASE READ EACH STEP CAREFULLY! In order to log into MariaDB to secure it, we'll need the current password for the root user. If you've just installed MariaDB, and haven't set the root password yet, you should just press enter here. Enter current password for root (enter for none): OK, successfully used password, moving on... Setting the root password or using the unix_socket ensures that nobody can log into the MariaDB root user without the proper authorisation. You already have your root account protected, so you can safely answer 'n'. Switch to unix_socket authentication [Y/n] y Enabled successfully!</pre>	2. 설치 후 보안 설정 -> mysql_secure_installation 룩키와 동일하게 설정 [엔터 -> y -> y -> y -> n -> y -> y]
<pre>root@ywub:~# mysql -u root -p Enter password: Welcome to the MariaDB monitor. Commands end with ; or \g. Your MariaDB connection id is 31 Server version: 10.11.13-MariaDB-0ubuntu0.24.04.1 Ubuntu 24.04 Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others. Type 'help;' or '\h' for help. Type '\c' to clear the current input statement. MariaDB [(none)]> CREATE DATABASE phpmyadmin; Query OK, 1 row affected (0.000 sec) MariaDB [(none)]> CREATE DATABASE phpmyadmin; Query OK, 1 row affected (0.000 sec) MariaDB [(none)]> CREATE USER 'yw'@'localhost' IDENTIFIED BY 'asd123!@'; Query OK, 0 rows affected (0.001 sec) MariaDB [(none)]> GRANT ALL PRIVILEGES ON phpmyadmin.* TO 'yw'@'localhost'; Query OK, 0 rows affected (0.000 sec) MariaDB [(none)]> FLUSH PRIVILEGES; Query OK, 0 rows affected (0.000 sec) MariaDB [(none)]> EXIT; Bye root@ywub:~#</pre>	3. 계정 만들기 -> mysql -u root -p <pre>MariaDB [(none)]> CREATE DATABASE phpmyadmin; Query OK, 1 row affected (0.000 sec) MariaDB [(none)]> CREATE USER 'yw'@'localhost' IDENTIFIED BY 'asd123!@'; Query OK, 0 rows affected (0.001 sec) MariaDB [(none)]> GRANT ALL PRIVILEGES ON phpmyadmin.* TO 'yw'@'localhost'; Query OK, 0 rows affected (0.000 sec) MariaDB [(none)]> FLUSH PRIVILEGES; Query OK, 0 rows affected (0.000 sec) MariaDB [(none)]> EXIT; Bye</pre> # 빨간 글자만 복사 붙여넣기 가능 (계정명 :yw / 비번) 변경해야함.

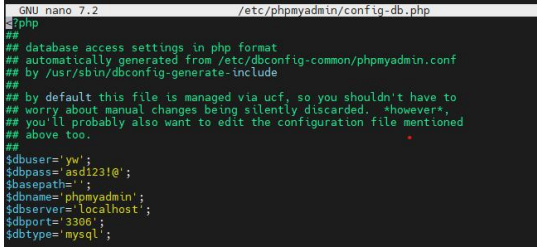 <pre> GNU nano 7.2 /etc/phpmyadmin/config-db.php <?php ## ## database access settings in php format ## automatically generated from /etc/dbconfig-common/phpmyadmin.conf ## by /usr/sbin/dbconfig-generate-include ## ## by default this file is managed via ucf, so you shouldn't have to ## worry about manual changes being silently discarded. *however*, ## you'll probably also want to edit the configuration file mentioned ## above too. ## \$dbuser='yw'; \$dbpass='asd123!@'; \$dbsepath=''; \$dbname='phpmyadmin'; \$dbserver='localhost'; \$dbport='3306'; \$dbtype='mysql'; </pre>	4. 설정 변경 → nano /etc/phpmyadmin/config-db.php \$dbuser = "" ; 부분을 설정한 계정으로 변경 후 저장
---	--

phpMyAdmin 설치

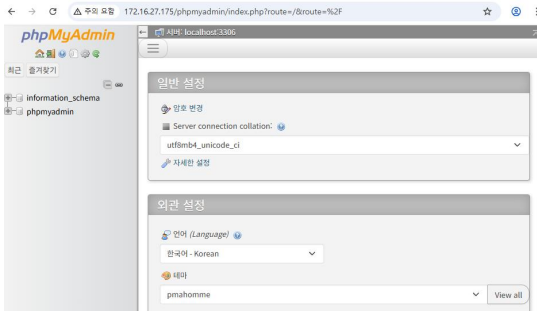	1. 설치 → apt install phpmyadmin -y 설치 과정에서: 웹 서버 선택 → apache2 선택 (스페이스바로 체크) dbconfig-common 설정 → Yes MariaDB root 비밀번호 입력 → phpMyAdmin 용 데이터베이스 자동 생성
	2. Apache2와 phpMyAdmin 연결 → ln -s /usr/share/phpmyadmin /var/www/html/phpmyadmin
	5. 아파치 재시작 → systemctl restart apache2 이제 브라우저에서 http://(IP)/phpmyadmin 접속 → 방금 만든 계정 (phpmyadminuser) 과 비밀번호로 로그인 가능

