



Version control with GitHub

What is the goal of making code?

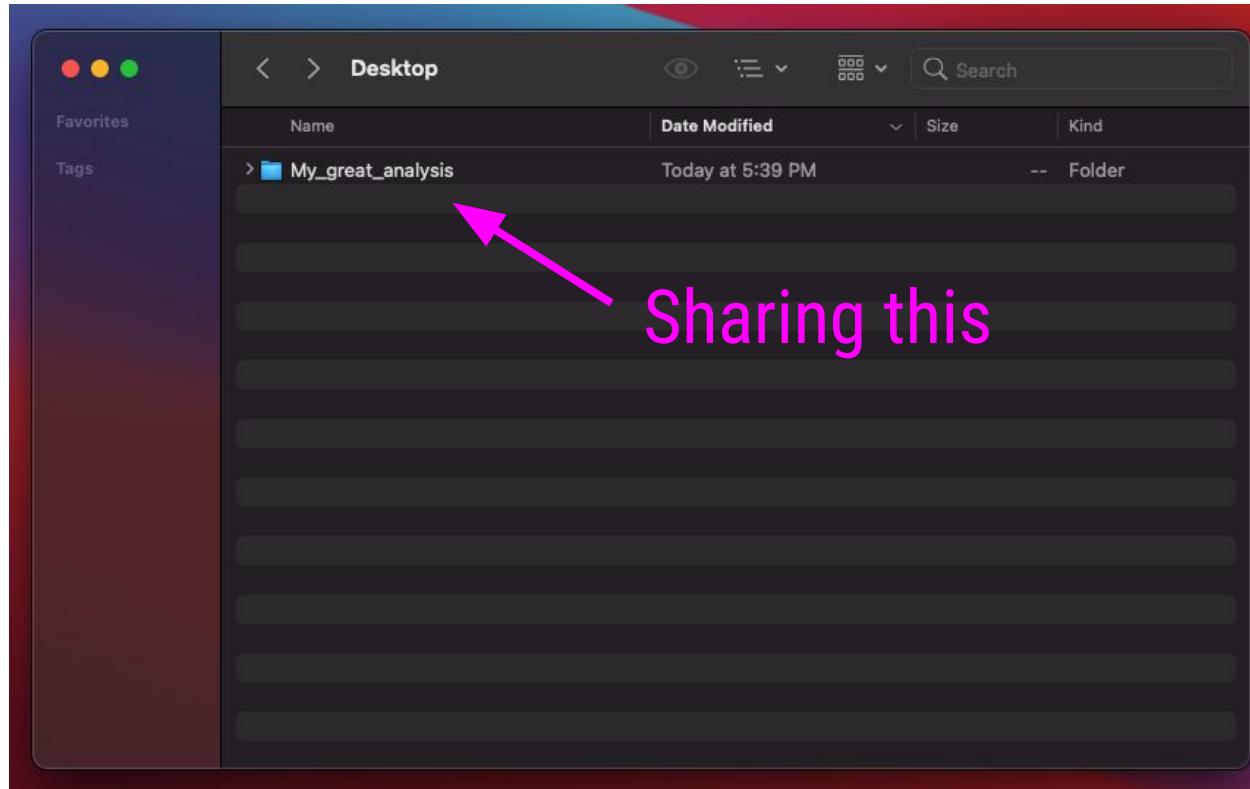

What is the goal of making code?

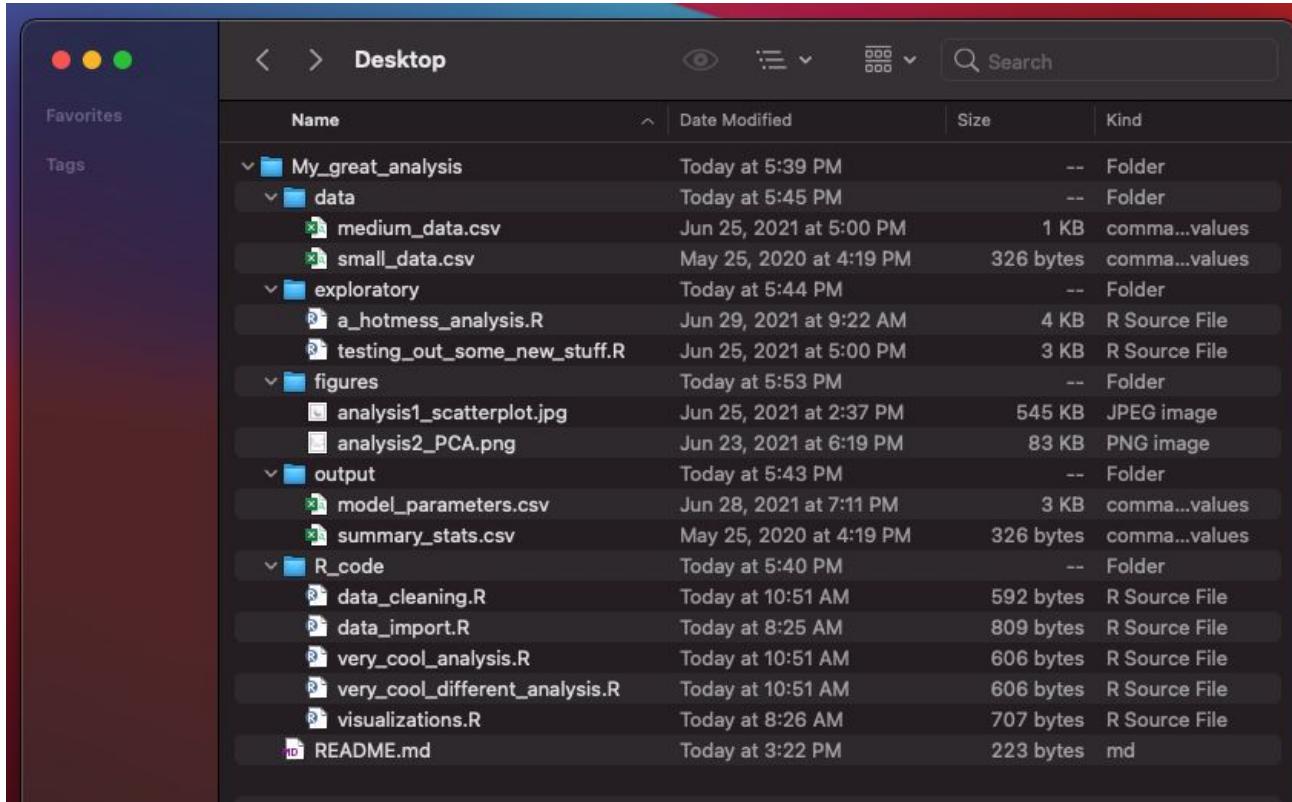

But first.. Where are we?

A screenshot of a Mac OS X Finder window. The path in the title bar is '/Users/avahoffman/Desktop/My_great_analysis'. The contents pane shows a folder named 'My_great_analysis' containing several subfolders ('data', 'exploratory', 'figures', 'output', 'R_code') and files ('medium_data.csv', 'small_data.csv', 'a_homess_analysis.R', 'testing_out_some_new_stuff.R', 'analysis1_scatterplot.jpg', 'analysis2_PCA.png', 'model_parameters.csv', 'summary_stats.csv', 'data_cleaning.R', 'data_import.R', 'very_cool_analysis.R', 'very_cool_different_analysis.R', 'visualizations.R', 'README.md'). The 'data' folder is expanded.

Name	Date Modified	Size	Kind
My_great_analysis	Today at 5:39 PM	--	Folder
data	Today at 5:45 PM	--	Folder
medium_data.csv	Jun 25, 2021 at 5:00 PM	1 KB	comma...values
small_data.csv	May 25, 2020 at 4:19 PM	326 bytes	comma...values
exploratory	Today at 5:44 PM	--	Folder
a_homess_analysis.R	Jun 29, 2021 at 9:22 AM	4 KB	R Source File
testing_out_some_new_stuff.R	Jun 25, 2021 at 5:00 PM	3 KB	R Source File
figures	Today at 5:53 PM	--	Folder
analysis1_scatterplot.jpg	Jun 25, 2021 at 2:37 PM	545 KB	JPEG image
analysis2_PCA.png	Jun 23, 2021 at 6:19 PM	83 KB	PNG image
output	Today at 5:43 PM	--	Folder
model_parameters.csv	Jun 28, 2021 at 7:11 PM	3 KB	comma...values
summary_stats.csv	May 25, 2020 at 4:19 PM	326 bytes	comma...values
R_code	Today at 5:40 PM	--	Folder
data_cleaning.R	Today at 10:51 AM	592 bytes	R Source File
data_import.R	Today at 8:25 AM	809 bytes	R Source File
very_cool_analysis.R	Today at 10:51 AM	606 bytes	R Source File
very_cool_different_analysis.R	Today at 10:51 AM	606 bytes	R Source File
visualizations.R	Today at 8:26 AM	707 bytes	R Source File
README.md	Today at 3:22 PM	223 bytes	md


A screenshot of a cloud storage interface. The path in the title bar is '/Cloud/project'. The contents pane shows a folder named 'project' containing subfolders ('data', 'exploratory', 'figures', 'output', 'R_code') and files ('project.Rproj', '.Rhistory', 'README.md'). The 'data' folder is selected.

Name	Size	Modified
project.Rproj	205 B	Jul 2, 2021, 6:09 PM
.Rhistory	0 B	Jul 2, 2021, 6:09 PM
data		
exploratory		
figures		
output		
R_code		
README.md	223 B	Jul 2, 2021, 6:14 PM

Absolute path Starts at the root directory: /

/Cloud/project

But first.. Where are we?

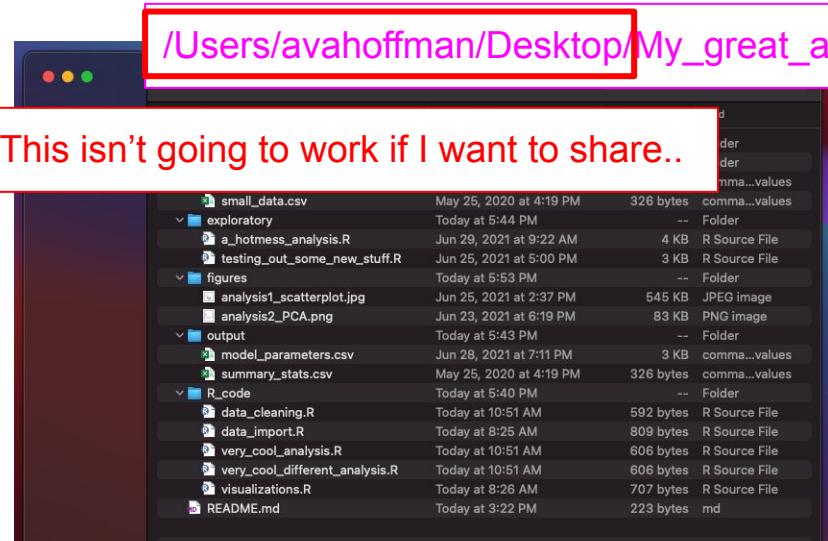


Name	Size	Modified
project.Rproj	205 B	Jul 2, 2021, 6:09 PM
.Rhistory	0 B	Jul 2, 2021, 6:09 PM
data		
exploratory		
figures		
output		
R_code		
README.md	223 B	Jul 2, 2021, 6:14 PM

Absolute path Starts at the root directory: /

/Cloud/project

Enter the *relative* path!

Launch “`data_cleaning.R`”

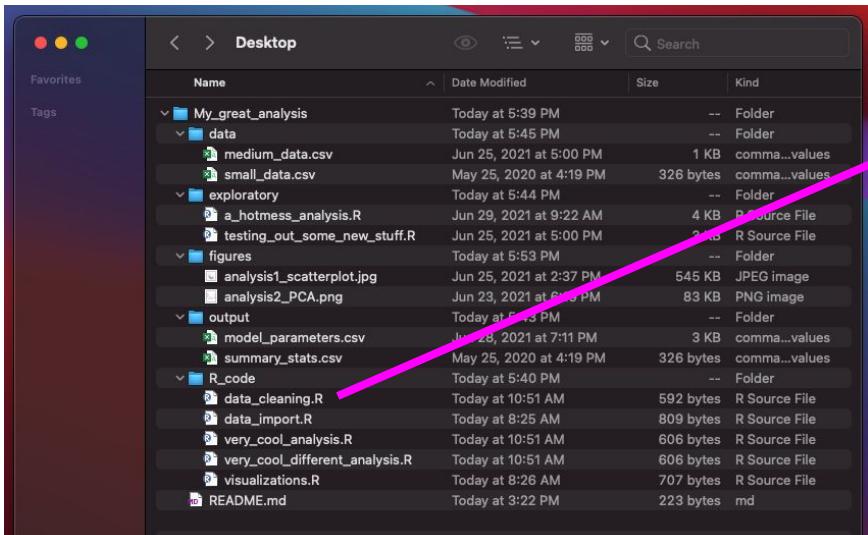

```
library(tidyverse)
# Read in Data
dat = read_csv("small_data.csv")
```

R looks in `/Users/avahoffman/Desktop/My_great_analysis/R_code`

Enter the *relative path*!

The screenshot shows the RStudio interface with a script editor containing the following code:

```
library(tidyverse)
# Read in Data
dat = read_csv("small_data.csv")
```

The console below shows the command being run and the resulting error:

```
R 4.1.0 - ~/Desktop/My_great_analysis/R_code/
> # Read in Data
> dat = read_csv("small_data.csv")
Error: 'small_data.csv' does not exist in current working directory
('/Users/avahoffman/Desktop/My_great_analysis/R_code').
```

A red box highlights the error message in the console.

The data isn't in
/Users/avahoffman/Desktop/My_great_analysis/R_code !

The screenshot shows the RStudio interface with the same script editor and console. The difference is in the console output:

```
R 4.1.0 - ~/Desktop/My_great_analysis/
> vwc = col_double(),
temp = col_double()
>
```

A pink arrow points from a callout box to the corrected line in the console. The callout box contains the text:

Use `../` to tell R to look a level higher

Relative path Starts
relative to another file

Enter the *relative* path + .Rproj

The screenshot shows the RStudio interface. On the left, a code editor window titled "data_cleaning.R" displays the following R code:

```
1 library(tidyverse)
2
3 # Read in Data
4 dat = read_csv("./data/small_data.csv")
5
6
```

Below the code editor is a "Console" tab showing the command "R 4.0.3 · /cloud/project/". To the right of the code editor is the "Environment" tab, which shows "Environment is empty".

On the far right is the "Files" tab, which displays the project structure:

Name	Size	Last Modified
.Rhistory	0 B	Jul 2, 2021, 6:
data	205 B	Jul 2, 2021, 6:
exploratory		
figures		
output		
project.Rproj		
R_code		
README.md		

A pink arrow points from the text "Relative path Starts relative to another file" in the bottom right box to the "project.Rproj" entry in the "Files" tab.

When a project is open, R knows to look relative to the .Rproj file

Click File > New Project... on your local machine if you need one

Relative path Starts relative to another file

Enter the *relative* path + .Rproj

The screenshot shows the RStudio interface. On the left, the code editor displays a script named `data_cleaning.R` with the following content:

```
1 library(tidyverse)
2 library(here)
3
4 here()
5
6 # Read in Data
7 dat = read_csv("./data/small_data.csv")
8
```

In the bottom-left corner, the Console tab shows the command `here()` being run and its output `[1] "/cloud/project"`.

On the right, the Global Environment pane shows the `Global Env` section. Below it, the Project browser pane displays the project structure:

Name	Size	Modified
..	0 B	Jul 2, 2021, 6:
.Rhistory	0 B	Jul 2, 2021, 6:
data	205 B	Jul 2, 2021, 6:
exploratory		
figures		
output		
project.Rproj		
R_code		
README.md		

A pink arrow points from the `here()` command in the Console to the `project.Rproj` file in the Project browser.

here () defines your base directory to be the directory where you have a .Rproj file

Relative path Starts relative to another file

Enter the *relative* path + .Rproj

The screenshot shows the RStudio interface with a pink callout box and arrows highlighting the use of the `here()` function.

Code Editor: Shows the script `data_cleaning.R` containing:

```
1 library(tidyverse)
2 library(here)
3
4 small_dat_path = here("data", "small_data.csv")
5
6 # Read in Data
7 dat = read_csv(small_dat_path)
8
9
```

Console: Shows the output of the code execution:

```
R 4.0.3 · /cloud/project/
> small_dat_path = here("data", "small_data.csv")
> small_dat_path
[1] "/cloud/project/data/small_data.csv"
>
```

File Explorer: Shows the project structure with a pink box around the `data` folder. Inside the `data` folder are two files: `medium_data.csv` and `small_data.csv`.

Name	Size	Modified
..		
medium_data.csv	1.2 KB	Jul 2, 2021, 6:
small_data.csv	326 B	Jul 2, 2021, 6:

Pink Callout Boxes:

- A pink arrow points from the `here()` call in the code editor to the `data` folder in the file explorer.
- A pink box surrounds the `data` folder in the file explorer, with the text: "here () can then be used to create absolute paths to files".
- A pink box surrounds the `small_data.csv` file in the file explorer, with the text: "Relative path Starts relative to another file".

Absolute path



Your house → Dinner → Movie Theater

- Very specific and helpful but only to **YOU**
- What happens if you move??



.Rproj + here()

Relative path


Dinner → Movie Theater

- Useful to many people
- But you need to know where you're starting

Your GPS!

- Navigate from your current location

What you
would share
with
someone
else

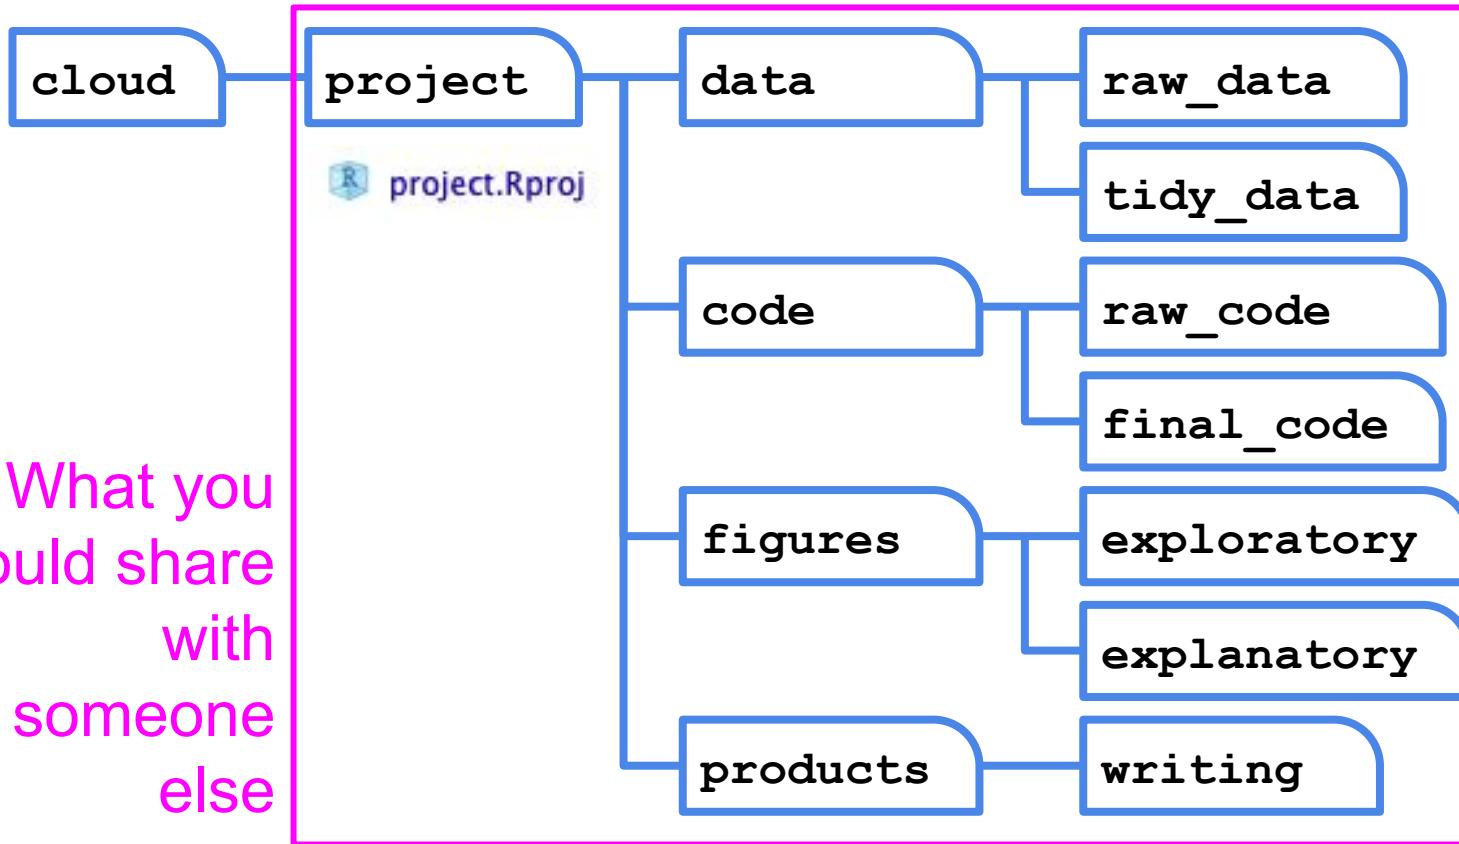

All paths in your code should be relative to /cloud/project

So how do you efficiently share projects or
folders structured like this with other people?

GitHub!

Unfortunate truth

<https://twitter.com/mtrc/status/617075570761965568>



Michael Cook
@mtrc

Follow

"Version control is a truly vital concept that has
unfortunately been implemented by madmen." Amen.
[twitter.com/Pentadact/stat...](https://twitter.com/Pentadact/status/617075570761965568)


5:00 PM - 3 Jul 2015

↪ 9

★ 11

Git commands have convenience
in mind, not intuition

What's the difference between Git and GitHub?

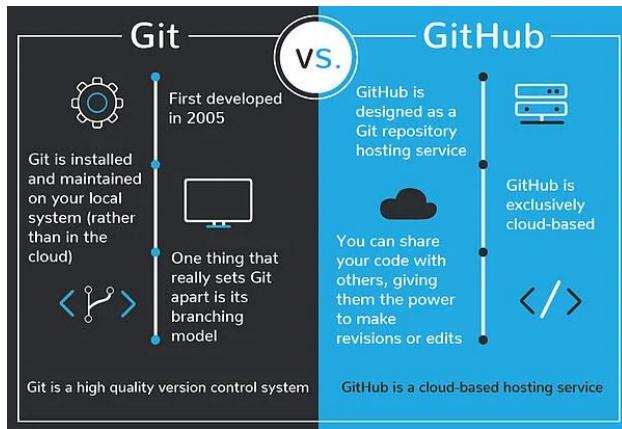


In Simple Terms

Git is a version control system that lets you manage and keep track of your source code history

GitHub is a cloud-based hosting service that lets you manage Git repositories

What's the difference between Git and GitHub?

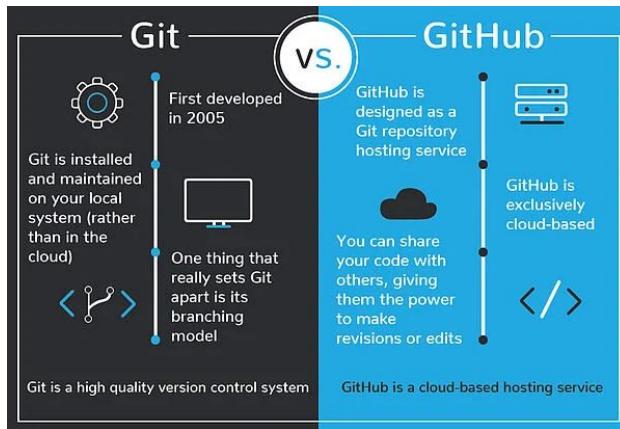

In Simple Terms

Git is a version control system that lets you manage and keep track of your source code history

GitHub is a cloud-based hosting service that lets you manage Git repositories

Git

Your entire work history

GitHub

LinkedIn®




git --fast-version-control

Search entire site...

Git is a **free and open source** distributed version control system designed to handle everything from small to very large projects with speed and efficiency.

Git is **easy to learn** and has a **tiny footprint with lightning fast performance**. It outclasses SCM tools like Subversion, CVS, Perforce, and ClearCase with features like **cheap local branching**, convenient **staging areas**, and **multiple workflows**.

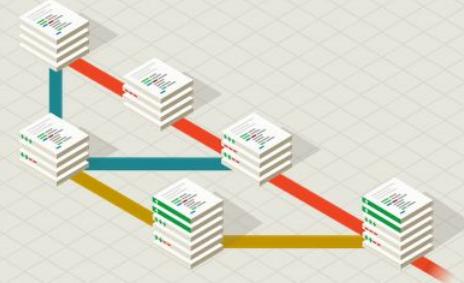

About

The advantages of Git compared to other source control systems.



Documentation

Command reference pages, Pro Git book content, videos and other material.



Downloads

GUI clients and binary releases for all major platforms.



Community

Get involved! Bug reporting, mailing list, chat, development and more.



Pro Git by Scott Chacon and Ben Straub is available to [read online for free](#). Dead tree versions are available on [Amazon.com](#).



[Mac GUIs](#)



[Tarballs](#)



[Windows Build](#)



[Source Code](#)

GitHub · Build software better

GitHub, Inc. [US] https://github.com

GitHub Search GitHub Explore Features Enterprise Blog Sign up Sign in

Build software better, together.

Powerful collaboration, code review, and code management for open source and private projects. Need private repositories? Upgraded plans start at \$7/mo.

Pick a username

Your email

Create a password

Use at least one lowercase letter, one numeral, and seven characters.

Sign up for GitHub


By clicking "Sign up for GitHub", you agree to our [terms of service](#) and [privacy policy](#). We will send you account related emails occasionally.

The image shows the GitHub homepage. At the top, there's a navigation bar with links for Explore, Features, Enterprise, and Blog, along with Sign up and Sign in buttons. The main feature is a large white rectangular form on the right side of the page, containing fields for a username, email, and password. Below the form, there's a note about password requirements and a prominent green 'Sign up for GitHub' button. The background of the page is dark with a subtle pattern of various icons related to software development and collaboration.

<https://github.com/>

Git Data Transport Commands

<http://osteale.com>

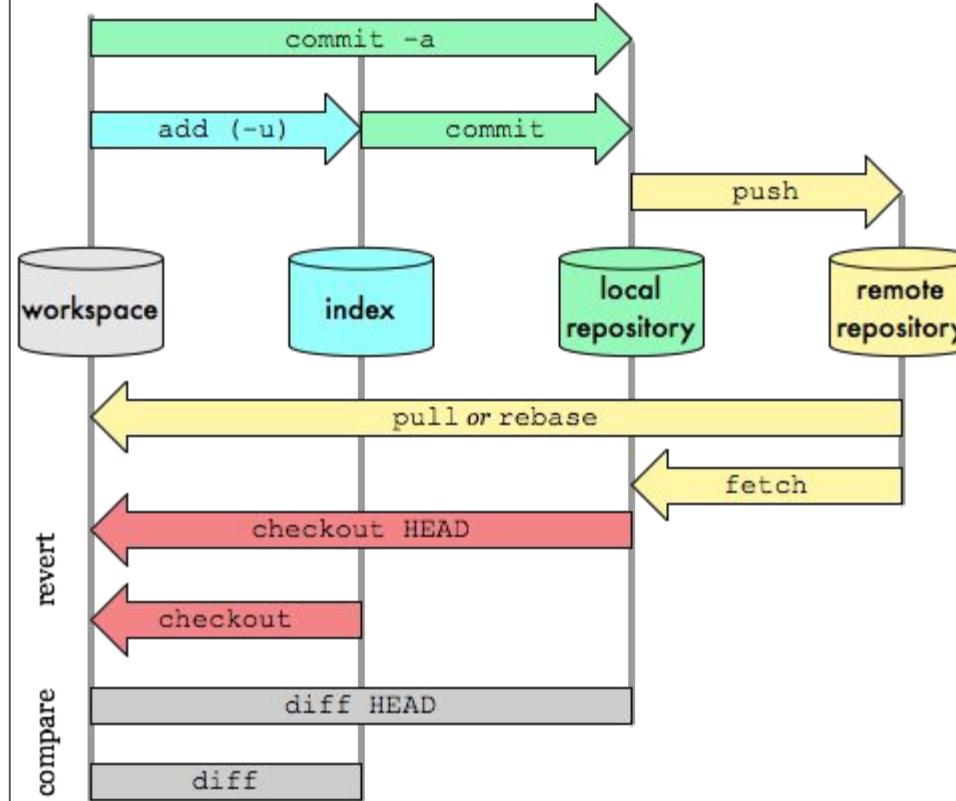

Basic use

- ▶ Change some files
- ▶ See what you've changed

```
git status  
git diff  
git log
```

- ▶ Indicate what changes to save

```
git add
```

- ▶ Commit to those changes

```
git commit
```

- ▶ Push the changes to GitHub

```
git push
```

- ▶ Pull changes from your collaborator

```
git pull
```

It's like a shared Dropbox folder that you have to sync yourself, on each of your computers, in specific orders

Why not just use Dropbox?


The screenshot shows a GitHub commit history for the repository `jtleek/jtleek.github.io`. The commits are listed by date:

- Commits on May 8, 2015:**
 - Merge pull request #14 from hammer/patch-1** (by jtleek at 2015-05-08)
 - updated papers with rail** (by jtleek at 2015-05-08)
- Commits on May 4, 2015:**
 - Merge pull request #14 from hammer/patch-1** (by jtleek at 2015-05-04)
 - Fix typo on papers.md** (by hammer at 2015-05-04)
- Commits on May 1, 2015:**
 - regionr eport paper** (by jtleek at 2015-05-01)
- Commits on Apr 30, 2015:**
 - added boosting lecture** (by jtleek at 2015-04-30)
 - polyester paper** (by jtleek at 2015-04-30)

Three specific commits are highlighted with pink arrows:

- A pink arrow points to the commit **Fix typo on papers.md** (by hammer at 2015-05-04).
- A pink arrow points to the commit **regionr eport paper** (by jtleek at 2015-05-01).
- A pink arrow points to the commit **polyester paper** (by jtleek at 2015-04-30).

possible, in theory

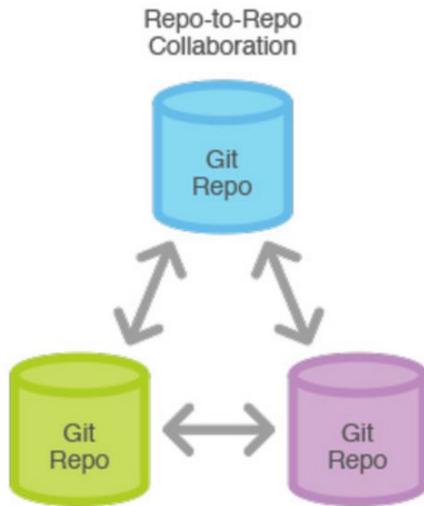

more typical

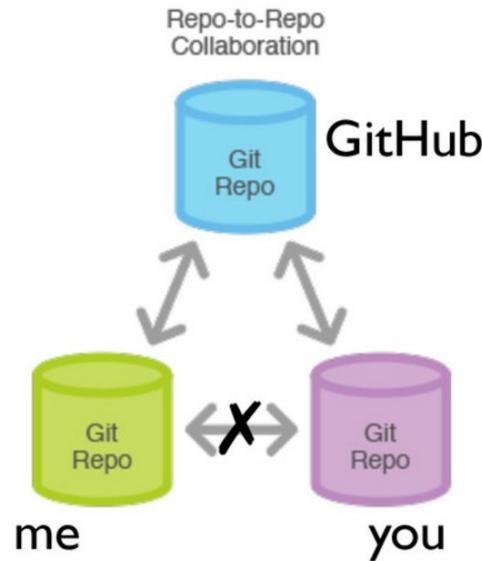


Image from <https://www.atlassian.com/git/tutorial/git-basics#!clone>

Jenny Bryan:<https://speakerdeck.com/jennybc/ubc-stat545-2015-cm001-intro-to-course>

SISBID / Data-Wrangling

Unwatch 13 Star 51 Fork 76

Code Issues Pull requests Actions Projects Wiki Security Insights ...

gh-pages 11 branches 1 tag Go to file Add file Code

carriewright11 Merge pull request #35 from SISBID... faef211 5 hours ago 338 commits

data	all pdfs may be created	12 months ago
labs	Merge pull request #36 from SISBID/data_cleaning	5 hours ago
lecture_notes	Merge pull request #36 from SISBID/data_cleaning	5 hours ago
.gitignore	addeed token	12 months ago
.nojekyll	updated license, added webpage	6 years ago
Google_Doc_Syll.url	updating data io lab	12 months ago
LICENSE	updated license, added webpage	6 years ago
Module1.Rproj	smaller repo	12 months ago
README.md	Update README.md	9 days ago
all_the_packages.txt	all the packages added	12 months ago
download_pdfs.R	updated index and the pdfs	12 months ago
index.Rmd	fixing links for subsetting lab from 2 to 1	2 days ago
index.html	fixing links for subsetting lab from 2 to 1	2 days ago
list_all_packages.R	all the packages added	12 months ago

About

Teaching material for Summer Institute in Statistics for Big Data Module 1.

Readme View license

Releases 1

2019 Final SISBID ... Latest on Jun 30, 2020

Packages

No packages published Publish your first package

Contributors 8



<https://github.com/SISBID/Data-Wrangling>

SISBID / Data-Wrangling

Unwatch 13 Star 51 Fork 76

Code Issues Pull requests Actions Projects Wiki Security Insights

gh-pages 11 branches 1 tag Go to file Add file Code

carriwright11 Merge pull request #35 from SISBID... faef211 5 hours ago 338 commits

data	all pdfs may be created	12 months ago
labs	Merge pull request #36 from SISBID/data_cleaning	5 hours ago
lecture_notes	Merge pull request #36 from SISBID/data_cleaning	5 hours ago
.gitignore	addeed token	12 months ago
.nojekyll	updated license, added webpage	6 years ago
Google_Doc_Syll.url	updating data io lab	12 months ago
LICENSE	updated license, added webpage	6 years ago
Module1.Rproj	smaller repo	12 months ago
README.md	Update README.md	9 days ago
all_the_packages.txt	all the packages added	12 months ago
download_pdfs.R	updated index and the pdfs	12 months ago
index.Rmd	fixing links for subsetting lab from 2 to 1	2 days ago
index.html	fixing links for subsetting lab from 2 to 1	2 days ago
list_all_packages.R	all the packages added	12 months ago

About Teaching material for Summer Institute in Statistics for Big Data Module 1.

Readme View license

Releases 1 2019 Final SISBID ... Latest on Jun 30, 2020

Packages No packages published Publish your first package

Contributors 8

<https://github.com/SISBID/Data-Wrangling>



Jenny Bryan
@JennyBryan



Following

I have my own ideas about what makes a good commit message.

📄 .travis.yml

if this works, it will be a miracle

RETWEETS

7

LIKES

28



2:54 AM - 11 Jul 2016



7

28

...

<https://twitter.com/JennyBryan/status/752440799149846528>

AnVIL already has Git installed.
Install Git/Github Locally
(for later)


<http://happygitwithr.com/install-git.html>

and

<https://try.github.io/levels/1/challenges/1>

How the pros git/github

How to keep the local file or the remote file during merge using Git and the command line?

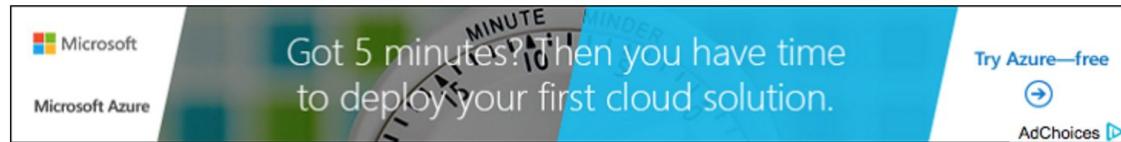

asked 5 years ago

viewed 31361 times

active 17 days ago

I know how to merge modification using vimdiff, but, assuming I just know that the entire file is good to keep or to throw away, how do I do that?

75

I don't want to open vimdiff for each of them, I change want a command that says 'keep local' or 'keep remote'.

33

E.G: I got a merge with files marked as changed because somebody opened it under windows, changing the EOL, and then committed. When merging, I want to just keep my own version and discard his.

I'm also interested in the contrary: I screwed up big time and want to accept the remote file, discarding my changes.

[git](#) [merge](#) [local](#)

[share](#) [improve this question](#)

asked Jul 11 '11 at 12:41




e-satis

238k • 82 • 228 • 285

[add a comment](#)

4 Answers

active oldest votes

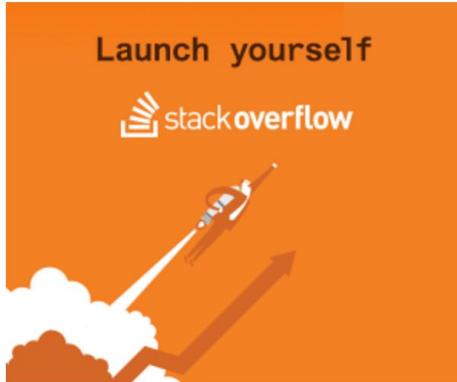

Reload th

The amount of Git skilz
necessary to fix a borked repo is
an order of magnitude bigger
than to bork it.

<https://github.com/jennybc/happy-git-and-github-for-the-user/blob/master/happy-git-and-github-for-the-user.pdf>



BURN IT ALL DOWN

<https://github.com/jennybc/happy-git-and-github-for-the-user/blob/master/happy-git-and-github-for-the-user.pdf>

THIS IS GIT. IT TRACKS COLLABORATIVE WORK
ON PROJECTS THROUGH A BEAUTIFUL
DISTRIBUTED GRAPH THEORY TREE MODEL.

COOL. HOW DO WE USE IT?

NO IDEA. JUST MEMORIZIZE THESE SHELL
COMMANDS AND TYPE THEM TO SYNC UP.
IF YOU GET ERRORS, SAVE YOUR WORK
ELSEWHERE, DELETE THE PROJECT,
AND DOWNLOAD A FRESH COPY.



"If that doesn't fix it, git.txt contains the phone number of a friend of mine who understands git. Just wait through a few minutes of 'It's really pretty simple, just think of branches as...' and eventually you'll learn the commands that will fix everything."

Step 1: New repo on GitHub

A screenshot of a GitHub user profile page for `avahoffman`. The top navigation bar includes links for `Pulls`, `Issues`, `Marketplace`, and `Explore`. A pink arrow points from the `New` button in the repository list to the `All activity` section on the right.

Repositories

- [SISBID/Data-Wrangling](#)
- [jhudsl/AnVIL_Book_Getting_Started](#)
- [avahoffman/blue-gramma-gene-expression](#)
- [jhudsl/intro_to_r](#)
- [avahoffman/DESeq2-viz-demo](#)
- [jhudsl/jhudsl.github.io](#)
- [avahoffman/CV-and-resumes](#)

[Show more](#)

Recent activity

[Add Instructor checklist as...](#)

All activity

carriewright11 pushed to SISBID/Data-Wrangling 5 hours ago

- 6 commits to [gh-pages](#)
- [98387ee](#) fixing links for subsetting lab from 2 to 1
- [faef211](#) Merge pull request #35 from SISBID/subsetting_part2
- [4 more commits »](#)

carriewright11 pushed to SISBID/Data-Wrangling 2 days ago

- 1 commit to [subsetting_part2](#)
- [98387ee](#) fixing links for subsetting lab from 2 to 1

KatherineCox pushed to jhudsl/AnVIL_Book_Getting_Started 2 days ago

- 1 commit to [main](#)
- [00d7503](#) Render bookdown

<https://github.com/>

The screenshot shows the GitHub homepage interface. At the top, there is a navigation bar with the GitHub logo, a search bar containing "Search or jump to...", and links for "Pulls", "Issues", "Marketplace", and "Explore". To the right of the search bar is a user profile icon and a dropdown menu. A pink box highlights the "New repository" option in this dropdown menu. Below the navigation bar, the user's profile "avahoffman" is shown, along with a list of repositories. A green "New" button is visible next to the repository list. The main content area displays "All activity" with several recent pushes from different users to various repositories. One push from "carriewright11" to "SISBID/Data-Wrangling" is detailed, showing 6 commits to "gh-pages" and two specific commits. Another push from "carriewright11" to the same repository is also listed. A third push from "KatherineCox" to "jhudsl/AnVIL_Book_Getting_Started" is shown at the bottom.

Search or jump to... /

Pulls Issues Marketplace Explore

avahoffman

Repositories

New

Find a repository...

SISBID/Data-Wrangling

jhudsl/AnVIL_Book_Getting_Started

avahoffman/blue-grama-gene-expression

jhudsl/intro_to_r

avahoffman/DESeq2-viz-demo

jhudsl/jhudsl.github.io

avahoffman/CV-and-resumes

Show more

Recent activity

Add Instructor checklist as...

All activity

carriewright11 pushed to SISBID/Data-Wrangling 5 hours ago

6 commits to [gh-pages](#)

98387ee fixing links for subsetting lab from 2 to 1

faef211 Merge pull request #35 from SISBID/subsetting_part2

4 more commits »

carriewright11 pushed to SISBID/Data-Wrangling 2 days ago

1 commit to [subsetting_part2](#)

98387ee fixing links for subsetting lab from 2 to 1

KatherineCox pushed to jhudsl/AnVIL_Book_Getting_Started 2 days ago

1 commit to [main](#)

00d7503 Render bookdown

New repository

Import repository

New gist

New organization

New project

<https://github.com/>

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#).

Repository template

Start your repository with a template repository's contents.

No template ▾

Owner *



avahoffman ▾

Repository name *

my_first_project



Great repository names are short and memorable. Need inspiration? How about [fuzzy-pancake](#)?

Description (optional)

My first project files

Public

Anyone on the internet can see this repository. You choose who can commit.

Private

You choose who can see and commit to this repository.

Initialize this repository with:

Skip this step if you're importing an existing repository.

Add a README file

This is where you can write a long description for your project. [Learn more](#).

Add .gitignore

Choose which files not to track from a list of templates. [Learn more](#).

Choose a license

A license tells others what they can and can't do with your code. [Learn more](#).

This will set `main` as the default branch. Change the default name in your [settings](#).

[Create repository](#)

<https://github.com/new>



Search or jump to...

Pulls Issues Marketplace Explore



avahoffman / my_first_project

Unwatch 1

Star 0

Fork 0

Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

...

main

Go to file

Add file

Code

avahoffman Initial commit ...

README.md

Initial comm...

README.md

my_first_project

My first project files

Clone

HTTPS SSH GitHub CLI

https://github.com/avahoffman/my_first_project

Use Git or checkout with SVN using the web URL.

Open with GitHub Desktop

Download ZIP

About

My first project files

Readme

Releases

No releases published


Create a new release

Packages

No packages published

Publish your first package

Step 2: Create “local” link

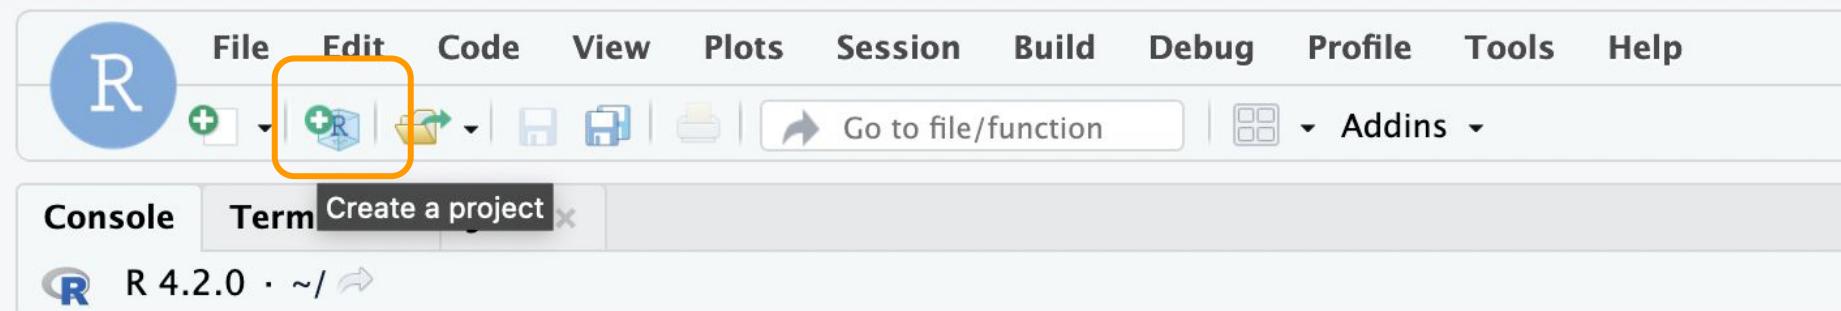[DASHBOARD](#)[DATA](#)[NOTEBOOKS](#)[WORKFLOWS](#)[JOB HIST](#)

R version 4.2.0 (2022-04-22) -- "Vigorous Calisthenics"

Copyright (C) 2022 The R Foundation for Statistical Computing

Platform: x86_64-pc-linux-gnu (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.

You are welcome to redistribute it under certain conditions.

Type 'license()' or 'licence()' for distribution details.



123 MiB



New Project Wizard

Create Project

**New Directory**

Start a project in a brand new working directory

**Existing Directory**

Associate a project with an existing working directory

**Version Control**

Checkout a project from a version control repository



Cancel

Environment is empty

Viewer

 Upload Delete

Size



Environment

History

Connections

Tutorial

New Project Wizard

123 MiB



Back

Create Project from Version Control

**Git**

Clone a project from a Git repository

**Subversion**

Checkout a project from a Subversion repository



Cancel

Environment is empty

Viewer

 Upload Delete

Size



Environment

History

Connections

Build

Git

Tutorial

160 MiB



New Project Wizard

Back

Clone Git Repository



Repository URL:

Project directory name:

Create project as subdirectory of:

Browse...

Create Project

Cancel

Environment is empty

Viewer

 Upload Delete Rename

Size

741 B

499 B

2.2 KB

169 B

880.6 KB

8.7 KB



Step 3: Change stuff

The screenshot shows the RStudio interface with a pink box highlighting the code editor area.

Code Editor:

- File menu: File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, Help
- Toolbar icons: New, Open, Save, Print, Run, Source, Addins
- Code pane: my-script.R x
- Code content:

```
1 # My first script
```
- Status bar: 1:18 (Top Level) R Script

Environment Tab:

- Environment, History, Connections, Git, Tutorial tabs
- Import Dataset button
- Global Environment dropdown
- Search bar
- Message: Environment is empty

Files Tab:

- Files, Plots, Packages, Help, Viewer tabs
- New Folder, New Blank File, Upload, Delete, Rename, More buttons
- File list:


Name	Size	Modified
..		
.gitignore	40 B	Jul 24, 2022, 9:42 PM
my_first_project.Rproj	205 B	Jul 24, 2022, 9:42 PM
my-script.R	17 B	Jul 24, 2022, 9:43 PM

Console Tab:

- Console, Terminal, Jobs tabs
- R 4.2.0 · ~/my_first_project/ prompt
- Output:

```
R version 4.2.0 (2022-04-22) -- "Vigorous Calisthenics"
Copyright (C) 2022 The R Foundation for Statistical Computing
Platform: x86_64-pc-linux-gnu (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.
```

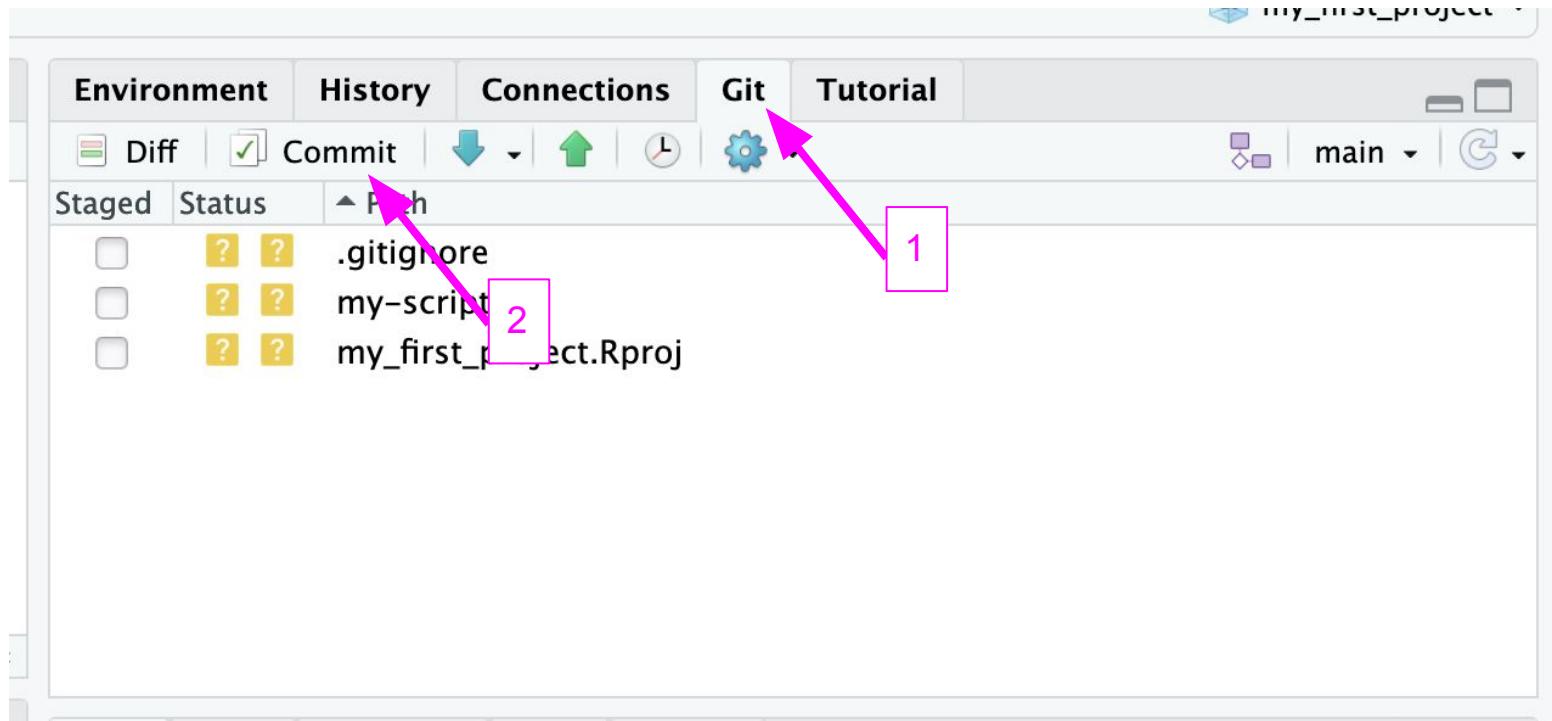

Changes History main | Stage Revert Ignore Pull Push

Staged Status Path

.gitignore
my-script.R
my_first_project.Rproj

Commit message
Created my script file
22 characters

Amend previous commit Commit

1

2

3

Staged Unstaged Context 5 lines Ignore Whitespace Unstage All


Unstage chunk

@@ -0,0 +1,4 @@

1 .Rproj.user
2 .Rhistory
3 .RData
4 .Ruserdata

The screenshot shows the RStudio Git Changes interface. In the top left, there are tabs for 'Changes' and 'History', and a dropdown for 'main'. Below that is a toolbar with 'Stage', 'Revert', 'Ignore', 'Pull', and 'Push' buttons. The main area shows a list of staged files: '.gitignore', 'my-script.R', and 'my_first_project.Rproj'. A pink box labeled '1' points to the 'Staged' tab. To the right, a 'Commit message' field contains 'Created my script file' with a character count of '22 characters'. A pink box labeled '2' points to this field. At the bottom, there are buttons for 'Amend previous commit' and 'Commit'. Below the commit buttons, there are filters for 'Staged' (selected), 'Unstaged', 'Context', '5 lines', 'Ignore Whitespace', and 'Unstage All'. A pink box labeled '3' points to the 'Unstage chunk' button. The bottom part of the interface shows a diff view with lines 1 through 4, each containing a file path.

You might be prompted for more information

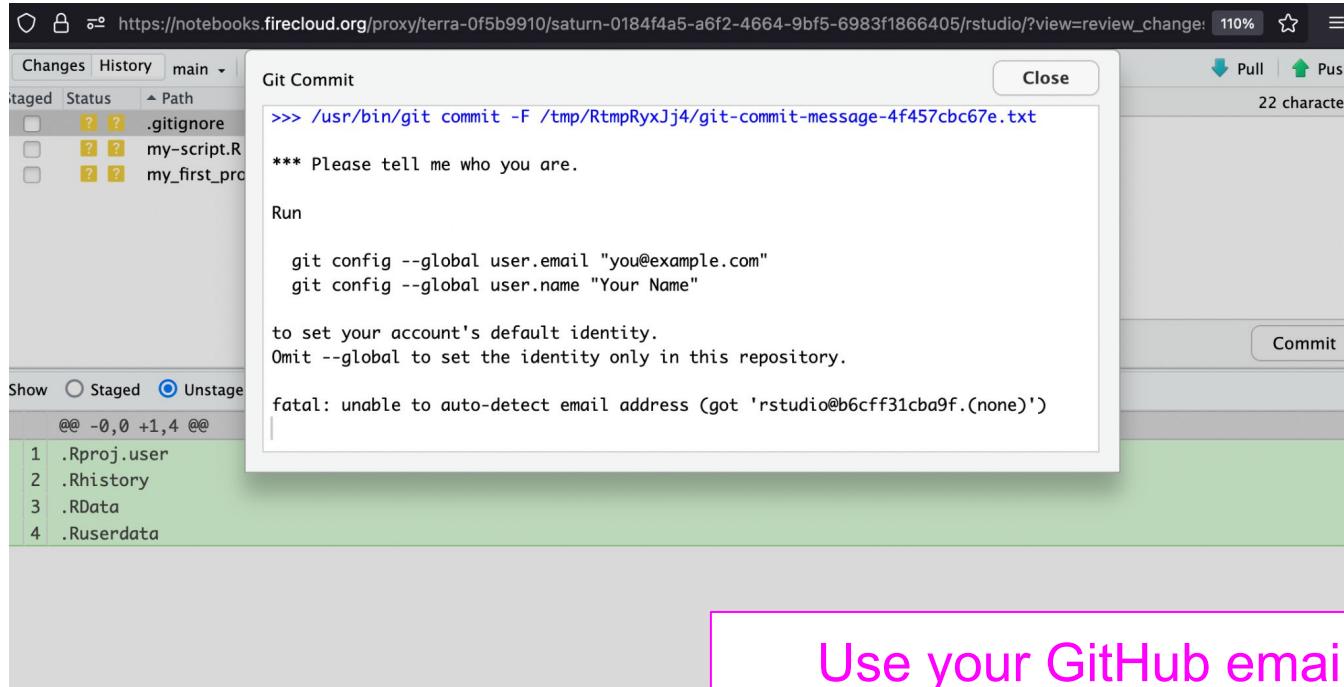

Use your GitHub email and
display name

You might be prompted for more information



A screenshot of the RStudio interface. At the top, there's a header bar with "1:18" and "(Top Level) ▾" on the left, and "R Script" with a dropdown arrow on the right. Below the header are three tabs: "Console" (selected), "Terminal" (highlighted with a pink arrow), and "Jobs". The main area shows a terminal window titled "Terminal 1" with the path "/home/rstudio/my_first_project". The terminal output is as follows:

```
rstudio@b6cff31cba9f:~/my_first_project$ git config --global user.email "avamariehoffman@gmail.com"
rstudio@b6cff31cba9f:~/my_first_project$ git config --global user.name "AM Hoffman"
rstudio@b6cff31cba9f:~/my_first_project$ 
```

Use the RStudio Terminal

try main ▾

is ahead of 'origin'


▲ Path

d ○ Unstage

Git Commit

Close

```
>>> /usr/bin/git commit -F /tmp/RtmpRyxJj4/git-commit-message-4f4261ceab0.txt
[main 0e67afd] Created my script file
  3 files changed, 18 insertions(+)
   create mode 100644 .gitignore
   create mode 100644 my-script.R
   create mode 100644 my_first_project.Rproj
```

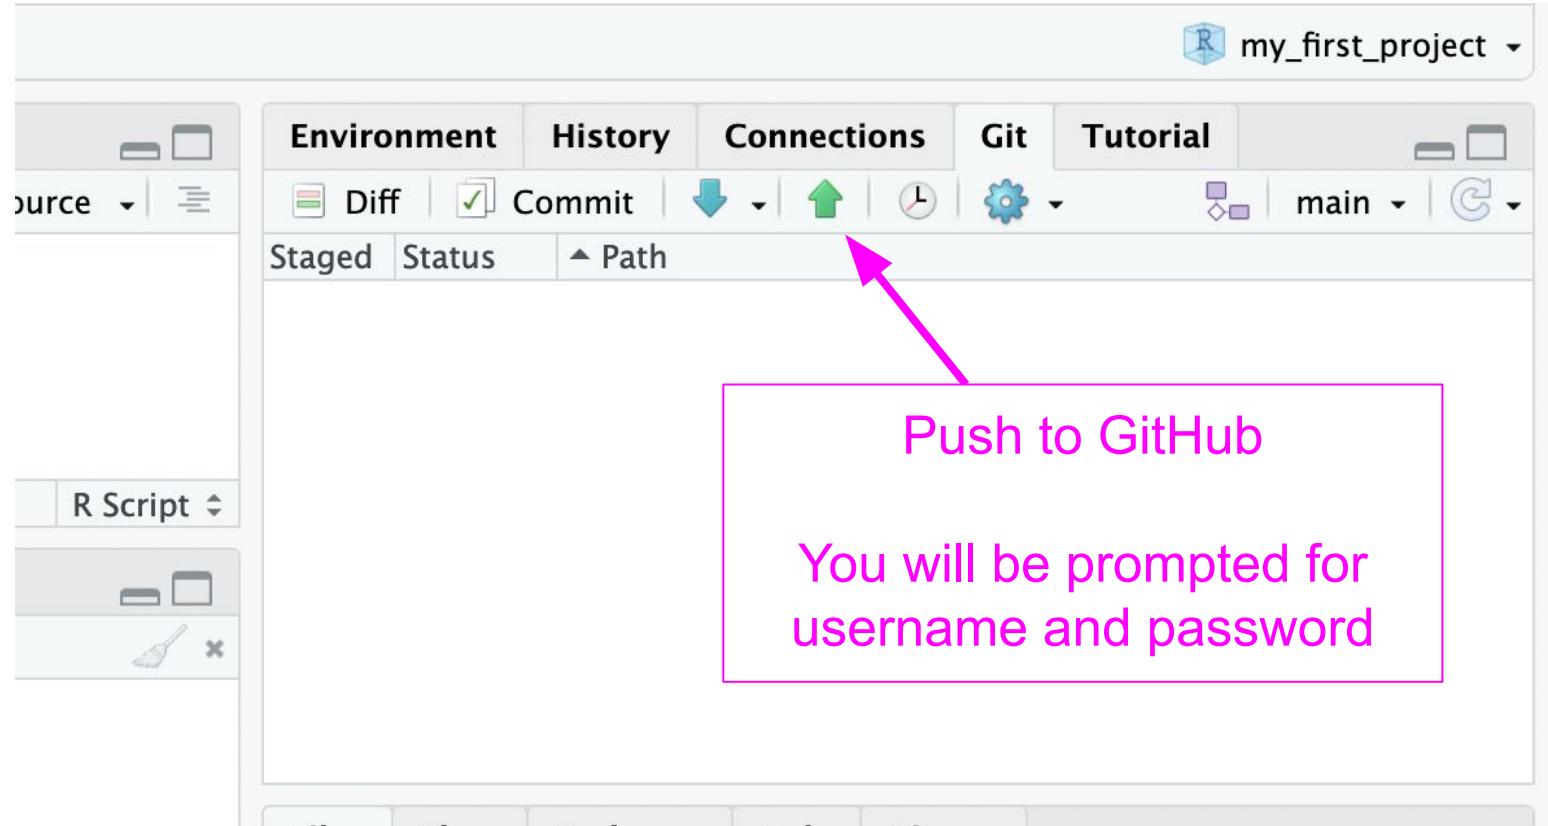

[main](#)[2 branches](#)[0 tags](#)[Go to file](#)[Add file](#)[Code](#)

avahoffman Update README.md

0bf19d7 now 5 commits

[.gitignore](#)

Created my script file

4 minutes ago

[README.md](#)

Update README.md

now

[my-script.R](#)

Created my script file

4 minutes ago

[my_first_project.Rproj](#)

Created my script file

4 minutes ago

README.md

my_ **Success!**

About

My first project files

[Readme](#)[0 stars](#)[1 watching](#)[0 forks](#)

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)

Languages

R 100.0%

Review

- You add/edit files in your AnVIL project or personal computer (your local repository).
- You publish/share these changes to a remote repository (GitHub) so that others may see them/incorporate them into their own work.
- Git commands
 - `git status`
 - `git add .`
 - `git commit -m "A message here"`
 - `git push`

Staging files and folders with git add

git add file_or_folder	stages specified file or folder
git add .	stages new and modified files
git add -u	stages modified and deleted files
git add -A	stages new, modified, and deleted files
git add *.csv	Stages any files with .csv extension
git add *	Use with caution: stages everything

Step 4: Incorporate changes
made by others

<> Edit file

Preview

 Show diff

my_first_project

Here is a description of the project.



Commit changes

Update README.md

Add an optional extended description...


Updating the readme on remote
(on GitHub) - simulates changes
made by others

-o- Commit directly to the main branch.

! Create a new branch for this commit and start a pull request. Learn more about pull requests.

Commit changes

Cancel

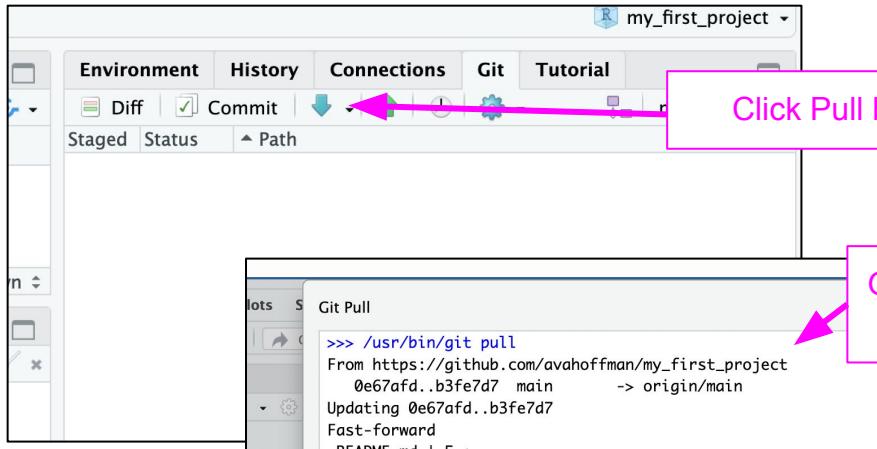

A terminal window titled 'Git Pull' displays the command output:

```
>>> /usr/bin/git pull
From https://github.com/avahoffman/my_first_project
 0e67af..b3fe7d7  main      -> origin/main
Updating 0e67af..b3fe7d7
Fast-forward
 README.md | 5 +---->
 1 file changed, 1 insertion(+), 4 deletions(-)
```

A pink callout box with the text 'Shows files changed' points to the terminal output. The RStudio interface is visible in the background.

The RStudio interface shows an updated 'my-script.R' file and a 'README.md' file. The 'README.md' file contains:

```
1 # my_first_project
2
3 Here is a description of the project.
4
```

A pink callout box with the text 'Files automatically update!' points to the updated 'README.md' file. Below, a terminal window titled 'Terminal 1' shows the command:

```
rstudio@b6cff31cba9f:~/my_first_project$ git config --global user.email "avamariehoffman@gmail.com"
rstudio@b6cff31cba9f:~/my_first_project$ git config --global user.name "AM Hoffman"
rstudio@b6cff31cba9f:~/my_first_project$
```

Pulling

- Others have pushed changes to the remote repository.
- You want to incorporate those changes into your local repository.
- Git commands
 - `git pull`

When working with others, you should create **branches** so you don't overwrite work by others. Let us know if you want to learn more about this!

Danger-free commands


<https://git-school.github.io/visualizing-git/>

git - the simple guide

<https://rogerdudler.github.io/git-guide/>

git cheat sheet

learn more about git the simple way at rogerdudler.github.io/git-guide/
cheat sheet created by Nina Joeschke of ninajs.de

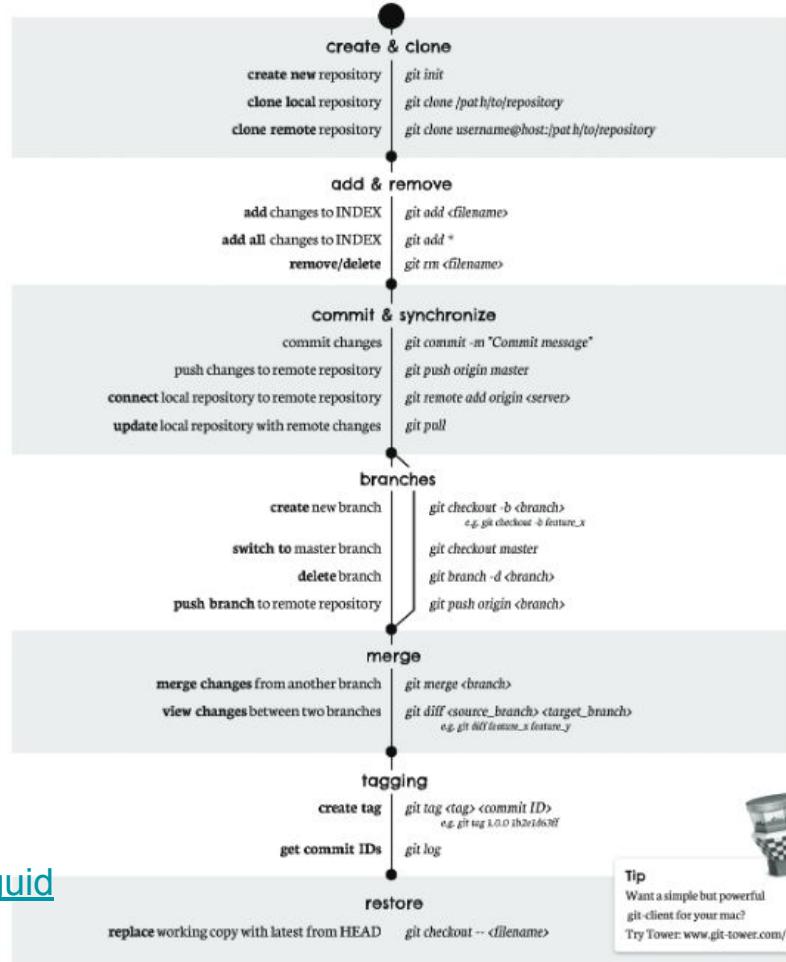

https://rogerdudler.github.io/git-guide/files/git_cheat_sheet.pdf



Overview Release Notes Help

GitHub Desktop

Focus on what matters instead of fighting with Git. Whether you're new to Git or a seasoned user, GitHub Desktop simplifies your development workflow.

[Download for macOS](#)

Download the native macOS build for [Apple silicon machines](#). If you don't know whether your machine has an Apple or Intel chip, see the [Apple docs](#).

[Download for Windows](#)

By downloading, you agree to the [Open Source Applications Terms](#).

Current Repository: desktop Current Branch: esc-pr #3972 Fetch origin: Last fetched 3 minutes ago

Changes History Add event handler to dropdown component

Appease linter iAmWillShepherd committed a day ago

Add event handler to dropdown com... iAmWillShepherd and Markus Olsson...

Move escape behavior to correct co... iAmWillShepherd and Markus Olsson...

Remove event handler from the bran... iAmWillShepherd and Markus Olsson...

Merge branch 'master' into esc-pr iAmWillShepherd committed a day ago

Merge pull request #4044 from des... Neha Batra committed a day ago

Merge pull request #4070 from desk... Brendan Forster committed 2 days ago

bump to beta3 Brendan Forster committed 2 days ago

Merge pull request #4057 from desk... Brendan Forster committed 2 days ago

Merge pull request #4067 from desk... Brendan Forster committed 2 days ago

[Release to 1.1.0-beta2](#)

```
@@ -145,6 +145,10 @@ export class ToolbarDropdown extends React.Component<
    this.state = { clientRect: null }
  }

  145 145 + private get isOpen() {
  146 146 +   return this.props.dropdownState === 'open'
  147 147 +
  148 +   private dropdownIcon(state: DropdownState): OcticonSymbol {
  149 +     // @TODO: Remake triangle octicon in a 12px version,
  150 +     // right now it's scaled badly on normal dpi monitors.
  151 +
  152     @@ -249,6 +253,13 @@ export class ToolbarDropdown extends React.Component<
      }
    }


    249 253 +   private onFoldoutKeyDown = (event: React.KeyboardEvent<HTMLElement>) => {
    250 254 +     if (!event.defaultPrevented && this.isOpen &&
    251 255       event.key === 'Escape') {
    252 +       event.preventDefault()
    253 +     }
    254 +
    255 +   }
  
```

<https://desktop.github.com/>



GitKraken

Legendary Git GUI client for Windows, Mac & Linux

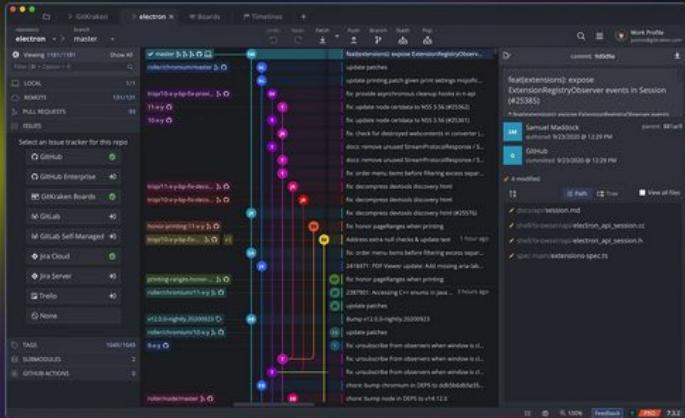

 Download the #1 Free Git GUI

Other Platforms

See Features →

<https://www.gitkraken.com/>

Nice practice

<https://www.katacoda.com/courses/git>