

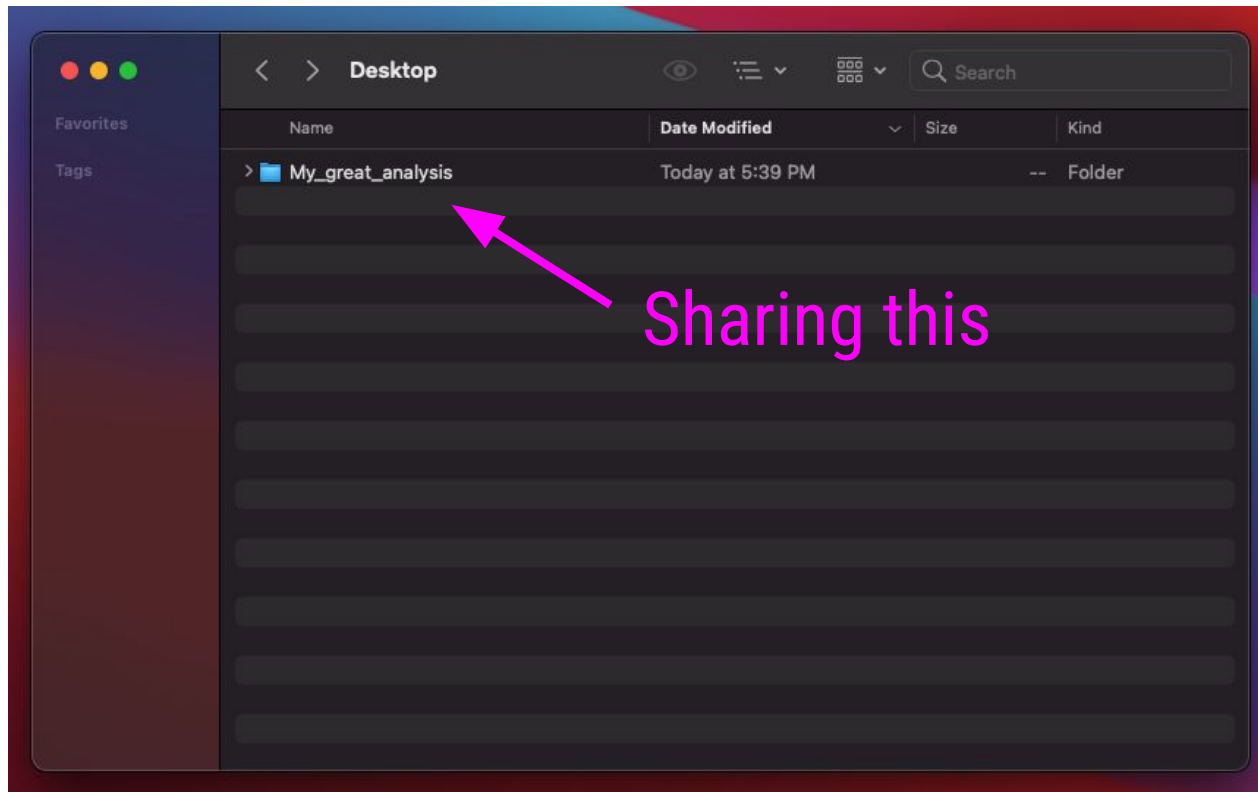
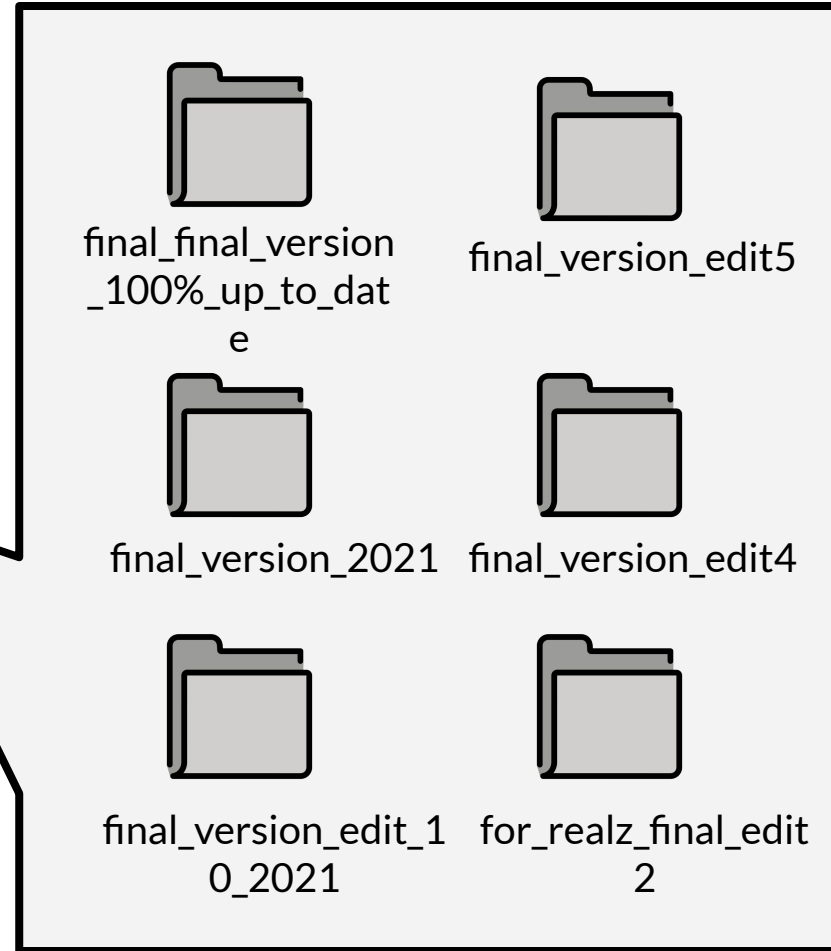


Version control with GitHub

What is the goal?



Now was it “final_final_version_100%_up_to_date” or “final_version_edit5” that I was working from?

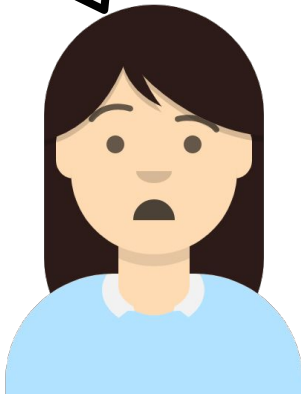

Version control is a system of keeping track of the different iterations of your project!

Unfortunate truth

<https://twitter.com/mtrc/status/617075570761965568>



Michael Cook

@mtrc

 **Follow**

"Version control is a truly vital concept that has unfortunately been implemented by madmen." Amen.

[twitter.com/Pentadact/stat...](https://twitter.com/Pentadact/status/617075570761965568)

5:00 PM - 3 Jul 2015


  9  11

Git commands have convenience
in mind, not intuition

It's like a shared Dropbox folder that you have to sync yourself, on each of your computers, in specific orders

Why not just use Dropbox?





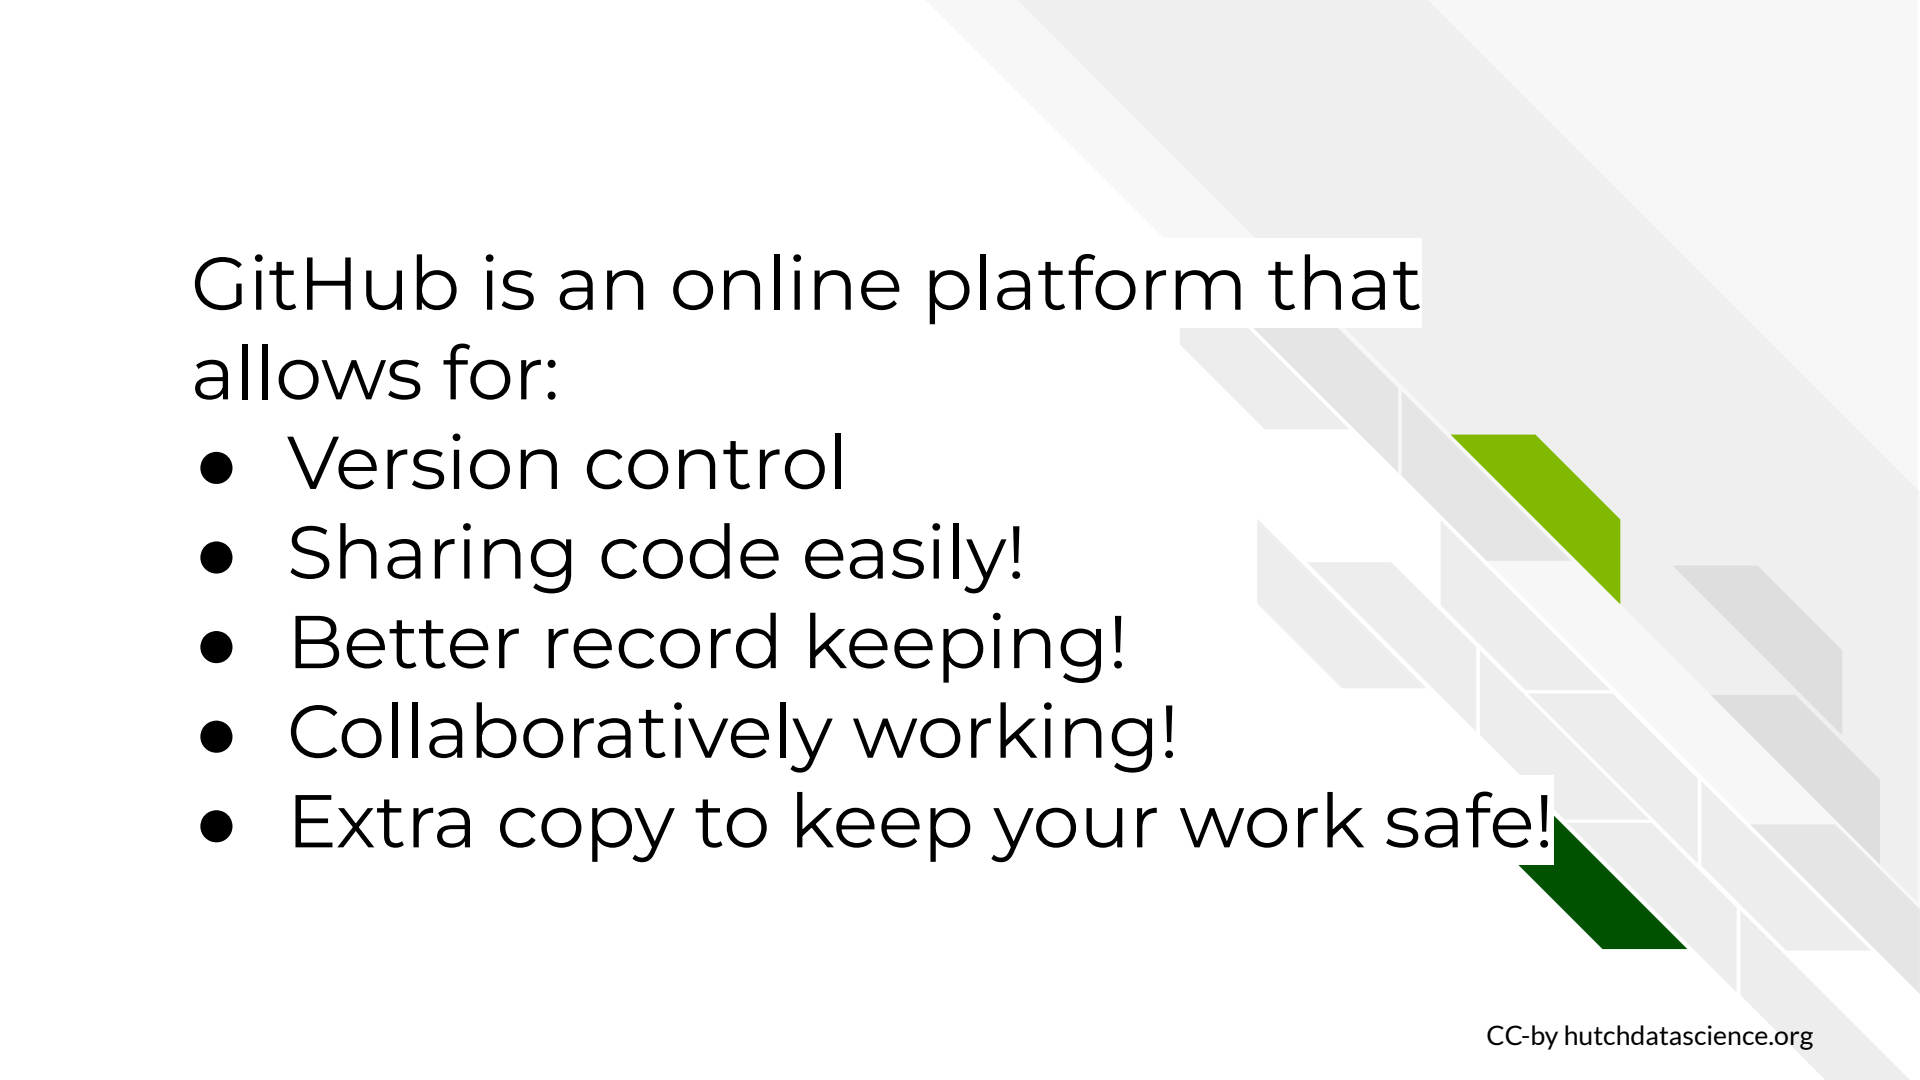

GitHub is an online platform that allows for:


- Version control
- Sharing code easily!
- Better record keeping!
- Collaboratively working!
- Extra copy to keep your work safe!

"Code and data are available upon request by email."

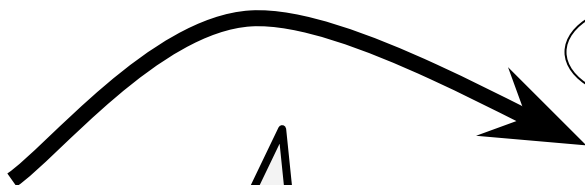

I'm requesting the code from your recent paper in the journal....


The corresponding author's inbox

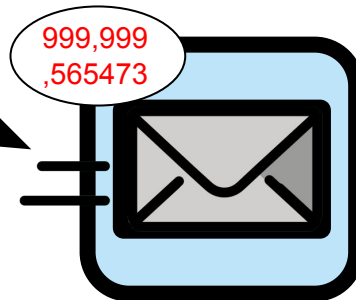





Open source = Code is available and can
be used for any purpose!

GitHub allows you to make your project open source!

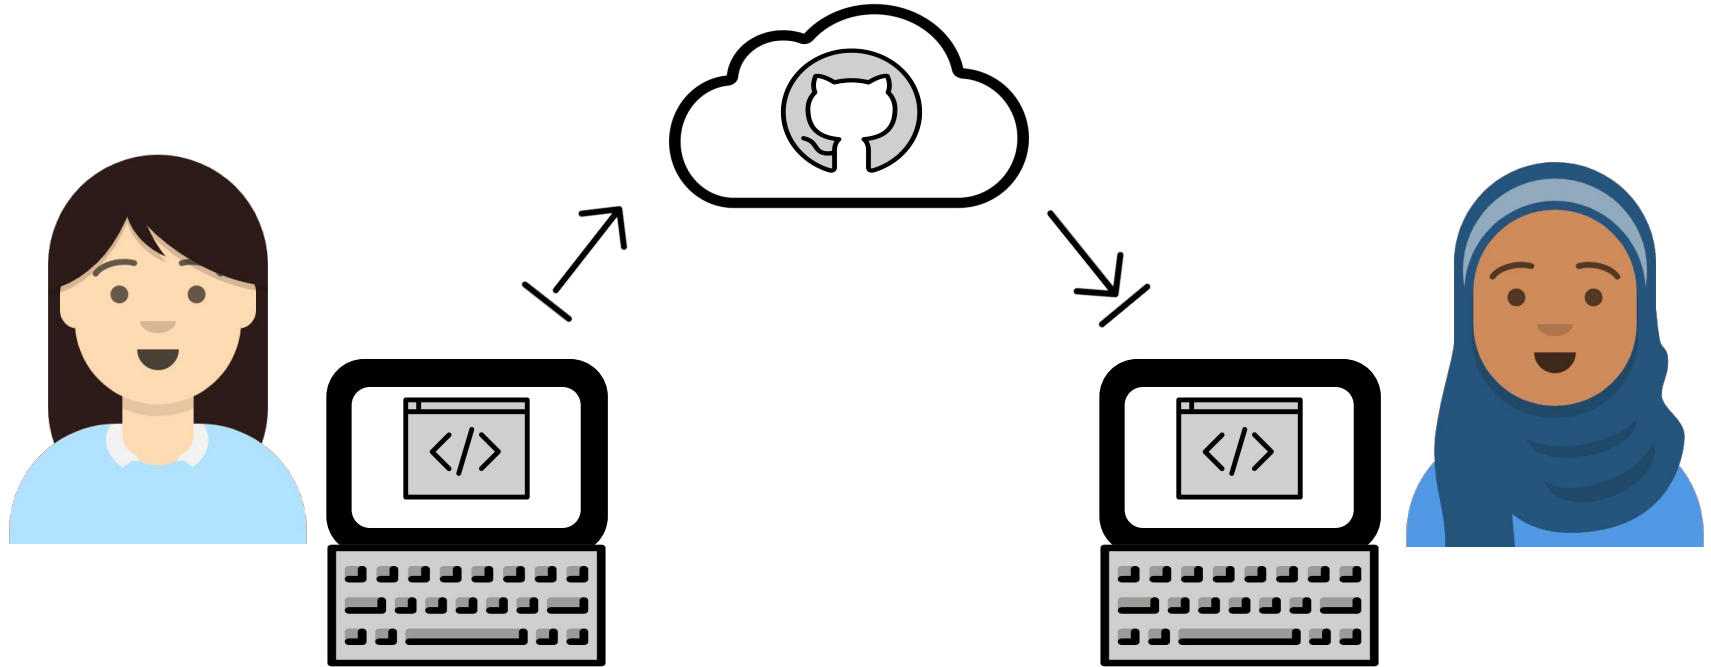




Keep better records!

Why did we write the code this way? I don't remember... Good thing through git tracking I can look into this file's history and remind myself how it became this.

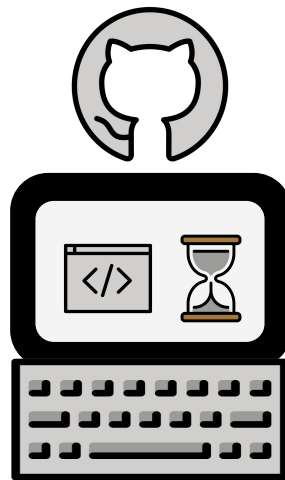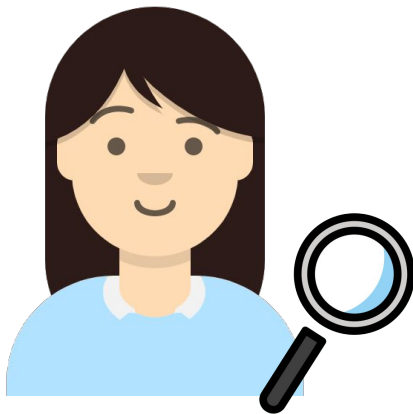


Keep your work safe!




Oh no! My computer broke! – Good thing Github has all my work.

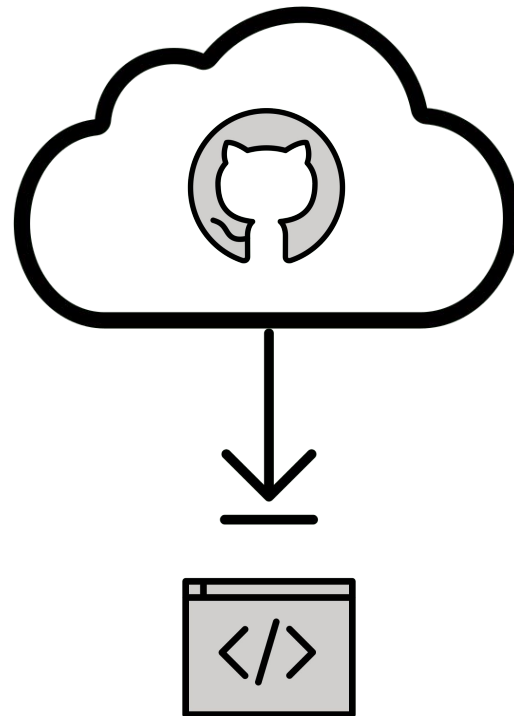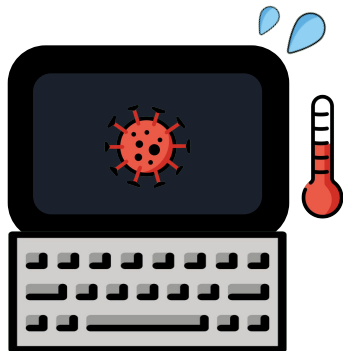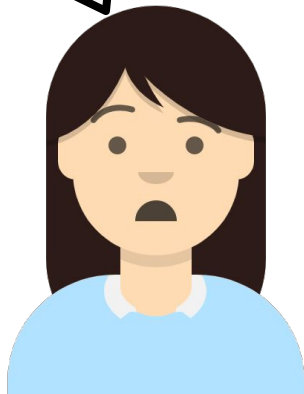

Great for
Collaborative
work

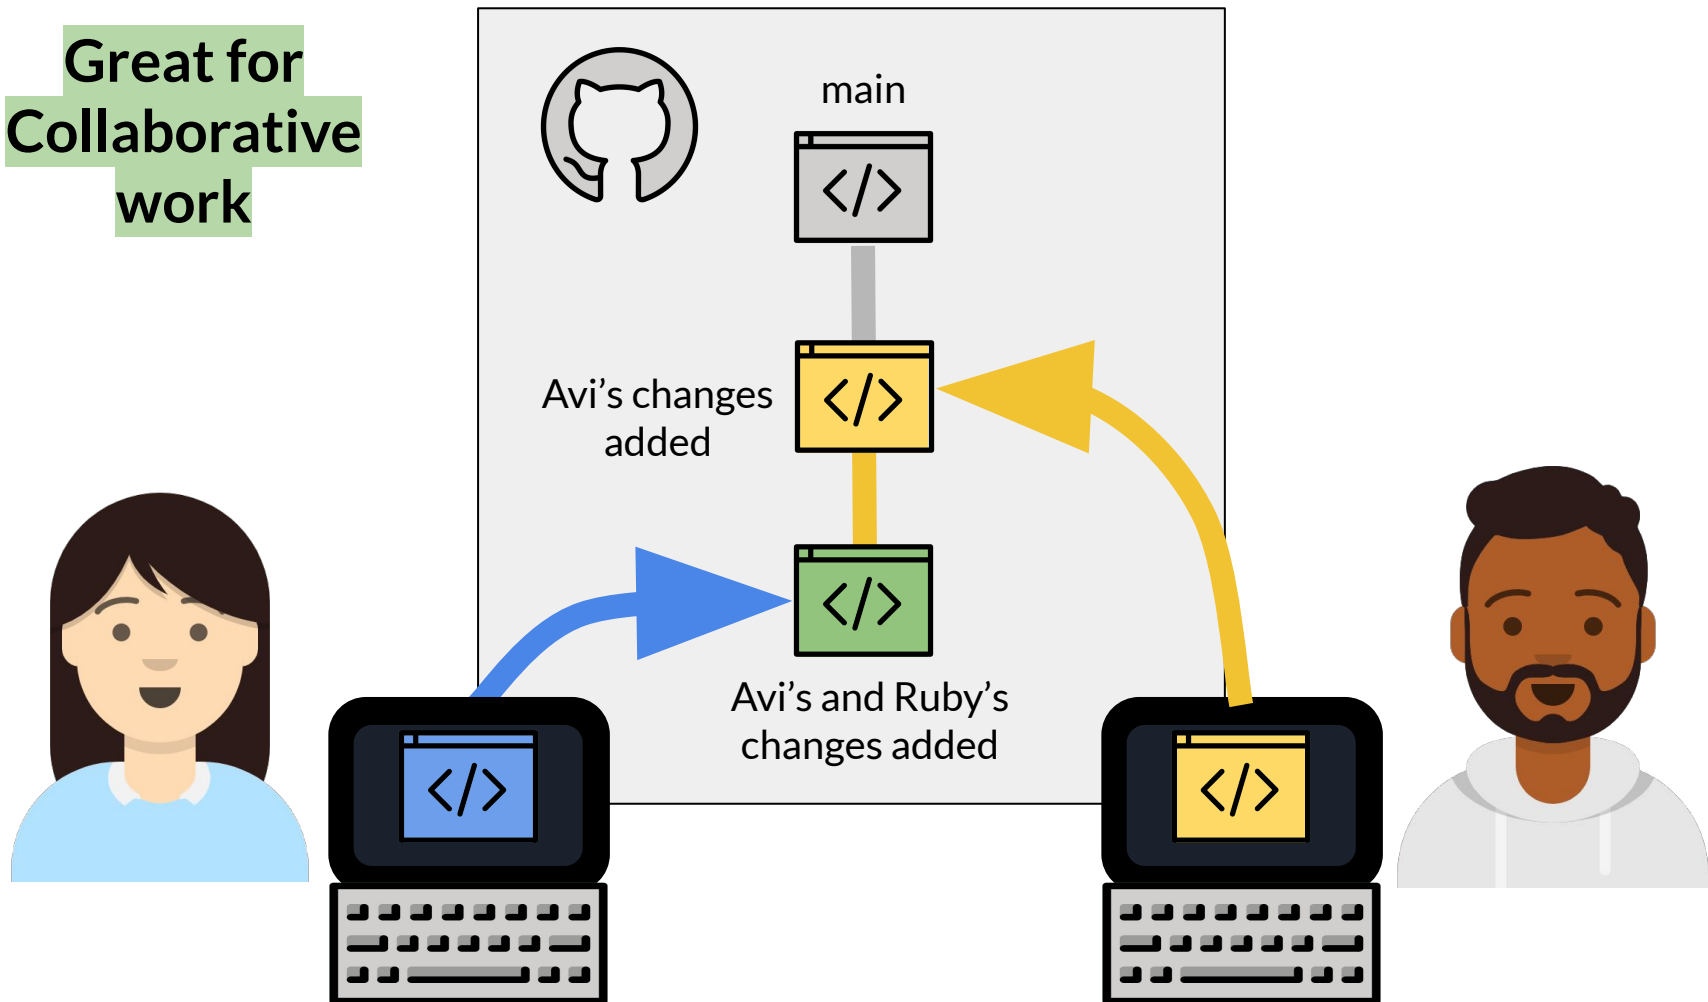

Isolate what you are working on
from the “perfected” version!

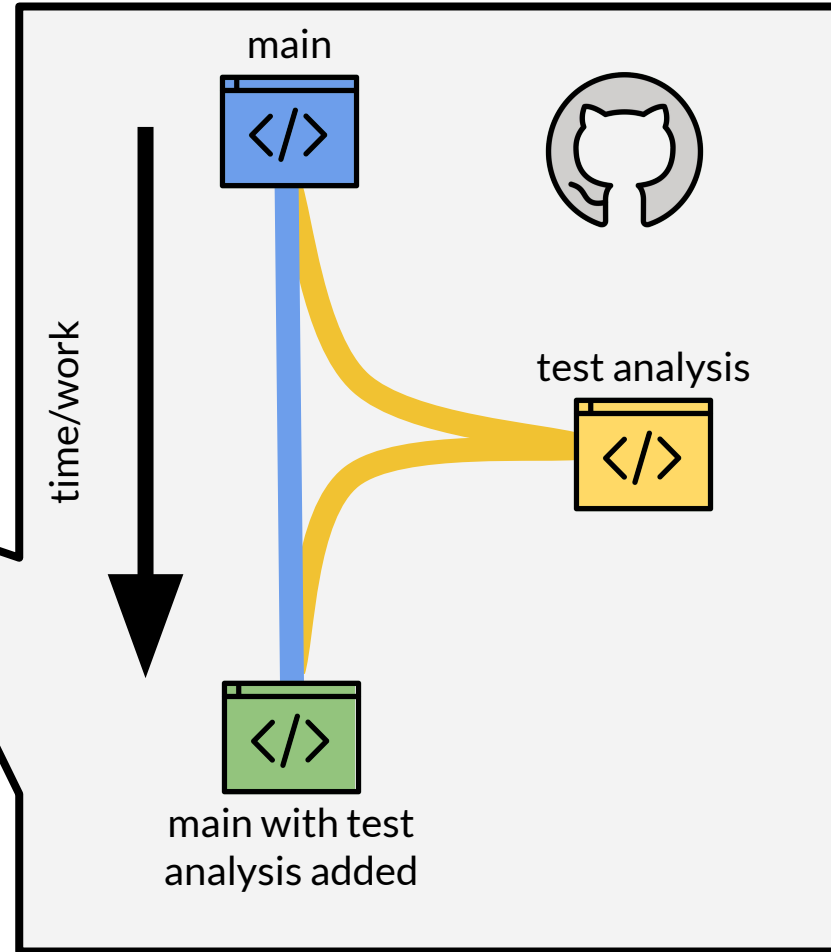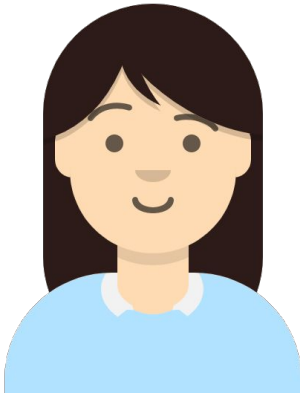

pull

add

clone


push




remote

branch

commit

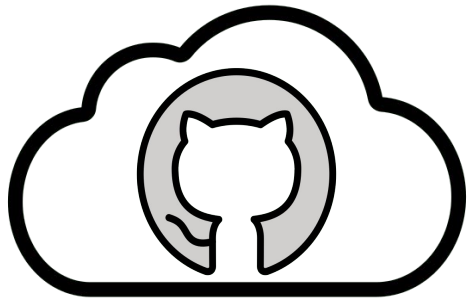


remote = the internet, <https://github.com/>




local = your computer



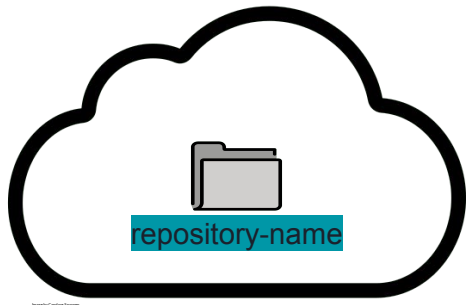

remote repository = project that is stored on the internet

e.g. `https://github.com/your-username/repository-name`




local repository = project copy on your computer



e.g. `~/some-filepath/repository-name`



clone = copy a remote repository to your local computer

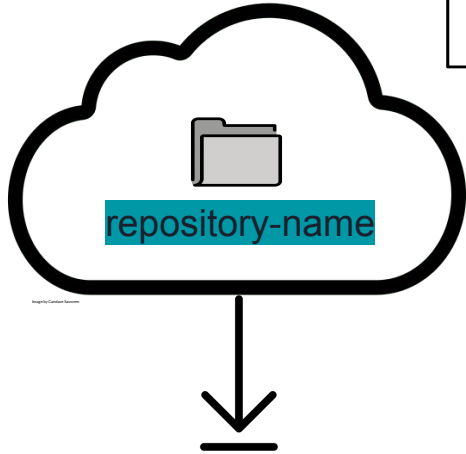

`https://github.com/your-username/repository-name`

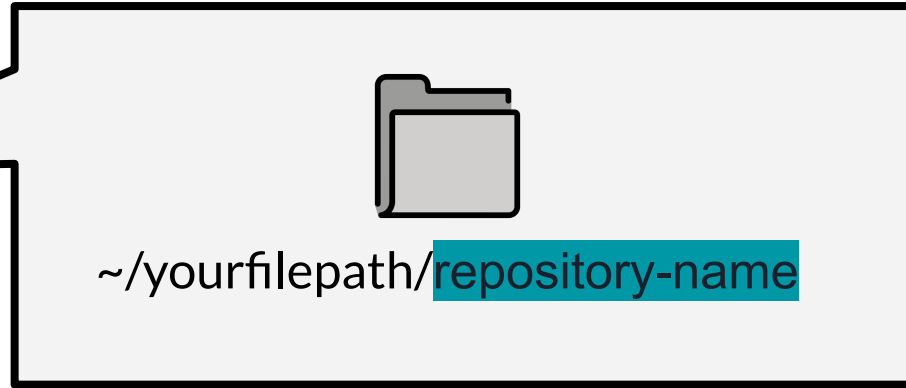

**DO NOT PUT PROTECTED
DATA ON GITHUB**


Even in a private repository!!!

LET'S PRACTICE!





Next Steps



Step 0: Accounts

Create an account at github.com

Install git <https://git-scm.com/downloads>

Restart RStudio



Step 1: New repo on GitHub

A new “folder” on github.com that can store files for a project





[Pulls](#) [Issues](#) [Marketplace](#) [Explore](#)

 **avahoffman** ▾

Repositories

 [SISBID/Data-Wrangling](#)

 [jhudsl/AnVIL_Book_Getting_Started](#)

 [avahoffman/blue-grama-gene-expression](#)

 [jhudsl/intro_to_r](#)

 [avahoffman/DESeq2-viz-demo](#)

 [jhudsl/jhudsl.github.io](#)

 [avahoffman/CV-and-resumes](#)

[Show more](#)

Recent activity

 [Add Instructor checklist as...](#)

All activity

 **carriewright11 pushed to SISBID/Data-Wrangling** 5 hours ago

6 commits to [gh-pages](#)

 [98387ee](#) fixing links for subsetting lab from 2 to 1

 [faef211](#) Merge pull request [#35](#) from SISBID/subsetting_part2

4 more commits »

 **carriewright11 pushed to SISBID/Data-Wrangling** 2 days ago

1 commit to [subsetting_part2](#)

 [98387ee](#) fixing links for subsetting lab from 2 to 1

 **KatherineCox pushed to jhudsl/AnVIL_Book_Getting_Started** 2 days ago

1 commit to [main](#)

 [00d7503](#) Render bookdown

<https://github.com/>

The screenshot shows the GitHub homepage. At the top, there is a dark navigation bar with the GitHub logo, a search bar labeled "Search or jump to...", and links for "Pulls", "Issues", "Marketplace", and "Explore". On the right side of the navigation bar, there is a bell icon for notifications, a plus icon in a square box, and a user profile icon. A pink rectangle highlights the plus icon, and a pink arrow points from it to a dropdown menu. The dropdown menu contains the following options: "New repository" (highlighted in blue), "Import repository", "New gist", "New organization", and "New project".

Below the navigation bar, the left sidebar shows the user profile for "avahoffman" and a list of repositories: "SISBID/Data-Wrangling", "jhudsl/AnVIL_Book_Getting_Started", "avahoffman/blue-grama-gene-expression", "jhudsl/intro_to_r", "avahoffman/DESeq2-viz-demo", "jhudsl/jhudsl.github.io", and "avahoffman/CV-and-resumes". There is a "New" button and a search bar for repositories.

The main content area shows "All activity" with a list of recent pushes. The first push is by "carriewright11" to "SISBID/Data-Wrangling" 5 hours ago, with 6 commits to "gh-pages". The second push is also by "carriewright11" to "SISBID/Data-Wrangling" 2 days ago, with 1 commit to "subsetting_part2". The third push is by "KatherineCox" to "jhudsl/AnVIL_Book_Getting_Started" 2 days ago, with 1 commit to "main".

<https://github.com/>

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#).

Required fields are marked with an asterisk (*).

Repository template

No template ▾

Start your repository with a template repository's contents.

Owner *

 avahoffman ▾

Repository name *

test_project

✔ test_project is available.

Great repository names are short and memorable. Need inspiration? How about [legendary-garban](#)

Description (optional)

Testing out github



Public

Anyone on the internet can see this repository. You choose who can commit.



Private

You choose who can see and commit to this repository.

Initialize this repository with:



Add a README file

This is where you can write a long description for your project. [Learn more about READMEs](#).

Add .gitignore

.gitignore template: None ▾

Choose which files not to track from a list of templates. [Learn more about ignoring files](#).

Choose a license

License: None ▾

A license tells others what they can and can't do with your code. [Learn more about licenses](#).

This will set  main as the default branch. Change the default name in your [settings](#).

 You are creating a public repository in your personal account.

<https://github.com/new>

Create repository



avahoffman / test_project

Q Type to search



<> Code Issues Pull requests Actions Projects Security Insights Settings



test_project

Private

Unwatch 1

Fork 0

Star 0

main

1 branch

0 tags

Go to file

Add file

<> Code

About



avahoffman Initial commit

d8bf495 1 minute ago 1 commit



README.md

Initial commit

1 minute ago

README.md



test_project

Testing out github

Testing out github

Readme

Activity

0 stars

1 watching

0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)



© 2023 GitHub, Inc.

[Terms](#)

[Privacy](#)

[Security](#)

[Status](#)

[Docs](#)

[Contact GitHub](#)

[Pricing](#)

[API](#)

[Training](#)

[Blog](#)

[About](#)

Step 1: New repo on GitHub

1. Click “New”
2. Name the repo, select “Public”, and add a README
3. Click “Create Repository”

Step 2: Upload a File to GitHub

Add an .Rmd file to the project



test_project Public

Pin Unwatch Fork 0 Star 0

main 1 Branch 0 Tags

Go to file

Add file Code

avahoffman Initial commit 172e618 · 1 minute ago 1 Commit

README.md Initial commit 1 minute ago

README

test_project

Testing out github

About

Testing out github

- Readme
- Activity
- 0 stars
- 1 watching
- 0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)



Pin



Unwatch

1



Fork

Go to file

t

Add file

<> Code

About

+ Create new file

Upload files

Testing out gi

Readme

Activity

0 stars

1 watching

0 forks

mit

2 minutes ago

test_project /



Drag additional files here to add them to your repository

Or [choose your files](#)

 My_analysis.Rmd



Commit changes

Add files via upload

Add an optional extended description...

☒ Commit directly to the `main` branch.

☐ Create a new branch for this commit and start a pull request. [Learn more about pull requests.](#)

Commit changes

Cancel



test_project

Public



Pin



Unwatch

1



main



1 Branch



0 Tags



Go to file

t

Add file

<> Code



avahoffman Add files via upload

566157e · now



2 Commits



My_analysis.Rmd

Add files via upload

now



README.md

Initial commit

17 minutes ago



README



test_project

Testing out github

Step 2: Upload a File to GitHub

1. “Add File”
2. “Upload Files”
3. Drag and drop / add files
4. Click “Commit changes”

Local git usage

(optional)



Step 3: Create “local” link

You can work on files directly and then sync. We will show how to do this with RStudio, but you can also do this with Github desktop or command line.



Search or jump to...



Pulls

Issues

Marketplace

Explore



avahoffman / my_first_project

Unwatch

1

Star

0

Fork

0

Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Copy the special git URL

main

Go to file

Add file

Code



avahoffman Initial commit



README.md

Initial commit

README.md

my_first_project

My first project files

Clone

HTTPS SSH GitHub CLI

https://github.com/avahoffman/my_first



Use Git or checkout with SVN using the web URL.



Open with GitHub Desktop



Download ZIP

About

My first project files

Readme

Releases


No releases published


[Create a new release](#)


Packages


No packages published

[Publish your first package](#)

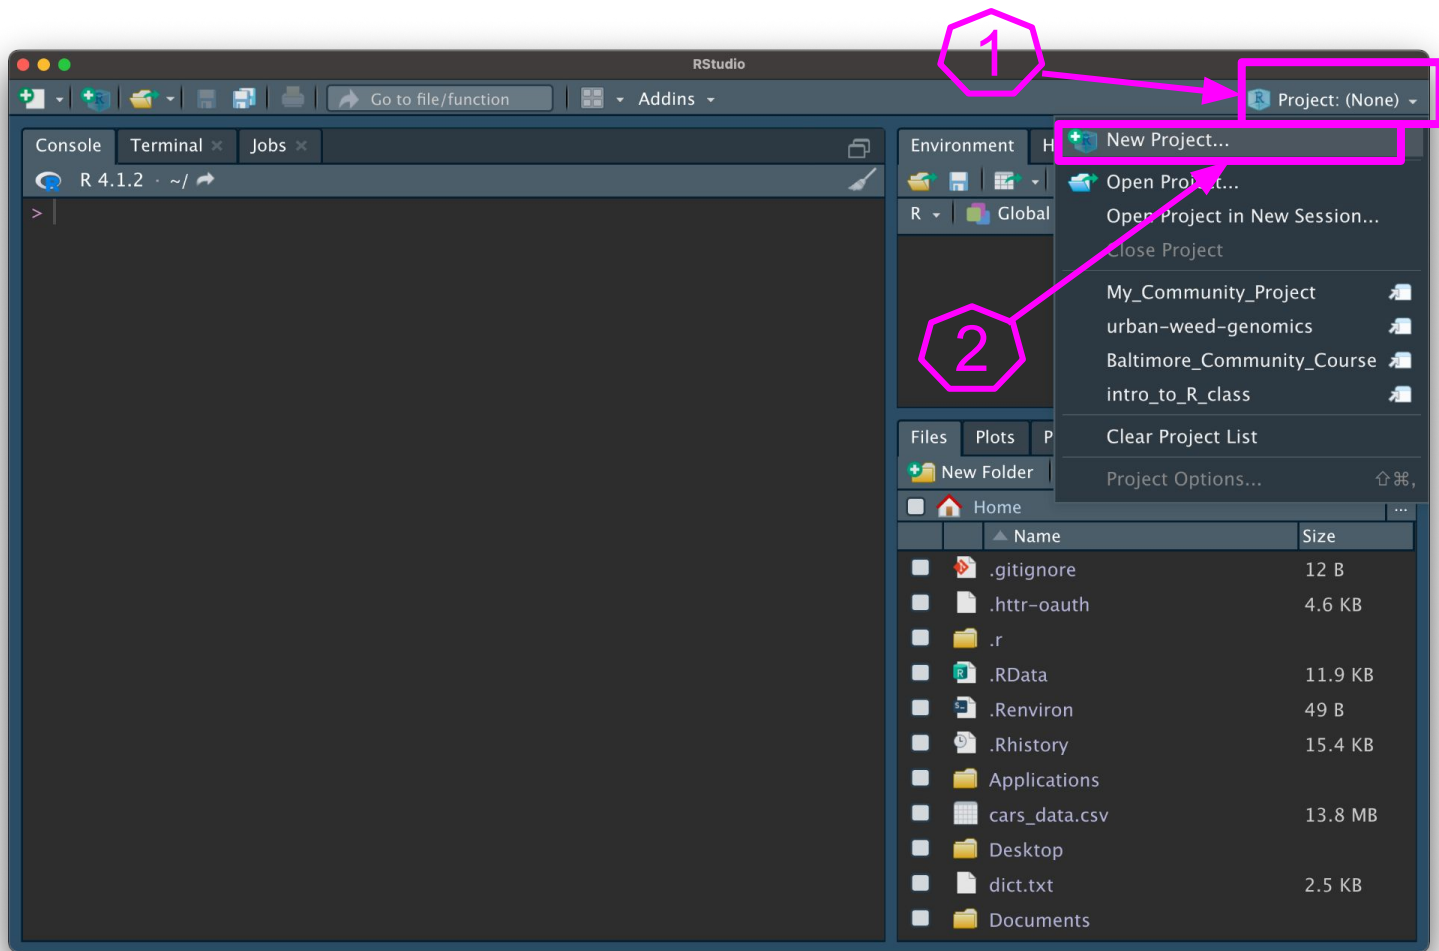

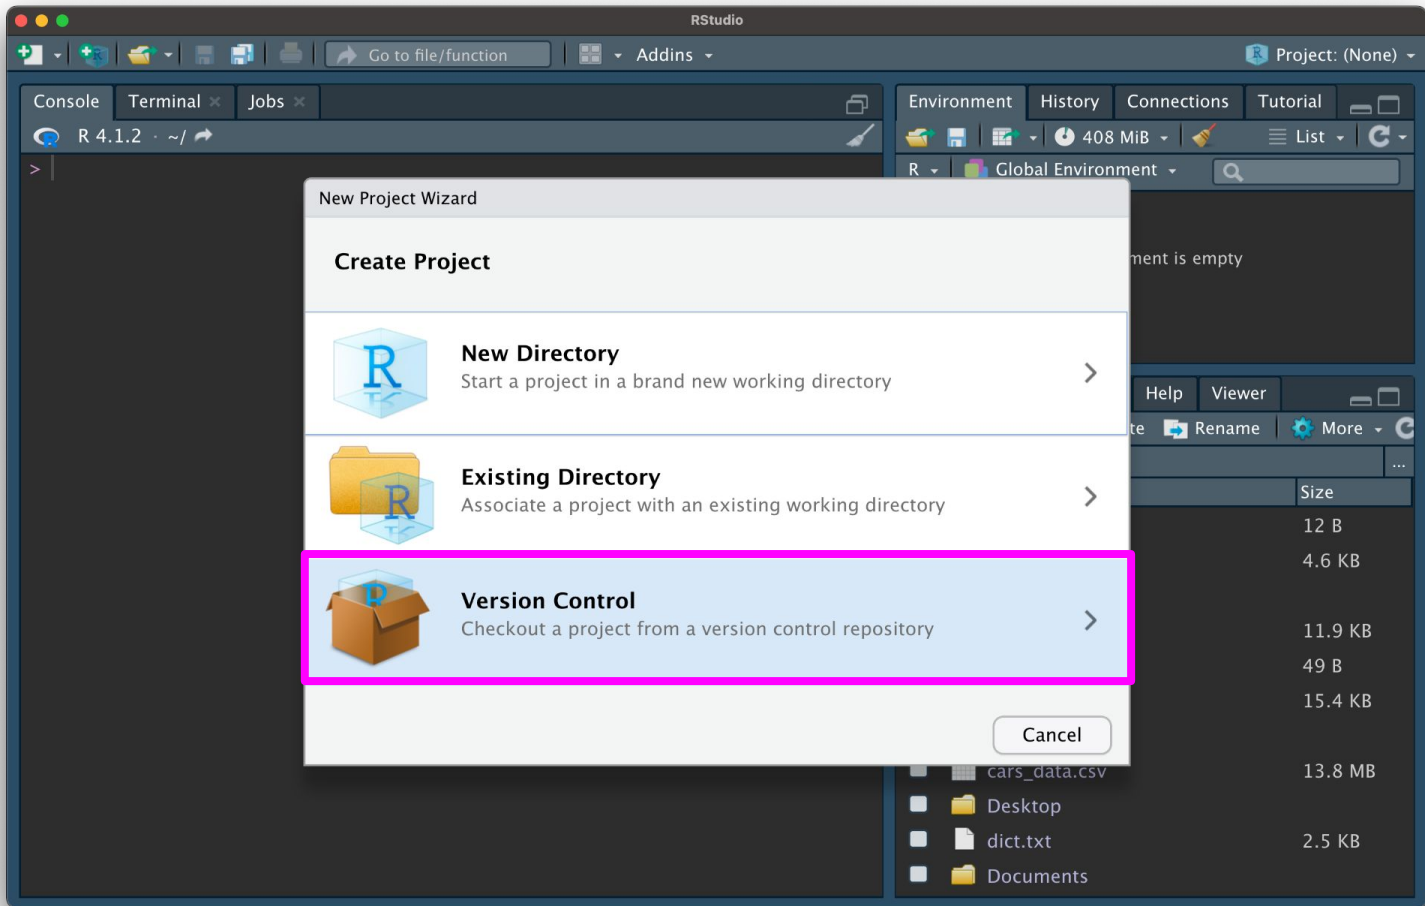

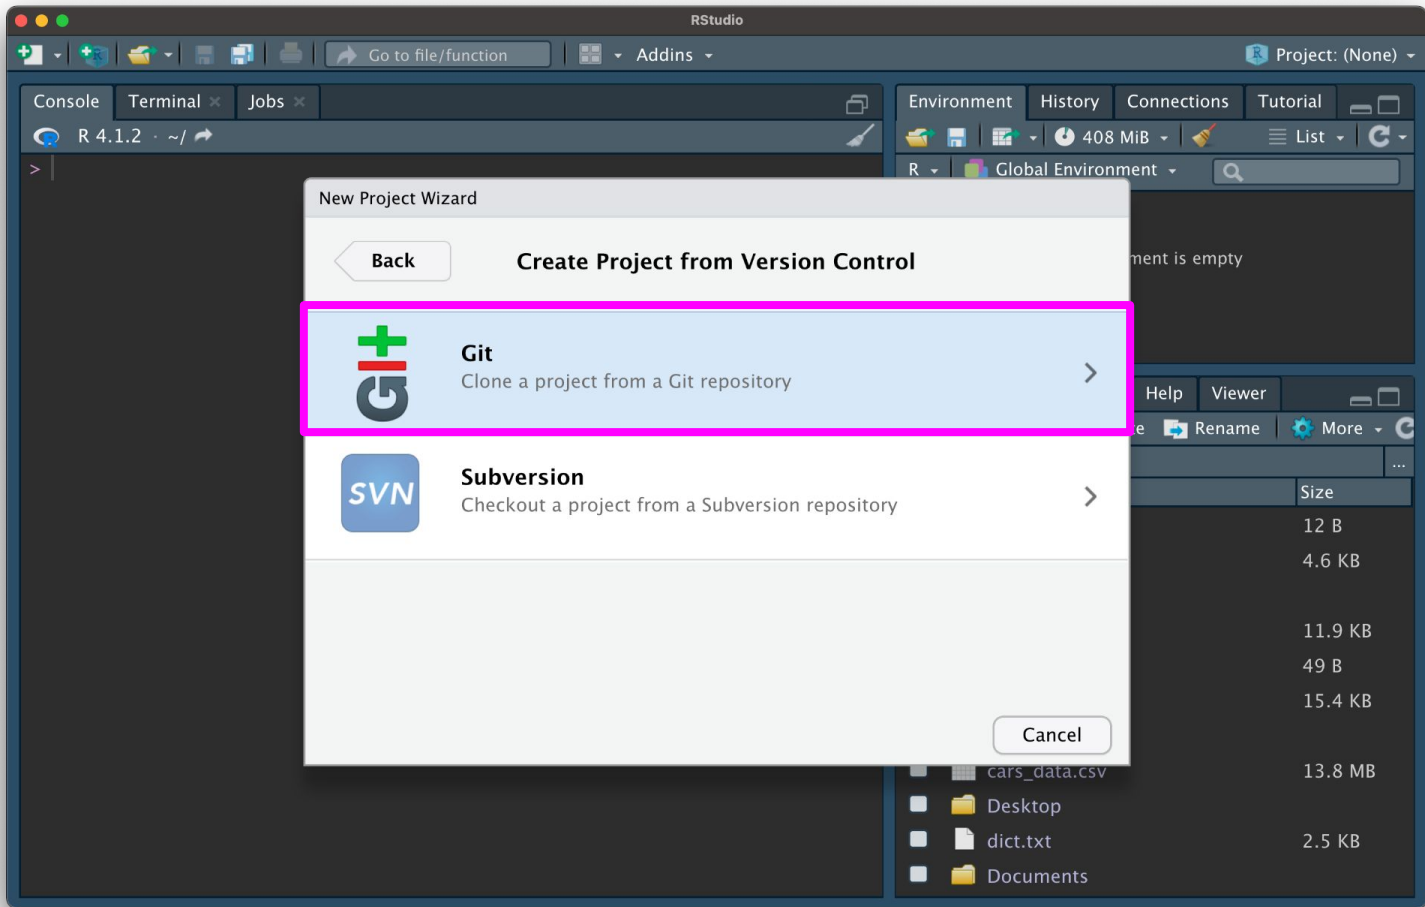


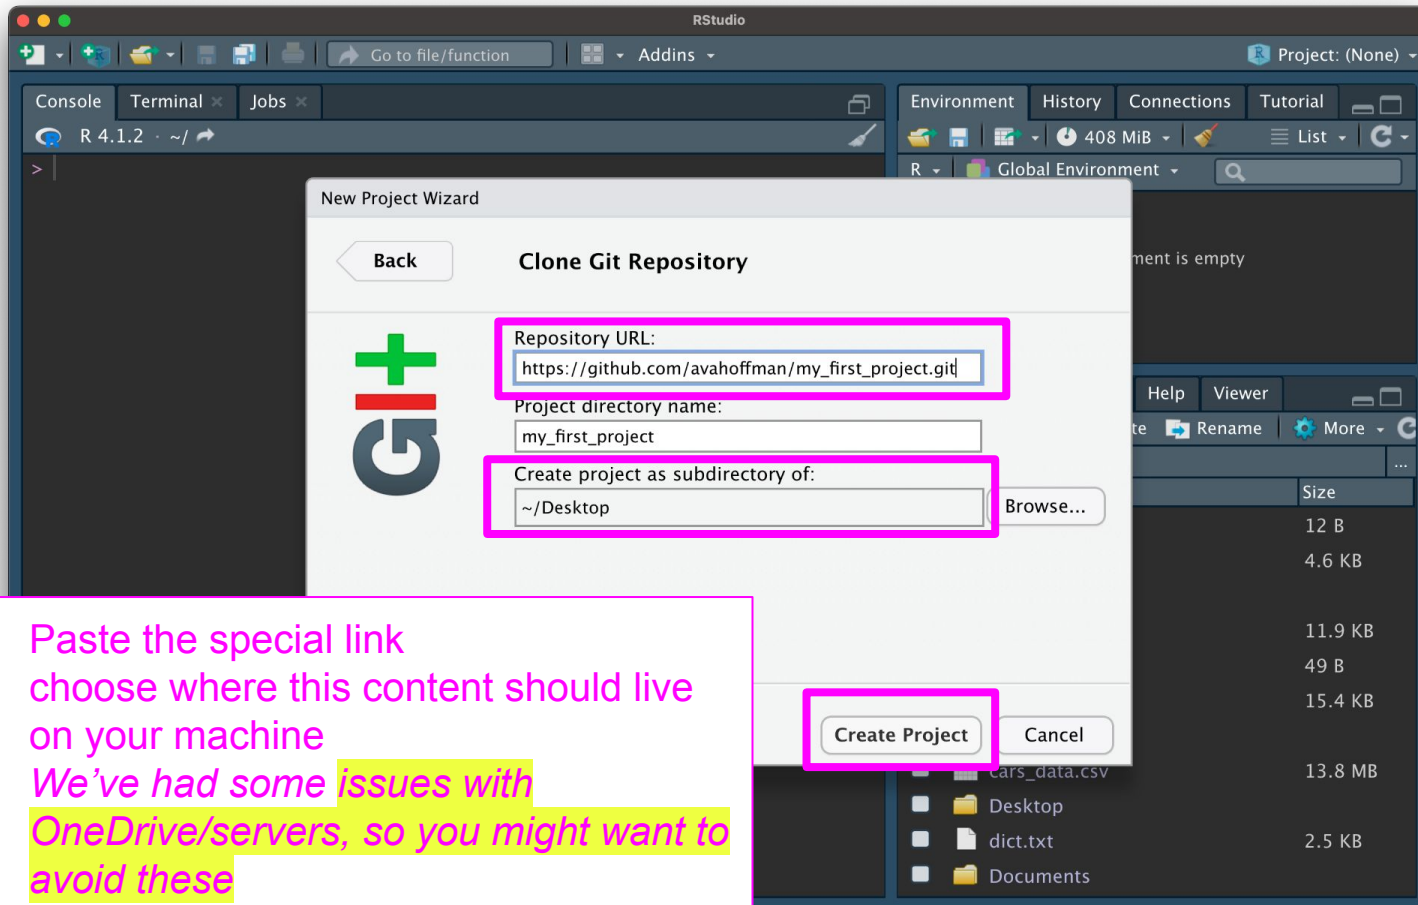

- Paste the special link
- choose where this content should live on your machine
- We've had some issues with OneDrive/servers, so you might want to avoid these

You might need to set a personal access token

- Like a very strong password!
- Steps:
 - Click your icon > Settings
 - Scroll down and click “Developer settings”
 - Click Personal access tokens > Tokens (classic)
 - Click Generate new token > Generate new token (classic)
 - Name the token under “Note”
 - Select the checkbox that says “repo”
 - Click “Generate token” at the bottom
 - Copy the token and save it somewhere safe
 - E.g., a password manager
 - Will start with “ghp_”
 - Paste the token In RStudio if prompted

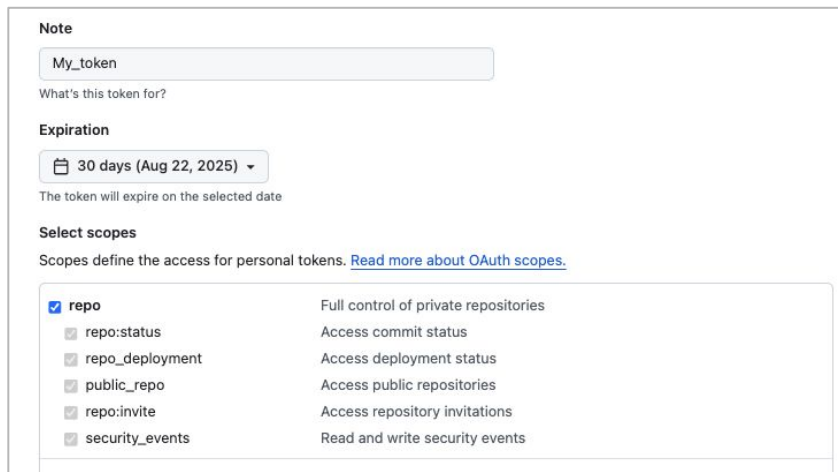

The screenshot shows the GitHub 'Generate new token (classic)' interface. It includes a text input for the token name, a dropdown for expiration, and a list of scopes to select.

Note

My_token

What's this token for?

Expiration


30 days (Aug 22, 2025)

The token will expire on the selected date

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes.](#)


Scope	Description
☒ repo	Full control of private repositories
☐ repo:status	Access commit status
☐ repo_deployment	Access deployment status
☐ public_repo	Access public repositories
☐ repo:invite	Access repository invitations
☐ security_events	Read and write security events

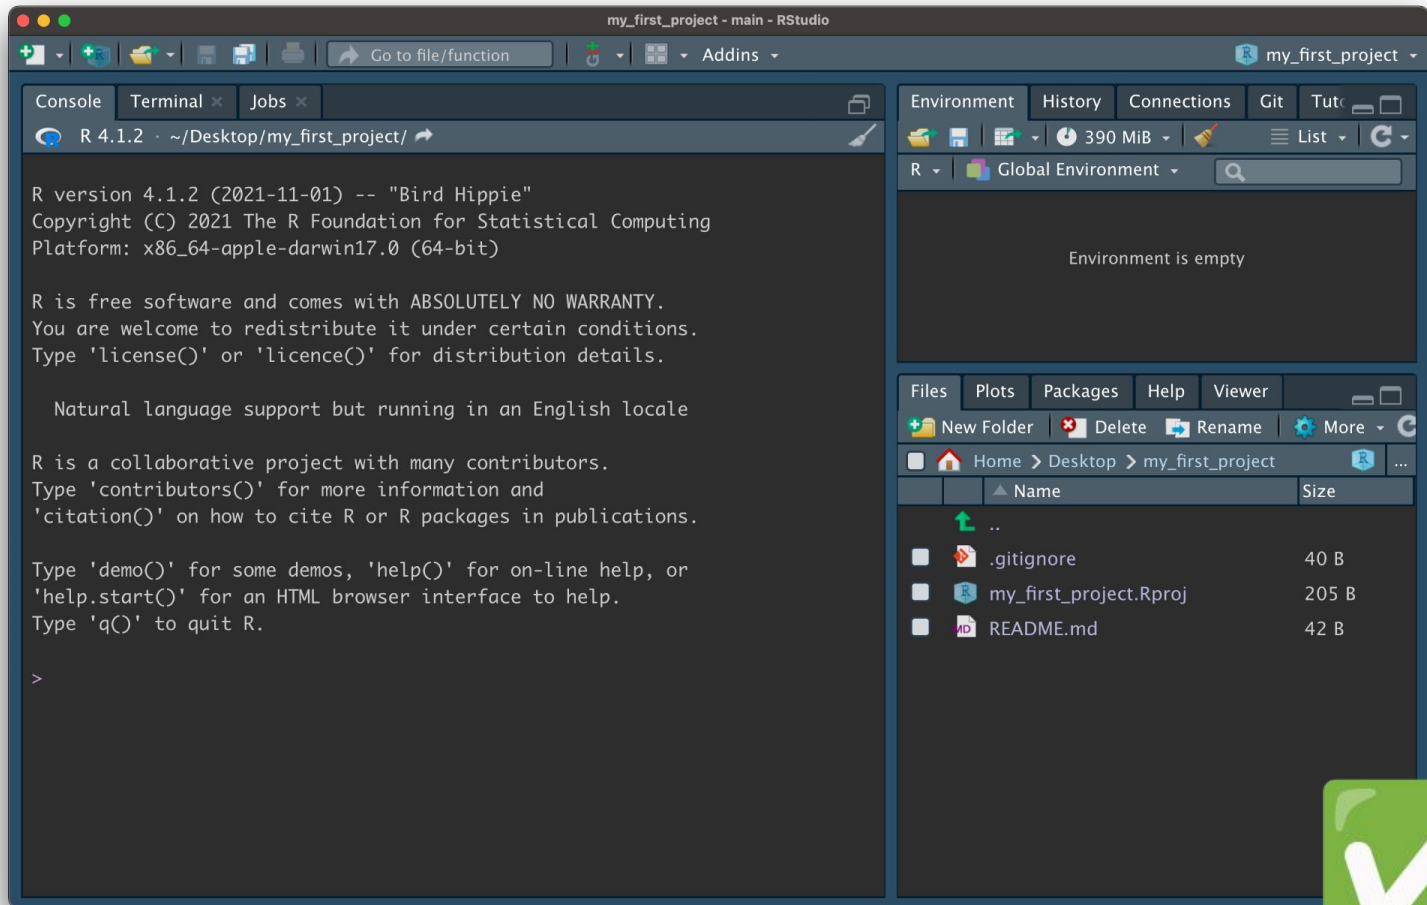


Step 4: Configure git

You should only need to do this once unless you want to use a different GitHub account.



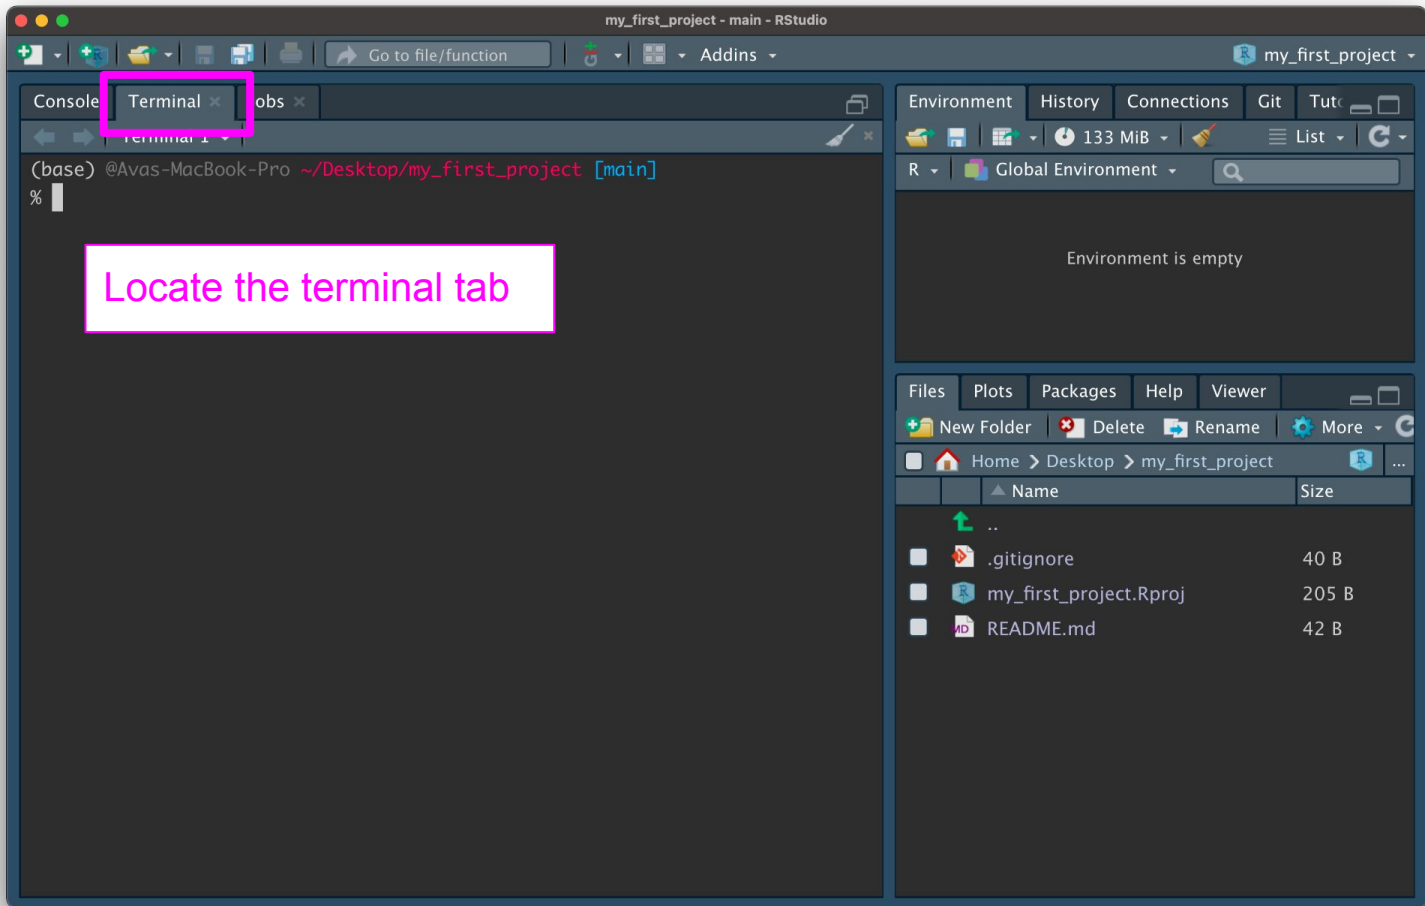

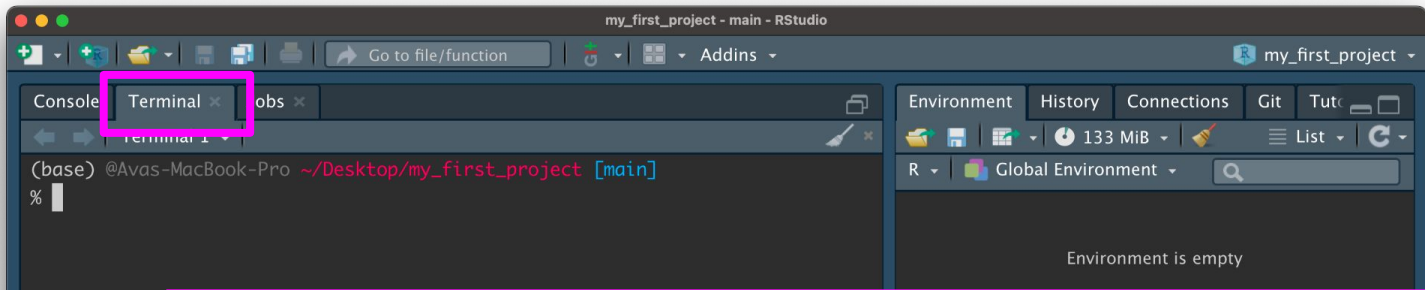

Type the following..

For Mac:


```
git config --global credential.helper osxkeychain
git config --global user.name johndoe123
git config --global user.email johndoe@example.com
```

For Windows:

```
git config --global credential.helper manager-core
git config --global user.name johndoe123
git config --global user.email johndoe@example.com
```

Step 5: Change stuff



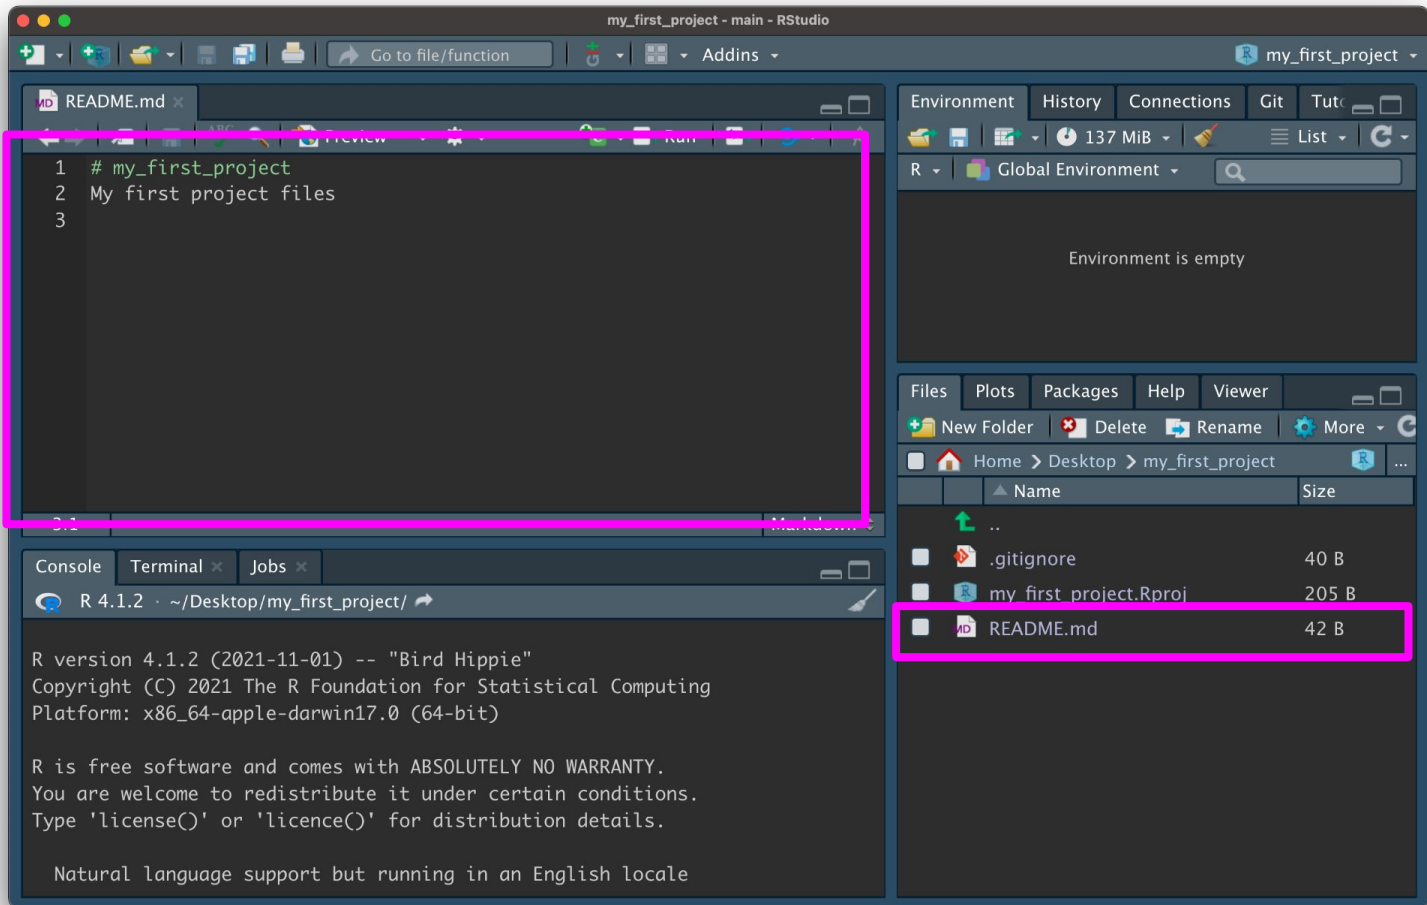

Make some changes...

The screenshot shows the RStudio IDE interface for a project named "my_first_project". The main editor window displays the "README.md" file with the following content:

```
1 # my_first_project
2 My first project files
3
4 Our project members are: ...|
```

The status bar at the bottom of the editor shows the time "4:29" and the "Markdown" mode.

The right-hand pane contains two sections:

- Environment/History/Connections/Git/Tutorial**: The "Git" tab is active, showing a table of staged files:

Staged	Status	Path
☐	?	my_first_project.Rproj
☒	M	README.md
☐	?	.gitignore

- Files/Plots/Packages/Help/Viewer**: The "Files" tab is active, showing a file explorer view of the project directory:

Name	Size	M
..		
.gitignore	40 B	F
my_first_project.Rproj	205 B	F
README.md	71 B	F

The bottom pane shows the "Console" tab with the R prompt and the following text:

```
R 4.1.2 ~ /Desktop/my_first_project/
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.
```

Make some changes...

The screenshot shows the RStudio IDE interface for a project named 'my_first_project'. The top toolbar includes a 'Go to file/function' button and an 'Addins' menu. The 'Addins' menu is open, and the 'Git' tab is highlighted with a pink box. A pink callout box with the text 'Locate the Git tab' points to this tab. The main editor window displays the 'README.md' file with the following content:

```
1 # my_first_project
2 My first project files
3
4 Our project members are: ...|
```

The bottom-left pane shows the 'Console' tab with the R prompt 'R 4.1.2 · ~/Desktop/my_first_project/' and the following text:

```
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publicat
ions.

Type 'demo()' for some demos, 'help()' for on-line hel
p, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.
```

The bottom-right pane shows the 'Files' tab with a file explorer view of the project directory. The files listed are:

Name	Size	M
..		
.gitignore	40 B	F
my_first_project.Rproj	205 B	F
README.md	71 B	F

Make some changes...

Click Commit

The screenshot shows the RStudio IDE interface for a project named 'my_first_project'. The main editor window displays the 'README.md' file with the following content:

```
1 # my_first_project
2 My first project files
3
4 Our project members are: ...|
```

The bottom pane is split into a 'Console' and a 'Terminal' tab. The 'Console' tab is active, showing the R prompt and the following text:

```
R 4.1.2 ~ /Desktop/my_first_project/
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.
```

The right-hand pane is split into a 'Git' tab and a 'Files' tab. The 'Git' tab is active, showing the 'Commit' button highlighted with a red box. Below the 'Commit' button is a table of staged files:

Staged	Status	Path
☐	?	my_first_project.Rproj
☒	M	README.md
☐	?	.gitignore


The 'Files' tab is also visible, showing a list of files in the project directory:

Name	Size	M
..		
.gitignore	40 B	F
my_first_project.Rproj	205 B	F
README.md	71 B	F


Make some changes...

Check the “Staged” box
for files you want to sync

Observe changes by line

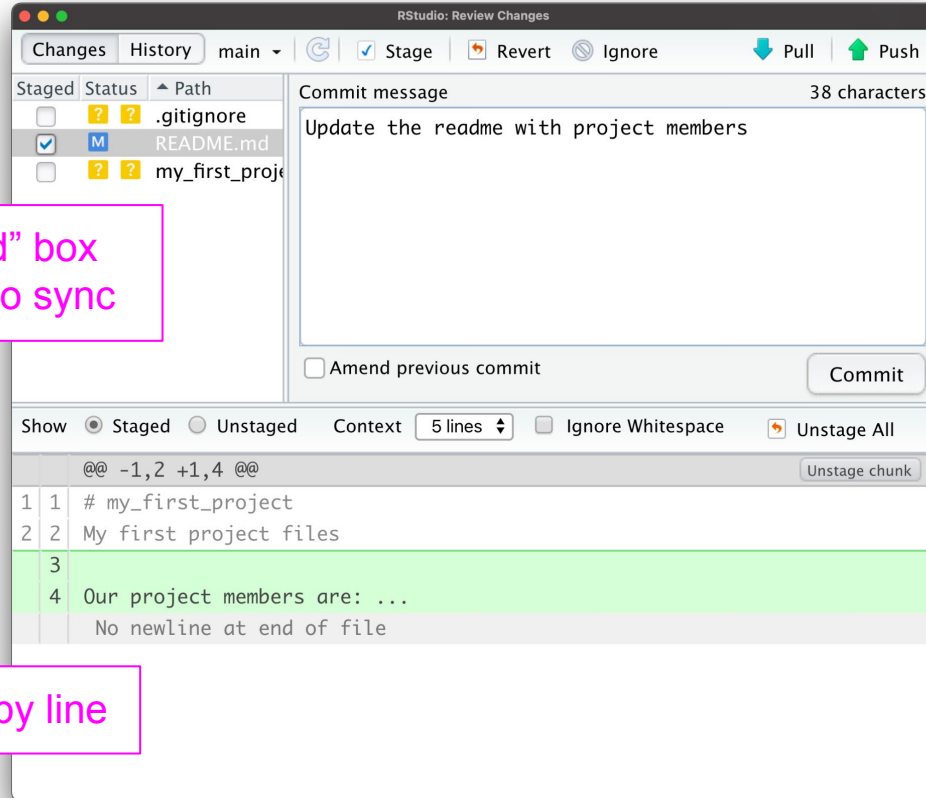


Make some changes...

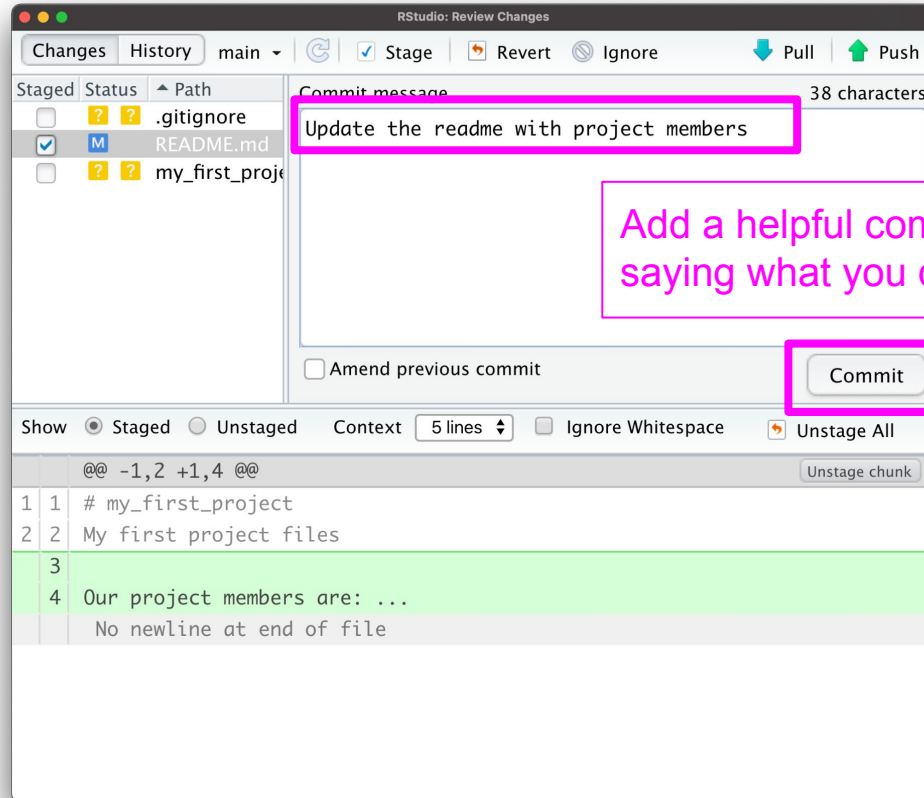


Add a helpful commit message saying what you did

Make some changes...

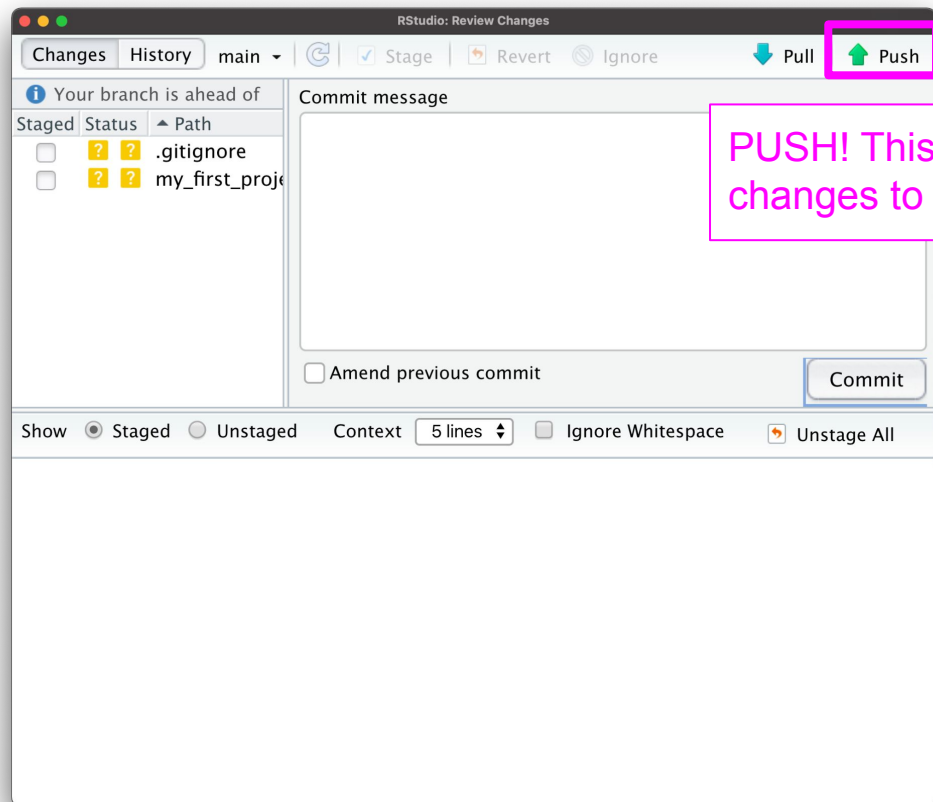

PUSH! This sends your changes to GitHub

Make some changes...

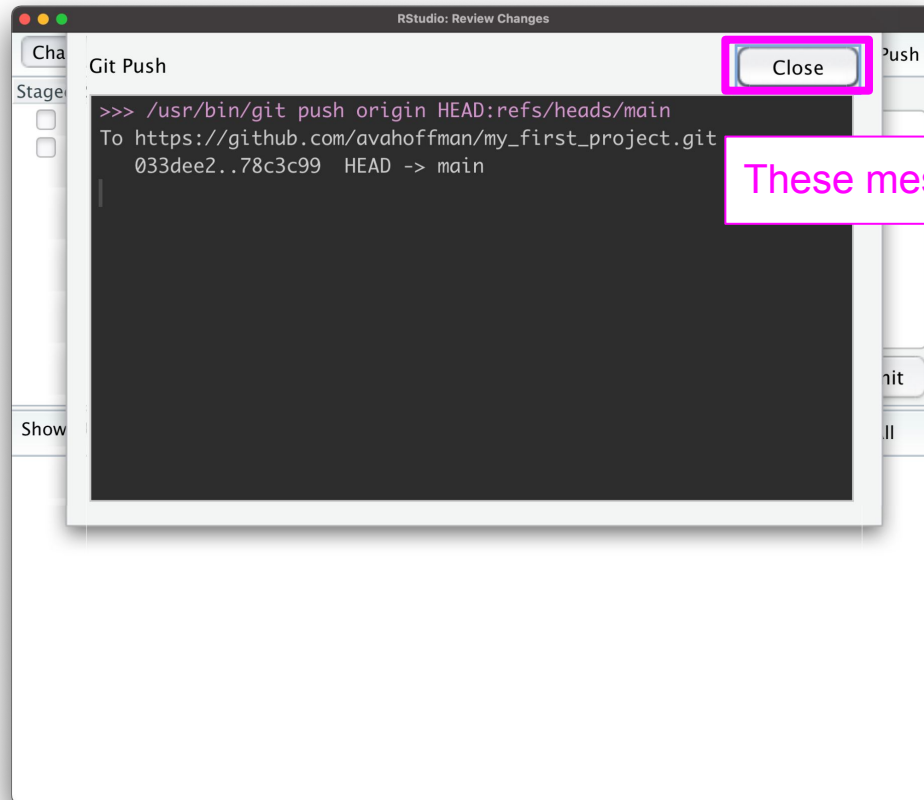

The screenshot shows an RStudio window titled "RStudio: Review Changes". A "Git Push" terminal window is open, displaying the following output:

```
>>> /usr/bin/git push origin HEAD:refs/heads/main
To https://github.com/avahoffman/my_first_project.git
033dee2..78c3c99 HEAD -> main
```

The "Close" button in the top right corner of the "Git Push" window is highlighted with a red rectangle.

These messages are FYI

You might be prompted for more information

```
/cloud/project$ git commit -m "Update Readme file"
```

```
*** Please tell me who you are.
```

Run

```
git config --global user.email "you@example.com"  
git config --global user.name "Your Name"
```

to set your account's default identity.

Omit `--global` to set the identity only in this repository.

```
fatal: unable to auto-detect email address (got 'rstudio-user@application-4375491-deployment-10694007-tknc5.(none)')  
/cloud/project$ git config user.email "avamariehoffman@gmail.com"  
/cloud/project$ git config user.name "Ava Hoffman"
```

Use your GitHub email and
display name / username

🔗 main ▾

🔗 1 branch

🏷 0 tags

Go to file

Add file ▾

Code ▾

About



My first project files

📖 Readme

★ 0 stars

👁 1 watching

🍴 0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published



avahoffman Update the readme with project members

78c3c99 14 minutes ago

🕒 2 commits



README.md

Update the readme with project members

14 minutes ago

README.md



my_first_project


My first project files

Our project members are: ...


Refresh the webpage to see
the changes you made

Review

- You add/edit files on your personal computer (your local repository).
- You publish/share these changes to a remote repository (GitHub) so that others may see them/incorporate them into their own work.
- Steps:
 - Make changes - be sure to SAVE any files!
 - Stage changes
 - Commit
 - Push

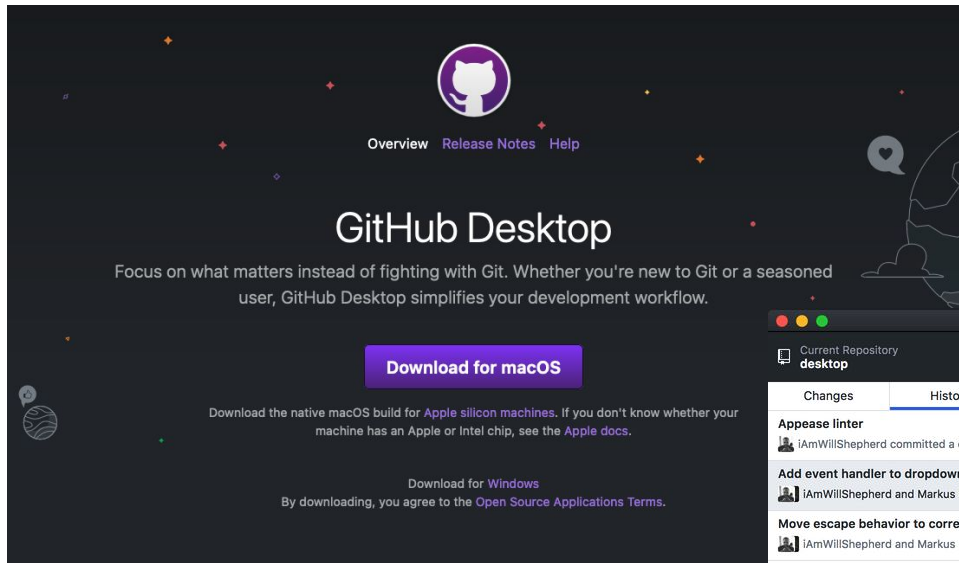

Other tools that can help

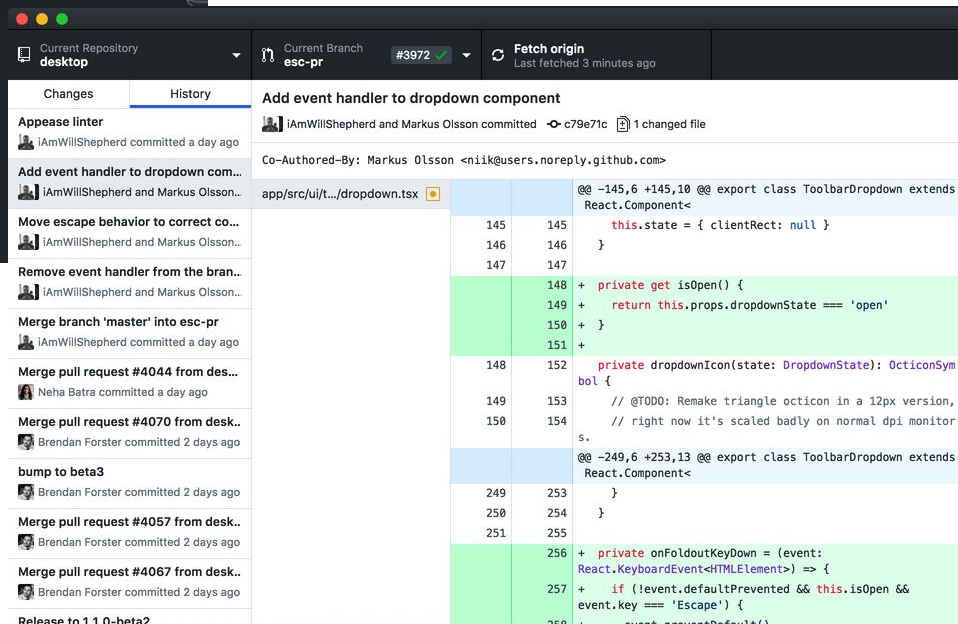


<https://desktop.github.com/>

Step 6: Incorporate other's changes

If there are any :)



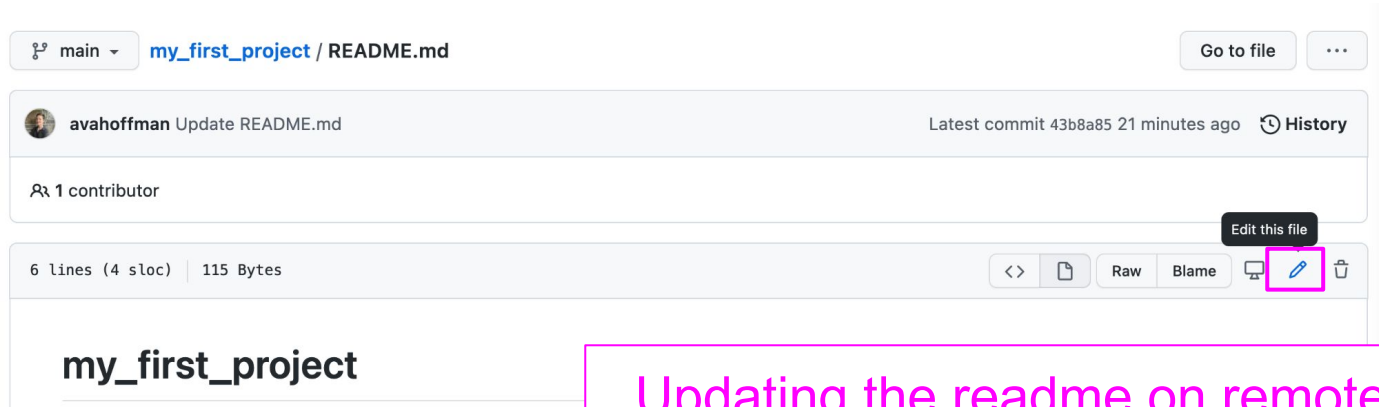

Updating the readme on remote
(on GitHub) will look a lot like
changes made by others

```
1 # my_first_project
2 My first project files
3
4 Our project members are: ...
5
6
7
```

Attach files by dragging & dropping, selecting or pasting them.



Commit changes

Update README.md

Add an optional extended description...

☒ Commit directly to the `main` branch.

☐ Create a new branch for this commit and start a pull request. [Learn more about pull requests.](#)

Commit changes

Cancel

Make changes, then scroll down
and commit.

Meanwhile back in RStudio...

The screenshot shows the RStudio interface for a project named 'my_first_project'. The top-left pane displays a README.md file with the following content:

```
1 # my_first_project
2 My first project files
3
4 Our project members are: ...|
```


The top-right pane shows the Git interface with a 'Pull' button highlighted by a red box and a red callout box that says 'Click Pull'. The bottom-right pane shows the file explorer with the following files:

Name	Size	M
..		
.gitignore	40 B	F
my_first_project.Rproj	205 B	F
README.md	71 B	F

The bottom-left pane shows the Console with the following text:

```
R 4.1.2 ~ /Desktop/my_first_project/
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.
```

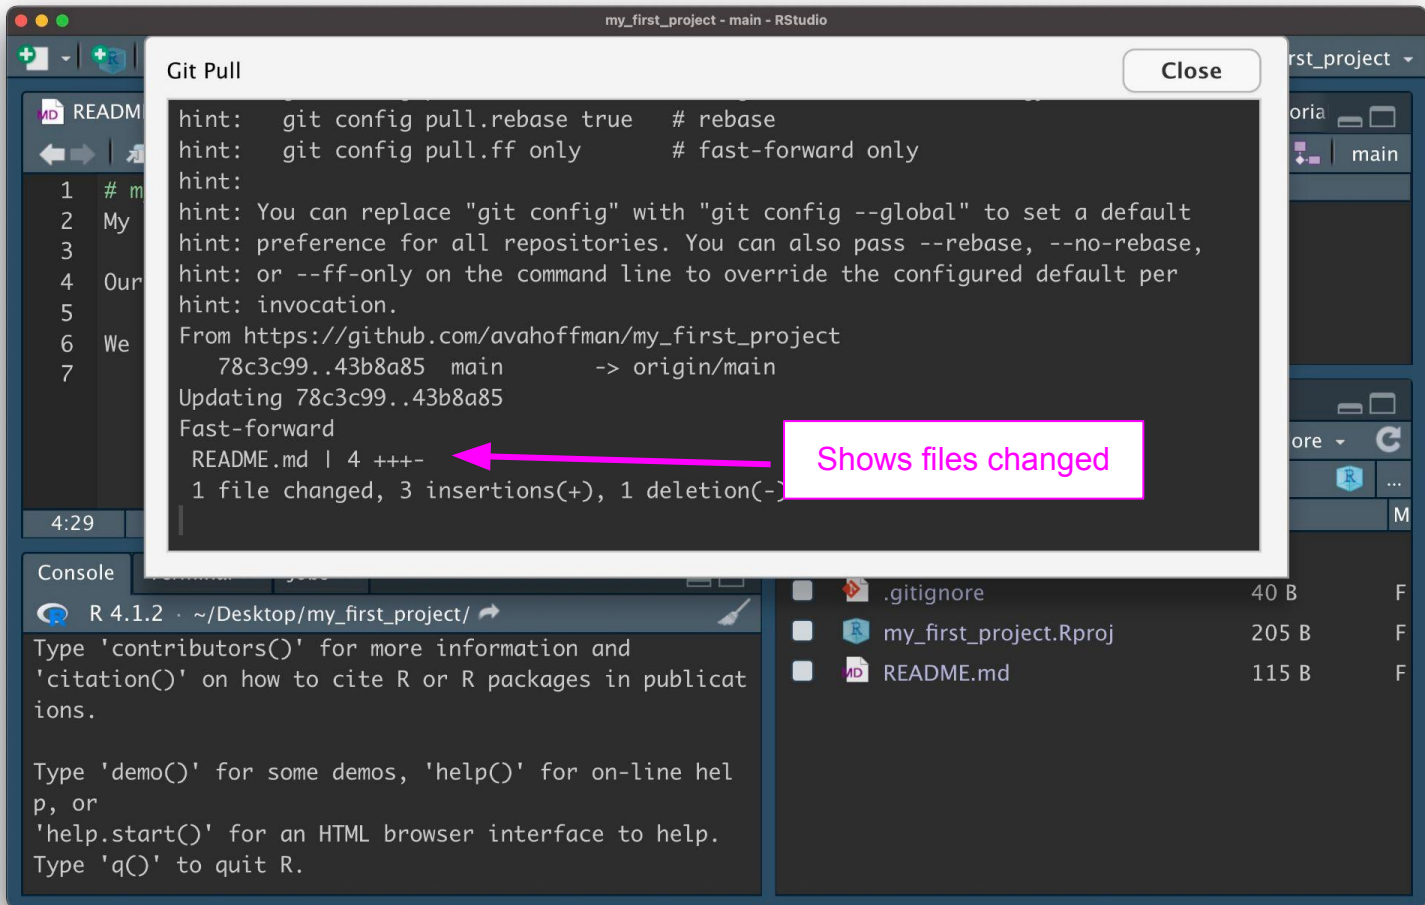

my_first_project - main - RStudio

Go to file/function Addins my_first_project

README.md

```
1 # my_first_project
2 My first project files
3
4 Our project members are: ...|
5
6 We should add a project description here.
7
```

4:29 Markdown

Environment History Connections Git Tutoria

Diff Commit

Staged	Status	Path
☐	?	my_first_project.Rproj
☐	?	.gitignore

Changes are immediately visible

Files Plots Packages

New Folder Delete Rename More

Home > Desktop > my_first_project

	Name	Size	M
	..		
☐	.gitignore	40 B	F
☐	my_first_project.Rproj	205 B	F
☐	README.md	115 B	F

Console Terminal Jobs

R 4.1.2 · ~/Desktop/my_first_project/

Type 'contributors()' for more information and 'citation()' on how to cite R or R packages in publications.


Type 'demo()' for some demos, 'help()' for on-line help, or 'help.start()' for an HTML browser interface to help. Type 'q()' to quit R.


Pulling


- Others have pushed changes to the remote repository.
- You want to incorporate those changes into your local repository.
- **It's always a good idea to pull before you start working!**
- Steps:
 - Pull


Step f: Branches

Develop new ideas safely on a branch



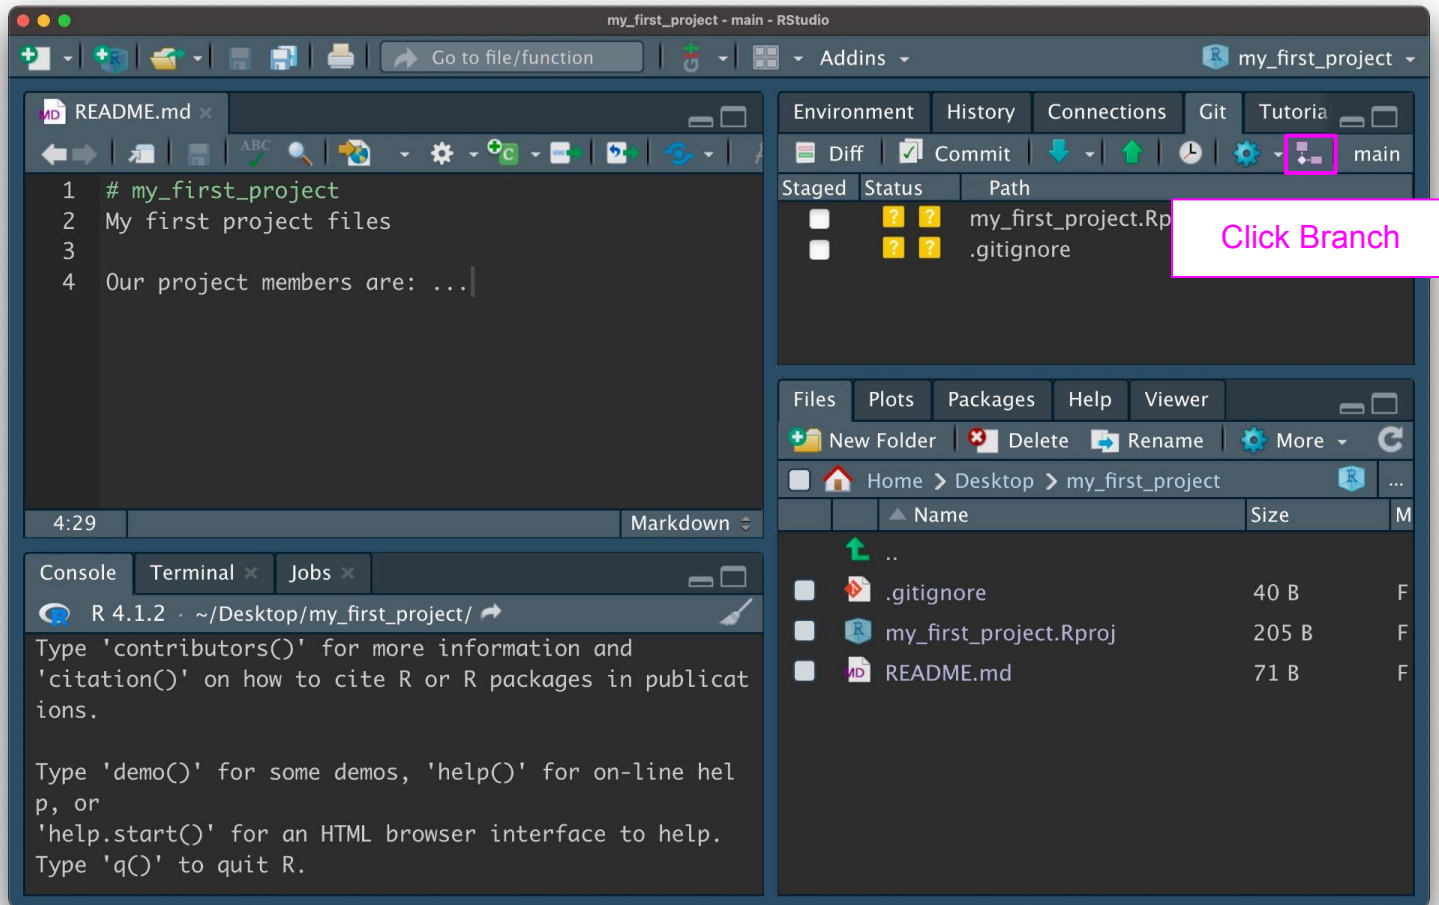

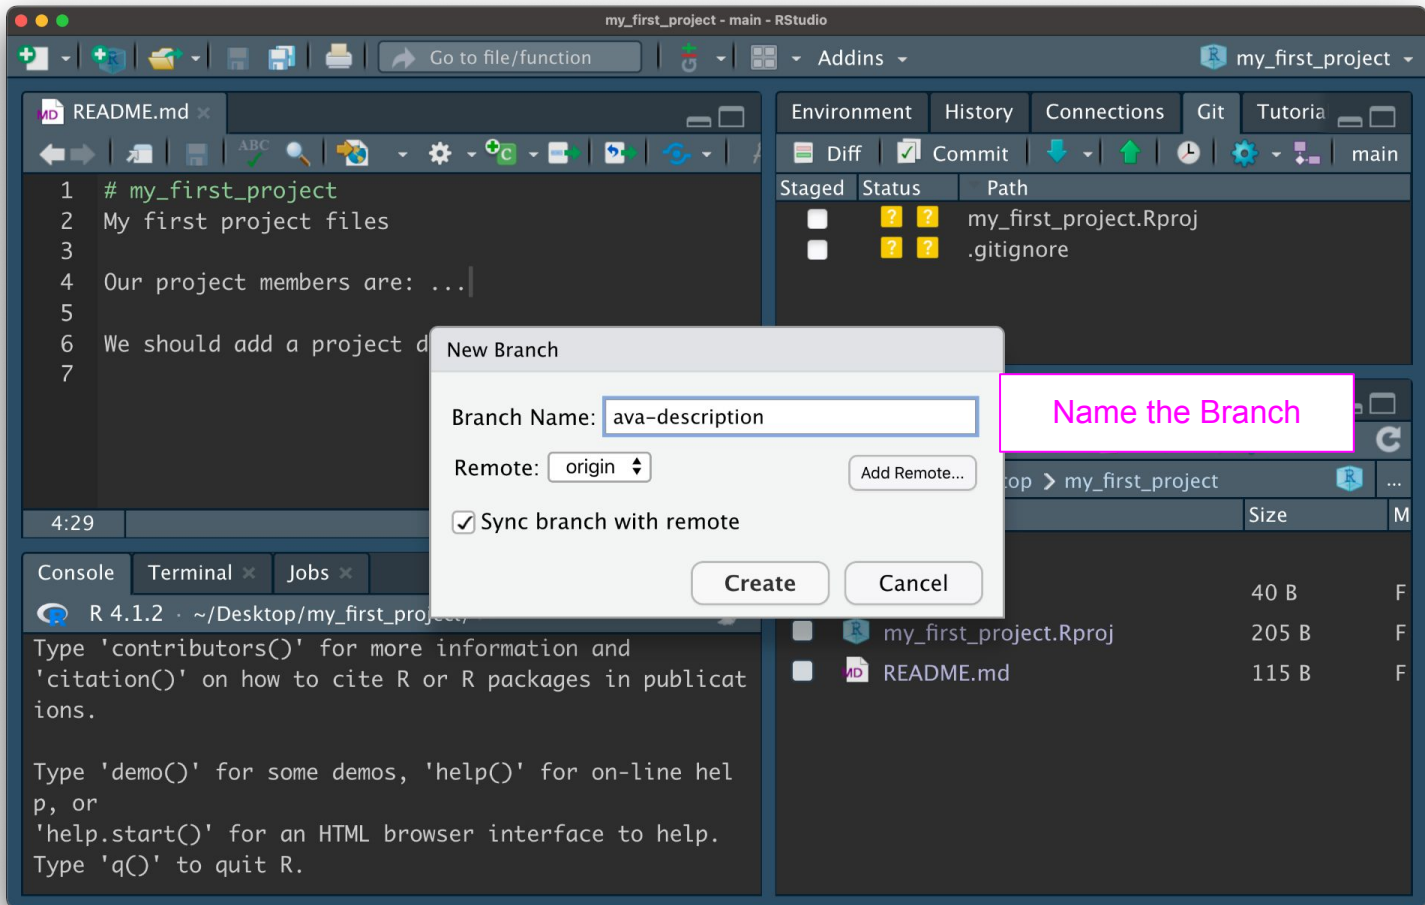

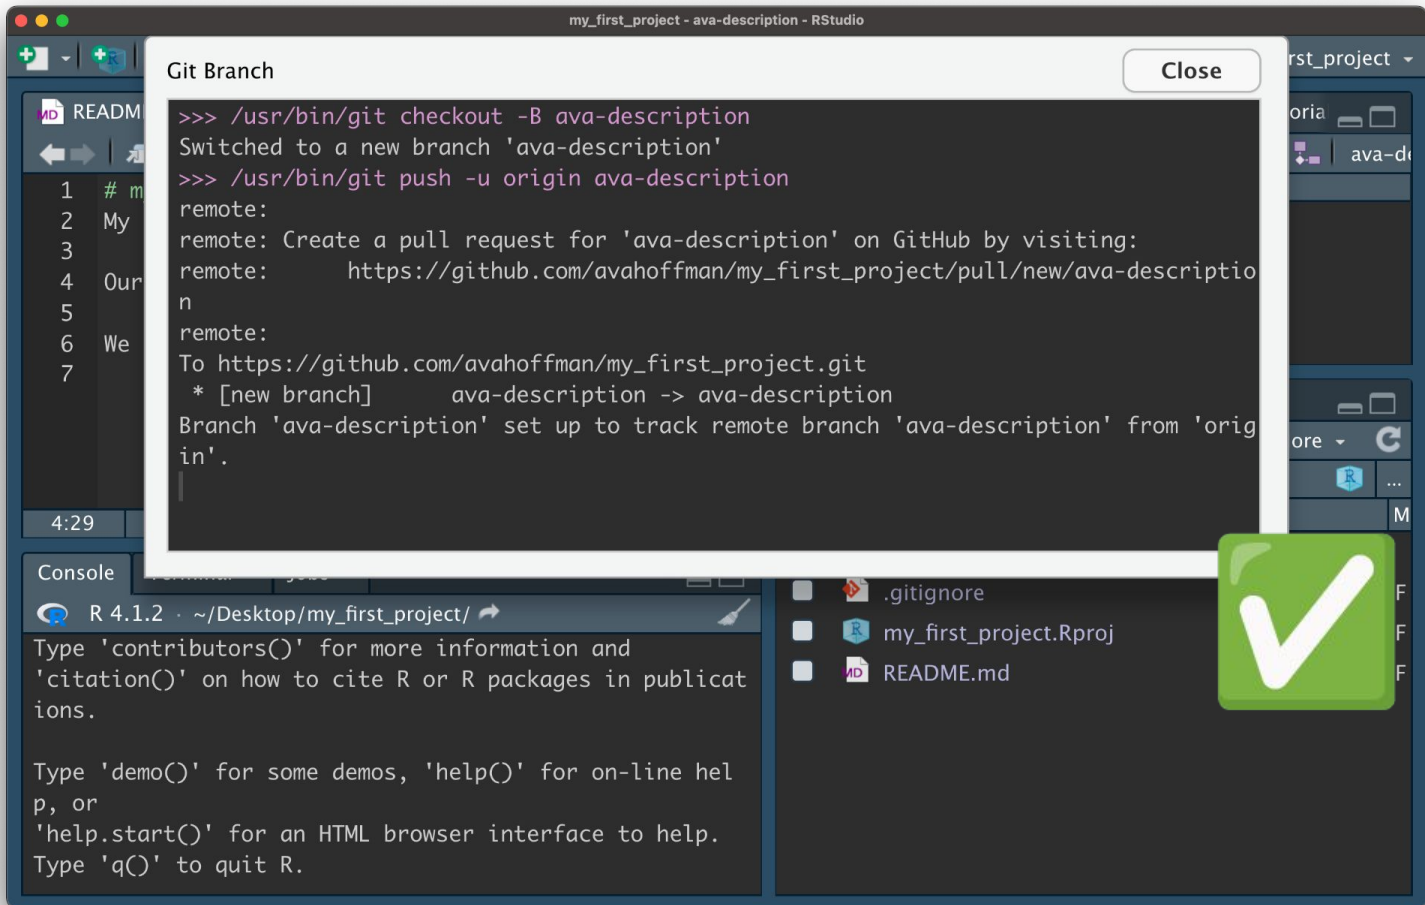

my_first_project - ava-description - RStudio

Go to file/function Addins my_first_project

README.md

Preview

```
1 # my_first_project
2 My first project files
3
4 Our project members are: ...
5
6 We should add a project description here.
7
8 Our project is the best!
```

8:25

Environment History Connections Git Tutorial

Diff Commit

Staged	Status	Path
☐	?	my_first_project.Rproj
☐	?	.gitignore

Files Plots Packages Help Viewer

Delete Rename More

Desktop > my_first_project

Size M

my_first_project.Rproj 205 B F

README.md 140 B F

Console Terminal Jobs

R 4.1.2 · ~/Desktop/my_first_project/

Type 'contributors()' for more information and 'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or 'help.start()' for an HTML browser interface to help. Type 'q()' to quit R.

Make changes
Stage changes
Commit
Push

 **ava-description** had recent pushes 4 minutes ago [Compare & pull request](#)

 **main**  2 branches  0 tags [Go to file](#) [Add file](#) [Code](#)

 **avahoffman** Update README.md 43b8a85 34 minutes ago ⌚ 3 commits

 README.md Update README.md 34 minutes ago

README.md 

my_first_project

My first project files

Our project members are: ...

We should add a project description here.

 **ava-description** had recent pushes 5 minutes ago [Compare & pull request](#)

 **ava-description**  2 branches  0 tags [Go to file](#) [Add file](#) [Code](#)

This branch is 1 commit ahead of main. [Contribute](#)

 **avahoffman** ava's change 44d699f 5 minutes ago ⌚ 4 commits

 README.md ava's change 5 minutes ago

[README.md](#) 

my_first_project

My first project files


Our project members are: ...

We should add a project description here.

Our project is the best!

If nothing else...

Use github as a place to store and share your code!

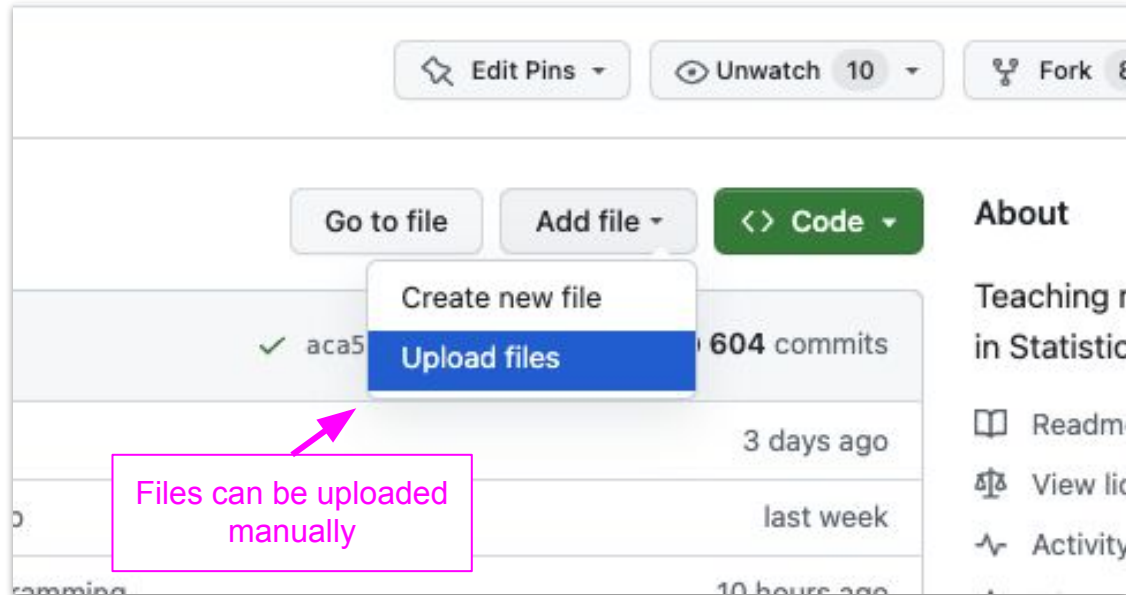

Where to learn more...

Resources!

<https://guides.github.com/activities/hello-world/>

<https://git-school.github.io/visualizing-git/>

<https://rogerdudler.github.io/git-guide/>

<https://www.katacoda.com/courses/git>

https://github.com/Meghansaha/please_let_me_merge?tab=readme-ov-file#resources-for-improving-git-knowledge

git cheat sheet

learn more about git the simple way at rogerdudler.github.io/git-guide/
cheat sheet created by Nara, jeschke of ningsgit.com

create & clone

create new repository `git init`
clone local repository `git clone /path/to/repository`
clone remote repository `git clone username@host:/path/to/repository`

add & remove

add changes to INDEX `git add <filename>`
add all changes to INDEX `git add *`
remove/delete `git rm <filename>`

commit & synchronize

commit changes `git commit -m "Commit message"`
push changes to remote repository `git push origin master`
connect local repository to remote repository `git remote add origin <server>`
update local repository with remote changes `git pull`

branches

create new branch `git checkout -b <branch>`
e.g. `git checkout -b feature_x`
switch to master branch `git checkout master`
delete branch `git branch -d <branch>`
push branch to remote repository `git push origin <branch>`

merge

merge changes from another branch `git merge <branch>`
view changes between two branches `git diff <source_branch> <target_branch>`
e.g. `git diff feature_x feature_y`

tagging

create tag `git tag <tag> <commit ID>`
e.g. `git tag 1.0.0 1b2e1d63ff`
get commit IDs `git log`

restore

replace working copy with latest from HEAD `git checkout -- <filename>`



Tip

Want a simple but powerful
git-client for your mac?
Try Tower: www.git-tower.com/

https://rogerdudler.github.io/git-guide/files/git_cheat_sheet.pdf

Basic use

- ▶ Change some files
- ▶ See what you've changed

```
git status  
git diff  
git log
```

- ▶ Indicate what changes to save

```
git add
```

- ▶ Commit to those changes

```
git commit
```

- ▶ Push the changes to GitHub

```
git push
```

- ▶ Pull changes from your collaborator

```
git pull
```

git cheat sheet

learn more about git the simple way at rogerdudler.github.io/git-guide/
cheat sheet created by Nara, jeschke of nimgit.com

create & clone

create new repository `git init`
clone local repository `git clone /path/to/repository`
clone remote repository `git clone username@host:/path/to/repository`

add & remove

add changes to INDEX `git add <filename>`
add all changes to INDEX `git add *`
remove/delete `git rm <filename>`

commit & synchronize

commit changes `git commit -m "Commit message"`
push changes to remote repository `git push origin master`
connect local repository to remote repository `git remote add origin <server>`
update local repository with remote changes `git pull`

branches

create new branch `git checkout -b <branch>`
e.g. `git checkout -b feature_x`
switch to master branch `git checkout master`
delete branch `git branch -d <branch>`
push branch to remote repository `git push origin <branch>`

merge

merge changes from another branch `git merge <branch>`
view changes between two branches `git diff <source_branch> <target_branch>`
e.g. `git diff feature_x feature_y`

tagging

create tag `git tag <tag> <commit ID>`
e.g. `git tag 1.0.0 1b2e1d63ff`
get commit IDs `git log`

restore


replace working copy with latest from HEAD `git checkout -- <filename>`



Tip

Want a simple but powerful
git-client for your mac?
Try Tower: www.git-tower.com/

https://rogerdudler.github.io/git-guide/files/git_cheat_sheet.pdf

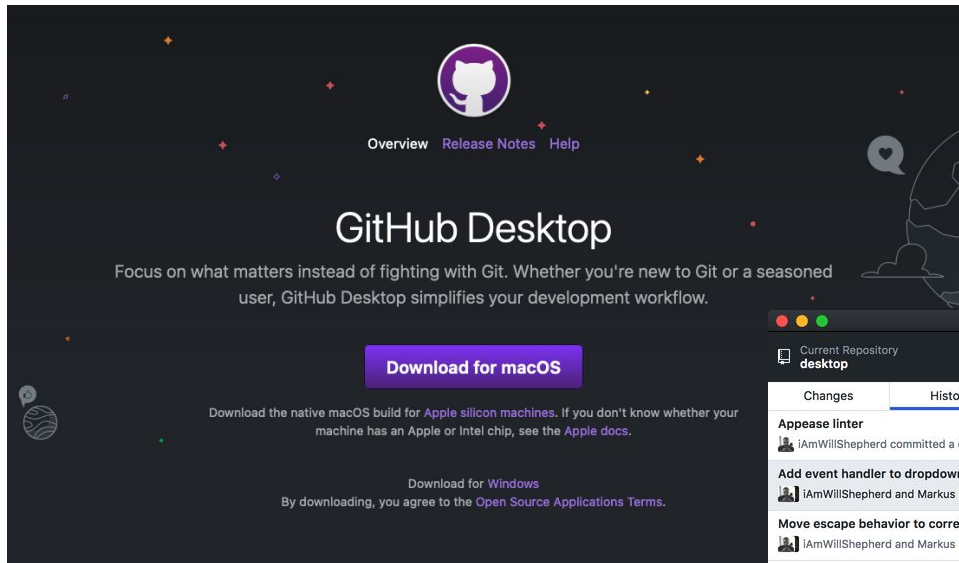

<https://desktop.github.com/>

Current Repository
desktop

Current Branch
esc-pr #3972 ✓


Fetch origin
Last fetched 3 minutes ago

Changes	History
Appease linter iAmWillShepherd committed a day ago	
Add event handler to dropdown component iAmWillShepherd and Markus Olsson committed 1 changed file	
Co-Authored-By: Markus Olsson <nirik@users.noreply.github.com>	
app/src/ui/t.../dropdown.tsx	<pre>@@ -145,6 +145,10 @@ export class ToolbarDropdown extends React.Component< 145 this.state = { clientRect: null } 146 } 147 148 + private get isOpen() { 149 + return this.props.dropdownState === 'open' 150 + } 151 + 152 private dropdownIcon(state: DropdownState): OcticonSym 153 bol { 154 // @TODO: Remake triangle octicon in a 12px version, 155 // right now it's scaled badly on normal dpi monitor 156 s. 157 158 @@ -249,6 +253,13 @@ export class ToolbarDropdown extends React.Component< 249 } 250 } 251 252 + private onFoldoutKeyDown = (event: 253 React.KeyboardEvent<HTMLElement>) => { 254 + if (!event.defaultPrevented && this.isOpen && 255 event.key === 'Escape') { 256 event.preventDefault() 257 } 258 }</pre>
Move escape behavior to correct co... iAmWillShepherd and Markus Olsson...	
Remove event handler from the bran... iAmWillShepherd and Markus Olsson...	
Merge branch 'master' into esc-pr iAmWillShepherd committed a day ago	
Merge pull request #4044 from des... Neha Batra committed a day ago	
Merge pull request #4070 from desk.. Brendan Forster committed 2 days ago	
bump to beta3 Brendan Forster committed 2 days ago	
Merge pull request #4057 from desk.. Brendan Forster committed 2 days ago	
Merge pull request #4067 from desk.. Brendan Forster committed 2 days ago	
Release to 1.1.0-beta2	



GitKraken

Legendary Git GUI client for Windows, Mac & Linux

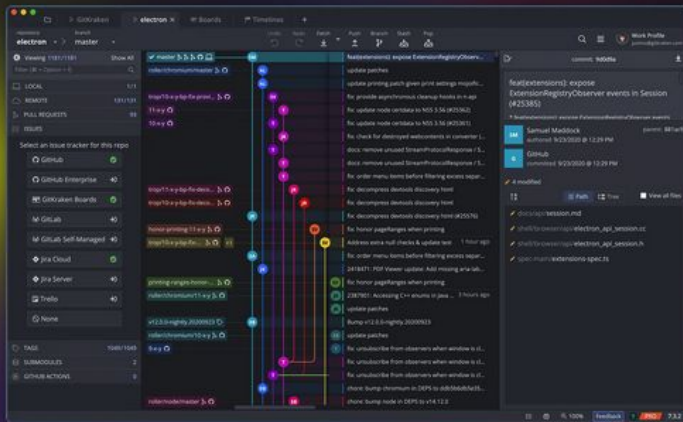

 Download the #1 Free Git GUI

Other Platforms

See Features →

<https://www.gitkraken.com/>