ASSIGNMENT MCQ

- 21) When implementing linear regression of some dependent variable y on the set of independent variables $\mathbf{x} = (x_1, \dots, x_r)$, where r is the number of predictors, which of the following statements will be true?
- a) β_0 , β_1 , ..., β_r are the **regression coefficients**.
- b) Linear regression is about determining the **best predicted weights** by using the **method of ordinary least squares**.
- c) E is the random interval
- d) Both and b

ANS: d) Both a and b


- 22) What indicates that you have a **perfect fit** in linear regression?
- a) The value $R^2 < 1$, which corresponds to SSR = 0
- b) The value $R^2 = 0$, which corresponds to SSR = 1
- c) The value $R^2 > 0$, which corresponds to SSR = 1
- d) The value $R^2 = 1$, which corresponds to SSR = 0

ANS: d) The value $R^2 = 1$, which corresponds to SSR = 0

- 23) In simple linear regression, the value of **what** shows the point where the estimated regression line crosses the y axis?
- a) Y
- b) B0
- c) B1
- d) F

ANS: b) B0

24) Check out these four linear regression plots:

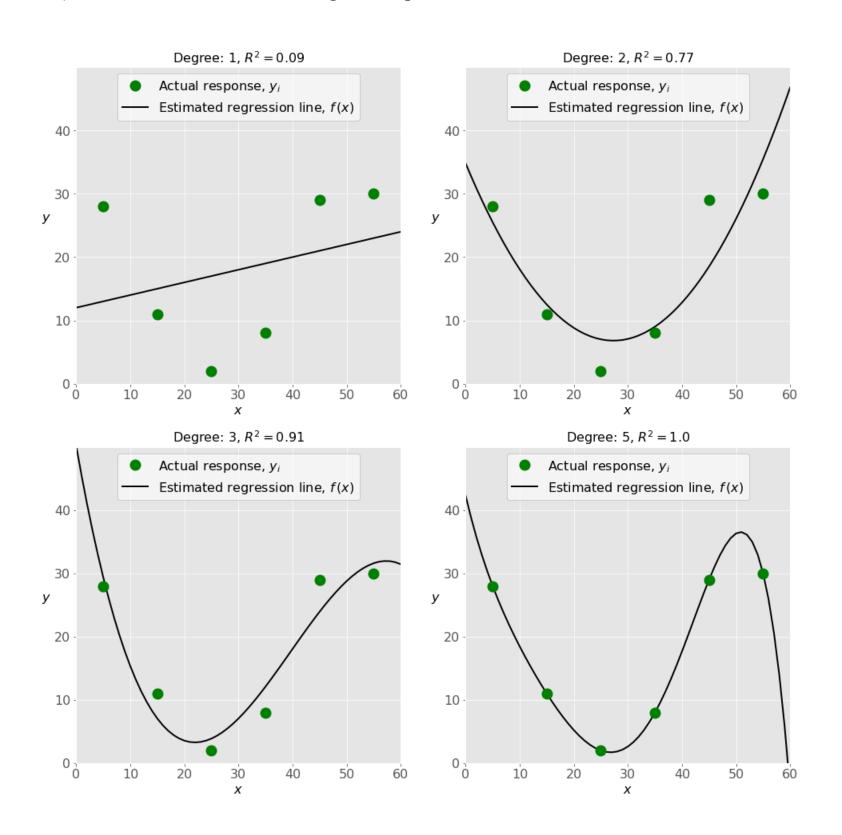

Which one represents an **underfitted** model?

- a) The bottom-left plot
- b) The top-right plot
- c) The bottom-right plot
- d) The top-left plot

ANS: d) The top-left plot

- 25) There are five basic steps when you're implementing linear regression:
- a. Check the results of model fitting to know whether the model is satisfactory.
- b. Provide data to work with, and eventually do appropriate transformations.
- c. Apply the model for predictions.
- d. Import the packages and classes that you need.
- e. Create a regression model and fit it with existing data.

However, those steps are currently listed in the wrong order. What's the correct order?

- a) e, c, a, b, d
- b) e, d, b, a, c
- c) d, e, c, b, a
- d) d, b, e, a, c

ANS: d) d, b, e, a, c

- 26) Which of the following are optional parameters to LinearRegression in scikit-learn?
- a) Fit
- b) fit_intercept
- c) normalize
- d) copy_X
- e) n_jobs
- f) reshape

ANS: b) fit_intercept c) normalize d) copy_X e) n_jobs - are optional parameters to LinearRegression

- 27) While working with scikit-learn, in which type of regression do you need to transform the array of inputs to include nonlinear terms such as x^2 ?
- a) Multiple linear regression
- b) Simple linear regression
- c) Polynomial regression

ANS: c) Polynomial regression

- 28) You should choose statsmodels over scikit-learn when:
- a) You want graphical representations of your data.
- b) You're working with nonlinear terms.
- c) You need more detailed results.
- d) You need to include optional parameters.

ANS: c) You need more detailed results.

- 29) ______ is a fundamental package for scientific computing with Python. It offers comprehensive mathematical functions, random number generators, linear algebra routines, Fourier transforms, and more. It provides a high-level syntax that makes it accessible and productive.
- a) Pandas
- b) Numpy
- c) Statsmodel
- d) scipy

ANS: b) Numpy

- 30) ______ is a Python data visualization library based on Matplotlib. It provides a high-level interface for drawing attractive and informative statistical graphics that allow you to explore and understand your data. It integrates closely with pandas data structures.
- a) Bokeh
- b) Seaborn
- c) Matplotlib
- d) Dash

ANS: b) Seaborn

- 41) Among the following identify the one in which dimensionality reduction reduces.
- a) Performance
- b) statistics
- c) Entropy
- d) Collinearity

ANS: d) Collinearity

- 42) Which of the following machine learning algorithm is based upon the idea of bagging?
- a) Decision Tree
- b) Random Forest
- c) Classification
- d) SVM

ANS: b) Random Forest

- 43) Choose a disadvantage of decision trees among the following.
- a) Decision tree robust to outliers
- b) Factor analysis
- c) Decision Tree are prone to overfit
- d) all of the above

ANS: c) Decision Tree are prone to overfit

- 44) What is the term known as on which the machine learning algorithms build a model based on sample data?
- a) Data Training
- b) Sample Data

- c) Training data
- d) None of the above

ANS: c) Training data

- 45) Which of the following machine learning techniques helps in detecting the outliers in data?
- a) Clustering
- b) Classification
- c) Anamoly detection
- d) All of the above

ANS: c) Anamoly detection

- 46) Identify the incorrect numerical functions in the various function representation of machine learning.
- a) Support Vector
- b) Regression
- c) Case based
- d) Classification

ANS: c) Case based

- 47) Analysis of ML algorithm needs
- a) Statistical learning theory
- b) Computational learning theory
- c) None of the above
- d) Both a and b

ANS: d) Both a and b

48) Identify the difficulties with the k-nearest neighbor algorithm.

- a) Curse of dimensionality
- b) Calculate the distance of test case for all training cases
- c) Both a and b
- d) None

ANS: c) Both a and b

- 49) The total types of the layer in radial basis function neural networks is _____
- a) 1
- b) 2
- c) 3
- d) 4

ANS: c) 3

- 50) Which of the following is not a supervised learning
- a) PCA
- b) Naïve bayes
- c) Linear regression
- d) KMeans

ANS: d) KMeans