

ofApp::draw(), Receiver::ReceiveImage(&texture), GetPixelData()

```
ofApp:: draw()
    receiver_. ReceiveImage( texture )
    texture. draw( 0, 0, w, h );

bool Receiver:: ReceiveImage( & texture )
    if ( receiver_. ReceiveImage( w, h ) ) {
        texture etc... 必要に応じて alloc
        return GetPixelData( texture )
    }
    return false;
```

NDI frame

& image

& fbo

ref ref

同じ側で frame 取得

texture etc... 必要に応じて alloc

return GetPixelData(texture)

no need to clear

- texture
- fbo
- image
- pixels

• alloc

• NDI sender 側で size 違った

fbo. getTexture()

image. getTexture()

```
return (uc*) videoFrame.p_data

bool Receiver:: GetPixelData( & texture )
    uc* videoData = receiver_. GetVideoData();
    texture ← videoData
    receiver_. FreeVideoData();
    return true;

if ( videoFrame.p_data )
    receiver_. FreeVideoData( & videoFrame );
    videoFrame.p_data = nullptr;
```


bug fix : Receive::ReceiveImage(ref w, ref h) | Get_1st(oldest)_video

for (int i = 0; i < 16; i++) ... ~~while (true)~~

timeout_ms

NDI-frame-type = recu_capture_v3 (pNDIrecu, &video_frame, &audio_frame, &metadata_frame, 0)

o none -- return false

o error --

o status_change, source_change -- ~~return false~~ continue

o meta_data -- if (p-data) -- save, free meta_frame ~~return false~~ continue

o audio - - - - if (p-data) -- save, free audio_frame ~~return false~~ continue
if (size 変更) -- realloc.

o video - - - - if (p-data) -- if (size 変更) -- save : w, h -- ref : 返す
video frame is free した return true

else - - - - [return false

o default -- return false.

return false

receiver :: -- GetVideoData()
GetPixelData() FreeVideoData()

bug fix : Receive::ReceiveImage(ref w, ref h) | Get_Latest_video

b_flag = true, video-frame-local -- NDIlib-video-frame-v2-t

for (int i = 0; i < 16; i++) ... ~~while (true)~~

timeout_ms

NDI-frame-type = recv_capture_v3 (pNDIrecv, &video-frame, &audio-frame, &metadata-frame, 0)

;
o none -- return false -- break from for loop
o error -- ;

o status_change, source_change -- ~~return false~~ continue

o meta-data -- if (p-data) -- save, free meta-frame ~~return false~~ continue


o audio - - - - if (p-data) -- save, free audio-frame ~~return false~~ continue
if (size 变更) -- realloc.

o video - - - if (b_flag) -- free video-frame, video-frame = null.


[if (p-data) -- video-frame = local, b_flag = true, continue.
else - - - - return false

[if (b_flag) -- if (size 变) -- save : w, h -- ref 2 不可
return true

return false

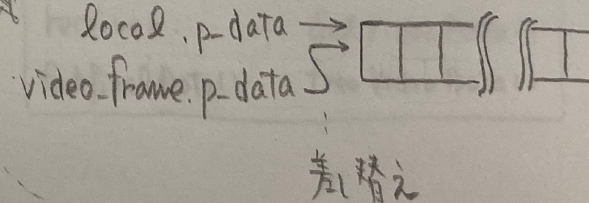

overloads of ReceiveImage()

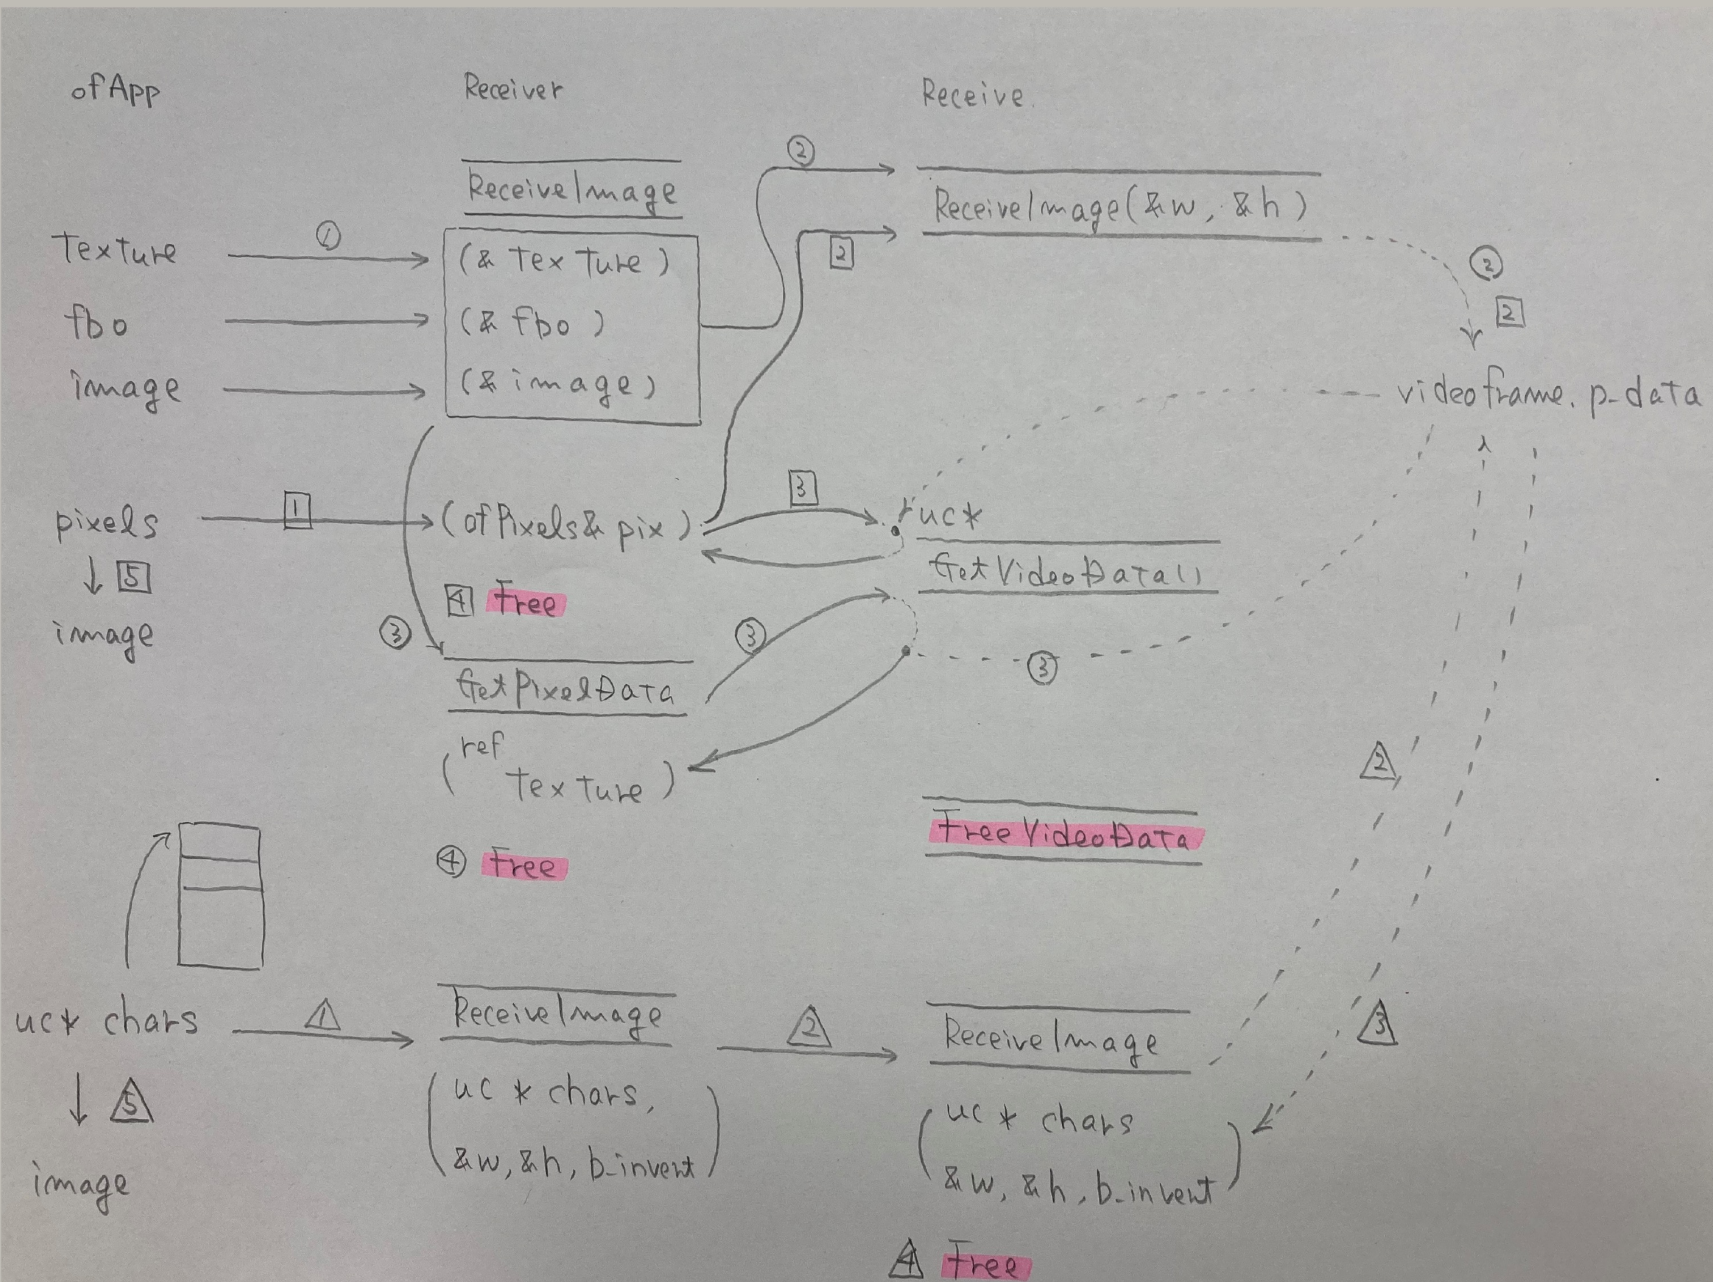

Receiver::ReceiveImage(&pix), Receiver::ReceiveImage(uc* chars)

bool

Receiver::ReceiveImage(&pix)

```
if (receive_.ReceiveImageref ref(w, h))  
    pix -- 必要に応じて alloc  
    uc* videoData = receive_.GetVideoData();  
    pix ← videoData  
    receive_.FreeVideoData();  
    return true;  
else  
    return false
```

bool

Receiver::ReceiveImage^{ref ref}(uc* chars, w, h, b_invert)

```
return receive_.ReceiveImageref ref(chars, w, h,  
    b_invert)
```

ofApp::draw()

```
if (size  $\neq$  0)  
    realloc -- [ ndi_chars -  
                ndi_image -  
else  
    ndi_image_ ← ndi_chars_  
ndi_image_.draw()
```


bug fix : Receive::ReceiveImage(uc* chars, ref w, ref h, b_invert) | Get_1st(oldest) & Get_Latest

b_flag = false; video_frame_local

for (i = 0; i < 16; i++)

NDI-frame-type = recu-capture-v3 (... , &video_frame, ...)
; &video_frame_local

o none -- return false → break: from for loop

o error -- ' 無効なデータに達しました。

o status-change, source-change -- return false continue

o meta-data -- if (p-data) -- save, free meta-frame return false continue

o audio if (p-data) -- save, free audio-frame return false continue

o video -- if (p-data) b_connected = true;
if (size 変) -- save: w, h, ref: 変, free video frame return true. bug fix by Sj
else ---- chars ← video frame.p-data
save: time code, time stamp, fps, w, h -- ref: 変: 変わらない
free video frame 1回

Sj追加

else ---- [b_connected = false, return false

call 個に realloc (17 行)

∴ 今回に 辞める 必要!

o video --- if (b_flag) -- free video-frame, video-frame = nullptr

if (p-data) b_connected = true;
if (size 変) -- save: w, h, ref: 変, free: video frame-local, return true
else ---- video frame = local, b_flag = true, continue

else ---- [b_connected = false, return false

if (b_flag) -- chars ← video frame.p-data

save: time code, time stamp, fps, w, h -- ref: 変: 変わらない

free: video-frame

return true,

return false

EOF