Incremental Migration and Child-to-Parent Capacity Handoff

Agent semantics select the beneficiary; native pages define the physical transfer

(a) Incremental FULL backup

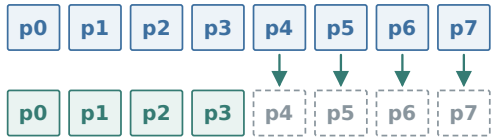

PREPARE_HOST: missing FULL; HBM remains resident.

(b) Necessary Mamba checkpoint

Select the required checkpoint state

No speculative Mamba in PREPARE_HOST.
Native cache retains other valid states.

(c) Coordinate child reclamation, parent restore and admission

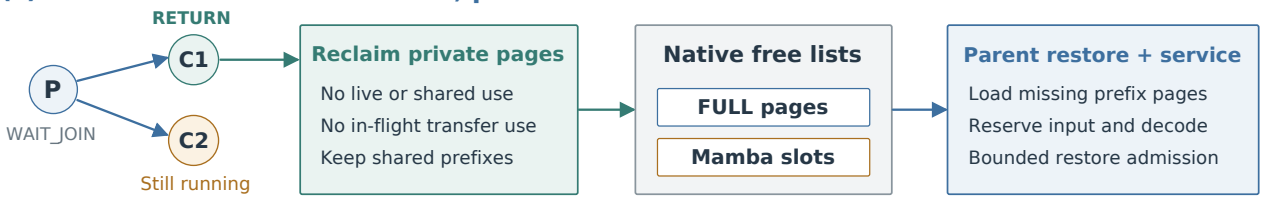

Earlier siblings can enable pre-RETURN H2D. The last child's capacity is available only after completion.
Reclaimed capacity uses native allocation; shared and still-live pages remain intact.