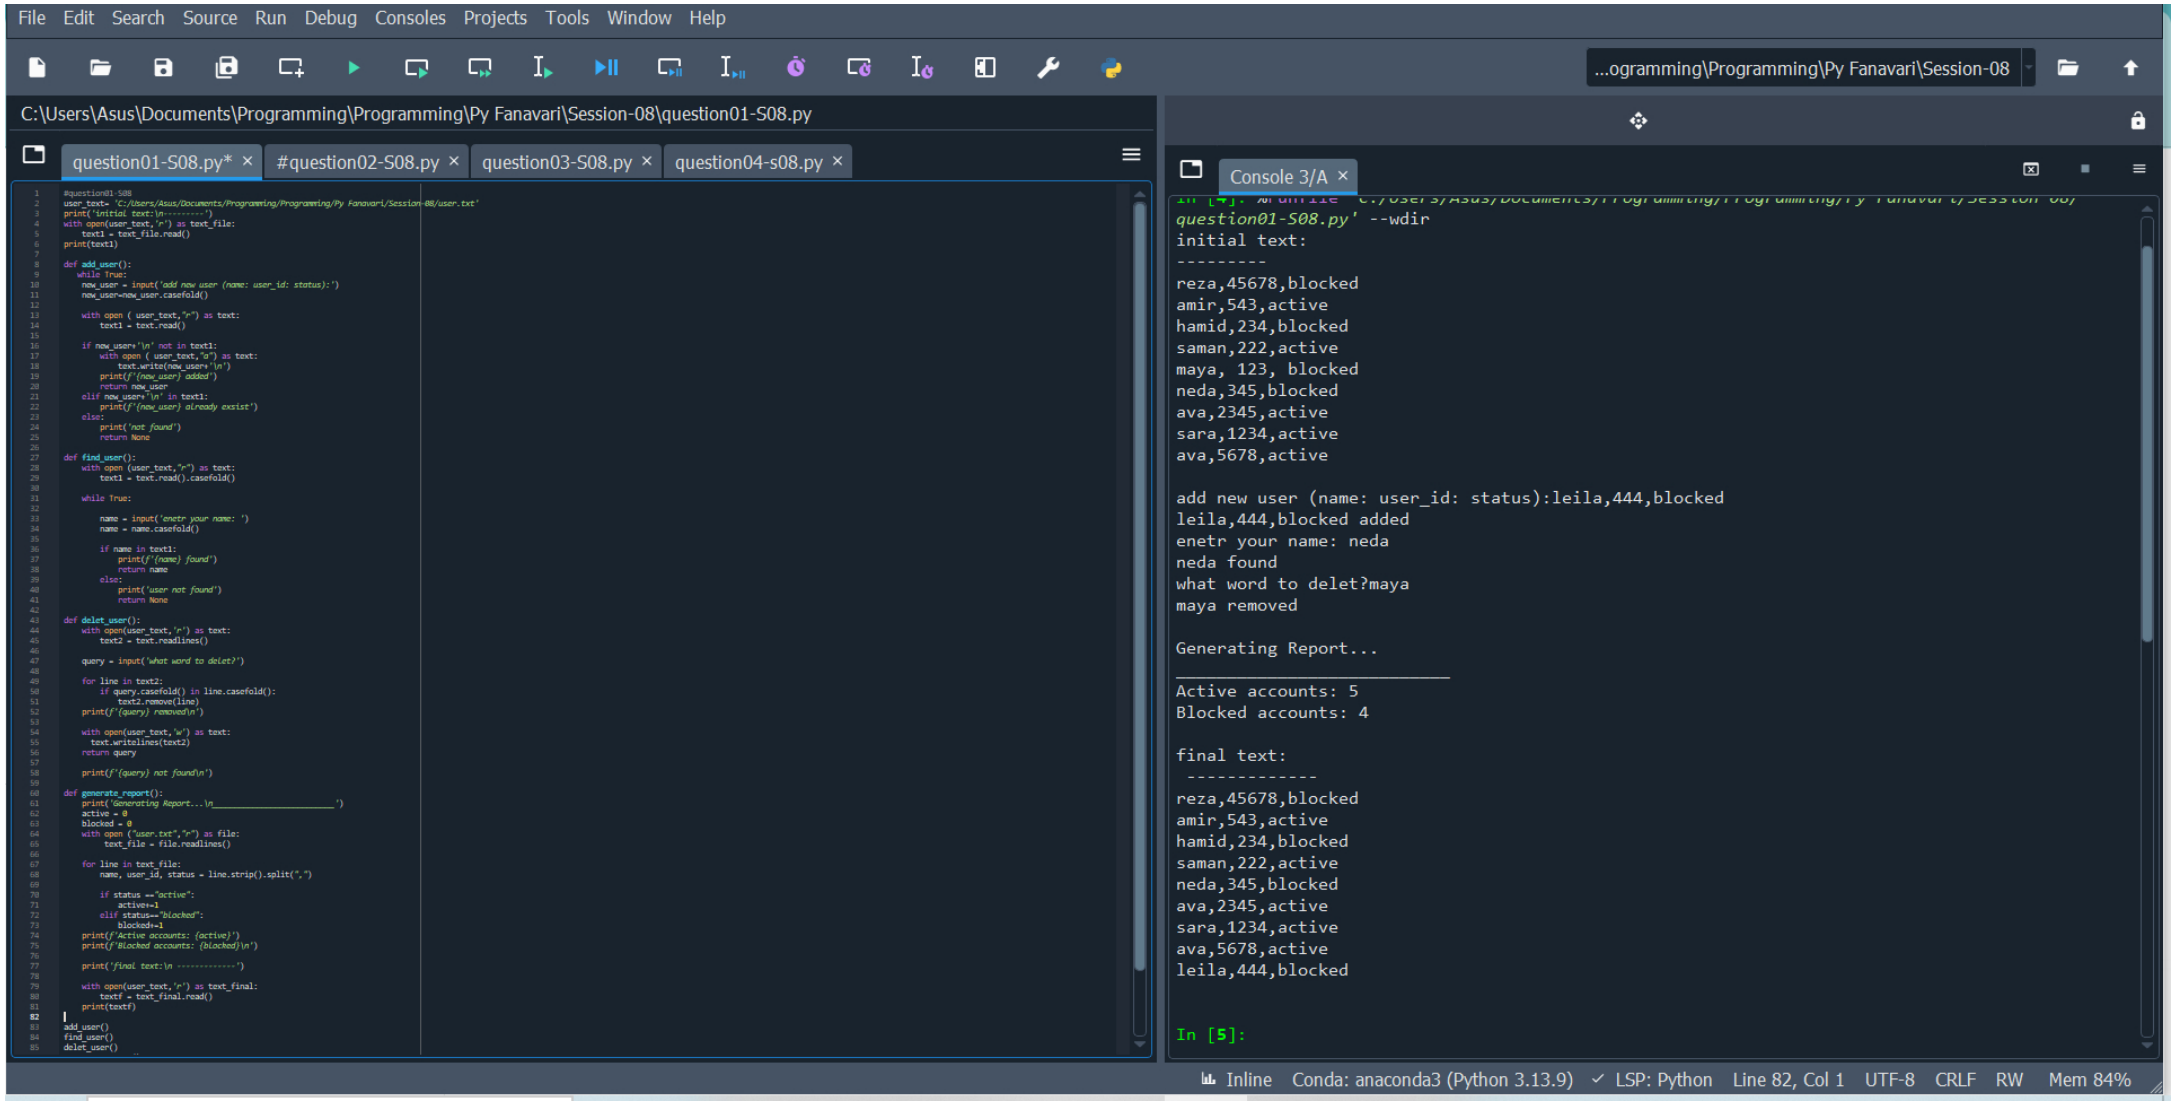
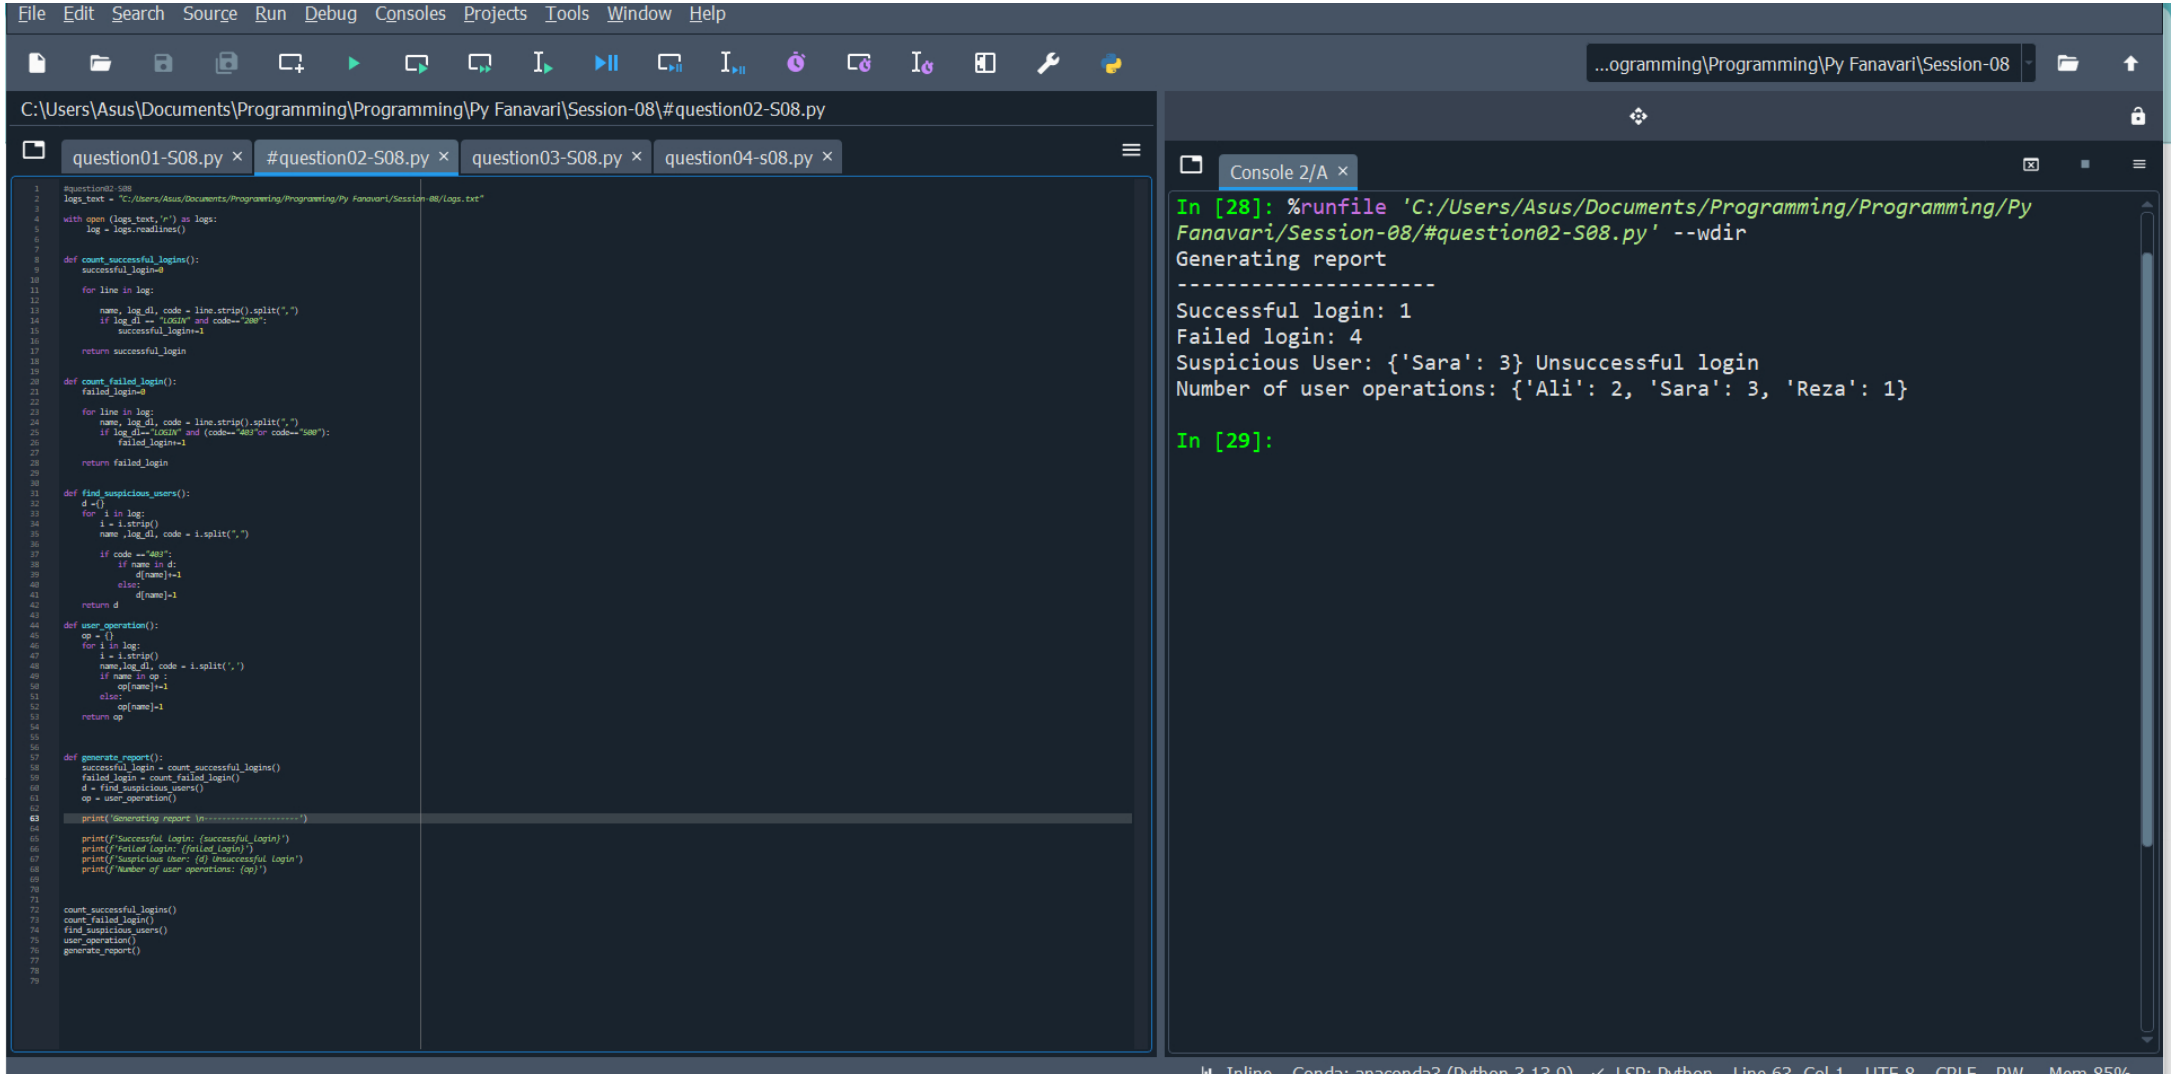
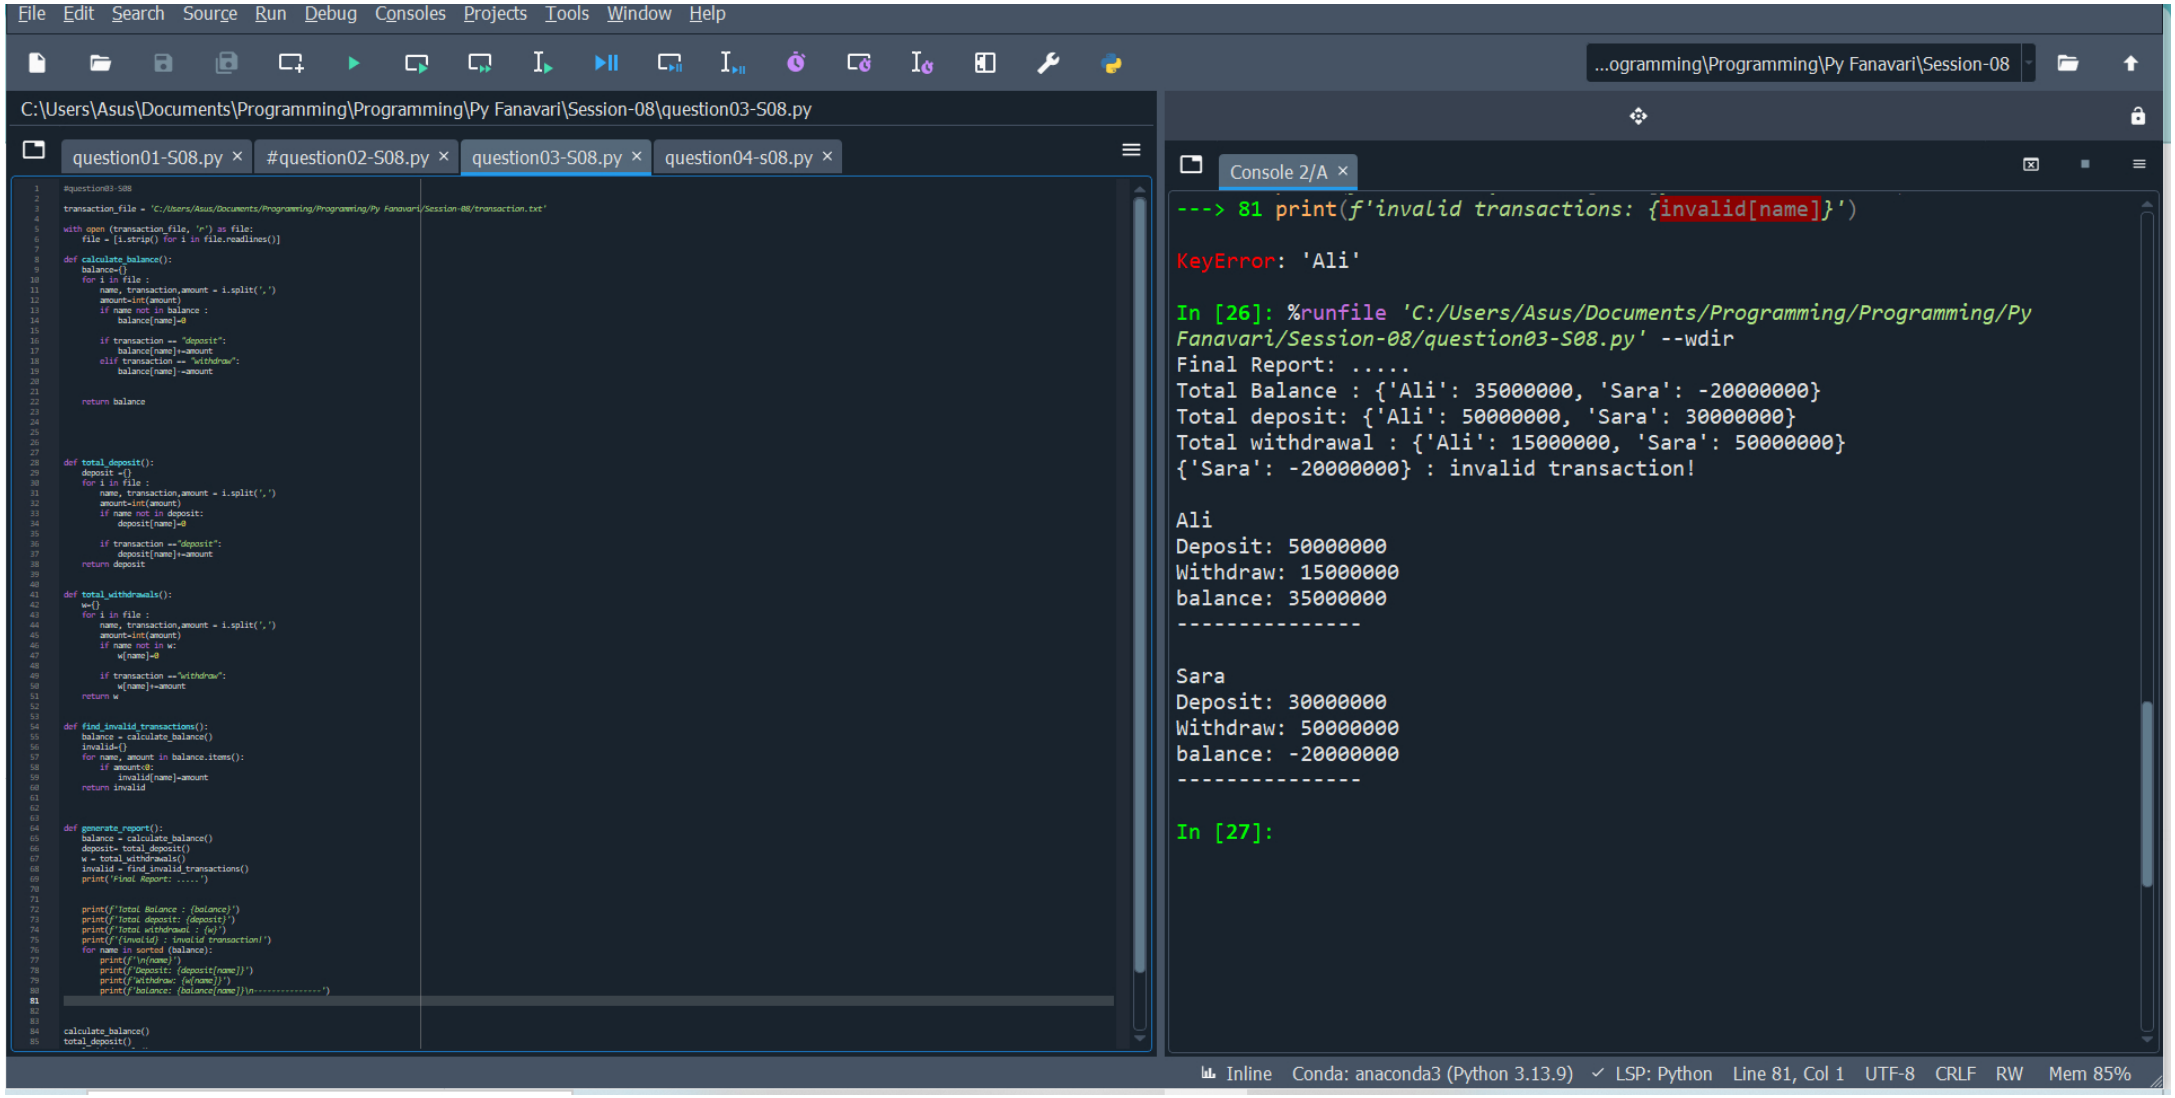

File Edit Search Source Run Debug Consoles Projects Tools Window Help
...ogramming\Programming\Py Fanavari\Session-08
C:\Users\Asus\Documents\Programming\Programming\Py Fanavari\Session-08\question01-S08.py
question01-S08.py* ×
#question02-S08.py ×
question03-S08.py ×
question04-s08.py ×
#question01-S08
user_text= 'C:/Users/Asus/Documents/Programming/Programming/Py Fanavari/Session-08/user.txt'
print('initial text:\n---------')
with open(user_text,"r") as text_file:
text1 = text_file.read()
print(text1)
def add_user():
while True:
new_user = input('add new user (name: user_id: status):')
new_user=new_user.casefold()
with open (user_text,"r") as text:
text1 = text.read()
if new_user+'\n' not in text1:
with open (user_text,"a") as text:
text.write(new_user+'\n')
print(f'{new_user} added')
return new_user
elif new_user+'\n' in text1:
print(f'{new_user} already exsist')
else:
print('not found')
return None
def find_user():
with open (user_text,"r") as text:
text1 = text.read().casefold()
while True:
name = input('enetr your name: ')
name = name.casefold()
if name in text1:
print(f'{name} found')
return name
else:
print('user not found')
return None
def delet_user():
with open(user_text,'r') as text:
text2 = text.readlines()
query = input('what word to delet?')
for line in text2:
if query.casefold() in line.casefold():
text2.remove(line)
print(f'{query} removed\n')
with open(user_text,'w') as text:
text.writelines(text2)
return query
print(f'{query} not found\n')
def generate_report():
print('Generating Report...\n_____________________')
active = 0
blocked = 0
with open ("user.txt","r") as file:
text_file = file.readlines()
for line in text_file:
name, user_id, status = line.strip().split(",")
if status =="active":
active+=1
elif status=="blocked":
blocked+=1
print(f'Active accounts: {active}')
print(f'Blocked accounts: {blocked}\n')
print('final text:\n ------------')
with open(user_text,'r') as text_final:
textf = text_final.read()
print(textf)
add_user()
find_user()
delet_user()
Console 3/A ×
question01-S08.py' --wdir
initial text:
----
reza,45678,blocked
amir,543,active
hamid,234,blocked
saman,222,active
maya, 123, blocked
neda,345,blocked
ava,2345,active
sara,1234,active
ava,5678,active
add new user (name: user_id: status):leila,444,blocked
leila,444,blocked added
enetr your name: neda
neda found
what word to delet?maya
maya removed
Generating Report...
____
Active accounts: 5
Blocked accounts: 4
final text:
----
reza,45678,blocked
amir,543,active
hamid,234,blocked
saman,222,active
neda,345,blocked
ava,2345,active
sara,1234,active
ava,5678,active
leila,444,blocked
In [5]:
Inline Conda: anaconda3 (Python 3.13.9) LSP: Python Line 82, Col 1 UTF-8 CRLF RW Mem 84%

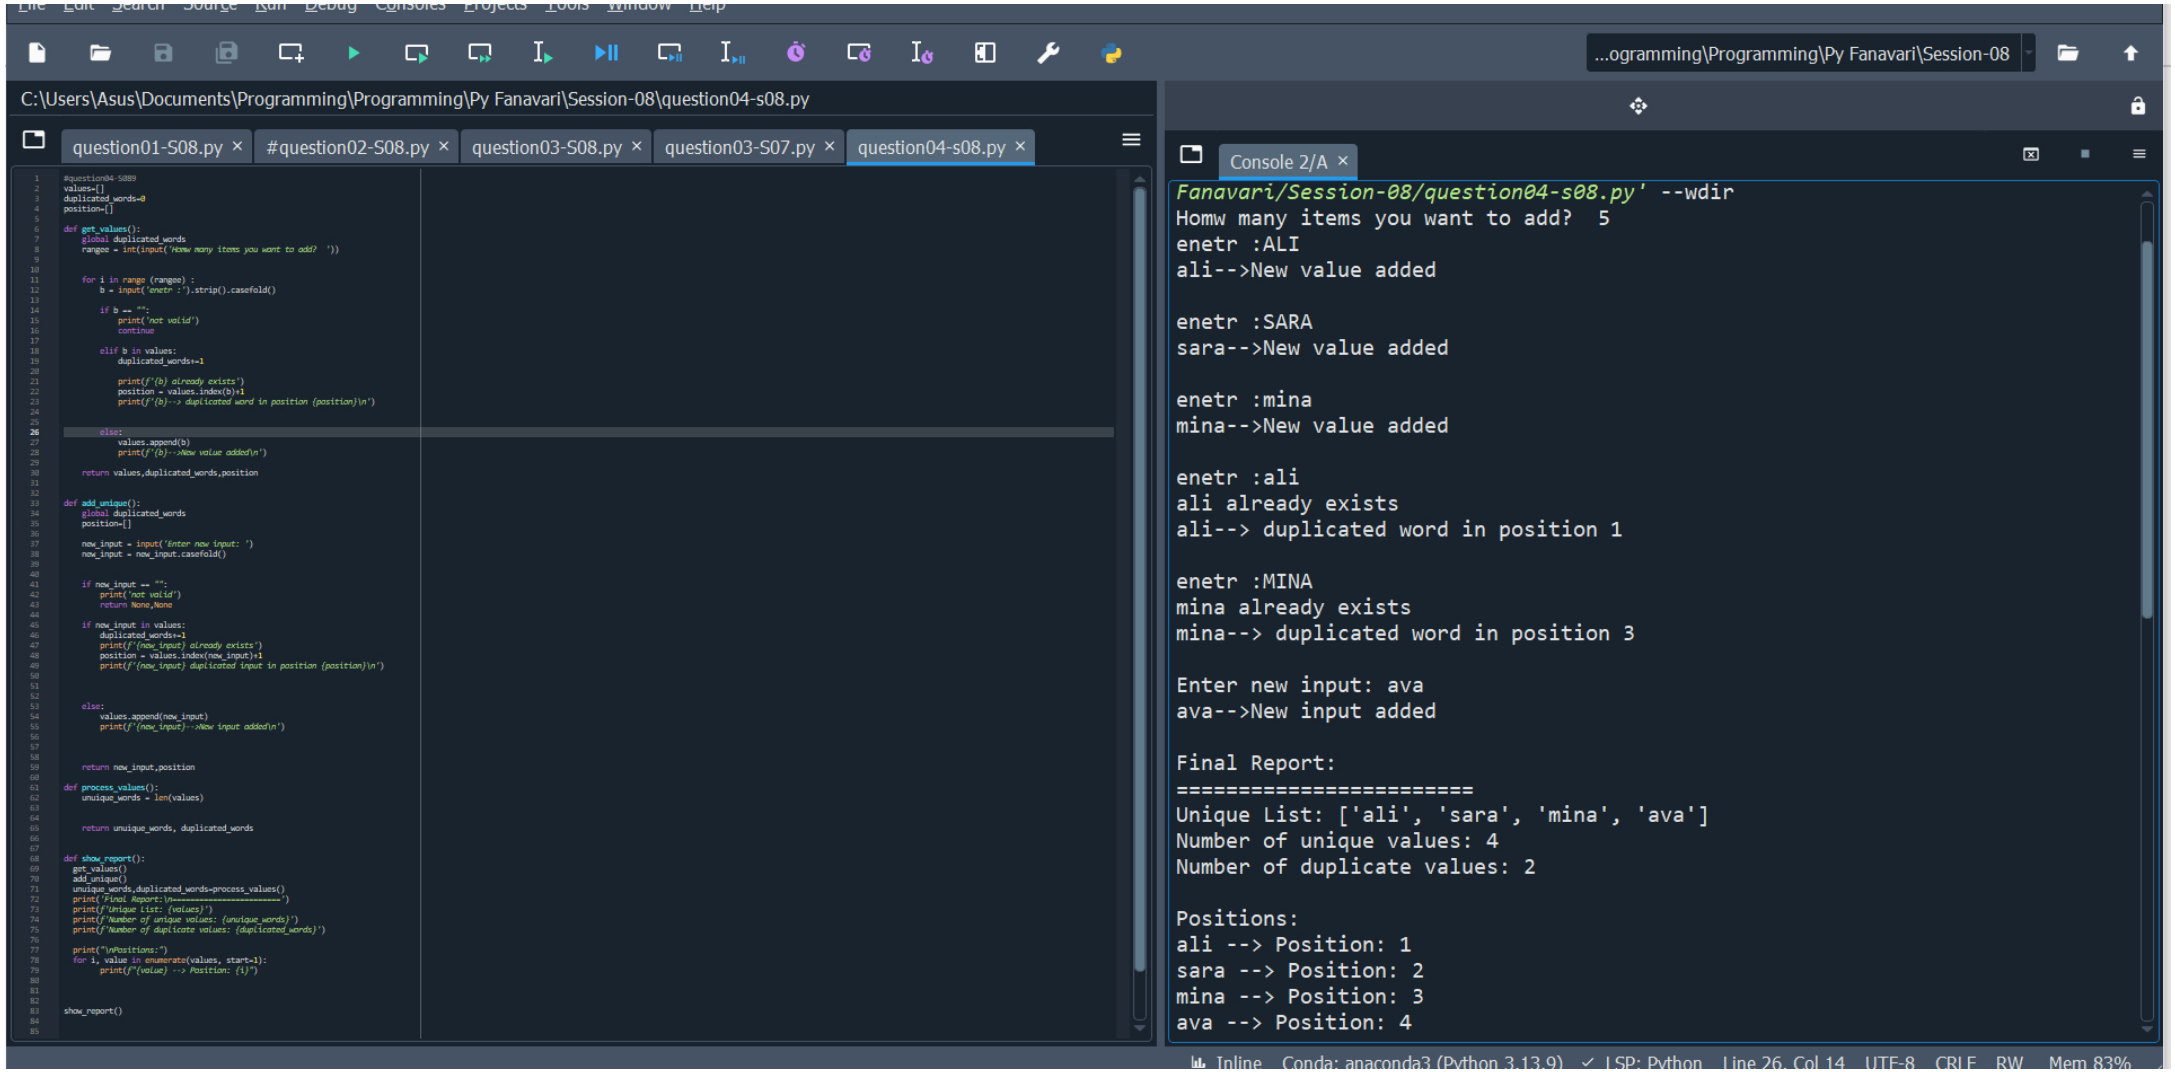

File Edit Search Source Run Debug Consoles Projects Tools Window Help
...ogramming\Programming\Py Fanavari\Session-08
C:\Users\Asus\Documents\Programming\Programming\Py Fanavari\Session-08\#question02-S08.py
question01-S08.py
#question02-S08.py
question03-S08.py
question04-s08.py
#question02-S08
logs_text = "C:/Users/Asus/Documents/Programming/Programming/Py Fanavari/Session-08/Logs.txt"
with open (logs_text,'r') as logs:
log = logs.readlines()
def count_successful_logins():
successful_login=0
for line in log:
name, log_dl, code = line.strip().split(",")
if log_dl == "LOGIN" and code=="200":
successful_login+=1
return successful_login
def count_failed_login():
failed_login=0
for line in log:
name, log_dl, code = line.strip().split(",")
if log_dl=="LOGIN" and (code=="403"or code=="500"):
failed_login+=1
return failed_login
def find_suspicious_users():
d ={}
for i in log:
i = i.strip()
name ,log_dl, code = i.split(",")
if code =="403":
if name in d:
d[name]+=1
else:
d[name]=1
return d
def user_operation():
op = {}
for i in log:
i = i.strip()
name,log_dl, code = i.split(',')
if name in op :
op[name]+=1
else:
op[name]=1
return op
def generate_report():
successful_login = count_successful_logins()
failed_login = count_failed_login()
d = find_suspicious_users()
op = user_operation()
print('Generating report \n--------------------')
print(f'Successful login: {successful_login}')
print(f'Failed login: {failed_login}')
print(f'Suspicious User: {d} Unsuccessful login')
print(f'Number of user operations: {op}')
count_successful_logins()
count_failed_login()
find_suspicious_users()
user_operation()
generate_report()
Console 2/A
In [28]: %runfile 'C:/Users/Asus/Documents/Programming/Programming/Py Fanavari/Session-08/#question02-S08.py' --wdir
Generating report

Successful login: 1
Failed login: 4
Suspicious User: {'Sara': 3} Unsuccessful login
Number of user operations: {'Ali': 2, 'Sara': 3, 'Reza': 1}
In [29]:


File Edit Search Source Run Debug Consoles Projects Tools Window Help
...ogramming\Programming\Py Fanavari\Session-08
C:\Users\Asus\Documents\Programming\Programming\Py Fanavari\Session-08\question03-S08.py
question01-S08.py
#question02-S08.py
question03-S08.py
question04-s08.py
#question03-S08
transaction_file = 'C:/Users/Asus/Documents/Programming/Programming/Py Fanavari/Session-08/transaction.txt'
with open (transaction_file, 'r') as file:
file = [i.strip() for i in file.readlines()]
def calculate_balance():
balance={}
for i in file :
name, transaction,amount = i.split(',')
amount=int(amount)
if name not in balance :
balance[name]=0
if transaction == "deposit":
balance[name]+=amount
elif transaction == "withdraw":
balance[name]-=amount
return balance
def total_deposit():
deposit ={}
for i in file :
name, transaction,amount = i.split(',')
amount=int(amount)
if name not in deposit:
deposit[name]=0
if transaction =="deposit":
deposit[name]+=amount
return deposit
def total_withdrawals():
w={}
for i in file :
name, transaction,amount = i.split(',')
amount=int(amount)
if name not in w:
w[name]=0
if transaction =="withdraw":
w[name]+=amount
return w
def find_invalid_transactions():
balance = calculate_balance()
invalid={}
for name, amount in balance.items():
if amount<0:
invalid[name]=amount
return invalid
def generate_report():
balance = calculate_balance()
deposit= total_deposit()
w = total_withdrawals()
invalid = find_invalid_transactions()
print('Final Report: .....')
print(f'Total Balance : {balance}')
print(f'Total deposit: {deposit}')
print(f'Total withdrawal : {w}')
print(f'{invalid} : invalid transaction!')
for name in sorted (balance):
print(f'\n{name}')
print(f'Deposit: {deposit[name]}')
print(f'Withdraw: {w[name]}')
print(f'balance: {balance[name]}\n---------------')
calculate_balance()
total_deposit()
Console 2/A
---> 81 print(f'invalid transactions: {invalid[name]}')
KeyError: 'Ali'
In [26]: %runfile 'C:/Users/Asus/Documents/Programming/Programming/Py Fanavari/Session-08/question03-S08.py' --wdir
Final Report: .....
Total Balance : {'Ali': 35000000, 'Sara': -20000000}
Total deposit: {'Ali': 50000000, 'Sara': 30000000}
Total withdrawal : {'Ali': 15000000, 'Sara': 50000000}
{'Sara': -20000000} : invalid transaction!
Ali
Deposit: 50000000
Withdraw: 15000000
balance: 35000000

Sara
Deposit: 30000000
Withdraw: 50000000
balance: -20000000

In [27]:
Inline Conda: anaconda3 (Python 3.13.9) LSP: Python Line 81, Col 1 UTF-8 CRLF RW Mem 85%


...ogramming\Programming\Py Fanavari\Session-08
C:\Users\Asus\Documents\Programming\Programming\Py Fanavari\Session-08\question04-s08.py
question01-S08.py
#question02-S08.py
question03-S08.py
question03-S07.py
question04-s08.py
#question04-S08
values=[]
duplicated_words=0
position=[]
def get_values():
global duplicated_words
rangee = int(input('Homw many items you want to add? '))
for i in range (rangee) :
b = input('enetr :').strip().casefold()
if b == "":
print('not valid')
continue
elif b in values:
duplicated_words+=1
print(f'{b} already exists')
position = values.index(b)+1
print(f'{b}--> duplicated word in position {position}\n')
else:
values.append(b)
print(f'{b}-->New value added\n')
return values,duplicated_words,position
def add_unique():
global duplicated_words
position=[]
new_input = input('Enter new input: ')
new_input = new_input.casefold()
if new_input == "":
print('not valid')
return None,None
if new_input in values:
duplicated_words+=1
print(f'{new_input} already exists')
position = values.index(new_input)+1
print(f'{new_input} duplicated input in position {position}\n')
else:
values.append(new_input)
print(f'{new_input}-->New input added\n')
return new_input,position
def process_values():
unique_words = len(values)
return unique_words, duplicated_words
def show_report():
get_values()
add_unique()
unique_words,duplicated_words=process_values()
print('Final Report:\n=======================')
print(f'Unique List: {values}')
print(f'Number of unique values: {unique_words}')
print(f'Number of duplicate values: {duplicated_words}')
print("\nPositions:")
for i, value in enumerate(values, start=1):
print(f"{value} --> Position: {i}")
show_report()
Console 2/A
Fanavari/Session-08/question04-s08.py' --wdir
Homw many items you want to add? 5
enetr :ALI
ali-->New value added
enetr :SARA
sara-->New value added
enetr :mina
mina-->New value added
enetr :ali
ali already exists
ali--> duplicated word in position 1
enetr :MINA
mina already exists
mina--> duplicated word in position 3
Enter new input: ava
ava-->New input added
Final Report:
=======================
Unique List: ['ali', 'sara', 'mina', 'ava']
Number of unique values: 4
Number of duplicate values: 2
Positions:
ali --> Position: 1
sara --> Position: 2
mina --> Position: 3
ava --> Position: 4
Inline
Conda: anaconda3 (Python 3.13.9)
LSP: Python
Line 26, Col 14
UTF-8
CRLF
RW
Mem 83%