

# **React Native Components and Styles**

## **SD550 – Web Application Development 2**

**Maharishi International University**

**Department of Computer Science**

**M.S. Thao Huy Vu**

# Maharishi International University - Fairfield, Iowa



All rights reserved. No part of this slide presentation may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying or recording, or by any information storage and retrieval system, without permission in writing from Maharishi International University.

# Main Points

- React Native Overview
- React Native Components: View, Text, Button, Touchable\*
- React Native Component Lifecycle

# React Native

A framework that relies on React core.

Allows us build mobile apps using only JavaScript.

Supports iOS and Android.

*Learn once, write anywhere*

# React Native

React Native works a lot like React, implementing JSX, state, and props. Of course, React Native is built on **Native components**, instead of HTML elements.

Unlike React for the web, React Native requires you to import each component in your project - after all, each component is setup to work **both in Android and iOS**.

# How does React Native work?

JavaScript is bundled, transpiled and minified.

Unlike the browser, where we run JS and UI in a single thread. A React Native app runs in many threads, so if the JS thread is blocked, the UI thread keeps working and UI is responsive.

The threads communicate **asynchronously** through a **bridge**.

The async communication makes it easy for the JS thread to ask the UI thread to render many items and not wait, when UI finishes or has an event, it is sent back to JS thread in async way.

# Threads in React Native App

There are 4 threads in the React Native App:

1. **JavaScript Thread:** is where the logic will run. React App <Button>
2. **Shadow Thread:** This thread is the background thread used by React Native to calculate your layout created using React library. (How the Button is translated into Native)
3. **UI Thread:** Also known as **Main Thread**. This is used for native android or iOS UI rendering. (Native button)
4. **Native Modules Thread:** Sometimes an app needs access to platform API, and this happens as part of native module thread. (A thread for each service: Camera, Geolocation, Sensor.. etc)

# React Native Rendering Process

When we first start the app, the main UI thread starts, JS thread starts, and JS bundles are pushed to JS thread.

The UI thread will not suffer at any time as JS thread is doing heavy calculations.

When React starts rendering, it generates a new virtual DOM (layout) it sends changes to Shadow thread, to generate shadow nodes.

Shadow thread sends generated layout to the main UI thread, and UI renders.




# Separation of React Native

Generally, we can separate React Native into 3 parts:

- React Native — JS side
- React Native — Bridge
- React Native — Native side

# React Native Threads

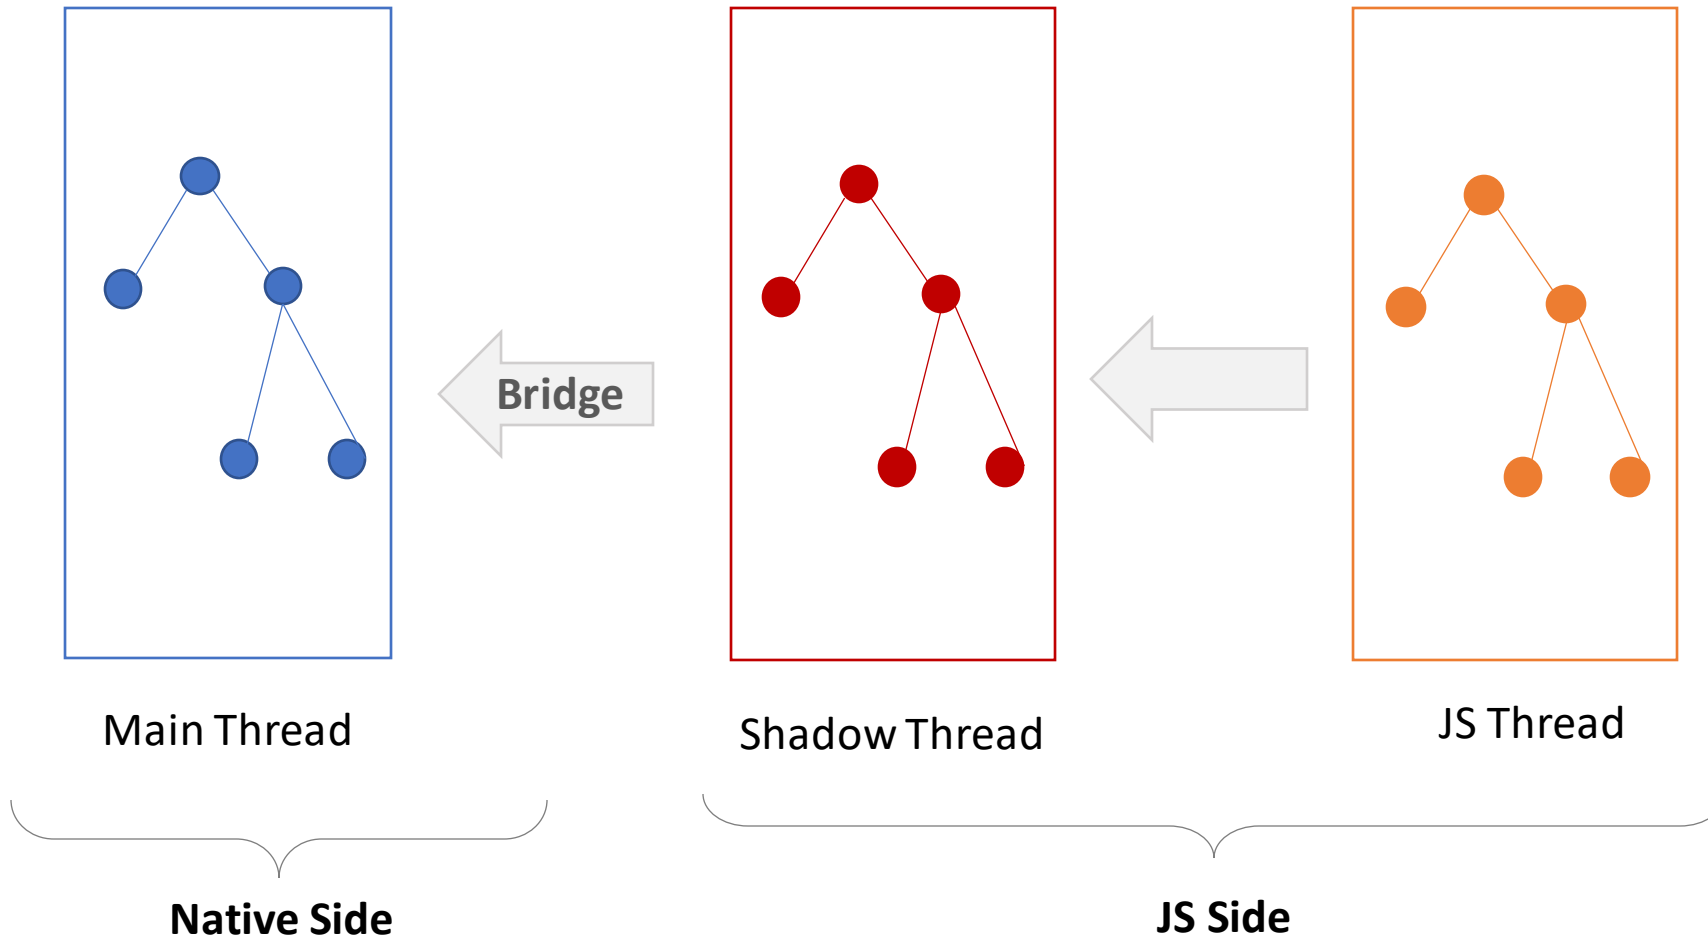

# Differences between RN and React for Web

All base components are different

The way we style elements (there is no `className` in react-native)

No browser APIs, most have been polyfilled (fetch, timers, console..)

Navigation is different (tab, scroll, gestures, transitions.. Etc)

# Expo

The fastest way to build an app. Suite of tools to accelerate the React Native development process.

- **Snack** - runs React Native in the browser
- **CLI** - a command-line interface to serve, share, and publish projects
- **Client** - runs your projects on your phone while developing
- **SDK** - bundles and exposes cross-platform libraries and APIs

<https://expo.io/tools>

# Expo CLI

```
npx create-expo-app myapp --template expo-template-blank-typescript
```

```
cd myapp
```

```
npx expo install react-native-web react-dom @expo/metro-runtime
```

```
npm run web
```

<https://expo.io>

# React Native Components

Not globally in scope like React web components and we must import them from `'react-native'`

- `div` → `View`
- `span` → `Text`

All text must be wrapped by a `<Text />` tag

- `button` → `Button`
- `ScrollView`

Buttons don't have style, and are rendered differently between Android and iOS, instead we will use `Touchable`s

# Import Components

To import each component, we will simply add it to our imported object:

```
import { Text, View } from "react-native";
```

`<Text></Text>` is a wrapper for any text in your page, it is similar to a `<p>` tag in HTML.

`<View></View>` acts very similar to `<div>`, it is a container perfect for dividing up and styling your page.

# React Native Screen

```
import { Text, View } from 'react-native';
```

```
export default function App() {  
  return (  
    <View>  
      <Text>Hello World</Text>  
    </View>  
  );  
}
```

Although View does work similarly to a div element, you can't wrap any text in <View></View>, you must use the <Text> component.



## <Text> and <View>

When a parent <Text> is wrapping a child <Text>, the nested text will come out on the same line, assuming there is enough space.

If two <Text> components were siblings wrapped by a <View>, they would appear on separate lines.

```
<Text style={{ color: 'red' }}>  
  <Text style={{ fontSize: 14 }}>Hello </Text>  
  <Text style={{ fontSize: 14 }}>MSD.</Text>  
</Text>
```

**Hello MSD.**

*Notice style inheritance, and discuss the changes of replacing the parent <Text> with a <View>*

# Style

React Native uses JS objects for styling, object keys are based on CSS properties in camelCase.

Lengths are in **unitless numbers**, abstracted as the app will render in different phones with different pixel density.

**style** attribute may take an array of styles.

**StyleSheet.create()** the same as creating objects for style but with additional optimization, as it only sends IDs over the bridge.

Every time we re-render a component `<View style={{}} />` a style object is recreated and passed through the bridge to UI thread.

# Style – length (width, height, margin...)

- Fixed width

Style={{width: 100}}

- Percentage

Style={{width: "50%"}}

- Flex

Style={{flex: 1}}

- Window dimension

Style={{width: Dimension.get('window').width}}

# Flexbox

All elements wrapped with **display: 'flex'** by default.

Unlike the web, the default **flexDirection** is set to **column**.


An element with **flex: 1** will occupy all space on the phone.

Flexbox offers two main properties **justifyContent** and **alignItems**.

<b>justifyContent</b>	'center', 'flex-start', 'flex-end', 'space-around', 'space-between'	How to align elements with the main axis.
<b>alignItems</b>	'center', 'flex-start', 'flex-end', 'stretched'	How to align elements with the cross axis


# Example

```
container: {  
  flexDirection: 'column',  
  justifyContent: 'center',  
  alignItems: 'center',  
  backgroundColor: 'grey',  
  flex: 1  
},  
redbox: {  
  width: 100,  
  height: 100,  
  backgroundColor: 'red'  
},  
bluebox: {  
  width: 100,  
  height: 100,  
  backgroundColor: 'blue'  
}
```

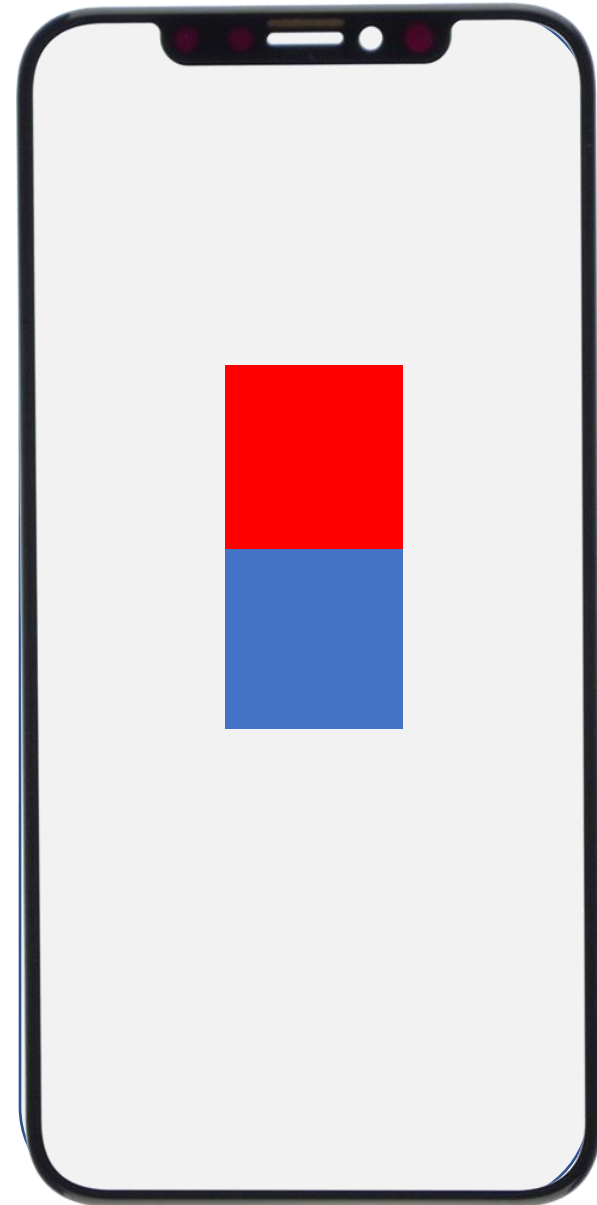

# Example

```
container: {  
  flexDirection: 'column',  
  justifyContent: 'space-between',  
  alignItems: 'flex-end',  
  backgroundColor: 'grey',  
  flex: 1  
},  
redbox: {  
  width: 100,  
  height: 100,  
  backgroundColor: 'red'  
},  
bluebox: {  
  width: 100,  
  height: 100,  
  backgroundColor: 'blue'  
}
```

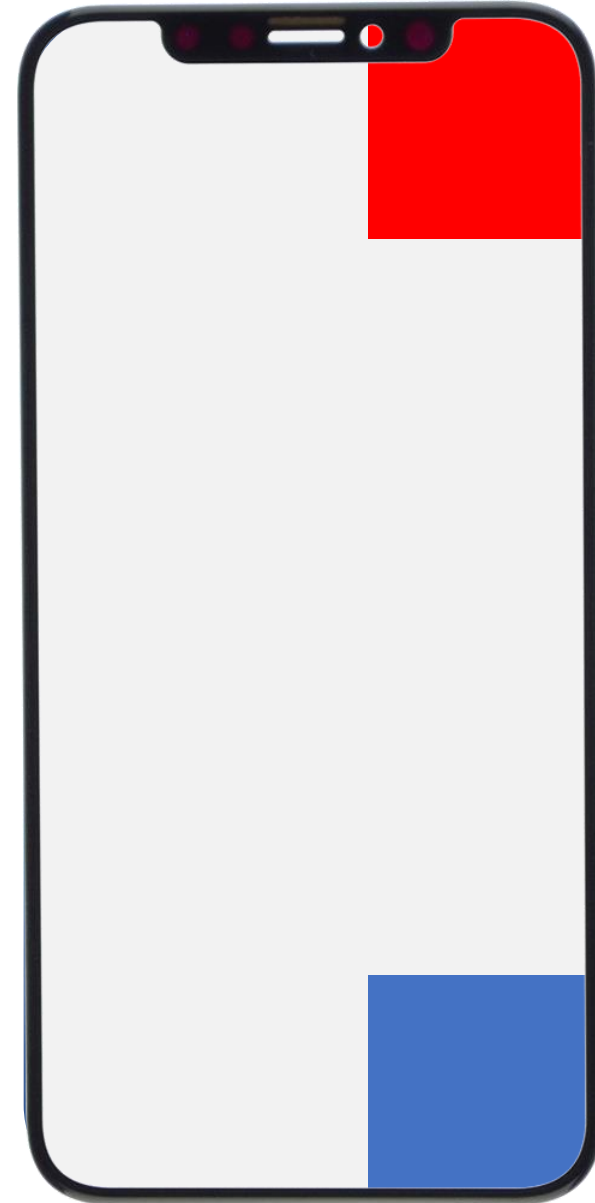

```
function App() {  
  const [showCounter, setShowCounter] = useState(true)  
  
  const toggleCounter = () => setShowCounter(!showCounter)  
  
  render() {  
    return (  
      <View style={styles.appContainer}>  
        <Button title="toggle" onPress={toggleCounter} />  
        {showCounter && <Counter />}  
      </View>  
    )  
  }  
}
```

# Event Handling

Unlike web, not every component has every interaction.

Only a few touchable components:

- Pressable
- Button
- Touchable

Web handlers will receive the event as an argument, but React Native handlers often receive different arguments. (No event obj, no defaultBehaviour).


Read the [docs](#)

`<View />` does not have events  
`<Text />` does not have events



# Pressable

- It is like a container to detect any pressing from fingers.

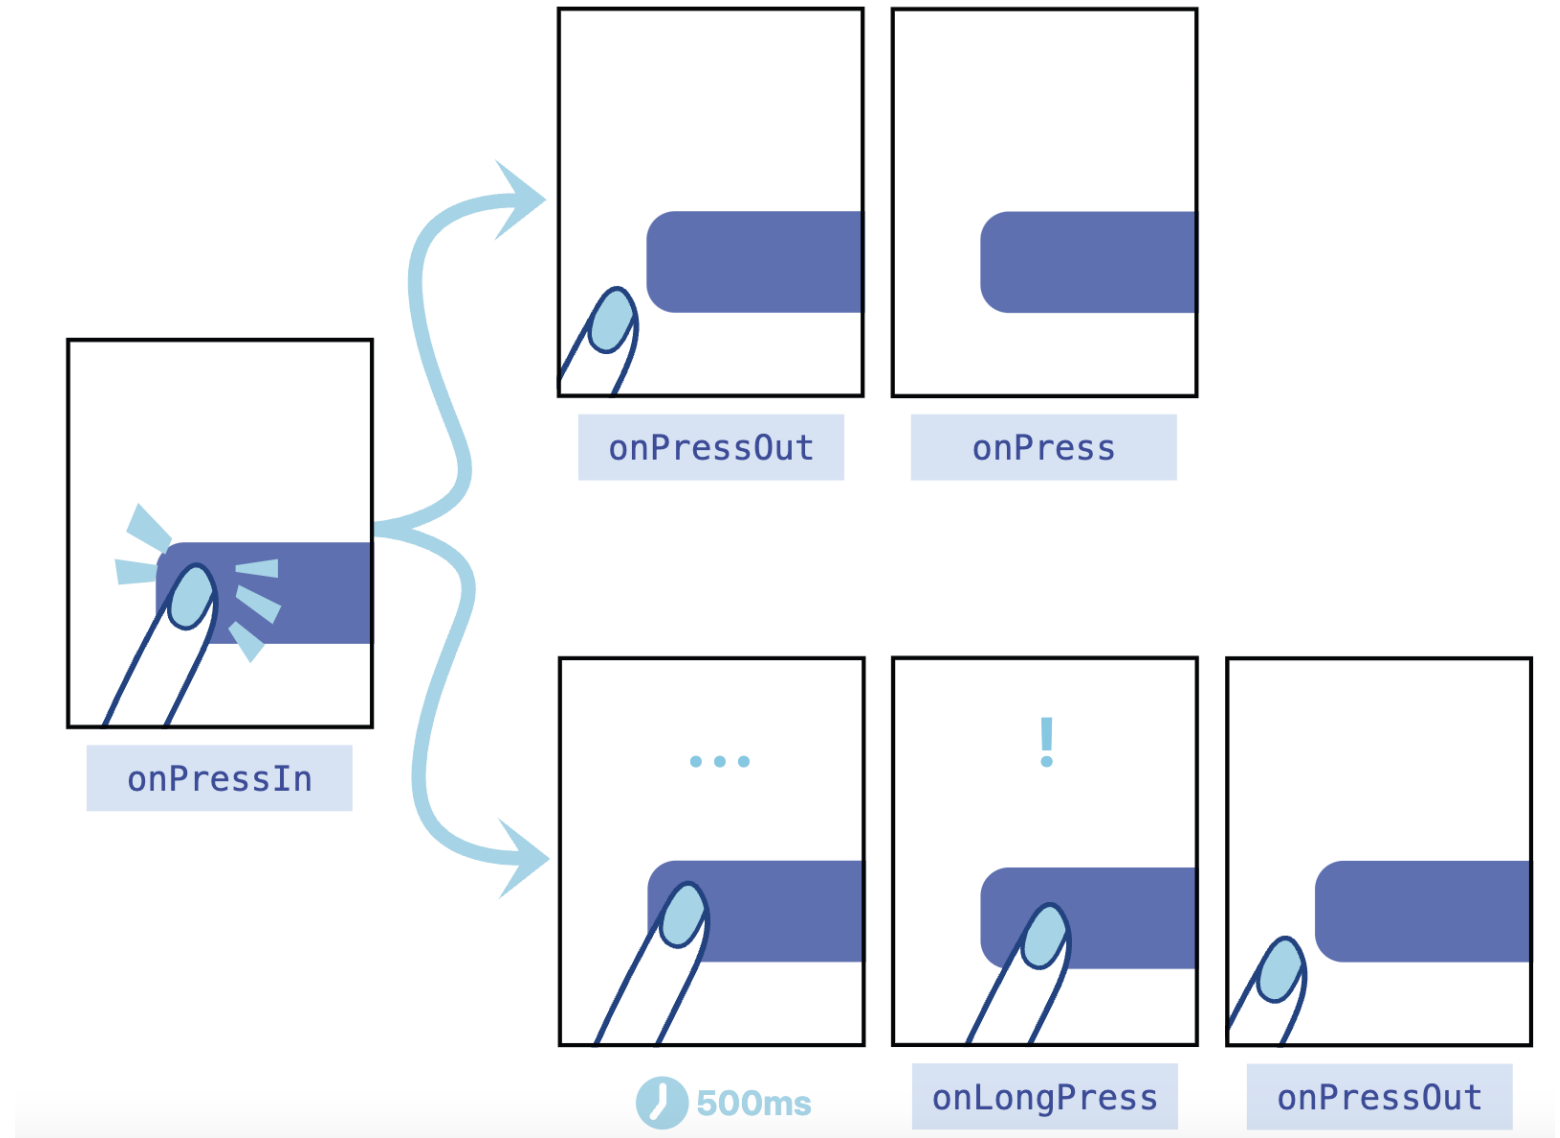

# Pressable example

```
<Pressable onPress={() => Alert.alert("button pressed!")}>  
  <Text>Click Me</Text>  
</Pressable>
```

We used **Alert** which is imported from the React Native core. This will show an alert on top of our screen, similar to a web **alert()**.

## <Button />

The React Native <Button /> has an **onPress()** prop, as opposed to anything **click**-related.

It also has a **title** prop for the text which goes inside it.

It doesn't have a **style** prop, but only a **color** prop.

On the iOS platform, it only shows up as the text in the title - with no background. Therefore, the **color** prop will only change the text color, though on Android it will change the background color of the button.

# Button Example

```
<Button  
  onPress={() => Alert.alert("button pressed!")}  
  title="alert button"  
  color="blue"  
>
```

We used **Alert** which is imported from the React Native core. This will show an alert on top of our screen, similar to a web **alert()**.

# The Touchables

```
<TouchableHighlight onPress={this.pressHandle}>  
  <Text>Click</Text>  
</TouchableHighlight>
```

The `TouchableHighlight` acts like a container for other components with a function when pressed, including a built-in animation. So you could just add `View` and `Text` components within a `Touchable` component to act just like a `<Button />`, but with customizable style.

# Touchable Components

- **TouchableHighlight**: when pressed, darkens the background.
- **TouchableOpacity**: when pressed, dims the opacity of the button.
- **TouchableNativeFeedback**: Android-only ripple effect.
- **TouchableWithoutFeedback**: a press without any feedback/effect.

# React Native Component Types

Return a node (something that can be rendered).

Represent a discrete piece of the UI.

- **Stateless** Functional Component (SFC), Pure Functional Component
- **Stateful** `React.Component` or Functional Component with Hooks.

# Stateless Functional Component (SFC)

Simplest component: use when you don't need state.

A function that takes props and returns a node.

Should be pure (it should not have any side effects like setting values, updating arrays, etc.).

Any change in props will cause the function to be re-invoked.




# Stateful React Components

These have additional features that SFCs don't.

Maintain their own state.

Have lifecycle methods (similar to hooks or event handlers) that are automatically invoked.

# Component Lifecycle

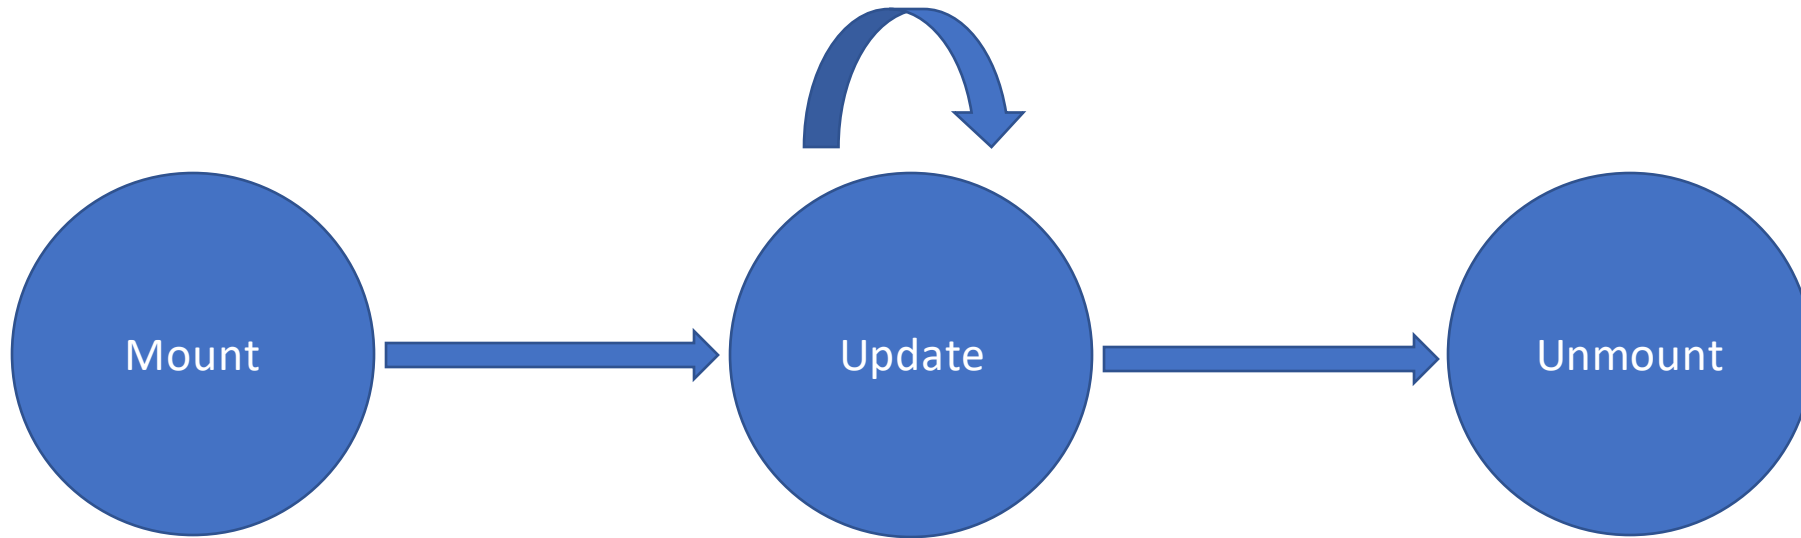

# Mount

- To load the data for the application after all components are initialized

```
useEffect(() => {  
  //Load the data below  
  ....  
}, [])
```

# Update

- To do other stuffs before or after a rendering

```
useEffect(() => {  
  //setup code here  
  Return () => {  
    //clean up code here  
  }  
})
```

# Unmount

- To clean up or remove network requests, listeners, or time intervals.
- `componentDidMount`

```
useEffect(() => {
```

```
  ...
```

```
    Return () => {  
      //clean up here  
    }
```

```
  }, [])
```

# Reference

- Expo: <https://expo.dev/>
- React Native: <https://reactnative.dev/>