# TALLER 3

# n8n

# SISTEMA RAG ESTÁNDAR

***Alejandro Samuel Coroiu***

***1º ASIR***

# *INDICE*

Nodo 1: [INGESTION] On form submission (Form Trigger) ..... 2
Nodo 2: [INGESTION] Simple Vector Store (modo insert)..... 3
Nodo 3: [INGESTION] Default Data Loader (Cargador de documentos) ... 4
Nodo 4: [INGESTION] Recursive Character Text Splitter ..... 5
Nodo 5: [COMPARTIDO] Embeddings Ollama ..... 5
Nodo 6: [CONSUMO] When chat message received (Chat Trigger) ..... 6
Nodo 7: [CONSUMO] AI Agent (Asistente Legal) ..... 6
Nodo 8: [CONSUMO] Ollama ..... 7
Nodo 9: [CONSUMO] Simple Memory (Memoria de conversación) ..... 8
Nodo 10: [CONSUMO] Simple Vector Store1 (modo retrieve-as-tool)..... 9
Workflow completo ..... 10
Funcionamiento de Agente IA ..... 11

# Nodo 1: [INGESTION] On form submission (Form Trigger)

1. Añado un nodo On form submission y lo configuro. Me permite subir documentos .pdf

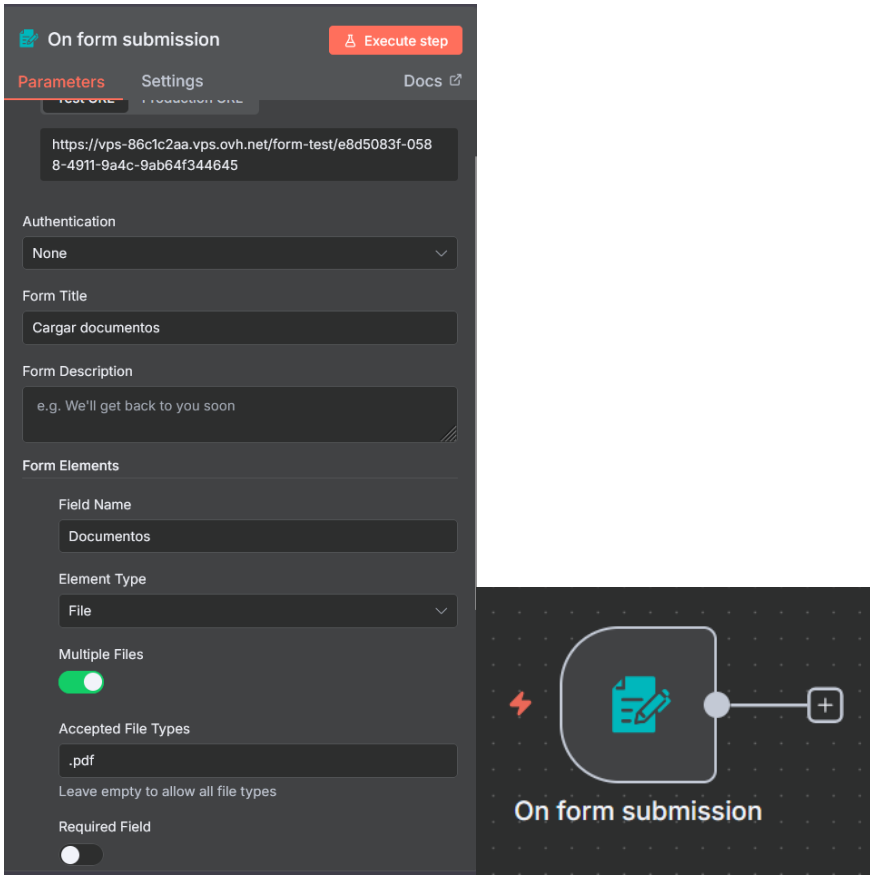


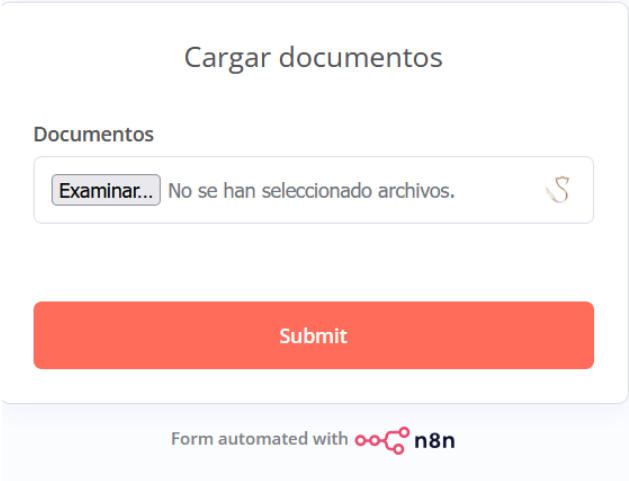

# Nodo 2: [INGESTION] Simple Vector Store (modo insert)

1. Añado un nodo Simple Vector Store y lo configuro

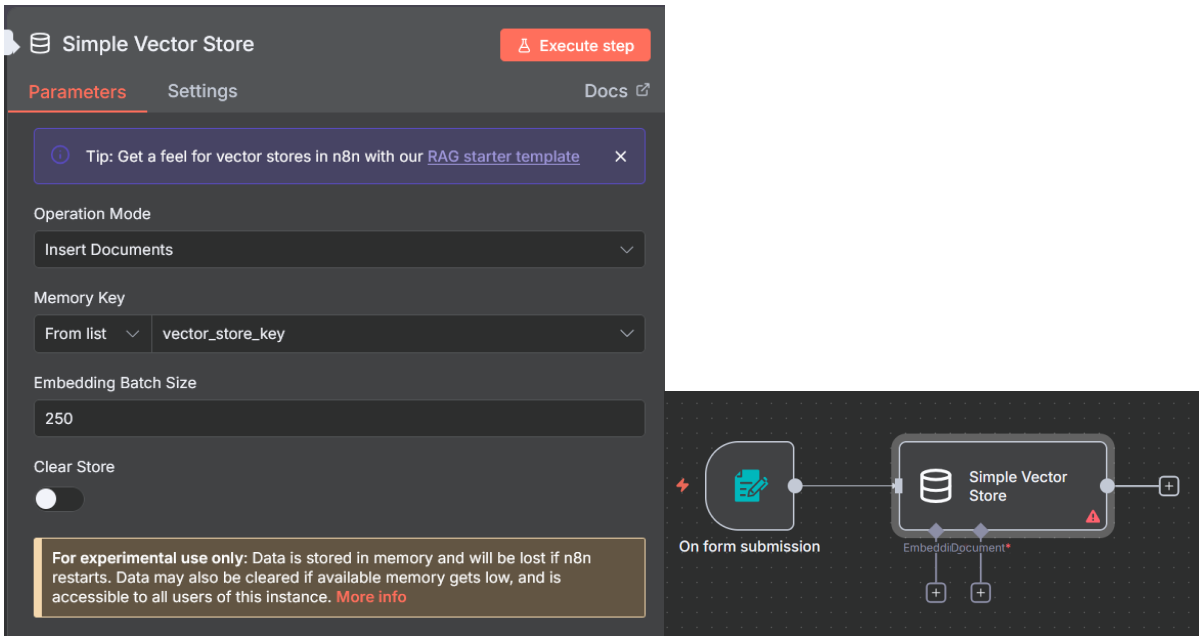


# Nodo 3: [INGESTION] Default Data Loader (Cargador de documentos)

1. Añado el nodo Default Data Loader como Document Loader de Simple Vector Store

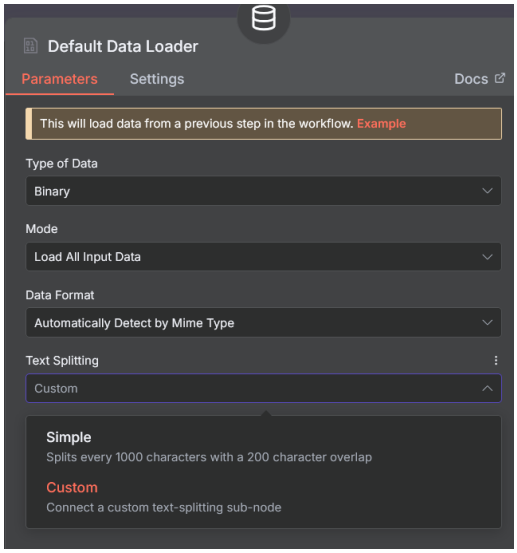

# Nodo 4: [INGESTION] Recursive Character Text Splitter

1. A Default Data Loader le añado el nodo Recursive Character Splitter

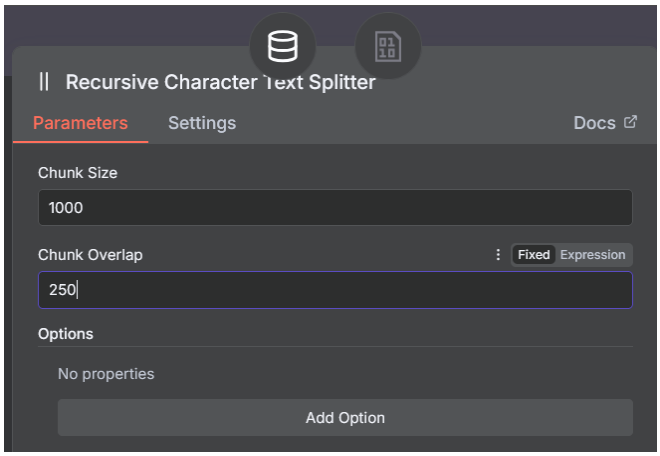


# Nodo 5: [COMPARTIDO] Embeddings Ollama

1. Uso el modelo Ollama para el embedding

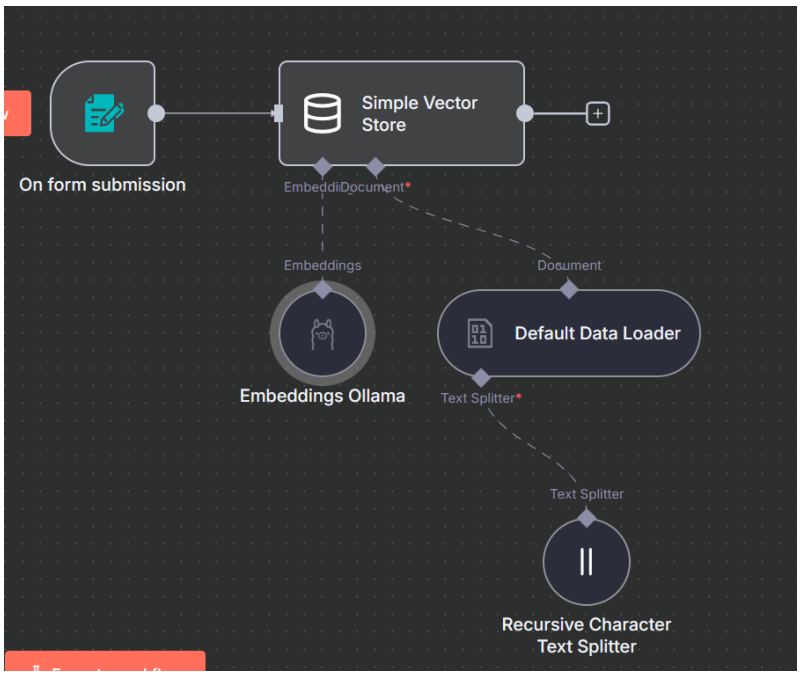

## Nodo 6: [CONSUMO] When chat message received (Chat Trigger)

1. Añado el nodo Chat trigger, separado de la zona de Ingesta

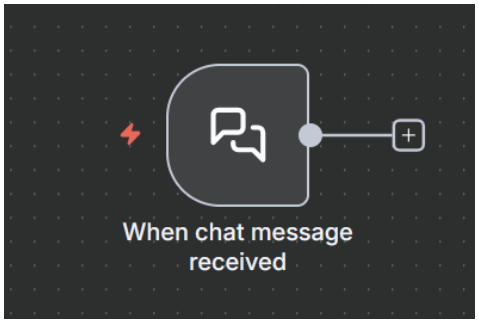


## Nodo 7: [CONSUMO] AI Agent (Asistente Legal)

1. Añado el nodo AI Agent con el Prompt:

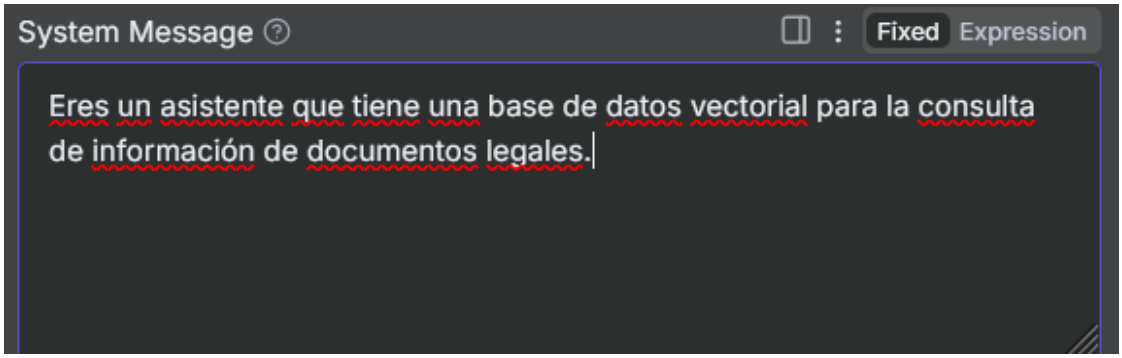


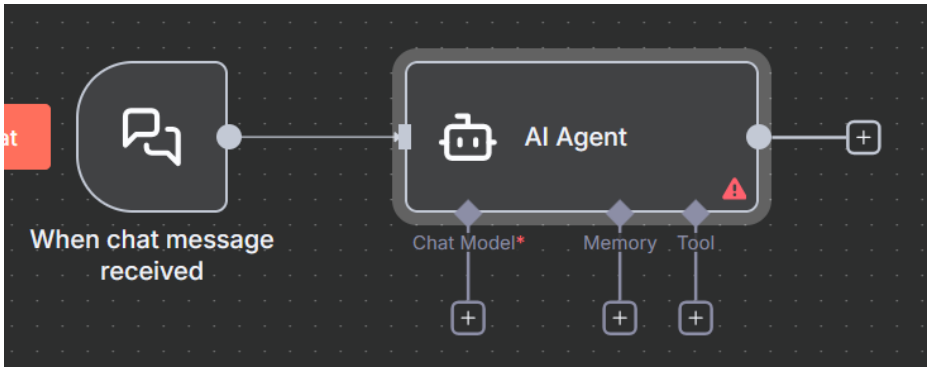

# Nodo 8: [CONSUMO] Ollama

1. Añado como modelo Ollama para el Agent AI

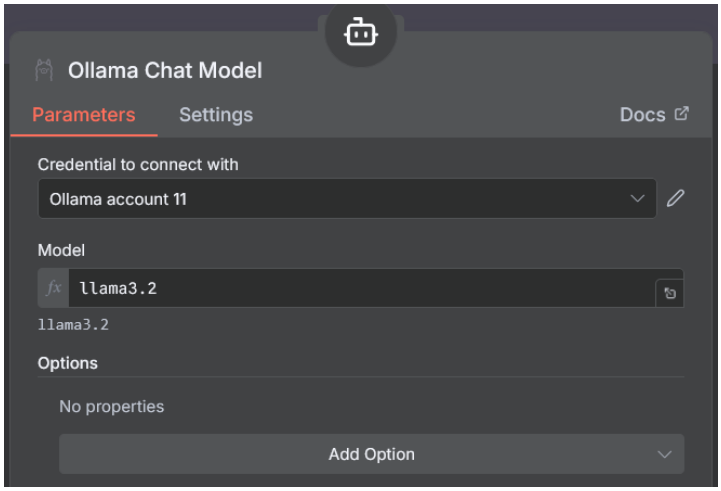


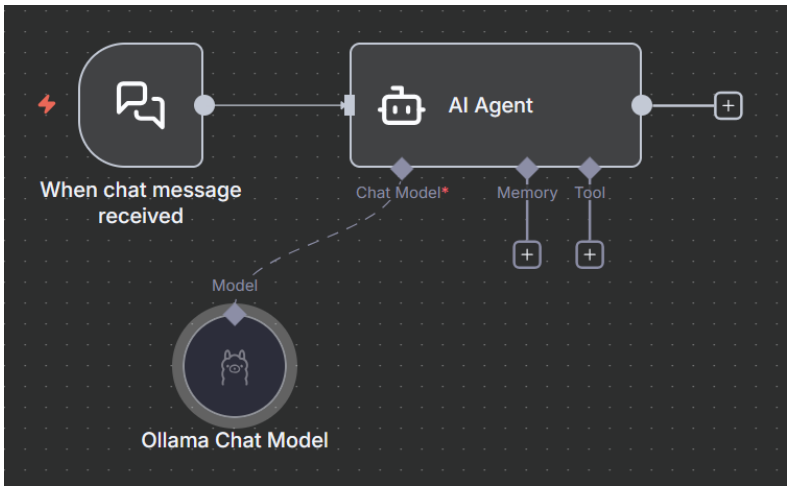

## Nodo 9: [CONSUMO] Simple Memory (Memoria de conversación)

1. Para la memoria del AI Agent le configuro una memoria simple de 10 mensajes

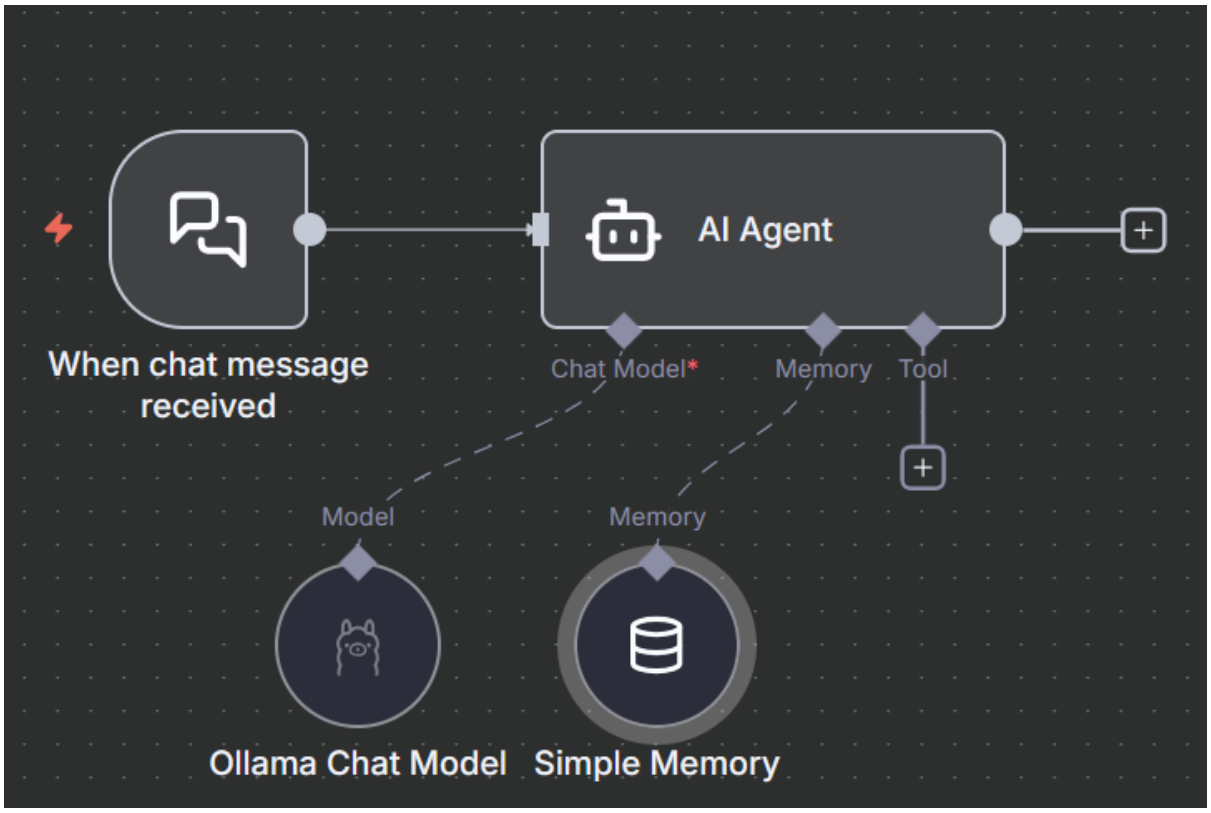

# Nodo 10: [CONSUMO] Simple Vector Store1 (modo retrieve-as-tool)

1. Añado el nodo como tool del agente IA

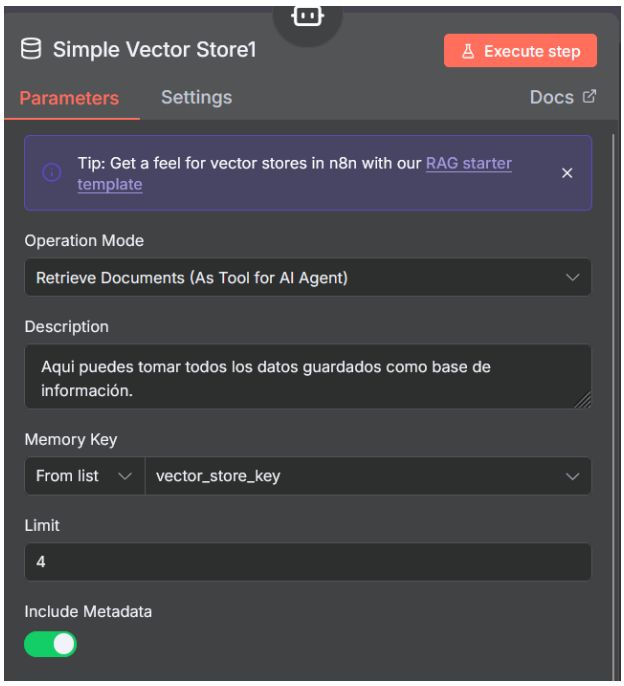

# Workflow completo

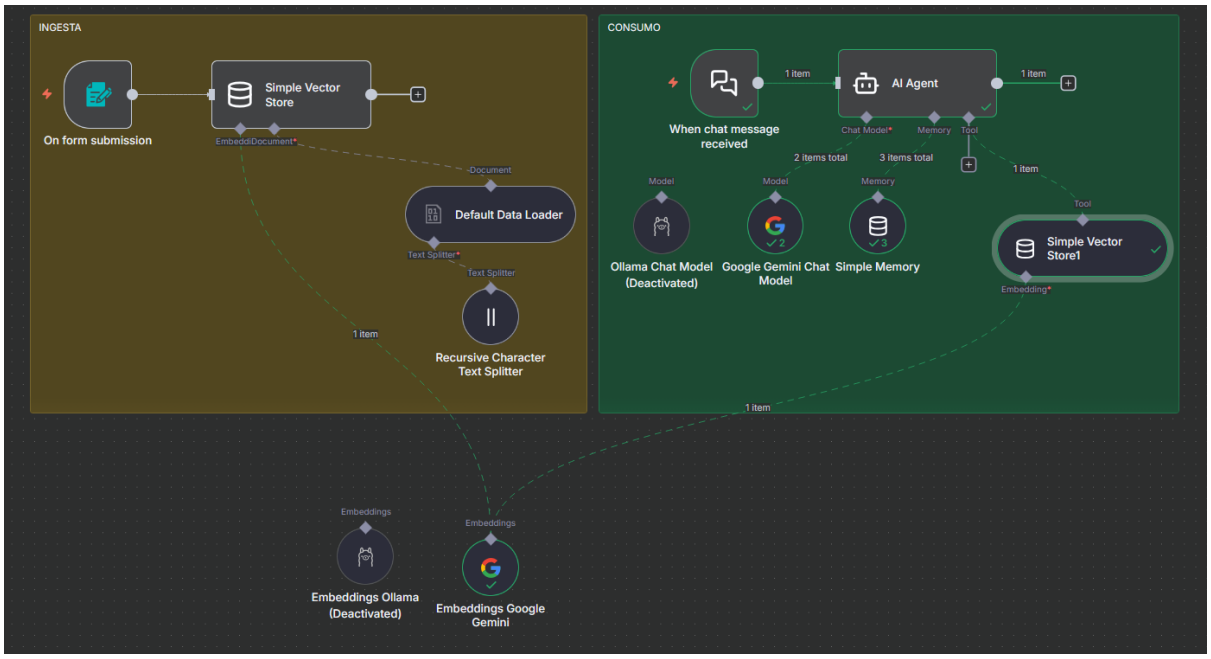
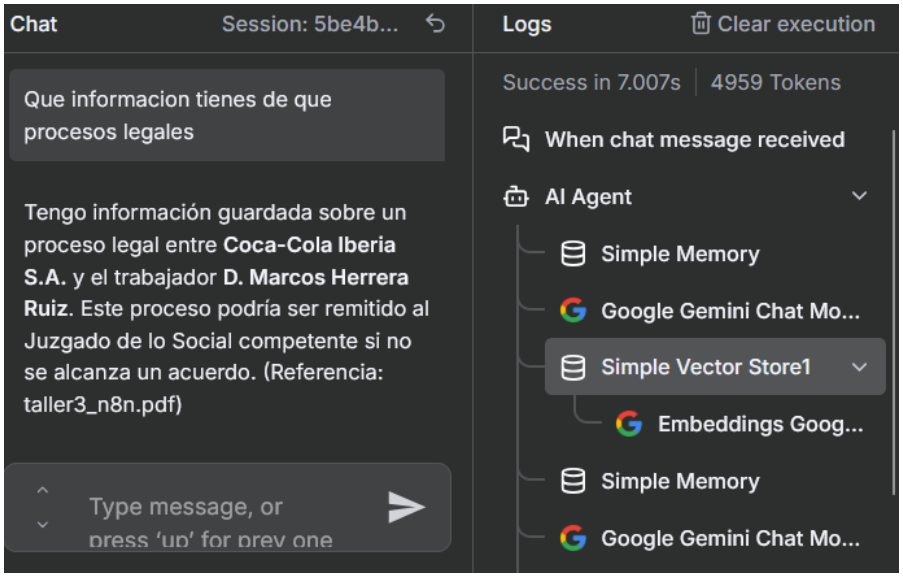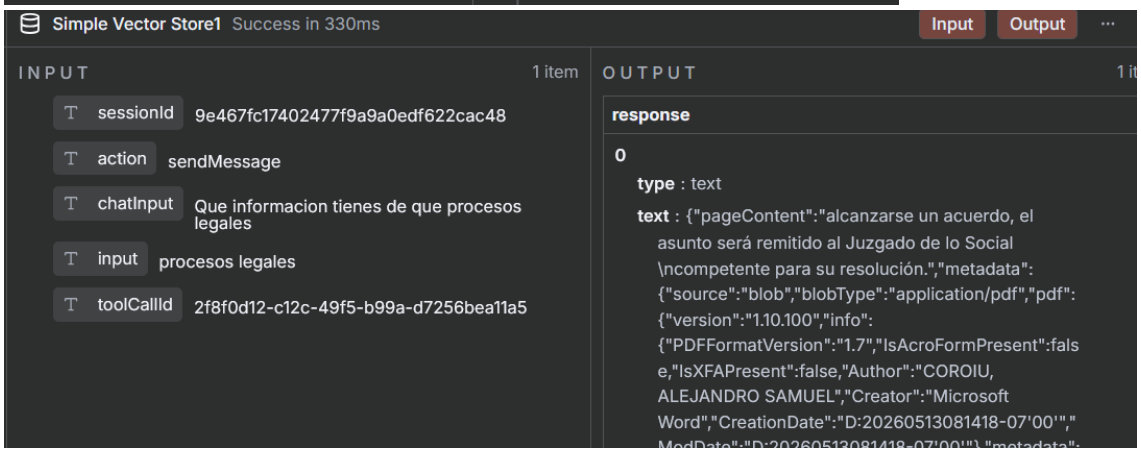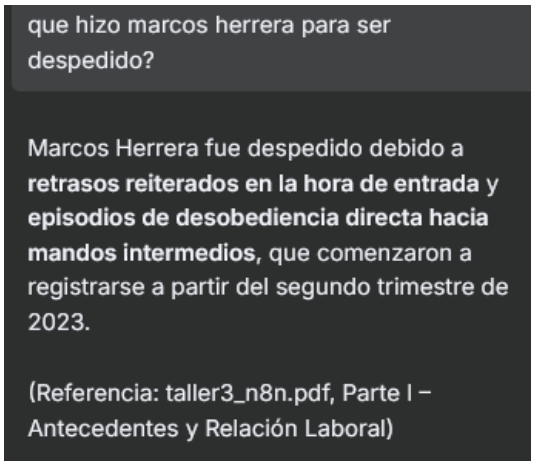
# Funcionamiento de Agente IA