



PIZZA

HUT



INTRODUCTION


Hi Everyone, I am Aman, the Pizza lover. Since I love to eat the Pizzas, I thought, I should make my first project on the Pizza Sales Database.

Welcome you all to my Sales Report Presentation.

In this project I have utilized SQL queries to solve the questions that are related to Pizza Sales.



DATA MODEL

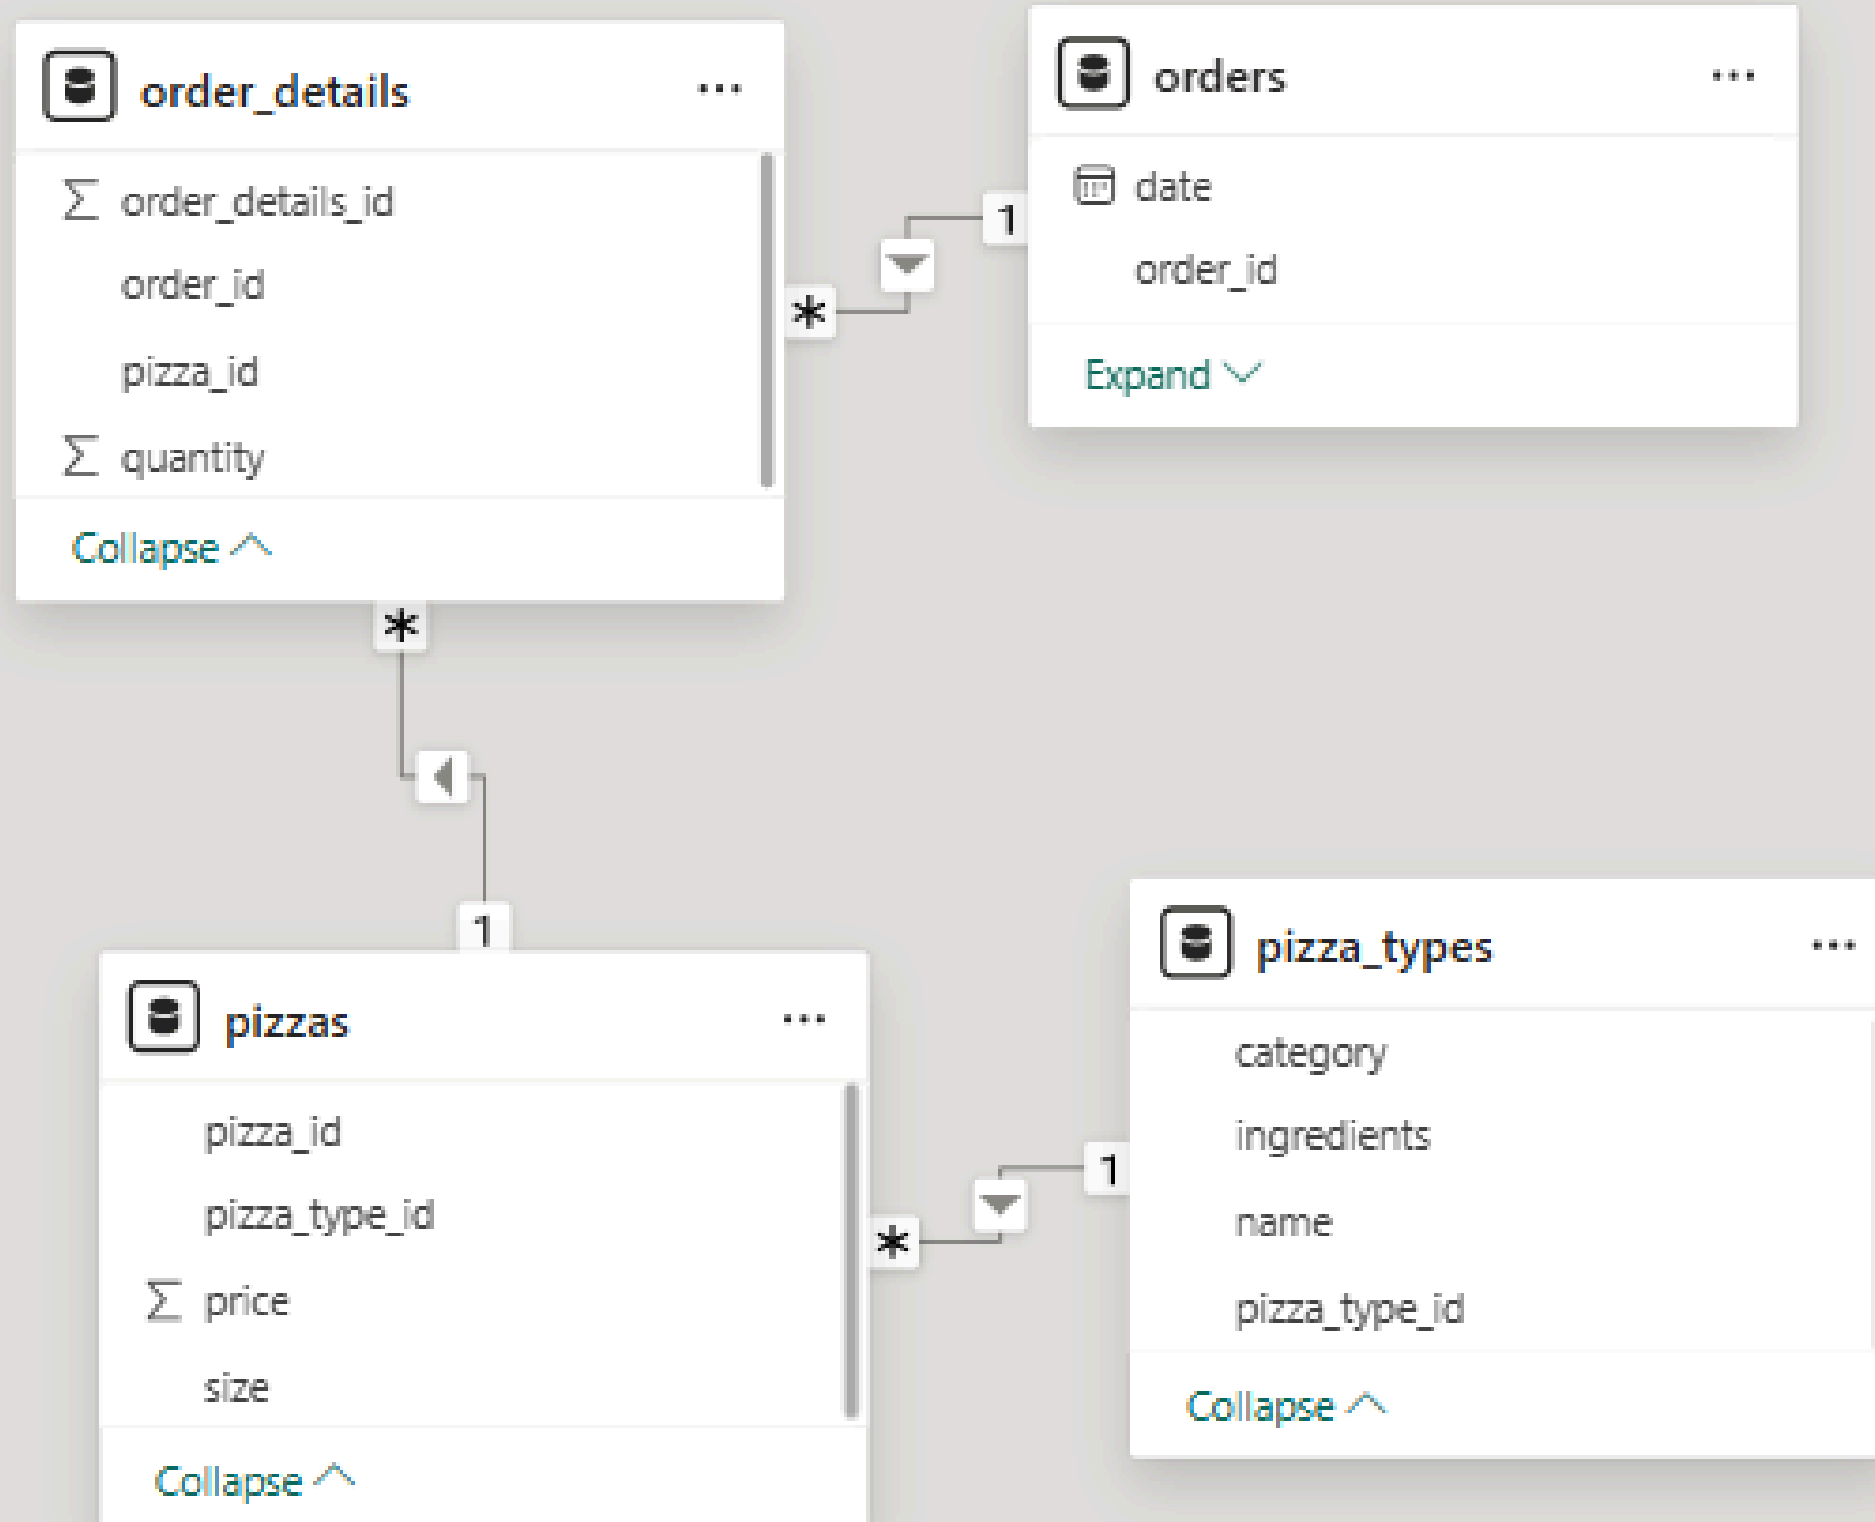



Retrieve the total number of orders placed.

```
SELECT  
    COUNT(order_id) AS total_orders  
FROM  
    orders;
```

Result Grid	
	total_orders
▶	21350



Calculate the total revenue generated from pizza sales.

```
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
          2) AS total_revenue
FROM
    order_details
    JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```

Result Grid			
	total_revenue		
▶	817860.05		



Identify the highest-priced pizza.

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
        pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

Result Grid			Filter Rows:
	name	price	
▶	The Greek Pizza	35.95	



Identify the most common pizza size ordered.

```
SELECT
    pizzas.size, COUNT(order_details.order_id) AS size_count
FROM
    pizzas
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY size_count DESC;
```

Result Grid		
	size	size_count
▶	L	18526
	M	15385
	S	14137
	XL	544
	XXL	28



List the top 5 most ordered pizza types along with their quantities.

```
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizzas
    JOIN
    pizza_types ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid			Filter Rows:
	name	quantity	
▶	The Classic Deluxe Pizza	2453	
	The Barbecue Chicken Pizza	2432	
	The Hawaiian Pizza	2422	
	The Pepperoni Pizza	2418	
	The Thai Chicken Pizza	2371	



Join the necessary tables to find the total quantity of each pizza category ordered.

```
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY category
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid			Filter
	category	quantity	
▶	Classic	14888	
	Supreme	11987	
	Veggie	11649	
	Chicken	11050	



Determine the distribution of orders by hour of the day.

```
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY hour;
```

Result Grid		
	hour	order_count
▶	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198
	22	663
	23	28
	10	8
	9	1

 Join relevant tables to find the category-wise distribution of pizzas.

```
SELECT
    category, COUNT(name)
FROM
    pizza_types
GROUP BY category;
```

	category	COUNT(name)
▶	Chicken	6
	Classic	8
	Supreme	9
	Veggie	9



Group the orders by date and calculate the average number of pizzas ordered per day.

```
SELECT
    ROUND(AVG(quantity), 0) AS avg_pizza_ordered_per_day
FROM
    (SELECT
        orders.order_date AS date,
        SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY date) AS order_quantity;
```

	avg_pizza_ordered_per_day
▶	138



Determine the top 3 most ordered pizza types based on revenue.

```
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

	name	revenue
▶	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5



Analyze the cumulative revenue generated over time.

```
select order_date, sum(revenue) over(order by order_date)
as cum_revenue
from
(select orders.order_date,
sum(order_details.quantity*pizzas.price) as revenue
from order_details join pizzas on
pizzas.pizza_id = order_details.pizza_id
JOIN orders on
order_details.order_id = orders.order_id
group by orders.order_date) as sales;
```

	order_date	cum_revenue
▶	2015-01-01	2713.8500000000004
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55
	2015-01-06	14358.5
	2015-01-07	16560.7
	2015-01-08	19399.05
	2015-01-09	21526.4
	2015-01-10	23990.350000000002
	2015-01-11	25862.65
	2015-01-12	27781.7
	2015-01-13	29831.300000000003
	2015-01-14	32358.700000000004
	2015-01-15	34343.500000000001
	2015-01-16	36937.650000000001
	2015-01-17	39001.750000000001
	2015-01-18	40978.600000000006
	2015-01-19	43365.750000000001



THANK YOU