

I/O Performance trade-offs among RNTuple's persistent layouts for DUNE Data Products

S M Shovan, *FCSI Summer Intern '25*

August 6, 2025

Fermi National Accelerator Laboratory

Outline

Introduction

Persistent Layouts

Parallel Optimizations

Challenges

Results

Trade-offs

Introduction

Introduction

- The Deep Underground Neutrino Experiment (DUNE) is projected to record roughly 30 PB of liquid-argon TPC data per year [1]—far beyond the scale of previous neutrino experiments.
- DUNE's **Phlex** stands for **P**arallel, **h**ierarchical, and **l**ayered **e**xecution of data-processing algorithms.
- ROOT's new `RNTuple` backend is a candidate for the long-term DUNE data model, promising faster compression, cluster-aware reads, and thread-safe writes.
- This study benchmarks alternative `RNTuple` *persistent layouts* (AOS/SOA, vertical splits, granularity levels) for realistic data products.
- Focus data products: `recob::Hit` (charge deposits) and `recob::Wire` (ROI-compressed waveforms).

- A single DUNE far-detector module streams about 1.2 TB/s of raw data before compression [2]; naive storage could potentially overwhelm the archival budget.
- Efficient layout choice can cut file size and accelerate cluster reads needed for GPU/CPU reconstruction farms.

Problem Statement

- Which RNTuple persistent layout minimises read time, write time and on-disk footprint for DUNE Hit/Wire data products?
- How does vertical splitting such as one RNTuple for all data products interact with horizontal granularities (event, spill, element)?
- How does the choice of persistent layout affect the performance of the read and write operations?

Objectives

- Benchmark seven layout variants on a 1 M-event (35 GB) Phlex dataset (`recob::Hit`, `recob::Wire` with ROIs).
- Measure: write throughput, cold/warm read latency, compressed file size.
- Quantify trade-offs of ROI flattening, vertical split depth, and SOA vs. AOS.

Persistent Layouts

Data Layouts: AOS vs. SOA

Array of Structures (AOS)

Stores complete objects in an array.

```
struct Hit {  
    long long EventID;  
    unsigned int fChannel;  
    float fPeakTime;  
};  
// Array: [Hit1, Hit2, ...]
```

Example: Hit, Wire (per-item entries).

Structure of Arrays (SOA)

Separate arrays per field.

```
struct Hits {  
    vector<long long> EventID;  
    vector<unsigned int> fChannel;  
    vector<float> fPeakTime;  
};  
// Columns: EventID[ ],  
fChannel[ ], fPeakTime[ ], ...
```

Example: Hits, Wires (per-event vectors).

Layout Strategies




Figure 1: AOS Layout

Layout Strategies




Figure 1: AOS Layout




Figure 2: 1 RNTuple for all data products




Figure 3: 1 RNTuple per data product




Figure 4: 1 RNTuple per group

Layout Strategies




Figure 1: AOS Layout




Figure 2: 1 RNTuple for all data products




Figure 3: 1 RNTuple per data product




Figure 4: 1 RNTuple per group




Figure 5: 1 fill/row per event




Figure 6: 1 fill/row per spill




Figure 7: 1 fill/row per top object




Figure 8: 1 fill/row per element

Layout Strategies: AOS vs SOA

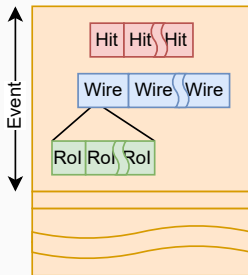


Figure 9: AOS Layout




Figure 10: SOA Layout

Granularity vs. Vertical Split Matrix

Horizontal Granularity	1 NTuple (all DP)	1 NTuple / DP	1 NTuple / group
Event-wise	event_allDP()	event_perDP()	event_perGroup()
Spill-wise	spill_allDP()	spill_perDP()	spill_perGroup()
Top-object-wise	–	topObject_perDP()	topObject_perGroup()
Element-wise	–	element_perDP()	element_perGroup()

DP = Data Product

Parallel Optimizations

Write Optimization: Multi-Threaded Chunking

Parallel Chunking Divide events into thread-specific ranges for concurrent filling.

```
std::vector<unsigned int> seeds = generateSeeds(nThreads);
for (int th = 0; th < nThreads; ++th) {
    int first = th * chunkSize;
    int last = std::min(first + chunkSize, totalEvents);
    futures.emplace_back(std::async(
        std::launch::async, thinWorkFunc, first, last, seeds[th], th ));
}
```

Example: `executeInParallel` writers.

Project Use: Scales writes with cores for large datasets.

Read Optimization: Cluster-Aware Splitting

Cluster Splitting Split read ranges by cluster boundaries to avoid duplicates.

```
auto clusters = split_range_by_clusters(*reader, nChunks);  
for (auto& chunk : clusters) {  
    futures.push_back(std::async(  
        &processChunk, chunk.first, chunk.second  
    ));  
}
```

Helper Function Defines cluster-based splits.

```
std::vector<std::pair<size_t, size_t>>  
split_range_by_clusters(ROOT::RNTupleReader& reader, int nChunks)
```

Project Use: Enhances read efficiency by reducing redundant reads.

Challenges

Challenge: Corrupted ROOT Files

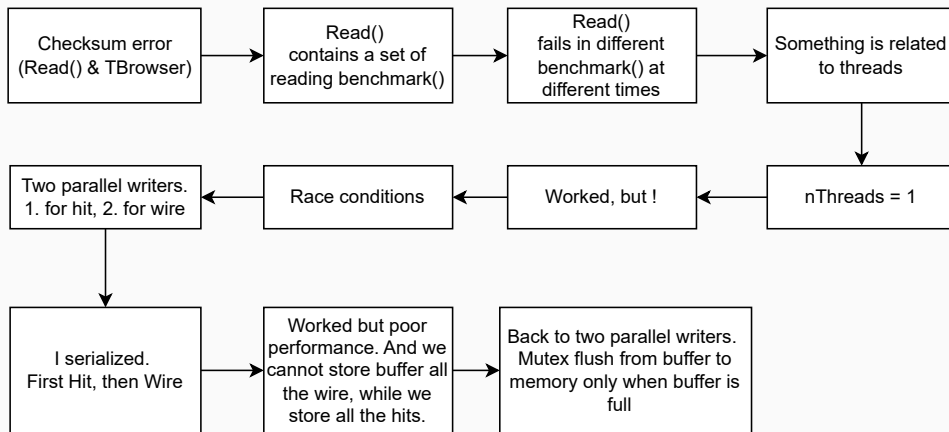


Figure 11: Challenge: Addressing corrupted ROOT files in parallel write operations.

Parallel Write Challenge: File Corruption Solution

Problem: Concurrent Flushes

Unsynchronized cluster flushes cause file corruption in multi-threaded writes. **Example Issue:** Threads overwriting shared file regions.

Solution: Mutex Synchronization Lock during flushes to serialize access per cluster.

```
for (int idx = first; idx < last; ++idx) {  
    // Generate data for hits/wires  
    if (hitStatus.ShouldFlushCluster()) {  
        hitContext.FlushColumns();  
        {  
            std::lock_guard<std::mutex> lock(mutex);  
        }  
        hitContext.FlushCluster();  
    }  
}
```

Project Use: Ensures thread-safe parallel writes without corruption.

ROI Flattening vs. Custom Dictionary

ROI Flattening (Non-Dictionary)

Flattens hierarchical ROI data into vectors for efficient storage without custom classes.

```
struct Wires {  
    vector<unsigned int> fSignalROI_nROIs;  
    vector<size_t> fSignalROI_offsets;  
    vector<float> fSignalROI_data;  
};
```

Example: Used in non-dictionary experiments for raw vector-based I/O.

Custom Dictionary (ROOT Classes)

Uses structured classes of ROOT's dictionary system, enabling object-oriented I/O.

```
struct RegionOfInterest {  
    size_t offset;  
    vector<float> data;  
};
```

Example: Used in dictionary experiments for type-safe, hierarchical data handling.

Results

- **Write Throughput:** Total events per second during RNTuple serialization.
- **Cold Read Time:** Latency for first access after file creation, reflecting raw I/O.
- **Warm Read Time:** Latency when data is cached, measuring memory locality effects.
- **Compressed File Size:** Total on-disk footprint post-write, accounting for RNTuple's column-wise compression.
- **Multi-thread Scaling:** Performance variation from 1 to 64 threads for write and read workloads.

AOS: Write Performance

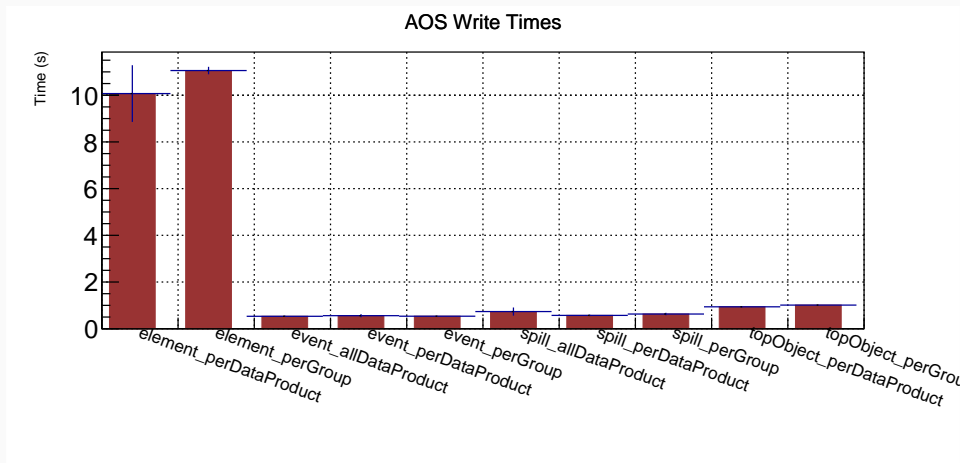


Figure 12: AOS (Array of Structures) Write Performance across different data organization strategies.

SOA: Write Performance

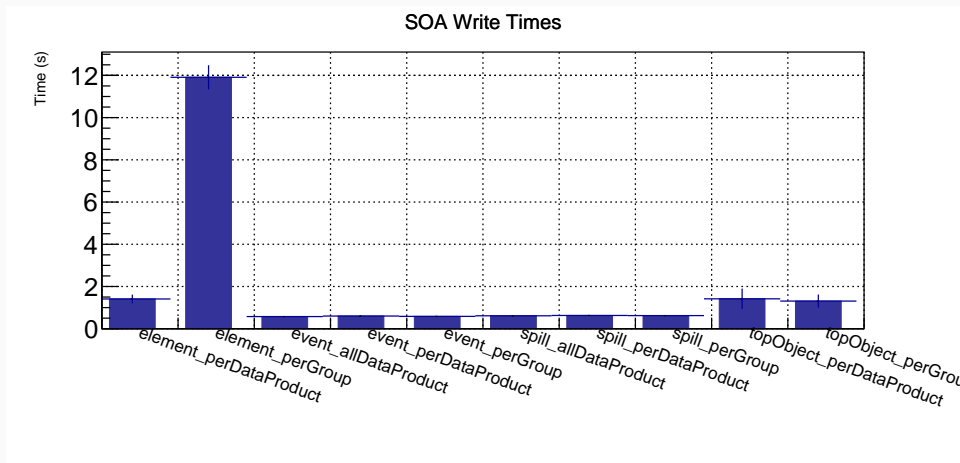


Figure 13: SOA (Structure of Arrays) Write Performance across different data organization strategies.

CPU Time Overheads

Writer	A	B	C
event_perGroup	✓	✓	
spill_perGroup	✓	✓	✓
element_perData	✓	✓	
topObject_perData		✓	
event_perData		✓	
spill_perData		✓	✓

- **A – ROI flattening:** dominant for *element* and *perGroup* writers.
- **B – Multiple NTuples:** extra Fill/Flush cycles & mutex contention.
- **C – Spill re-partitioning:** additional work unique to *spill* writers.

AOS vs SOA: Cold Read Performance Comparison

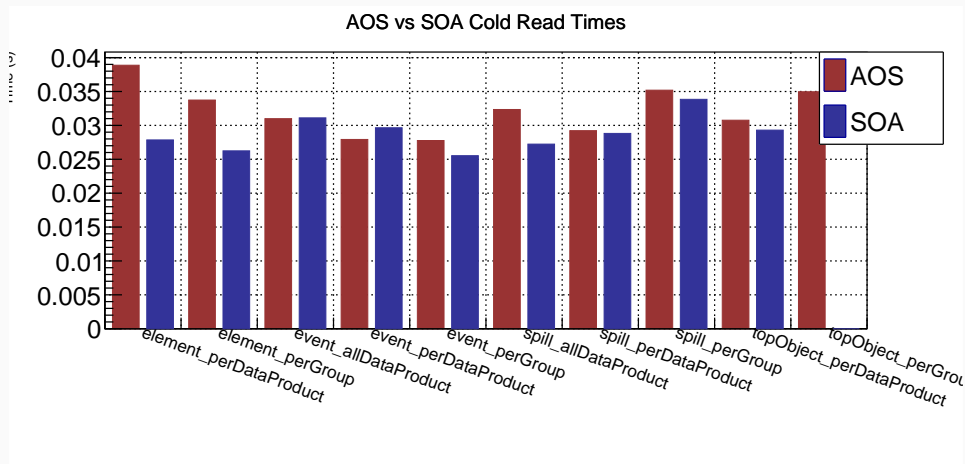


Figure 14: Cold Read Performance Comparison: Initial read times for AOS vs SOA implementations.

AOS vs SOA: Warm Read Performance Comparison

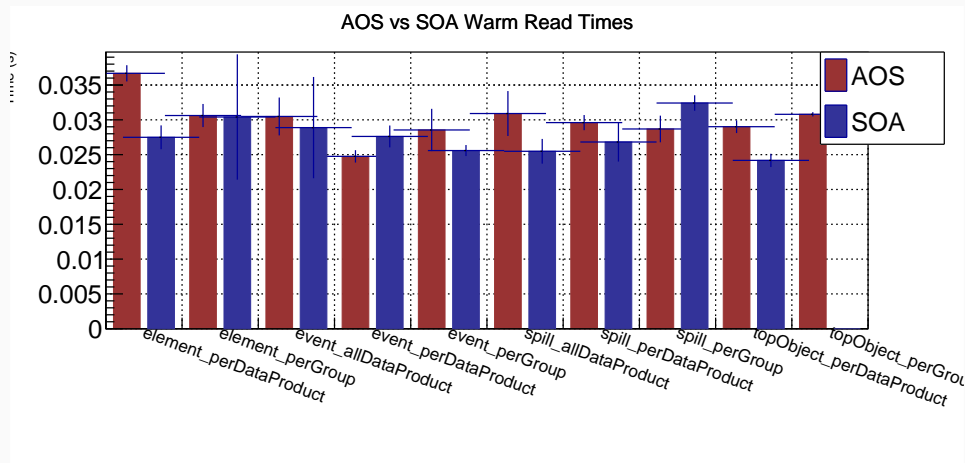


Figure 15: Warm Read Performance Comparison: Subsequent read times for AOS vs SOA implementations.

AOS: File Size Analysis

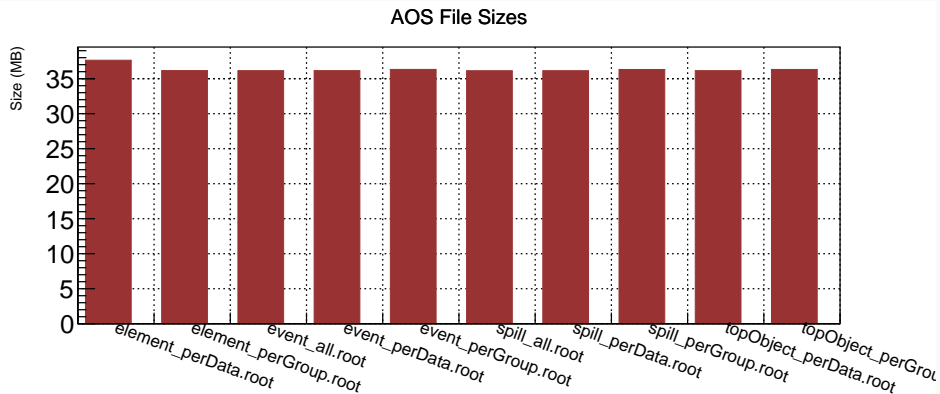


Figure 16: AOS (Array of Structures) File Size Analysis across different data organization strategies.

SOA: File Size Analysis

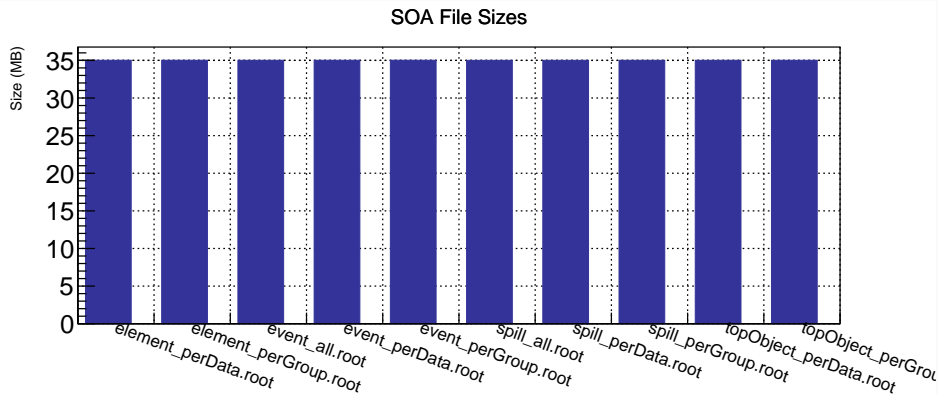


Figure 17: SOA (Structure of Arrays) File Size Analysis across different data organization strategies.

File Size Insights

Writer variant	Size (% of most)
aos_element_perData.root	47%
soa_element_perData.root	100%
aos_element_perGroup.root	42%
soa_element_perGroup.root	39%
aos_event_* / aos_spill_*	~103%
soa_event_* / soa_spill_*	100%

Key Take-aways

- Deep nesting & high row counts double basket overhead (offset tables, headers, CRC).
- Flattened perGroup writers cut size roughly in half by removing ROI nesting.

Trade-offs

Trade-off Analysis

Future Considerations

- **Thread Scaling Analysis:** Rigorous testing across 1–128 threads to evaluate layout performance scaling and optimal configurations.
- **Extensible Framework:** Develop scalable architecture for arbitrary data products beyond Hits and Wires with configurable layouts.
- **Advanced Layout Testing:** Explore N-tuple groupings and clustering strategies for improved read/write efficiency and storage optimization.

- [1] DUNE Collaboration, “Deep Underground Neutrino Experiment Technical Design Report–Volumell: DUNE Physics,” 2020, Sec.2.6.
- [2] DUNE Collaboration, “Data Acquisition System for the DUNE Far Detector,” IEEE NSS/MIC Proc., 2023.

Thank you!
Questions?