


PBL 4 번 보고서

구성도:

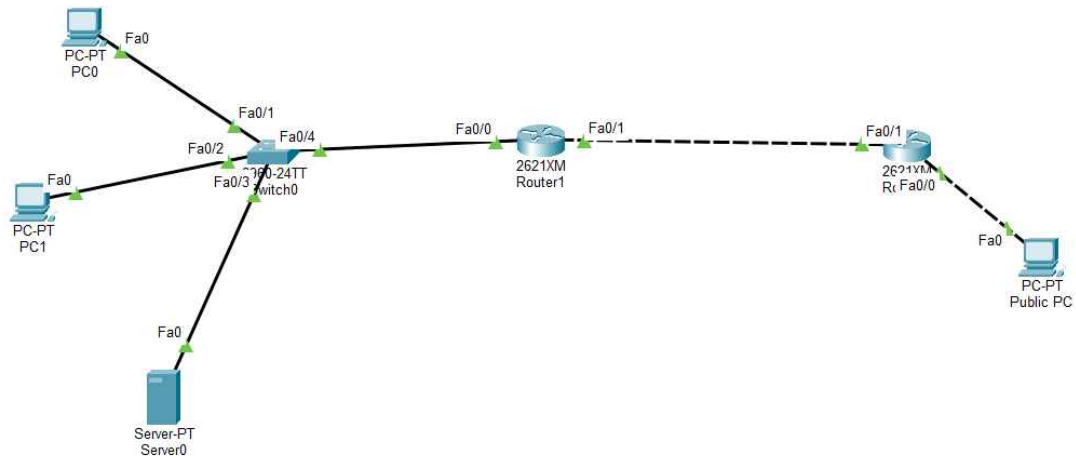

Router1 설정:

```
interface FastEthernet0/0
ip address 192.168.10.1 255.255.255.0
no shutdown
```

DHCP 서버 설정 :

```
ip dhcp excluded-address 192.168.10.1 192.168.10.9
ip dhcp pool OFFICE
network 192.168.10.0 255.255.255.0
default-router 192.168.10.1
dns-server 8.8.8.8
```

Switch 설정:

DHCP 활성화:

```
ip dhcp snooping
```

```
ip dhcp snooping vlan 1
```

Trust Port 설정:

```
interface FastEthernet0/4
```

```
ip dhcp snooping trust
```

Rate Limit 적용:

```
interface FastEthernet0/1
```

```
ip dhcp snooping limit rate 5
```

```
interface FastEthernet0/2
```

```
ip dhcp snooping limit rate 5
```

```
interface FastEthernet0/3
```

```
ip dhcp snooping limit rate 5
```

하다가 막힌 점

Packet Tracer 주의사항

Packet Tracer에서는 Option 82 때문에 DHCP가 실패하는 경우가 있음.

다음 명령으로 해결.

```
no ip dhcp snooping information option
```

확인 명령어

Router DHCP Binding

```
show ip dhcp binding
```

예시

```
192.168.10.10
```

```
192.168.10.11
```

```
192.168.10.12
```

DHCP Snooping 상태

```
show ip dhcp snooping
```

확인 내용

DHCP Snooping Enabled

VLAN 1 적용

Trust Port(Fa0/4) 확인

DHCP Snooping Binding Table

```
show ip dhcp snooping binding
```

확인 내용

MAC Address

IP Address

VLAN

Interface

이렇게 Snooping은 신뢰할 수 있는 DHCP 서버만 DHCP 응답을 전송하도록 제안하는 보안 기능이다.