

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch master
```

```
No commits yet
```

```
Changes to be committed:
```

```
(use "git rm --cached <file>..." to unstage)
```

```
new file:   Screenshots.docx
new file:   Student.txt
new file:   ~$reenshots.docx
```

```
Untracked files:
```

```
(use "git add <file>..." to include in what will be committed)
```

```
IgnoreExample.txt
```

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % █
```

```
[avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch master
```

```
No commits yet
```

```
Changes to be committed:
```

```
(use "git rm --cached <file>..." to unstage)
```

```
new file:   .gitignore
new file:   IgnoreExample.txt
new file:   Screenshots.docx
new file:   Student.txt
new file:   ~$reenshots.docx
```

```
Changes not staged for commit:
```

```
(use "git add <file>..." to update what will be committed)
```

```
(use "git checkout -- <file>..." to discard changes in working directory)
```

```
modified:   IgnoreExample.txt
```

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % █
```

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   IgnoreExample.txt

no changes added to commit (use "git add" and/or "git commit -a")
avdonr@Avdons-MacBook-Pro Software Management Lab 1 %
```

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch new
Changes to be committed:
  (use "git reset HEAD <file>..." to unstage)

        new file:   BranchExample.txt
        modified:   IgnoreExample.txt

avdonr@Avdons-MacBook-Pro Software Management Lab 1 %
```


```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch master
Changes to be committed:
  (use "git reset HEAD <file>..." to unstage)

        new file:   BranchExample.txt
        modified:   IgnoreExample.txt

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   BranchExample.txt

avdonr@Avdons-MacBook-Pro Software Management Lab 1 %
```

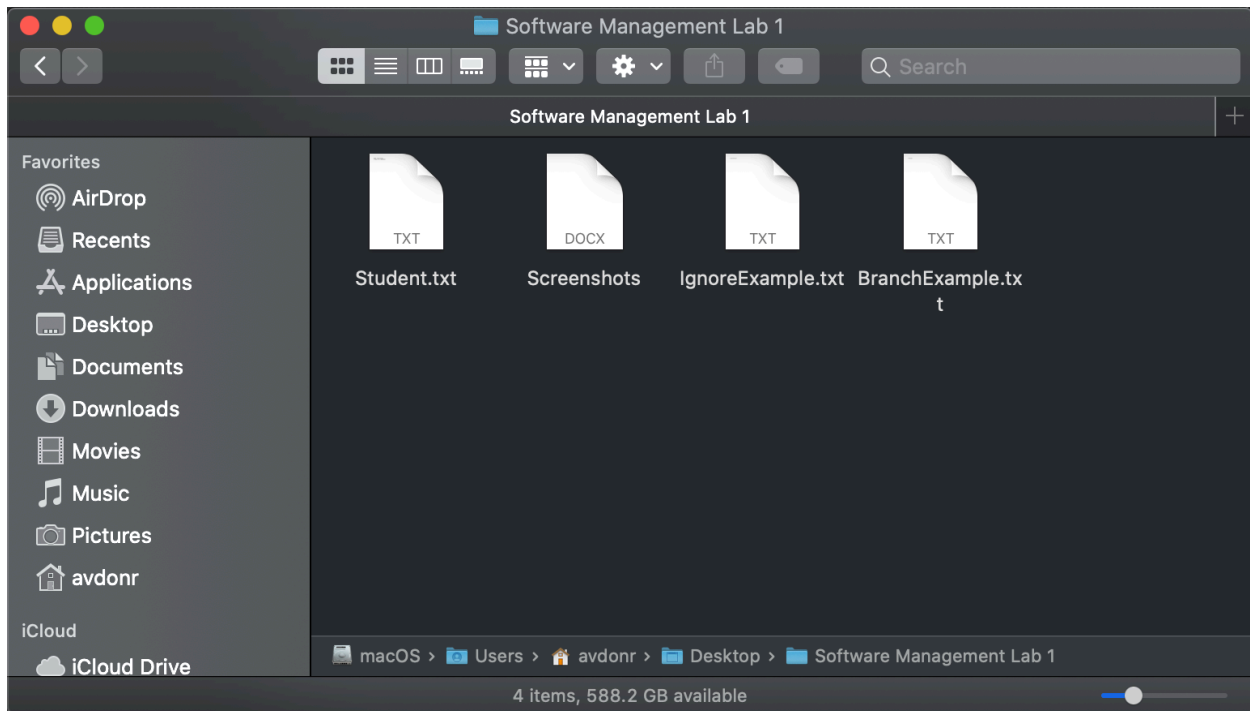

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch master
Changes to be committed:
  (use "git reset HEAD <file>..." to unstage)

    new file:   .DS_Store
    new file:   BranchExample.txt
    modified:   IgnoreExample.txt
    new file:   RemoveExample.txt

Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

    deleted:    RemoveExample.txt

avdonr@Avdons-MacBook-Pro Software Management Lab 1 %
```

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git commit -m "second"
[master d96f5a8] second
 4 files changed, 3 insertions(+), 1 deletion(-)
 create mode 100644 .DS_Store
 create mode 100644 BranchExample.txt
 create mode 100644 RemoveExample.txt
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch master
Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        deleted:      RemoveExample.txt

no changes added to commit (use "git add" and/or "git commit -a")
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % █
```

```
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % git status
On branch master
Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        deleted:      RemoveExample.txt

no changes added to commit (use "git add" and/or "git commit -a")
avdonr@Avdons-MacBook-Pro Software Management Lab 1 % █
```