
Enabling Claude Desktop 3P


Hands-On Guide

Author : LLM-Kita Team


Please sign-up if you do not have account yet and the recharge you account so you can use **Pay-As-You-Go (charged by Saldo)** or **buy an LLM Package** first, afterwards, you can create an **API Key** from **Developer** menu inside your management dashboard.

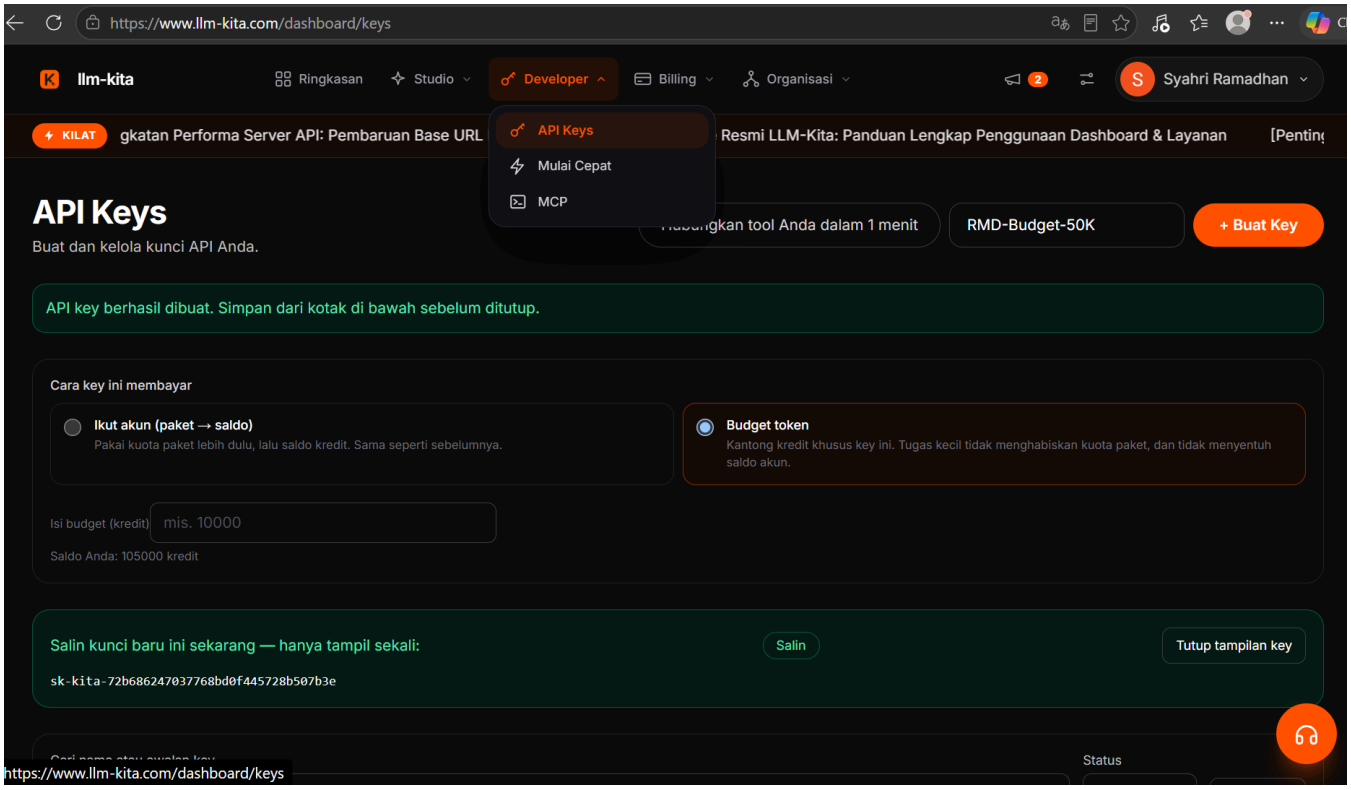

Please copy the generated **API KEY** and save to secure location on your Password Manager software or some encrypted folder, alternatively you can create a temporary file with `notepad.exe`, then pasted the value inside that file.

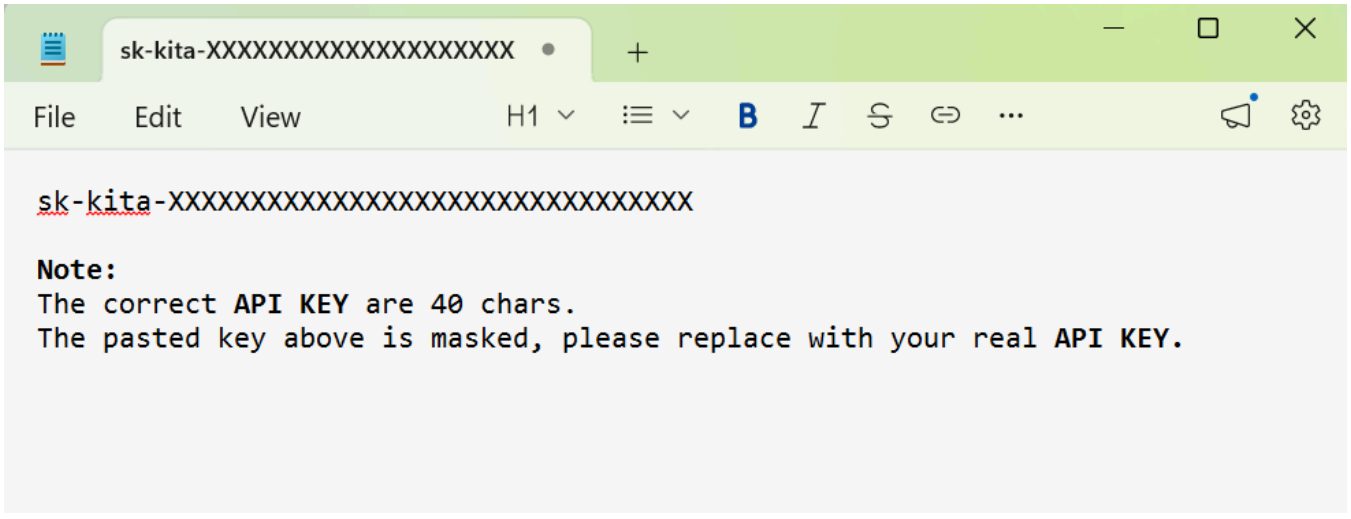

Open Windows Terminal as Administrator, right click at **Windows Start** logo, and choose **Terminal (Admin)**:

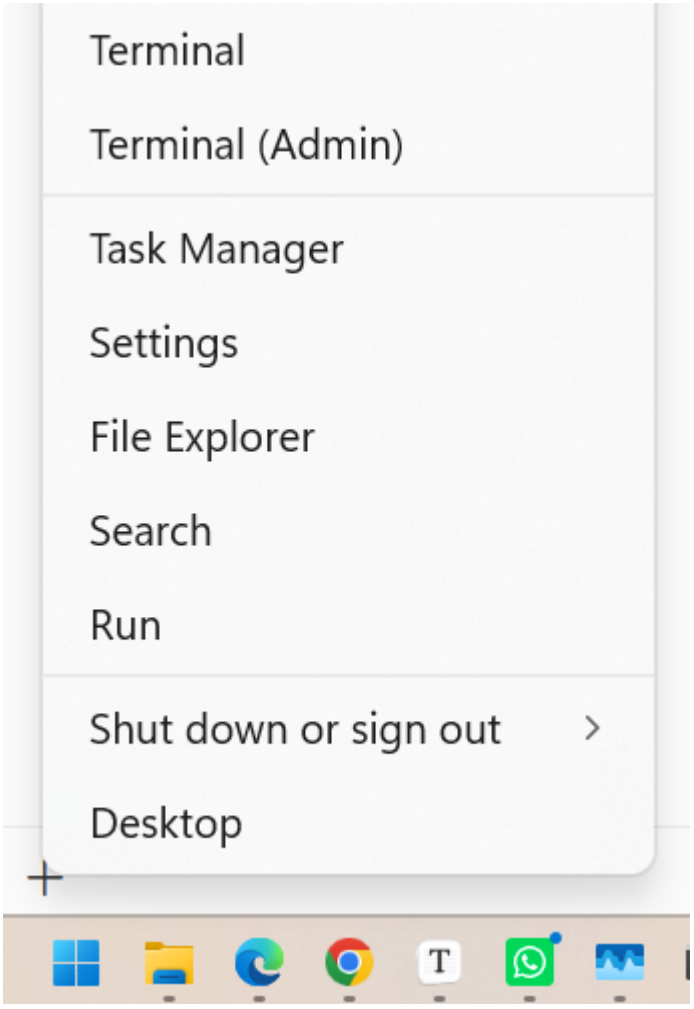

The **Windows Terminal** would then appear with *elevated privilege*.



Execute these command below, execute one by one then pressing **ENTER**:

```
cd ~

mkdir .claude -Force

cd .\.claude

pwd

dir
```

Expected output:

```
PS C:\Users\RMD\.claude> cd ~
```

```
PS C:\Users\RMD> mkdir .claude -Force

    Directory: C:\Users\RMD

Mode                 LastWriteTime         Length Name
----                 -------------         ------ ----
d----          11/10/2026    12:06                .claude

PS C:\Users\RMD> cd .\.claude

PS C:\Users\RMD\.claude> pwd

Path
----
C:\Users\RMD\.claude
```

Download the `Enable-Claude3pGateway.ps1` script file into this folder.

```
<sample powershell script to download from LLM-Kita Github Repository>
```


Expected output:

```
PS C:\Users\RMD\.claude> dir

    Directory: C:\Users\RMD\.claude

Mode                 LastWriteTime         Length Name
----                 -------------         ------ ----
-a---          11/10/2026    12:04          48680 Enable-Claude3pGateway.ps1
-a---          11/10/2026    11:55           2014 settings.json
```

Ensure you have already sign-out from Claude.ai and also close your Claude Desktop

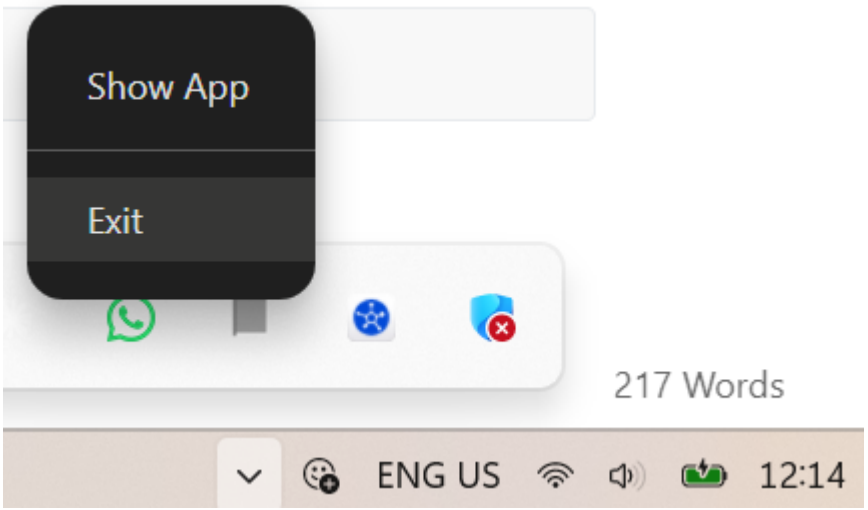

> **Note:** To ensure Claude Desktop is closed, check at the Claude system-tray icon, right-click and select **Exit**

Ensure you are still in the `~\.claude` directory, if not change directory and check your location path, with these commands:

```
cd ~\.claude

pwd
```

Expected Output


```
PS C:\Users\RMD\.claude> cd ~\.claude
PS C:\Users\RMD\.claude> pwd

Path
----
C:\Users\RMD\.claude
Please ensure you do not close the `notepad.exe` which opened temporary file where you save
the generated **API KEY** value from **LLM-Kita** developer dashboard. We need that value to
copied and pasted back into script interactive prompt-request.
```

Now, we need to execute the downloaded script from `https://www.llm-kita.com` with these parameters:


```
.\Enable-Claude3pGateway.ps1 -Interactive -Force -Verbose
```

Expected output:

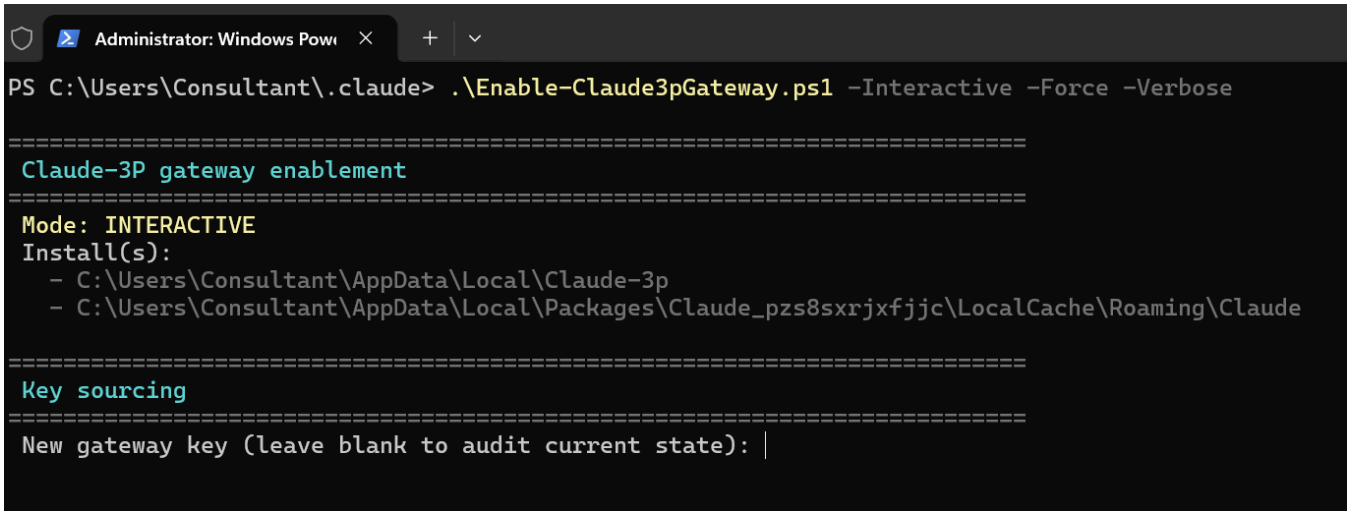


> **Note:**
> Please refrain to fill any value, after the `blinking cursor`.

We need to copy and paste the value from opened temporary file in `notepad.exe`

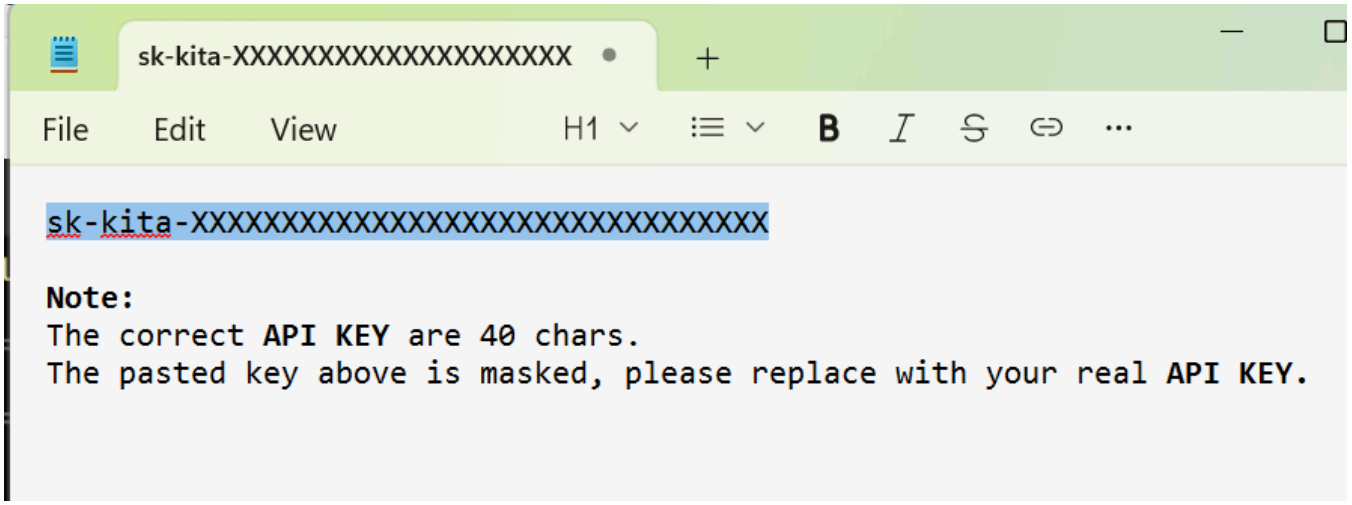


And then paste it back after the `blinking-cursor` in the **API KEY** prompt-request (which still running by the script file)

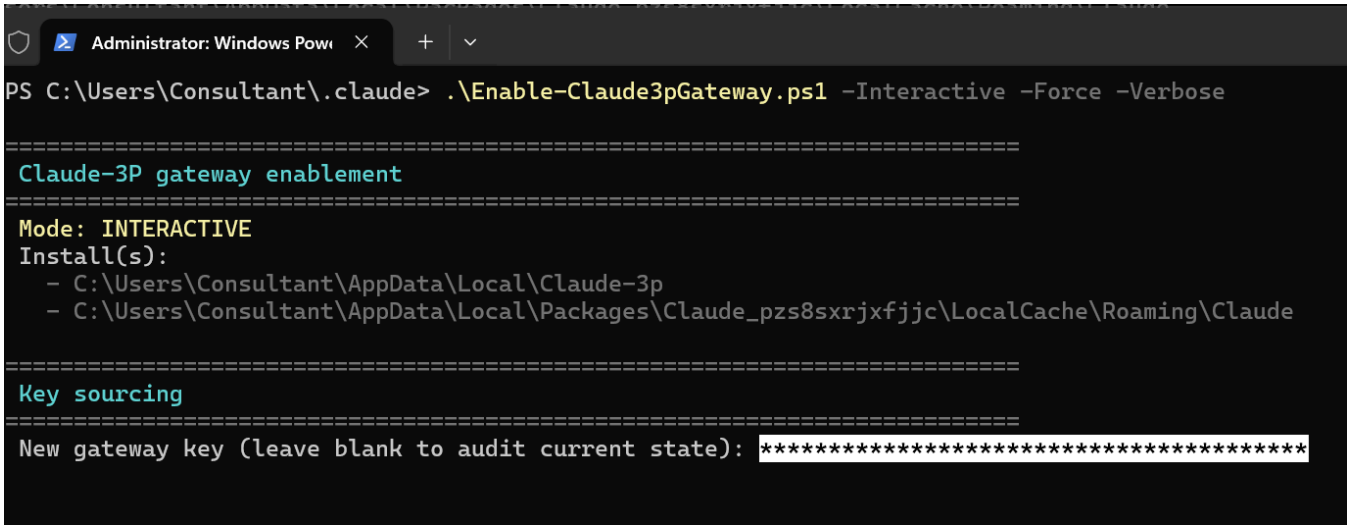

> **Note:**
> The pasted **API KEY** value will be automatically masked / hidden for security precaution.

Then wait for the script to finish setup of your **Claude Desktop** with **3P Deployment Mode** so we can use it **WITHOUT** official **Claude.ai PRO / MAX / Enterprise** subscription.

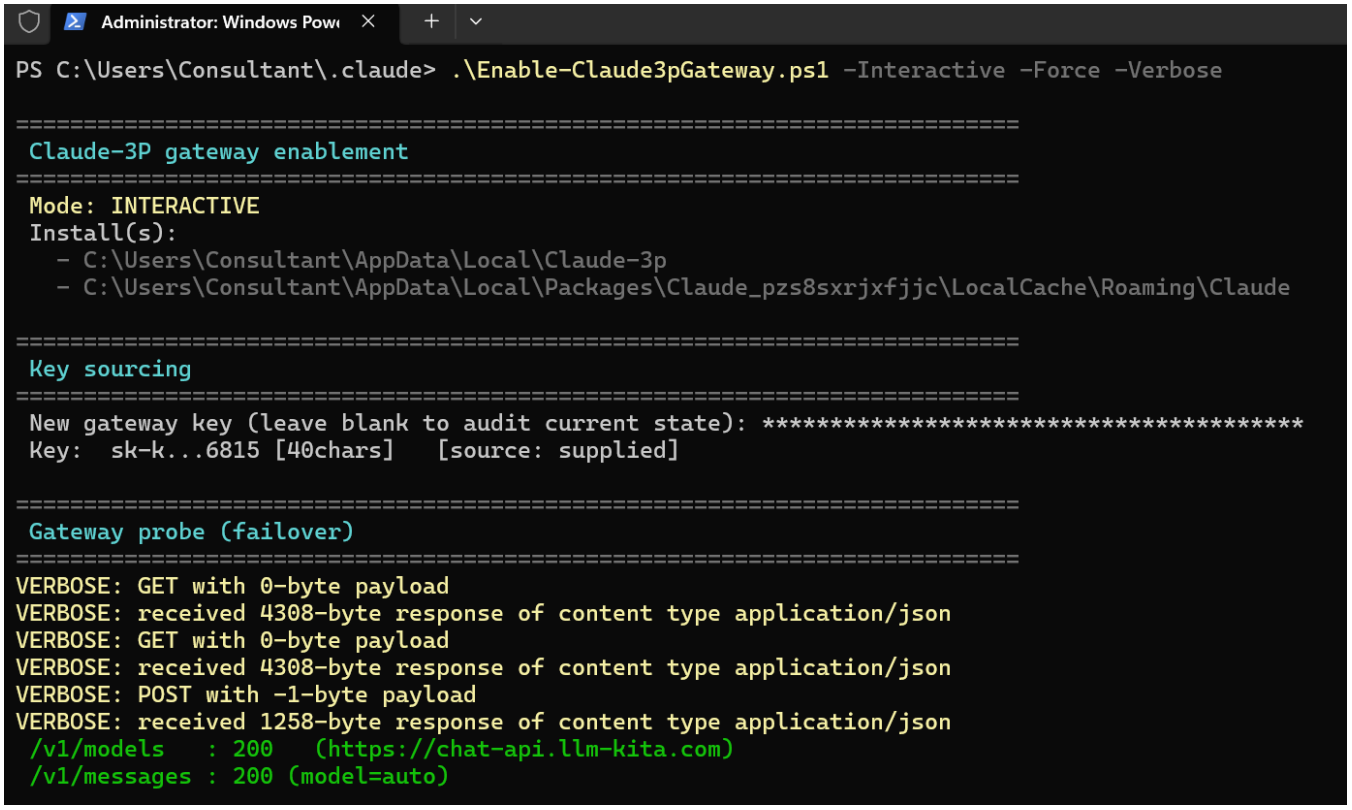

Here it is the expected end-to-end output:

```
PS C:\Users\RMD\.claude> .\Enable-Claude3pGateway.ps1 -Interactive -Force -Verbose

================================================================================
 Claude-3P gateway enablement
================================================================================
 Mode: INTERACTIVE
 Install(s):
   - C:\Users\RMD\AppData\Local\Claude-3p
   - C:\Users\RMD\AppData\Local\Packages\Claude_pzs8sxrjxfjjc\LocalCache\Roaming\Claude

================================================================================
 Key sourcing
================================================================================
 New gateway key (leave blank to audit current state):
**************************************
 Key:  sk-k...6815 [40chars]   [source: supplied]

================================================================================
 Gateway probe (failover)
================================================================================
VERBOSE: GET with 0-byte payload
VERBOSE: received 4308-byte response of content type application/json
VERBOSE: GET with 0-byte payload
VERBOSE: received 4308-byte response of content type application/json
VERBOSE: POST with -1-byte payload
VERBOSE: received 1258-byte response of content type application/json
 /v1/models   : 200   (https://chat-api.llm-kita.com)
 /v1/messages : 200 (model=auto)
```

```
================================================================================
 Credential locations
================================================================================

Location                                  Role     Current               Match
--------                                  ----     -------               -----
settings.json :: env.ANTHROPIC_AUTH_TOKEN written  sk-k...6815 [40chars] yes
settings.json :: env.ANTHROPIC_API_KEY    written  sk-k...6815 [40chars] yes
settings.json :: env.ANTHROPIC_BASE_URL   written  http...com/ [30chars] NO
configLibrary :: inferenceGatewayApiKey   written  sk-k...6815 [40chars] yes
configLibrary :: inferenceGatewayBaseUrl  written  http...com/ [30chars] NO
User env :: LLM_KITA_API_KEY              written  sk-k...6815 [40chars] yes
Machine env :: LLM_KITA_API_KEY           reported <empty>               empty -> set
desktop_cfg :: deploymentMode             written  2chars                NO


 Reported only (not modified):

 Stale keys on disk (history -- the app does not read these):
   jl-t...8420 [40chars]
   lv-j...7210 [43chars]
   pf-n...2555 [40chars]
   ry-d...0d80 [40chars]
   sk-k...4867 [35chars]
   sk-k...6815 [45chars]
   sk-k...0b00 [40chars]
   ta-f...9635 [42chars]
   vb-i...1554 [40chars]
   wb-k...7344 [39chars]
   wb-k...1540 [40chars]
 REVOKE at the gateway, or overwrite locally with -ScrubStale.

================================================================================
 Apply
================================================================================
 -> C:\Users\RMD\AppData\Local\Claude-3p
   deploymentMode already 3p
   configLibrary :: merged gateway fields  (backup captured)
   _meta.json :: appliedId=00000000-0000-4000-8000-000000000114  (backup:
_meta.json.bak.20261011-125639)
 -> C:\Users\RMD\AppData\Local\Packages\Claude_pzs8sxrjxfjjc\LocalCache\Roaming\Claude
   configLibrary :: merged gateway fields  (backup captured)
   _meta.json :: appliedId=00000000-0000-4000-8000-000000000114  (backup:
_meta.json.bak.20261011-125639)
 CLI sync (settings.json):
   settings.json env block already current
   settings.json re-parse: VALID

================================================================================
 Result
================================================================================
 Changed:
   - C:\Users\RMD\AppData\Local\Claude-3p :: configLibrary entry
```


```
   - C:\Users\RMD\AppData\Local\Claude-3p :: _meta.json
   - C:\Users\RMD\AppData\Local\Packages\Claude_pzs8sxrjxfjjc\LocalCache\Roaming\Claude ::
configLibrary entry
   - C:\Users\RMD\AppData\Local\Packages\Claude_pzs8sxrjxfjjc\LocalCache\Roaming\Claude ::
_meta.json
VERBOSE: GET with 0-byte payload
VERBOSE: received 4308-byte response of content type application/json
VERBOSE: GET with 0-byte payload
VERBOSE: received 4308-byte response of content type application/json
VERBOSE: POST with -1-byte payload
VERBOSE: received 1033-byte response of content type application/json

 Post-write probe  /v1/models: 200   /v1/messages: 200 (model=auto)


 Next: fully quit and restart Claude Desktop
 and the CLI.
 Env vars and the credential file are read at launch, not on the fly.
 Then confirm the newest log shows no setup window:
   Get-Content 'C:\Users\RMD\AppData\Local\Claude-3p\logs\main.log' -Tail 200 | Select-
String 'Opening 3P setup window|credential rejected'

PS C:\Users\RMD\.claude>
```

After the script finished, then you can open again your **Claude Desktop** from **Windows Start** menu.

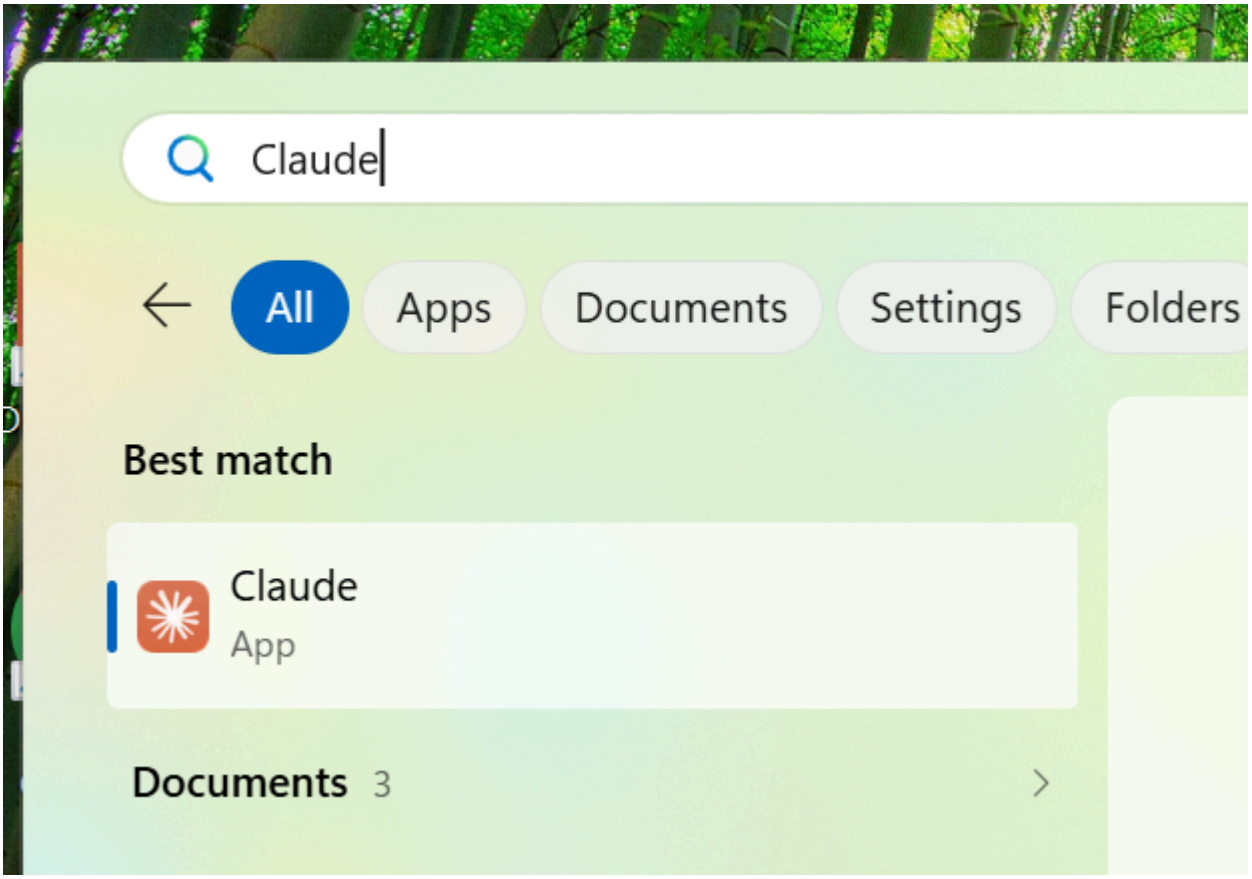


Now you should be welcomed with **3P Deployment Mode** sign-in menu.

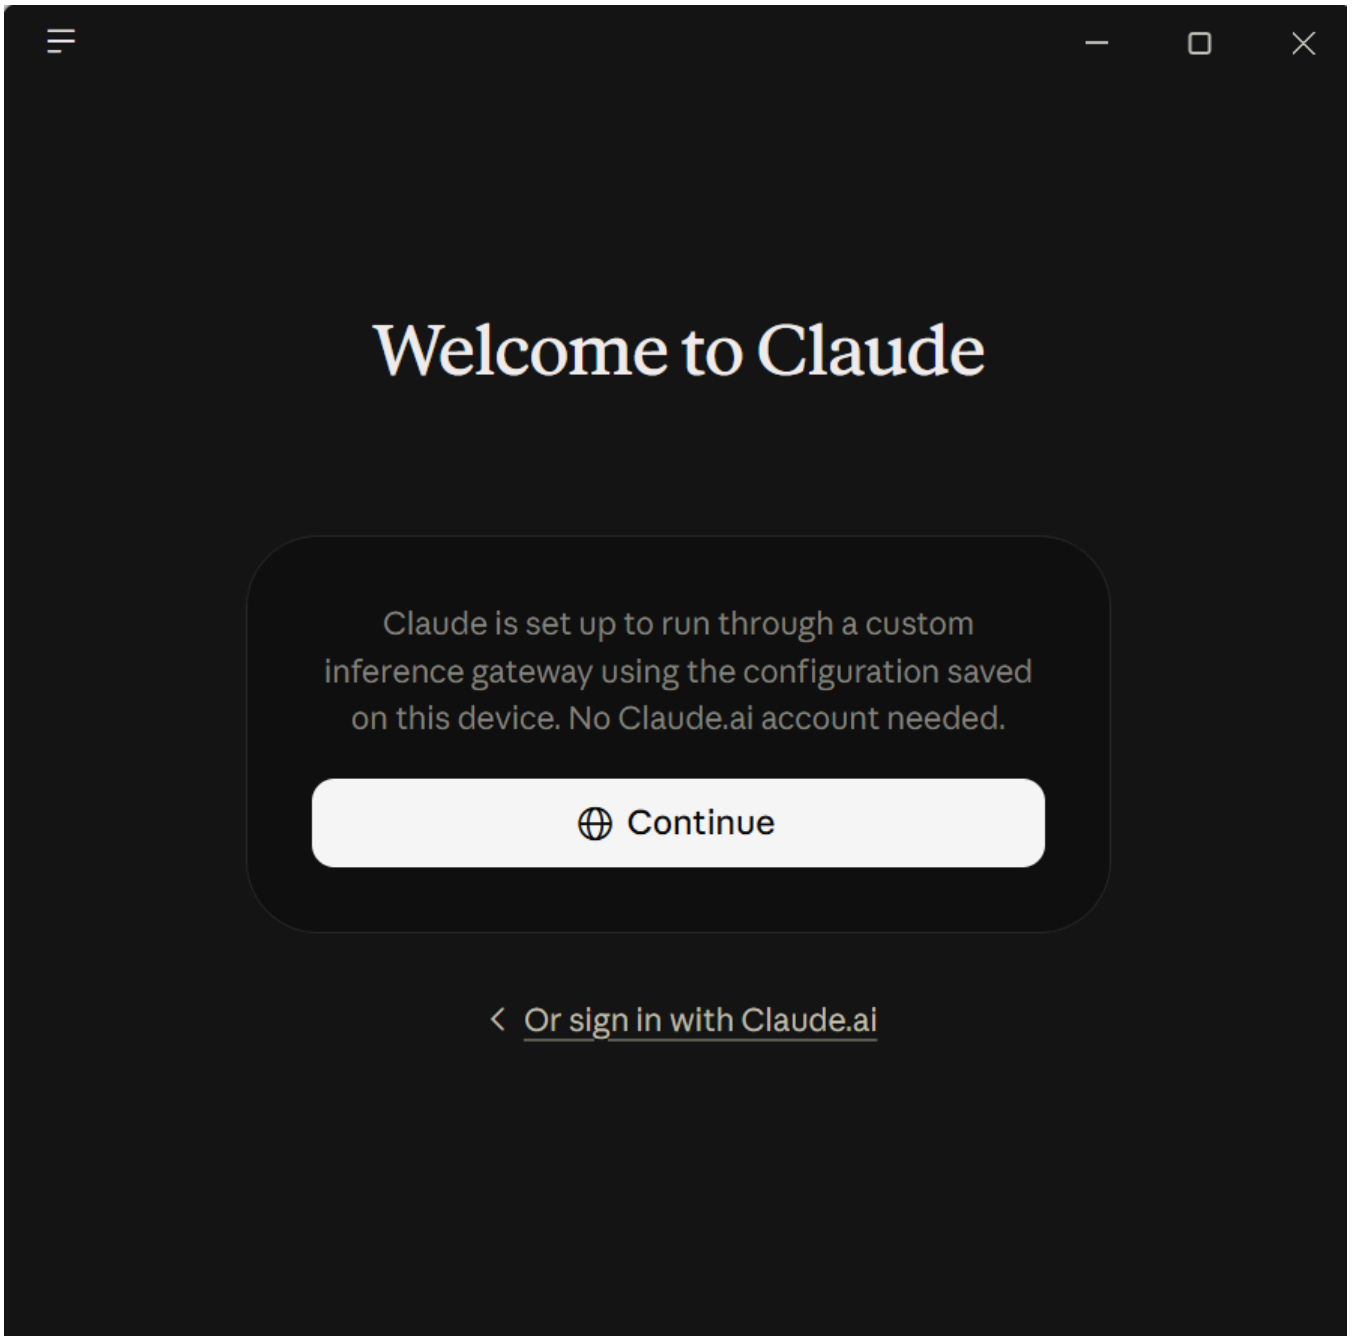


Choose **Continue**.


Then after **Claude** app signed-in, immediately move your cursor to bottom-most left menu, which is your **Windows Login User Name**, right-click and select **Inference configuration**.

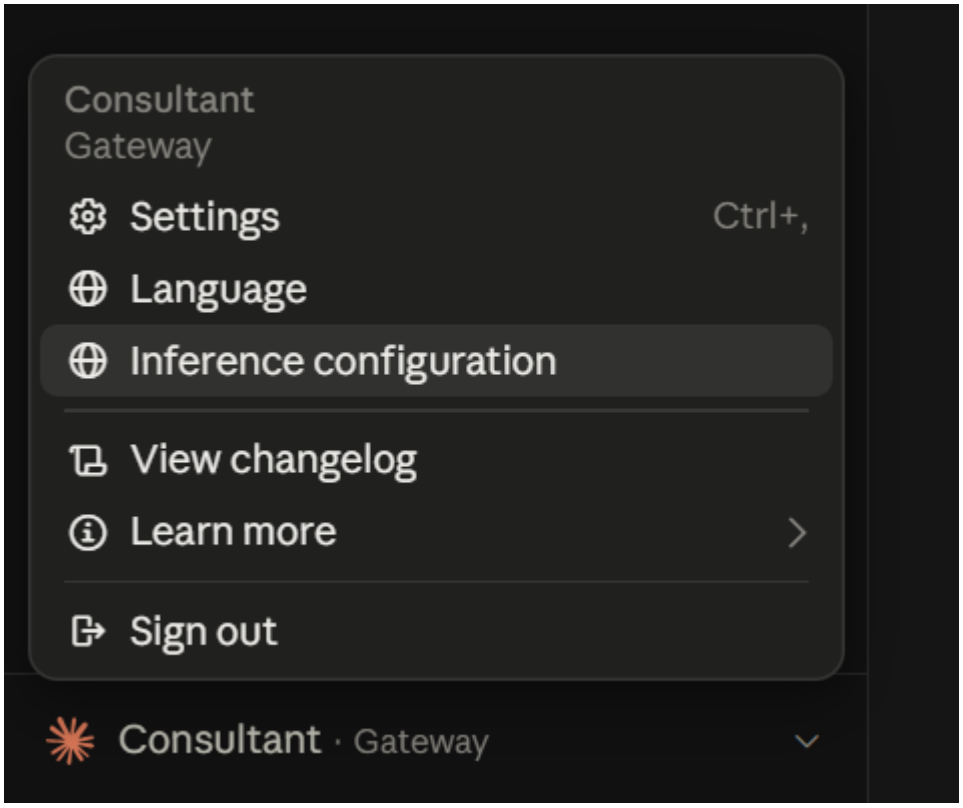


When the configuration screen appear, select the **Connection** setting at the left panel.

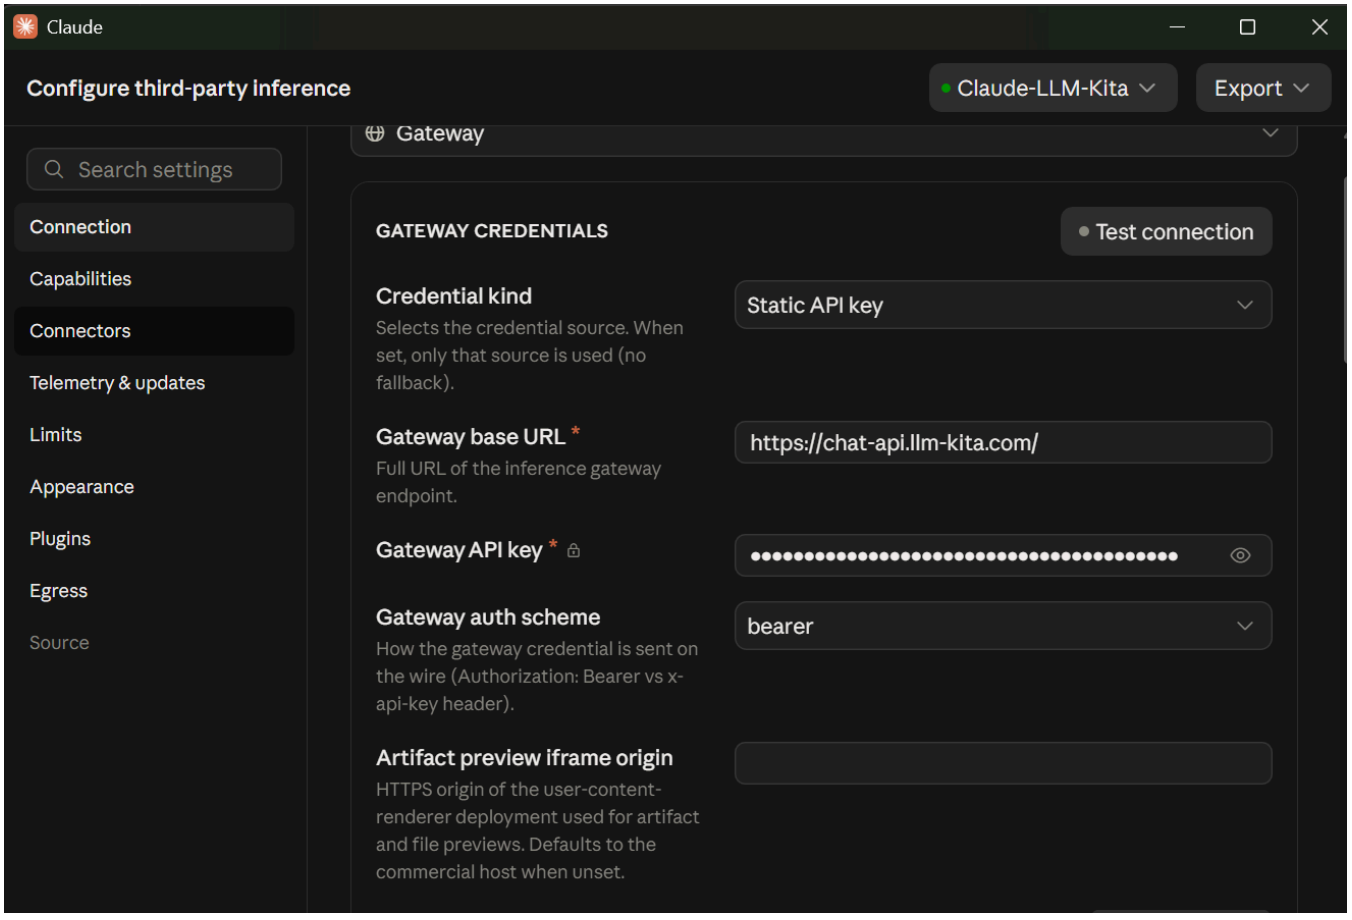


Then to verify, click the button **Test connection** at the right-frame, and wait until the color changed to **GREEN**.

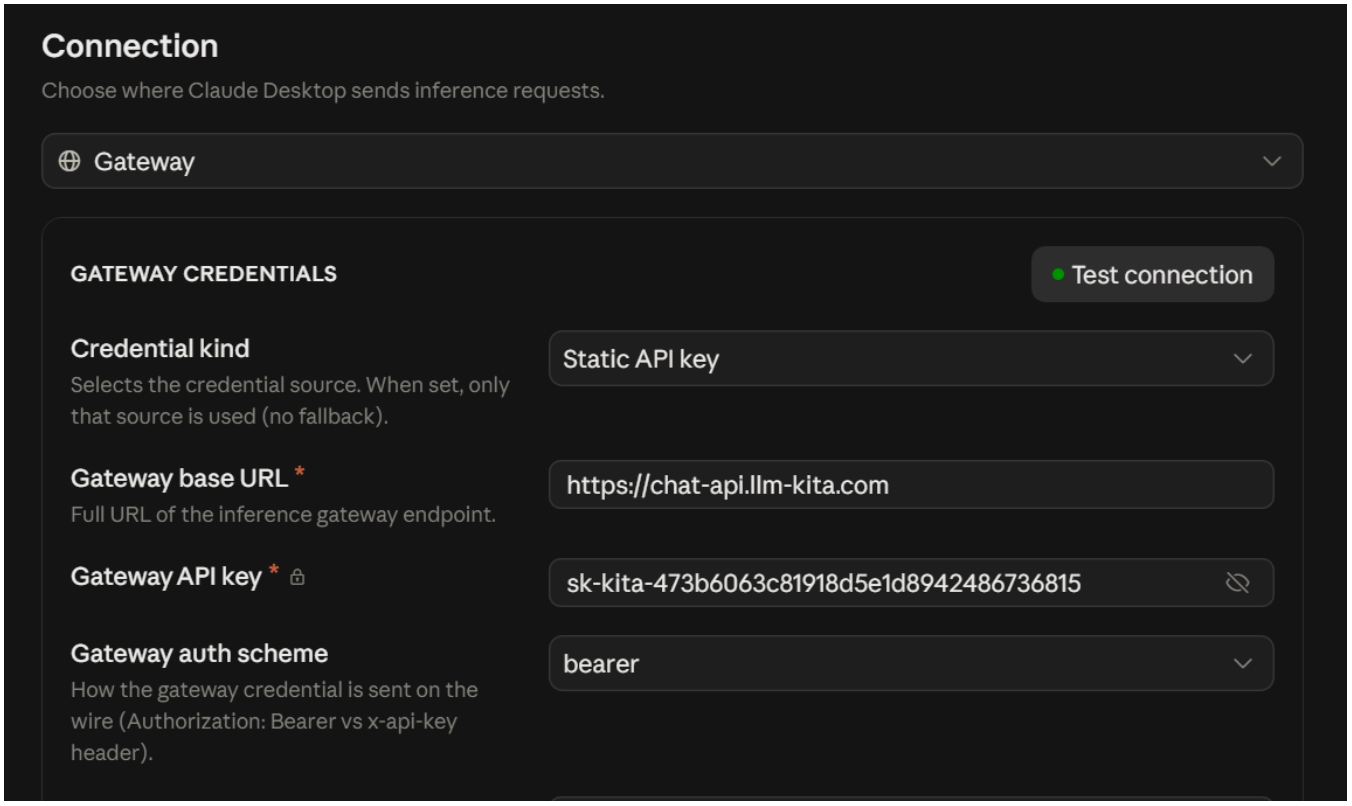


Scroll down a bit until you found **green-highlighted message** that identify as successful connection.

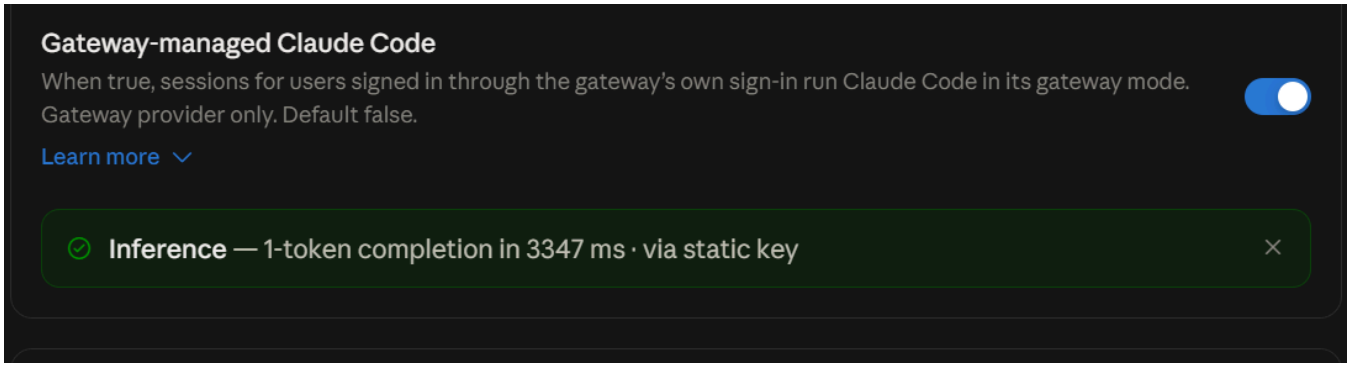


Also, verify if model discovery working normally.

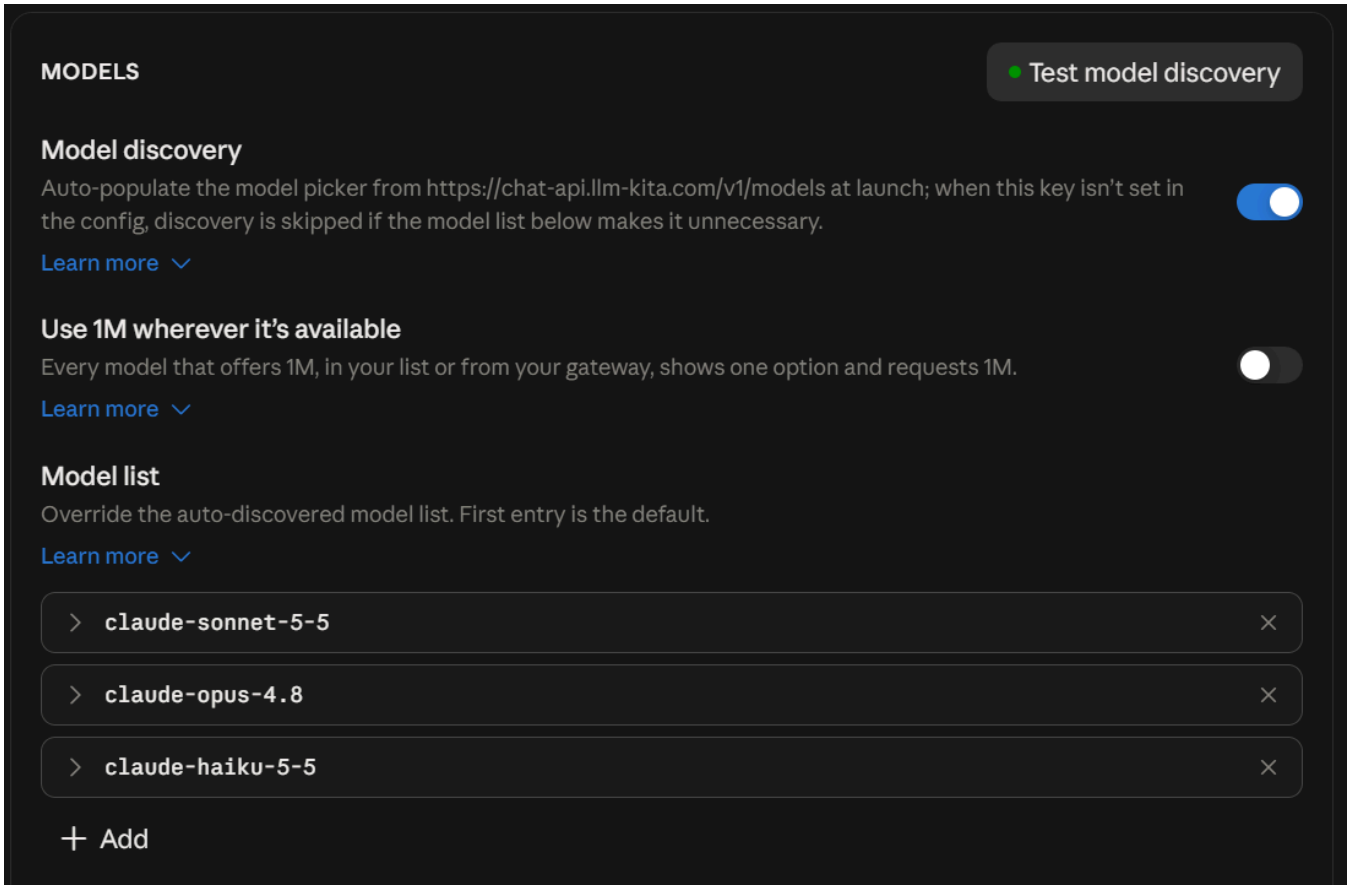


Scroll down again a bit, then you would see the message from **Model discovery** that informs us on available `model-id` to be configured in **Claude Desktop 3P**.

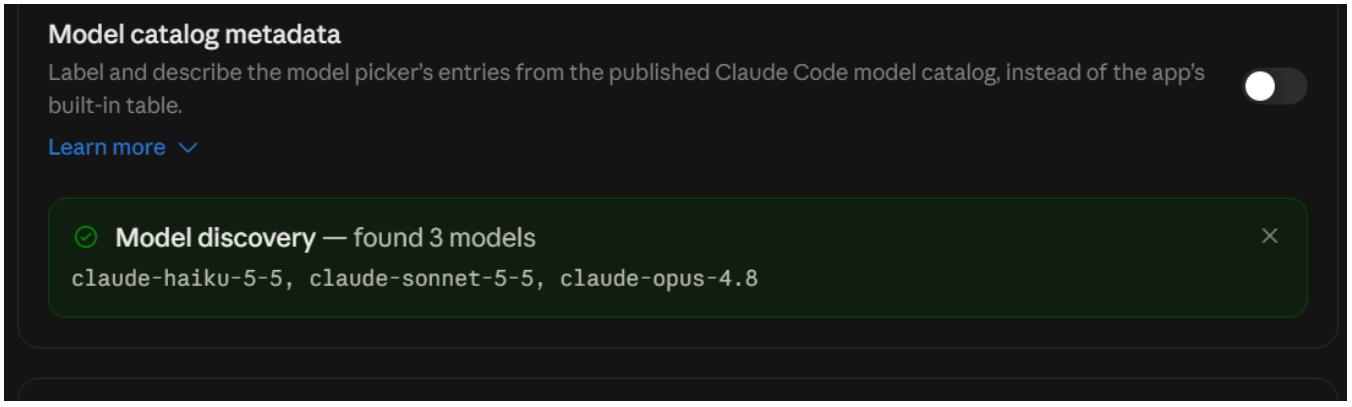

At last ! Now you can start using **Chat** or **Cowork** user-interface with **LLM-Kita**!.

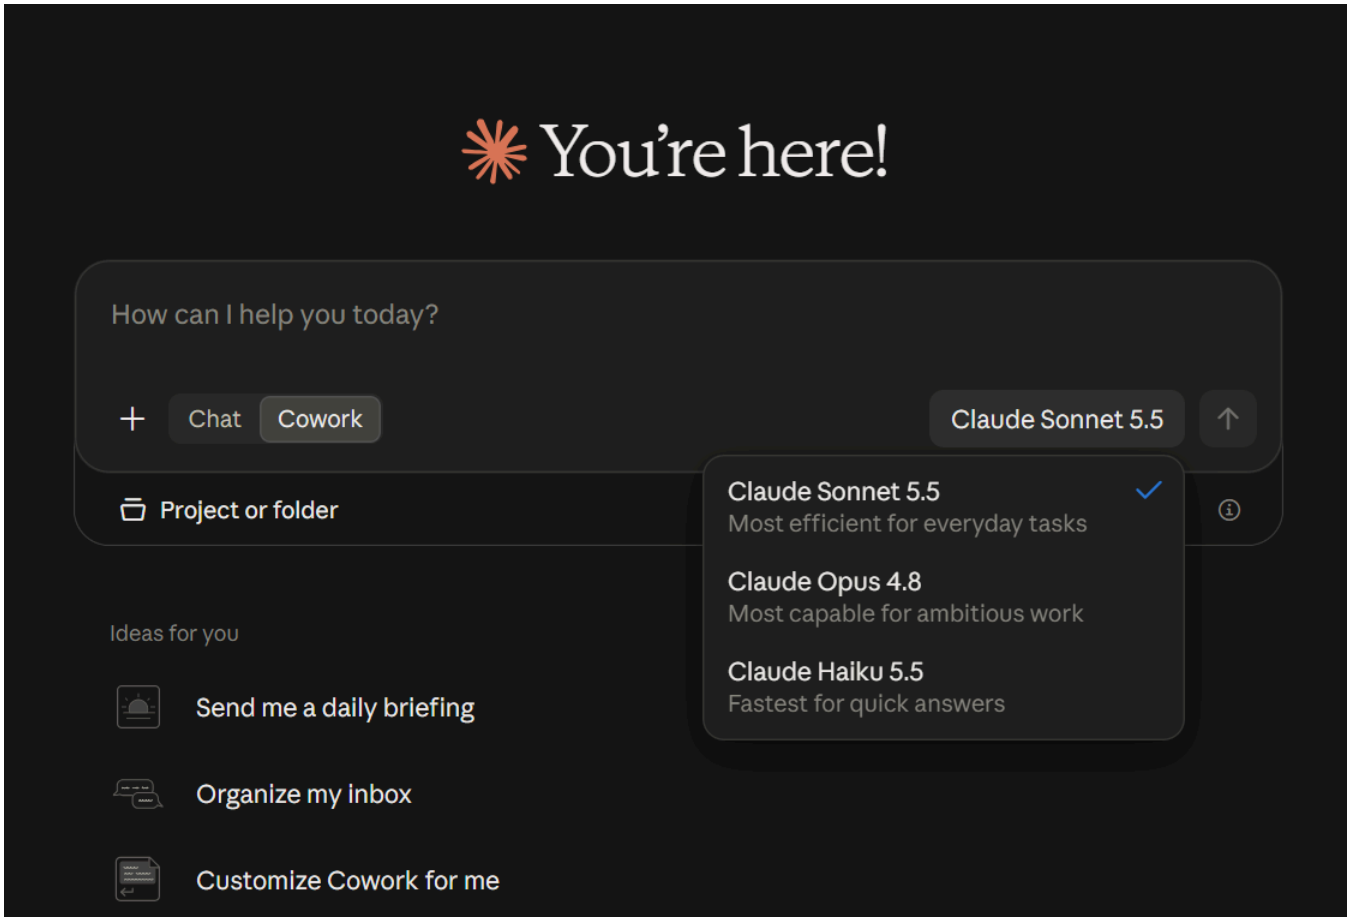

Or, continue hacking and debugging in **Code** user-interface?

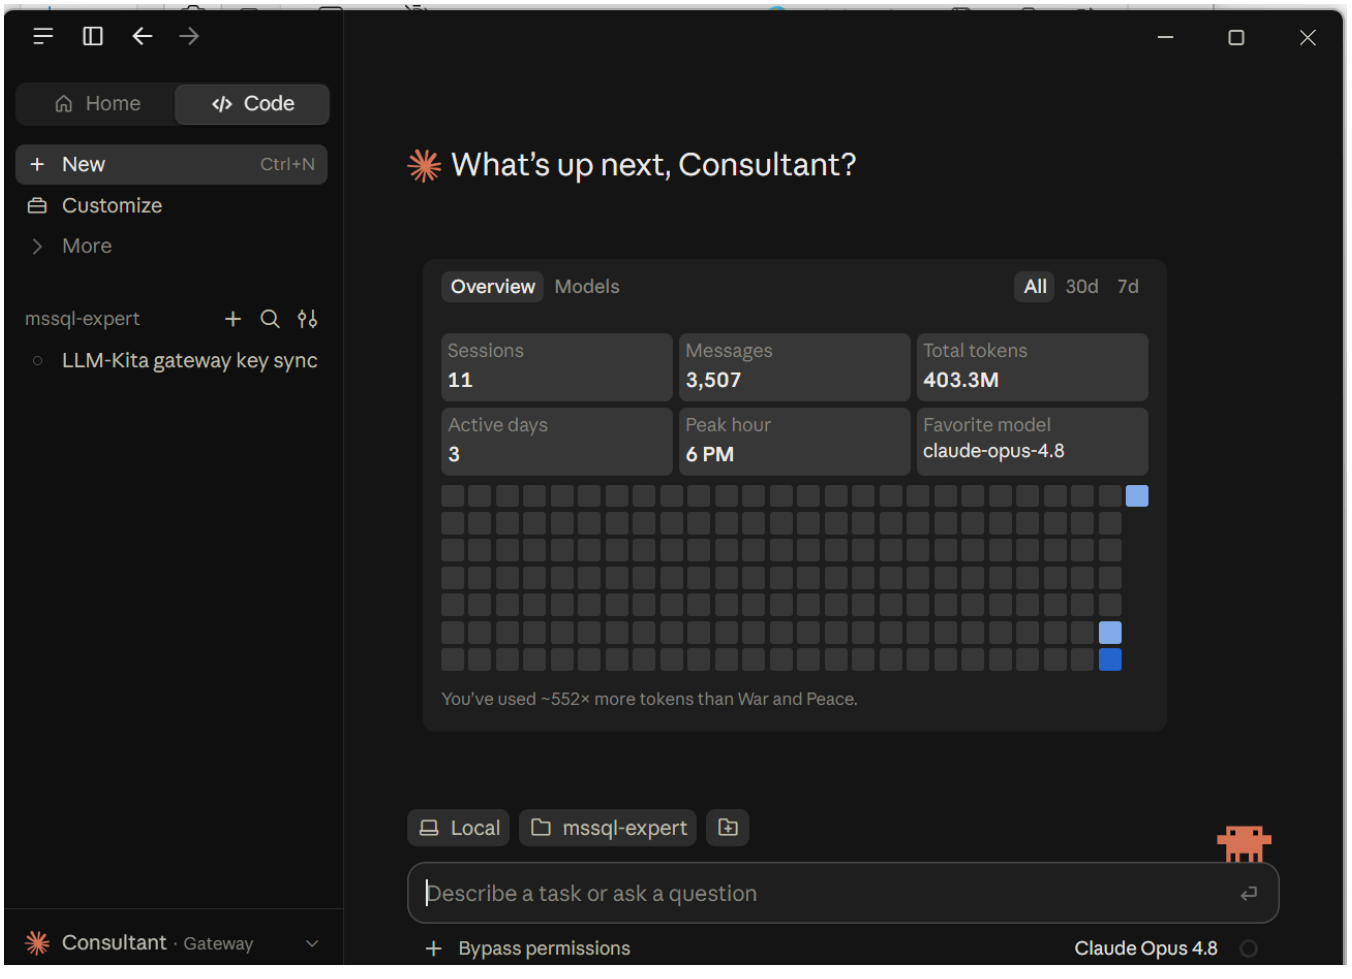

Whichever you preference, always trust **LLM-Kita**, as your sole affordable and reliable **LLM gateway provider** ! 😄