

CL1002
Programming
Fundamentals

LAB 11
Nested Structure,
Introduction to Pointers,
Accessing Arrays using Pointer,
Dynamic Memory Management

NATIONAL UNIVERSITY OF COMPUTER AND EMERGING SCIENCES

Learning Objectives

1. Structures
2. Nested Structures
3. Introduction to Pointers
4. Accessing Array using Pointers
5. Dynamic Memory

1. Structures

Structures are derived data types—they're constructed using objects of other types. Normally, we use structure to store the record or the details of any item or entity. Structure members can be variables of the primitive data types (e.g., int, float, etc.), or aggregates, such as arrays and other structures.

- Keyword struct introduces a structure definition
- The identifier Chocolate is the structure tag, which names the structure definition and is used with struct to declare variables of the structure type—e.g., struct Chocolate kitkat, Mars, Jubilee.
- Variables declared within the braces of the structure definition are the structure's members.
- Members of the same structure type must have unique names, but two different structure types may contain members of the same name without conflict.

1.1 Declaration of Struct

```
struct Chocolate{  
    char Name[20];  
    float Weight;  
    int Calories;  
    float Price;  
    char ExpiryDate[10];  
};
```

1.2 Declaration & Initialization of Struct type Variables

You can declare the variables before the semi-colon(;) or using a proper declaration syntax like other variable's in main();

```
struct Chocolate{  
    char Name[20];  
    float Weight;  
    int Calories;  
    float Price;  
    char ExpiryDate[10];  
}var1, var2, var3;
```

```

Int main()
{
Struct Chocolate Kitkat, Mars, Jubilee, mychocolate[3];
//      OR
struct Chocolate myChocolate;
    gets(myChocolate.Name);
    myChocolate.Weight= 20;
    myChocolate.Calories= 500;
    myChocolate.Price= 100;
    strcpy(myChocolate.ExpiryDate,"01-Feb-2021");

//      OR

struct Chocolate Jubilee = {"Jubilee",20.50,500,100,"01-Feb-2021"};

}

```

1.3 Declaration & Initialization of Struct type Array

```

1  #include <stdio.h>
2  struct date
3  {
4      int day;
5      int month;
6      int year;
7  };
8  int main(void)
9  {
10     struct date d;
11     printf("%u\n", sizeof(d));
12     return 0;
13 }

```

Output:

12

Example 02:

```
1  #include <stdio.h>
2  #include <string.h>
3  /*Declaration of the struct */
4  struct book
5  {
6  char title[100];
7  int year;
8  float price;
9  };
10 /*Declaration of the struct end here*/
11 int main(void)
12 {
13 struct book b;
14 strcpy(b.title, "Literature");
15 b.year = 2016;
16 b.price = 10.85;
17 printf("%s %d %.2f\n", b.title, b.year, b.price);
18 return 0;
19 }
```

Example 03:

```
1  #include <stdio.h>
2  struct student {
3      char name[50];
4      int roll;
5      float marks;
6  } s;
7  int main() {
8      printf("Enter information:\n");
9      printf("Enter name: ");
10     fgets(s.name, sizeof(s.name), stdin);
11     printf("Enter roll number: ");
12     scanf("%d", &s.roll);
13     printf("Enter marks: ");
14     scanf("%f", &s.marks);
15     printf("Displaying Information:\n"); /*Displaying Information*/
16     printf("Name: ");
17     printf("%s", s.name);
18     printf("Roll number: %d\n", s.roll);
19     printf("Marks: %.1f\n", s.marks);
20
21     return 0;
22 }
```

Example 04:

```
1  #include <stdio.h>
2  #include <string.h>
3  struct book
4  {
5      char title[100];
6      int year;
7      float price;
8  };
9  int main(void)
10 { char *ptr1;
11   int *ptr2;
12   float *ptr3;
13   struct book b;
14   strcpy(b.title, "Literature");
15   b.year = 2016;
16   b.price = 10.8;
17   ptr1 = b.title;
18   ptr2 = &b.year;
19   ptr3 = &b.price;
20   printf("%s %d %.2f\n", ptr1, *ptr2, *ptr3);
21   return 0;
22 }
```

Example 05:

```
1  #include <stdio.h>
2  #include <string.h>
3  struct book
4  { |char title[100];
5    |int year;
6    |float price;
7  };
8  int main(void)
9  {
10 |char *ptr1;
11 |int *ptr2;
12 |float *ptr3;
13 |struct book b;
14 |strcpy(b.title, "Literature");
15 |b.year = 2016;
16 |b.price = 10.8;
17 |ptr1 = b.title;
18 |ptr2 = &b.year;
19 |ptr3 = &b.price;
20 |printf("%s %d %.2f\n", ptr1, *ptr2, *ptr3);
21 |return 0;
22 }
```

2.0 Nested Structures

Nested structure in C is nothing but structure within structure. One structure can be declared inside other structure as we declare structure members inside a structure. The structure variables can be a normal structure variable ,array or a pointer variable to access the data. You can learn below concepts in this section.

Example 06:


```
1 // Nested Structures
2 #include <stdio.h>
3 #include <string.h>
4 struct date
5 {
6     int day;
7     int month;
8     int year;
9 };
10 struct product /* Since the type date is declared, it can be used to
11 declare nested structures. */
12 {
13     char name[50];
14     double price;
15     struct date s_date;
16     struct date e_date;
17 };
18 int main(void)
19 {
20     struct product prod;
21     strcpy(prod.name, "product");
22     prod.s_date.day = 1;
23     prod.s_date.month = 9;
24     prod.s_date.year = 2012;
25     prod.e_date.day = 1;
26     prod.e_date.month = 9;
27     prod.e_date.year = 2015;
28     prod.price = 7.5;
29     printf("The product's life is %d years\n", prod.e_date.year -
30 prod.s_date.year);
31     return 0;
32 }
```

Example 07:

[*] Example-07-NestedStructure.c

```
1 #include<stdio.h>
2 #include<string.h>
3 struct UniversityDetails{
4     int UniRanking;
5     char UniName[90];
6 };
7 struct student_detail{
8     int std_id;
9     char std_name[20];
10    float std_percentage;
11    // structure within structure
12    struct UniversityDetails data;
13 };
14 int main(){
15     struct student_detail std_data = {1, "Ali", 85.5, 220, "FAST-NUCES" };
16     printf("Id is: %d \n", std_data.std_id);
17     printf("Name is: %s\n", std_data.std_name);
18     printf("Percentage is: %f\n\n", std_data.std_percentage);
19
20     printf("Uni Rank is: %d\n", std_data.data.UniRanking);
21     printf("Uni Name is: %s\n", std_data.data.UniName);
22     return 0;
23 }
```

OUTPUT:

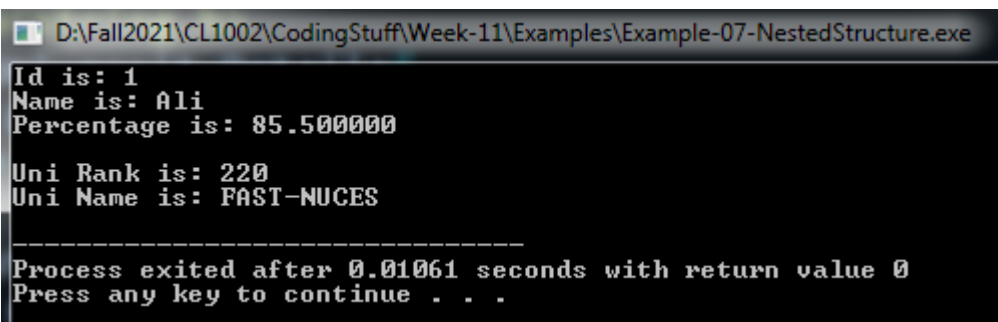

```
D:\Fall2021\CL1002\CodingStuff\Week-11\Examples\Example-07-NestedStructure.exe
Id is: 1
Name is: Ali
Percentage is: 85.500000

Uni Rank is: 220
Uni Name is: FAST-NUCES

Process exited after 0.01061 seconds with return value 0
Press any key to continue . . .
```

Another example of Nested Structure:

Example 08:


```
1 // Nested Structure
2 #include<stdio.h>
3 #include<string.h>
4 struct Type{
5     char TypeName[20];
6 };
7 struct Car{
8     char CarName[20];
9     char make[15];
10    char model[15];
11    char color[10];
12    int seats;
13    int engine;
14    int price;
15    // structure within structure
16    struct Type CarType;
17 };
18 int main(){
19     struct Car myCar;
20     puts("***Example of Nested Structure***");
21
22     puts("Enter the Name of Car: ");
23     gets(myCar.CarName);
24     puts("Enter type of Car: {Mini, Sedan, Sports, Luxury, SUV}");
25     gets(myCar.CarType.TypeName);
26
27     puts("Enter the color of Car: ");
28     gets(myCar.color);
29     puts("Enter the maker of Car: ");
30     gets(myCar.make);
31     puts("Enter the Model of Car: ");
32     gets(myCar.model);
33     printf("Enter numbers of seats: ");
34     scanf("%d",&myCar.seats);
35     printf("Enter the price: ");
36     scanf("%d",&myCar.price);
37     printf("Enter the engine capacity: ");
38     scanf("%d",&myCar.engine);
```

```

39
40     puts("\n\n***Print***");
41
42     printf("\nCarName: %s",myCar.CarName);
43     printf("\nCarType: %s",myCar.CarType.TypeName);
44     printf("\nColor: %s",myCar.color);
45     printf("\nMaker: %s",myCar.make);
46     printf("\nModel: %s",myCar.model);
47     printf("\nNumbers of Seats: %d",myCar.seats);
48     printf("\nCar Price: %d",myCar.price);
49     printf("\nCar engine Capacity: %d", myCar.engine);
50 }

```

D:\Fall2021\CL1002\CodingStuff\Week-11\Examples\Example-08-NestedStructur.exe

Example of Nested Structure

Enter the Name of Car:

Picanto

Enter type of Car: {Mini, Sedan, Sports, Luxury, SUV}

Mini

Enter the color of Car:

White

Enter the maker of Car:

KIA

Enter the Model of Car:

Picanto

Enter numbers of seats: 4

Enter the price: 120000

Enter the engine capacity: 1300

Print

CarName: Picanto

CarType: Mini

Color: White

Maker: KIA

Model: Picanto

Numbers of Seats: 4

Car Price: 120000

Car engine Capacity: 1300

Process exited after 71.68 seconds with return value 0

Press any key to continue . . .

3.0 Introduction to Pointers



Pointer is a variable whose value is a memory address. Normally, a variable directly contains a specific value. A pointer contains the memory address of a variable that, in turn, contains a specific value. In this sense, a variable name directly references a value, and a pointer indirectly references a value.

3.1 Pointer Declaration & Initialization

Syntax: type * variable;

Code: `int *ptr = 0; // Pointer Declaration`
 `int var= 10;`
 `ptr = &var; // Pointer Initialization`

The value of the pointer variable ptr is a memory address. A data item whose address is stored in this variable must be of the specified type.

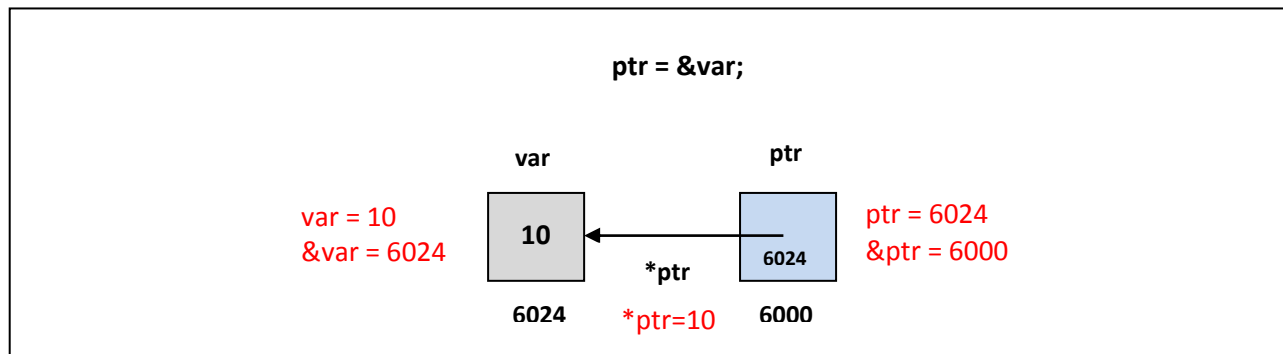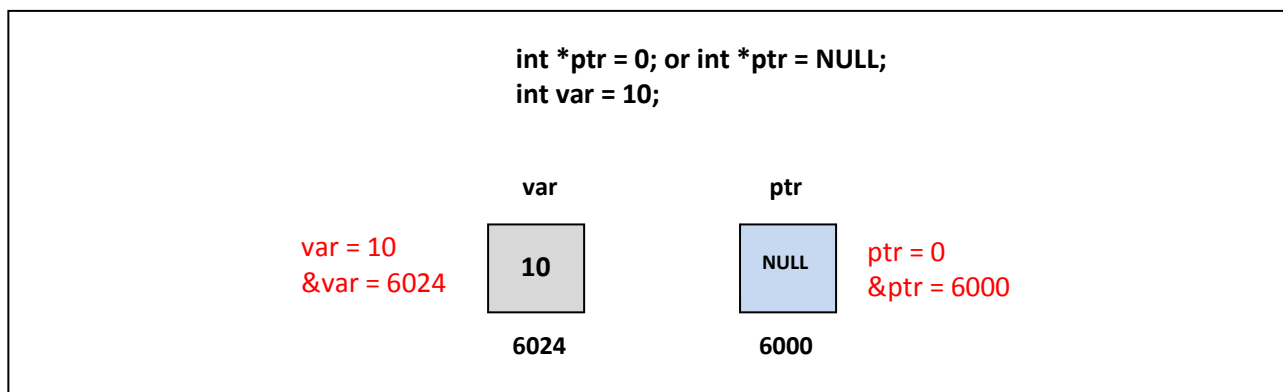

Sample Code:

```
1  /*Pointers*/
2  #include<stdio.h>
3  int main(){
4      int a;
5      int *aPtr;
6      a = 7;
7      aPtr = &a;
8      printf("The address of a is %p \nThe value of aPtr is %p", &a, aPtr);
9      printf("\nThe value of a is %d \nThe value of aPtr is %d",a, *aPtr);
10     printf("\n\n Showing that * and & are complements of each others \n
11     &*aPtr = %p \n *aPtr = %p\n", &*aPtr, *aPtr);
12 }
```

D:\Fall2021\CL1002\CodingStuff\Week-11\Examples\Example-09-Pointer.exe

```
The address of a is 000000000022FE4C
The value of aPtr is 000000000022FE4C
The value of a is 7
The value of aPtr is 7
```

```
Showing that * and & are complements of each others
&*aPtr = 000000000022FE4C
*aPtr = 000000000022FE4C
```

```
-----
Process exited after 0.01513 seconds with return value 0
Press any key to continue . . .
```

3.2 POINTER ARITHMETICS

- A limited set of arithmetic operations may be performed on pointers. A pointer may be incremented (++) or decremented (--), an integer may be added to a pointer (+ or +=), an integer may be subtracted from a pointer (- or -=) and one pointer may be subtracted from another.
- When an integer is added to or subtracted from a pointer, the pointer is incremented or decremented by that integer times the size of the object to which the pointer refers.
- Two pointers to elements of the same array may be subtracted from one another to determine the number of elements between them.

4.0 Accessing Array using Pointers

Arrays and pointers are intimately related in C and often may be used interchangeably.

- An array name can be thought of as a constant pointer.
- Pointers can be used to do any operation involving array subscripting.
- When a pointer points to the beginning of an array, adding an offset to the pointer indicates which element of the array should be referenced, and the offset value is identical to the array subscript. This is referred to as pointer/offset notation.
- An array name can be treated as a pointer and used in pointer arithmetic expressions that do not attempt to modify the address of the pointer.
- Pointers can be subscripted exactly as arrays can. This is referred to as pointer/subscript notation.

Sample Code:

```
#include <stdio.h>

int main()
{
    int *ptr = NULL; // pointer variable of type "pointer to int" / null pointer
    int intVariable1 = 10; // Declare an integer variable and initialize it with 10

    // Use address-of operator & to assign memory address of intVariable1 to a pointer
    ptr = &intVariable1;
    // Pointer ptr now holds a memory address of intVariable

    // Print out associated memory addresses and their values
    printf("The memory address allocated to ptr at the time of its creation:%d \n",&ptr);
    printf("\nptr is pointing to memory address or value contained in ptr:%d\n",ptr);
    printf("\nThe memory address allocated to intVariable at the time of its creation:%d\n",&intVariable1);
    printf("The value contained in intVariable:%d\n",intVariable1);
    printf("\nptr is pointing to the value:%d\n", *ptr);

    int array[3] = {1,2,3},offset,i; //Initialize an array of three elements
    printf("\nThe number of bytes in the array is %d\n", sizeof(array));

    ptr = array; // Assign memory address of arr to pointer
    printf("\nThe number of bytes in the ptr is %d\n", sizeof(*ptr));

    printf("\nThe total number of elements in the array is %d\n", sizeof(array)/sizeof(*ptr));

    // Print out associated memory addresses and their values
    printf("\nThe memory address allocated to array at the time of its creation:%d\n", array);
    printf("\nptr is now pointing to memory address array[0] or value now contained in ptr:%d\n",ptr);
    printf("\nThe value at array[0]:%d\n", *ptr);

    ptr++; //Adds 4 to the value(address) contained in ptr i.e to address of array[0] and now contains the address of
array[1]
    printf("\nptr is now pointing to memory address array[1] or value now contained in ptr:%d\n",ptr);
    printf("\nThe value at array[1]:%d\n", *ptr);

    ptr--; //Subtracts 4 from the value(address) contained in ptr i.e from address of array[1] and now contains the address of array[0]
    printf("\nptr is now pointing to memory address array[0] or value now contained in ptr:%d\n",ptr);
    printf("\nThe value at array[0]:%d\n", *ptr);

    ptr = ptr+2; //Adds 4 to the value(address) contained in ptr i.e to address of array[0] and now contains the address of
array[2]
    printf("\nptr is now pointing to memory address array[2] or value now contained in ptr:%d\n",ptr);
    printf("\nThe value at array[2]:%d\n", *ptr);

    ptr = ptr - 2;

    // Displaying array using array subscript notation
    printf( "\nArray printed with:\nArray subscript notation\n" );
    for ( i = 0; i < 3; ++i )
    {
        printf( "array[ %d ] = %d\n", i,array[ i ]);
    }

    // Displaying array using array name and pointer/offset notation
    printf( "\nPointer/offset notation where the pointer is the array name\n" );
    for ( offset = 0; offset < 3; ++offset )
    {
        printf( "( array + %d ) = %d\n", offset, *(array + offset) );
    }
}
```

```

// Displaying array using ptr and pointer/offset notation
printf( "\nPointer/offset notation\n" );
for ( offset = 0; offset < 3; ++offset )
{
    printf( "( ptr + %d ) = %d\n", offset, *(ptr + offset) );
}

// Displaying array using ptr and array subscript notation
printf( "\nPointer subscript notation\n" );
for ( i = 0; i < 3; ++i )
{
    printf( "ptr[ %d ] = %d\n", i, ptr[ i ] );
}

return 0;
}

```

```

D:\Fall2021\CL1002\CodingStuff\Week-11\Examples\Example-08-PointerToArrays.exe
ptr is now pointing to memory address array[2] or value now contained in ptr:229
3304
The value at array[2]:3
Array printed with:
Array subscript notation
array[ 0 ] = 1
array[ 1 ] = 2
array[ 2 ] = 3
Pointer/offset notation where the pointer is the array name
*( array + 0 ) = 1
*( array + 1 ) = 2
*( array + 2 ) = 3
Pointer/offset notation
*( ptr + 0 ) = 1
*( ptr + 1 ) = 2
*( ptr + 2 ) = 3
Pointer subscript notation
ptr[ 0 ] = 1
ptr[ 1 ] = 2
ptr[ 2 ] = 3
-----
Process exited after 0.01862 seconds with return value 0
Press any key to continue . . .

```

4.0 Dynamic Memory

The process of allocating memory during program execution is called dynamic memory allocation. The ability for a program to obtain more memory space at execution time to hold new nodes, and to release space no longer needed is known as dynamic memory management.

4.1 Importance of Dynamic memory

Many times, it is not known in advance how much memory will be needed to store particular information in a defined variable and the size of required memory can be determined at run time. For example, we may want to hold someone's name, but we do not know how long their name is until they enter it. Or we may want to read in a number of records from disk, but we don't know in advance how many records there are. Or we may be creating a game, with a variable number of monsters (that changes over time as some monsters die and new ones are spawned) trying to kill the player.

C language offers 4 dynamic memory allocation functions. They are,

Function	Syntax
malloc ()	malloc (number *sizeof(int));
calloc ()	calloc (number, sizeof(int));
realloc ()	realloc (pointer_name, number * sizeof(int));
free ()	free (pointer_name);

Malloc()

- malloc function is used to allocate space in memory during the execution of the program.
- malloc does not initialize the memory allocated during execution. It carries garbage value.
- Malloc function returns null pointer if it couldn't able to allocate requested amount of memory.

Calloc()

- calloc function is also like malloc function. But calloc initializes the allocated memory to zero. But, malloc doesn't.

Realloc()

- realloc function modifies the allocated memory size by malloc and calloc functions to new size.
- If enough space doesn't exist in memory of current block to extend, new block is allocated for the full size of reallocation, then copies the existing data to new block and then frees the old block.

Free()

- free function frees the allocated memory by malloc, calloc, realloc functions and returns the memory to the system.

Malloc & free Sample Code:

Example-10-DynamicMemory.c

```
1 // Dynamic MemoryExample
2 #include<stdio.h>
3 #include<stdlib.h>
4
5 int main(){
6     int n, i, *ptr, sum = 0;
7
8     printf("Enter number of elements: ");
9     scanf("%d", &n);
10
11     ptr = (int*)malloc(n*sizeof(int));
12     // if memory can not be allocated
13     if(ptr == NULL){
14         printf("Error! Memory not allocated");
15         exit(0);
16     }
17     printf("Enter elements: ");
18     for( i = 0; i<n; ++i){
19         scanf("%d", ptr + i);
20         sum += *(ptr + i);
21     }
22     printf("Sum = %d", sum);
23
24     // deallocating the memory
25     free(ptr);
26
27     return 0;
28 }
```

D:\Fall2021\CL1002\CodingStuff\Week-11\Examples\Example-10-DynamicMemory.exe

```
Enter number of elements: 5
Enter elements: 1
2
3
4
5
Sum = 15
-----
Process exited after 36.31 seconds with return value 0
Press any key to continue . . .
```


Calloc & free Sample Code:

```
Example-10-DynamicMemory.c Example-11-DynamicMemory.c
1 // Dynamic MemoryExample
2 #include<stdio.h>
3 #include<stdlib.h>
4
5 int main(){
6     int n, i, *ptr, sum = 0;
7
8     printf("Enter number of elements: ");
9     scanf("%d", &n);
10
11     ptr = (int*)calloc(n,sizeof(int));
12     // if memory can not be allocated
13     if(ptr == NULL){
14         printf("Error! Memory not allocated");
15         exit(0);
16     }
17     printf("Enter elements: ");
18     for( i = 0; i<n; ++i){
19         scanf("%d", ptr + i);
20         sum += *(ptr + i);
21     }
22     printf("Sum = %d", sum);
23
24     // deallocating the memory
25     free(ptr);
26
27     return 0;
28 }
```

D:\Fall2021\CL1002\CodingStuff\Week-11\Examples\Example-11-DynamicMemory.exe

```
Enter number of elements: 3
Enter elements: 6
9
2
Sum = 17
-----
Process exited after 9.009 seconds with return value 0
Press any key to continue . . .
```

Realloc Sample Code:

Example-10-DynamicMemory.c	Example-11-DynamicMemory.c	Example-12-DynamicMemory.c
----------------------------	----------------------------	----------------------------

```
1 // Dynamic MemoryExample
2 #include<stdio.h>
3 #include<stdlib.h>
4
5 int main(){
6     int n1,n2, i, *ptr;
7
8     printf("Enter the size: ");
9     scanf("%d", &n1);
10
11     ptr = (int*)malloc(n1*sizeof(int));
12     printf("Address of previously allocated memory");
13     for(i = 0; i<n1; ++i)
14         printf("%pc\n",ptr + i);
15
16     printf("Enter the new size: ");
17     scanf("%d",&n2);
18     //reallocating the memory
19     ptr = realloc(ptr, n2*sizeof(int));
20
21     printf("Address of newly allocated memory:\n");
22     for(i = 0; i<n2; ++i)
23         printf("%pc\n", ptr + i);
24     free(ptr);
25     return 0;
26 }
```

D:\Fall2021\CL1002\CodingStuff\Week-11\Examples\Example-12-DynamicMemory.exe

```
Enter the size: 2
Address of previously allocated memory000000000002C5590c
000000000002C5594c
Enter the new size: 5
Address of newly allocated memory:
000000000002C5590c
000000000002C5594c
000000000002C5598c
000000000002C559Cc
000000000002C55A0c

-----
Process exited after 10.13 seconds with return value 0
Press any key to continue . . .
```

4.2 Difference between static memory allocation and dynamic memory allocation in C

Static memory allocation	Dynamic memory allocation
In static memory allocation, memory is allocated while writing the C program. Actually, user requested memory will be allocated at compile time.	In dynamic memory allocation, memory is allocated while executing the program. That means at run time.
Memory size can't be modified while execution. Example: array	Memory size can be modified while execution. Example: Linked list