

Advanced Algorithm for Polyp Detection Using Depth Segmentation in Colon Endoscopy

APARNA RATHEESH^{#*1} POOJA SOMAN^{#*2} REVATHY NAIR M^{#*3} DEVIKA R G^{##*4} ANEESH R P^{**5}

¹aparnaratheesh92@gmail.com ²poojasoman2009@gmail.com ³revathygeethu92@gmail.com

⁴rgdevika@gmail.com ⁵aneeshprakkulam@gmail.com

[#]PG scholar ^{##} Asst.Professor, ^{*} Mohandas College of Engineering and Technology, Kerala University,

^{**}Regional Center,IHRD,Trivandrum, Kerala, India

Abstract— Colon cancer is a major cause of cancer in women and colorectal polyps are the important cause to colon cancer. Colonoscopy is one of the best method for detecting the colon cancer. Colon endoscopy is a technique in which the image of the intestine can be obtained through the camera attached to endoscope and video sequence is further analysed. Algorithms for the automatic detection of polyps are being developed, with texture analysis. In this paper, a novel algorithm is proposed for the detection of polyps. In this paper two types of segmentation methods are adapted. In the first method, linear thresholding is used to detect the saturated region from the HSV image. In the second method, Markovian Random Field is used to segment the image depth-wise. The proposed algorithm is based on extracting certain texture as well as color information from the frames captured by the camera. The proposed algorithm, is very simple, fast and efficient method which is highly helpful for the radiologists in detecting polyps. SVM classifier is used to predict the disease condition using the texture vector and color correlogram vector. The density of the polyp areas are also been estimated. This system is successfully tested with colon endoscopy video images and achieved accuracy of 96.7%.

Index Terms— Colonoscopy, Colon polyp, HSV Conversion, Markovian Random Field, SVM Classifier

I. INTRODUCTION

Abnormal multiplying of cells can cause cancer. It causes abnormal cell growth with the potential to invade or spread to other parts of the body. Colorectal cancer is a type of cancer occurs in colon. In women colorectal cancer is considered as second cause and in men it is the third most cancer [1]. Colon polyps may lead to colon cancer. Polyps are the abnormal cell growth on the walls of the gastrointestinal tract and large intestine. Endoscopy is a less invasive diagnostic medical procedure.

Colonoscopy is a process of looking inside and typically refers to looking inside the body for medical reasons using an endoscope an instrument used to examine inside the esophagus, stomach, and small intestine. The video sequence obtained as a result consists of thousands of frame for a single patient. Each

image frame has to be further analyzed by the doctor for the detection. Many existing methods are there to find out the polyps based on the shape of the polyp such as Shape index and Curvedness [2] or the Gaussian Mean curvatures [3]. The main disadvantage of that approaches is that, these computations are mainly based on the differentiation of shapes, sometimes protrusions are also classified as polyp. The image sometimes consists of protrusions, mucosal tissue folds other than polyps. So here the major drawback is that the algorithm sometimes measures these protrusions as a polyp.

Due to the lack of human efficiency when size of dataset increases, the development of computer-assisted and automated detection techniques are very crucial. In the proposed method, both color as well as texture information about the polyp is taken into consideration, assuming that the polyps are highly textured [4]. Texturing helps in the segmentation and classification of the polyps. In this paper polyp detection as well as the density of the polyp can be estimated by depth segmentation method.

II. METHODOLOGY

In polyp diagnosis, computers play a major role which has inbuilt software for detection. The software uses algorithm to find anatomical structures and region of interest. The algorithm takes each of the frame as input and the output can be classified as whether the frame contains polyp or the normal frame. For the analysis of the algorithm each of the single frames from the video sequence have to be analyzed further for the detection of polyp.

The method deals with basic image processing steps along with image segmentation by Markov Random Field to find density of the polyp. Markov random field is used to model various low to mid-level tasks in image processing and computer vision. The database used for in this work is the data set courtesy of the Government Medical college Hospital, Trivandrum. The database consists of endoscopic videos of 10 patients, each containing 2100 frames.

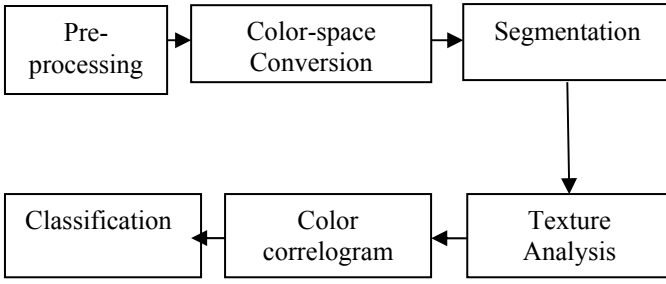


Figure 1:-Block diagram of proposed method

A Pre-processing

The endoscopic video sequence are converted in to frames for the analysis. The endoscopic video sequence of single patient may contains thousands of frame.

The images obtained by the endoscopic video sequence are in circular shape. Using linear extrapolation technique, from the circular portion of the image, values can be extended to the outer portion of the circular frame with solid color. Linear extrapolation is done by solving the linear system which corresponds to an upwind discretization of the following PDE [4]

$$\nabla f \cdot \mathbf{r} = 1 \quad (1)$$

where f denotes a pre-processed frame on a $N_x \times N_y$ cartesian grid, \mathbf{r} at the pixel (i, j) is a unit vector field.

$$\bar{\mathbf{r}}_{ij} = \frac{1}{\sqrt{(i - N_y/2)^2 - (j - N_x/2)^2}} \begin{bmatrix} i - \frac{N_y}{2} \\ j - \frac{N_x}{2} \end{bmatrix} \quad (2)$$

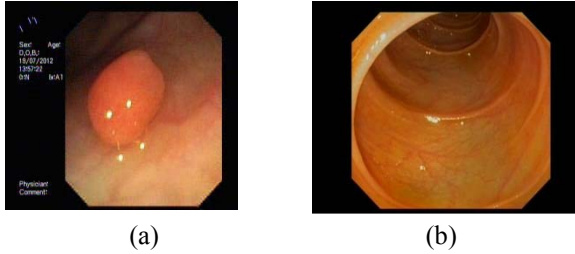


Figure 2:-Input frame of video sequence (a) abnormal frame (b) normal frame

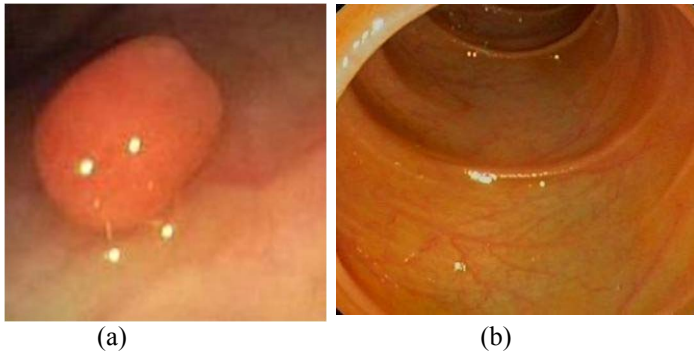


Figure 3:-Pre-processed images (a) abnormal frame (b) normal frame.

B. Color space conversion

By using the color space conversion the image intensity value can be obtained for the analysis of the image for the segmentation purpose. The frame is converted in to HSV color space. HSV is cylindrical coordinate system in which the points in RGB model is represented as cylindrical coordinates. Hue(H) is the attribute of a visual sensation and is a measure of spectral composition of a color represented when the angle varies. Saturation(S) refers to the purity of color of a stimulus relative to its own brightness. Value(V) is the intensity of the pixel. HSV separates image intensity values from the color information and is helpful for the histogram image equalization.

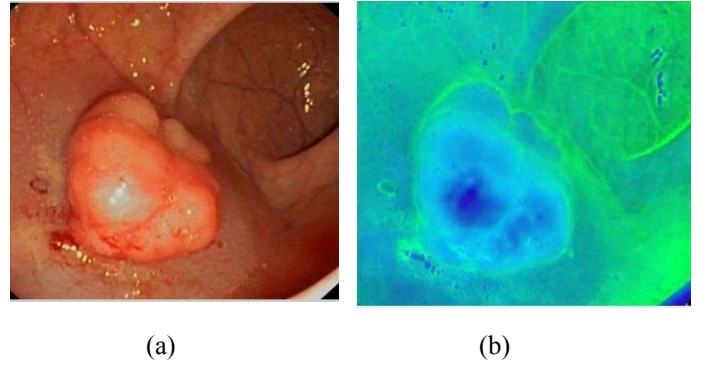


Figure 4:- (a) pre-processed image (b) HSV converted image


C. Segmentation

In this step, the main portion or the region of interest is been detected for further process and are done based on the thresholding. Thresholding is done to find out the actual area or the region of polyp. Multi level threshold used in saturation image to segment the polyp region. Here in this method can be able to find the edge features so that the outline of the polyp portion is obtained.

For finding the actual depth of the polyp together with thresholding, Markovian Random Field is used for segmentation.


Markovian random fields (MRFs) have been widely used in the field of image processing is for computer vision problems, like image segmentation[6], depth inference[7]. The MRF algorithm [8], first convert the image to 2D gray-level, to find out the intensities based on the gaussian distributions and segments are extracted. Then EM Algorithm is used to find out the parameter set. MAP Estimation is also used for finding the sum of energy function and to reduce the energy value of the function. The difference between MRF and HMRF will affect the parameter set, for solving the HMRF problem EM algorithm is used.

MRF uses the intensity parameter for segmentation. Using MRF depth segmentation, the image can be converted in to different layers.

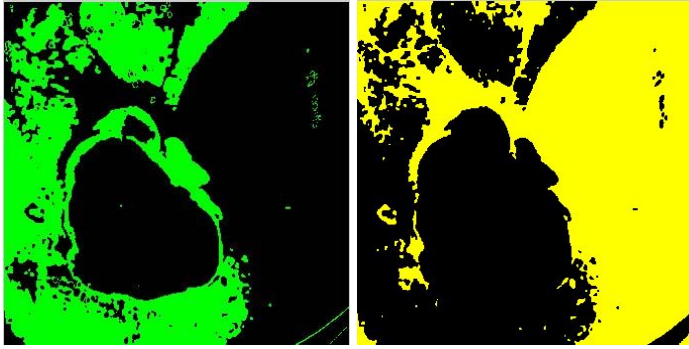

(a)

(b)

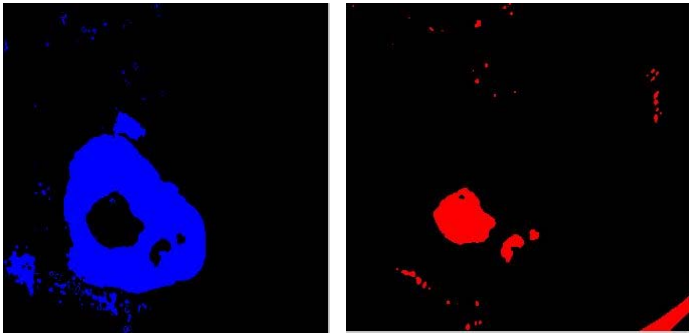

(c)

(d)

Figure 5:-Different layers obtained as a result of MRF segmentation

D. Texture Analysis

The texture content computation in the frame is an vital step of the algorithm for the texture analysis .Since the polyps are highly texture,higher the texture content the more will be the presence of polyp region.The pre-processed frame f contains both texture as well as cartoon components,to separate the pre-processed frame into the texture and cartoon components, Buades et al. [5] algorithm is used.Using thresholding technique, texture content is estimated[4].

$$T_{max} = \max T_{ij}, 1 \leq i \leq N_x, 1 \leq j \leq N_y \quad (3)$$

E. Color correlogram

Color correlogram expresses spatial correlation of color features when the changes in the distance occurs.Color correlogram gives correlation of neighborhood pixels indexed by the image.In correlogram ,an image is a table indexed by color pairs,where d -th entry for row (i,j) specifies the

probability of finding a pixel of color j at a distance d from a pixel of color i in the image.

Let $[D]$ be a set of distance vectors d_1, d_2, \dots, d_m for the color pairs $c(i,j)$, then the color correlogram I [9] is defined by

$$\gamma^d_{ci,cj}(I) = \frac{1}{p_i} \frac{1}{p_j} \frac{1}{p_d} \frac{1}{p_{||p_1-p_2||=d}} \quad (4)$$

$\gamma^d_{ci,cj}(I)$ gives the probability of a pixel at a distance of k from the pixel of c_j .

The auto correlation is the spatial correlation between two similar colors. Auto correlogram of image, I is represented by

$$\alpha^d_{ci,cj}(I) = \gamma^d_{ci,cj}(I) \quad (5)$$

F. Classification

Here SVM classifier is used for classification. Cancerous polyps can be estimated by using SVM technique. For finding out the texture and to find out the polyp conditions classifier is used. Here SVM classifier is used to predict the disease condition using the texture vector and color correlogram vector. SVM is a supervised learning process in machine learning approach. The main purpose of SVM is to build optimal separating hyper planes [23] and it accepts data and identifies patterns used for classification. SVMs method consists of the steps includes[22], Firstly, mapping input data to high-dimensional feature space. Then select a kernel and computes the hyper planes, to find the maximum distance between the closest points and then detect the outer boundaries.

The density of the polyp can be estimated using Gaussian kernel distribution.

$$\hat{f}(x) = \frac{1}{f h^d} \sum_{i=1}^n K\left(\frac{x-x_i}{h}\right) \quad (6)$$

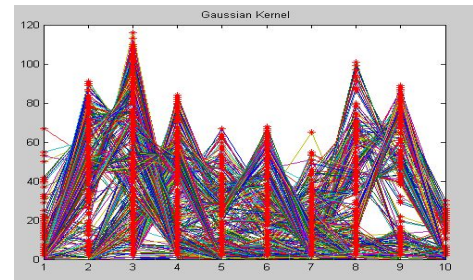


Figure 6: Gaussian kernel distribution of the detected polyp frame

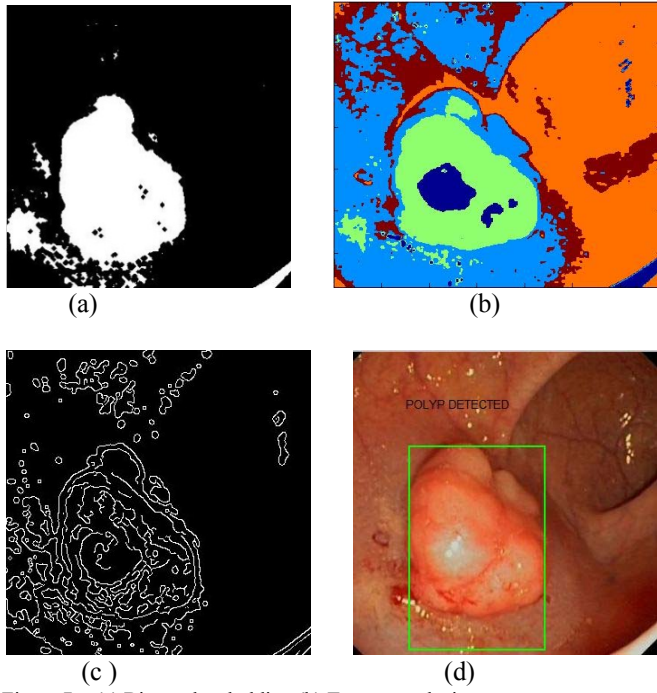


Figure 7 :- (a) Binary thresholding (b) Texture analysis
(c) MRF segmentation (d) Polyp detection

III.RESULTS AND DISCUSSIONS

The automatic detection of polyp using depth segmentation method helps to find out density of polyp. There are many segmentation techniques are used in earlier methods. But the depth of the image is not calculated in any of the methods to find density. For polyp detection, this method uses the texture information and the color information in the frame. An algorithm has been developed and implemented.

At first the video sequence is converted into different frames. From the frames, take one frame as the input frame for the processing of the algorithm. As the first step pre-processing is done to the selected frame and input pre-processed frame is converted into HSV converted frame for the analysis of the image for the segmentation purpose. From the above texture analysis, the region which is highly textured. Using thresholding method, the image is converted in to binary image with segmented portions. To find the texture content of the frame, the input image is processed, the polyp is highly textured. By analyzing the texture content, frame containing higher density of polyp can be estimated.

In real conditions, good performance of the algorithm is tested with the database. The algorithm shows high sensitivity, high specificity and accuracy for polyp detection. The sensitivity measure which is the true positive rate [TPR] and the specificity measure which is the false positive rate [FPR] has been measured [4].

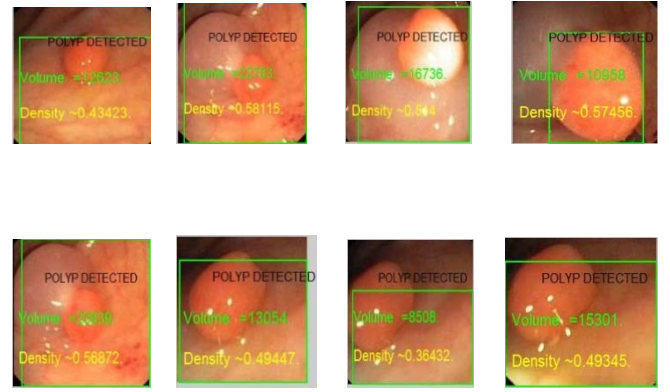


Figure 8;- Polyp detected frames.



Figure 9:- Normal frames

No:- of frames	True Positive (TP)	True Negative (TN)	False Positive (FP)	False Negative (FN)
2000	970	960	40	30

Table 1:- Performance analysis

$$\text{Accuracy} = \frac{(TP+TN)}{(TP+TN+FP+FN)} = 96.7\% \quad (7)$$

$$\text{Sensitivity} = \frac{TP}{TP+FN} = 97\% \quad (8)$$

$$\text{Specificity} = \frac{TN}{FP+TN} = 96\% \quad (9)$$

Algorithm	Accuracy
LDA	90%
QDA	92.6%
Proposed Method	96.7%

Table 2:-Comparison chart

IV.CONCLUSION

An efficient algorithm with Markovian Random Field segmentation technique has to be developed for achieving better resolution and depth of the image. Using this algorithm automatically the polyp can be detected, which reduces the number of frames to be evaluated by the doctor and hence reduces the processing time. Images obtained by endoscope that are suffered from illumination intensity problem, poor contrast are pre-processed for segmentation. The developed algorithm is used for depth-wise segmentation and hence density can be estimated. The approach for image segmentation in the detection of polyp is highly advantageous because of applicability, suitability, performance, computation and efficiency of the algorithm. Segmentation techniques based on graylevel techniques such as thresholding, and region based techniques are the simplest techniques and have limited applications. SVM, MRF have high applications and results on medical image segmentation and cancerous polyps are predicted using the classifier. Here by efficient method of segmentation based on MRF is proposed and a successive result is obtained with an high accuracy. This method is efficient accurate, reliable, robust and less dependency on the operator.

ACKNOWLEDGMENT

The author would extremely thankful to the Government Medical College Hospital, Trivandrum, India for providing the database for this work.

REFERENCES

- [1] A. Jemal, F. Bray, M. M. Center, J. Ferlay, E. Ward, and D. Forman, "Global cancer statistics," *CA, Cancer J. Clin.*, vol. 61, pp. 69–90, 2011.
- [2] H. Yoshida and J. Nappi, "3-D computer-aided diagnosis scheme for detection of colonic polyps," *IEEE Trans. Med. Imag.*, vol. 20, no. 12, pp. 1261–1274, Dec. 2001.
- [3] P. Figueiredo, I. Figueiredo, S. Prasath, and R. Tsai, "Automatic polyp detection in pillcam colon 2 capsule images and videos: Preliminary feasibility report," *Diagnostic Therapeutic Endoscopy*, vol. pp. 182435, 2011.
- [4] Alexander V. Mamonov, Isabel N. Figueiredo, Pedro N. Figueiredo, and Yen-Hsi Richard Tsai, "Automated polyp detection in colon capsule endoscopy," *IEEE Transactions On Medical Imaging*, vol. 33, no. 7, July 2014.
- [5] A. Buades, T. Le, J.-M. Morel, and L. Vese, "Cartoon+texture image decomposition, image processing on line 2011 [Online]. Available: http://dx.doi.org/10.5201/ipol.2011.blmv_ct
- [6] Shyr-Shen Yu, Chung-Yen Tsai, Chen-Chung Liu, "A breast region extraction scheme for digital mammograms using gradient vector flow snake, New Trends in Information Science and Service Science (NISS), 2010 4th International Conference, IEEE 2010.
- [7] Pradeep N, IEEE Member "Segmentation and Feature Extraction of Tumors from Digital Mammograms", *Computer Engineering and Intelligent Systems* www.iiste.org ISSN 2222-1719 (Paper) ISSN 2222-2863, Vol 3, No.4, 2012.
- [8] Parvathy.S.Kumar "Efficient Method of Segmenting Tumor in Mammogram and MRI Based on Depth", *ijee*, July 2015
- [9] Hazra Dipankar, "Retrieval of Color Image using Color Correlogram and Wavelet filters", *Proc. of Int. Conf. on Advances in computer engineering*, 2011.
- [10] F. Condessa and J. Bioucas-Dias, "Segmentation and detection of colorectal polyps using local polynomial approximation," in *Image Analysis and Recognition*. New York: Springer, 2012, pp. 188–197
- [11] M. Liedlgruber and A. Uhl, "Computer-aided decision support systems for endoscopy in the gastrointestinal tract: A review," *IEEE Rev. Biomed. Eng.*, vol. 4, pp. 73–88, 2011.
- [12] C. van Wijk, V. F. van Ravesteijn, F.M. Vos, and L. J. van Vliet, "Detection and segmentation of colonic polyps on implicit isosurfaces by second principal curvature flow," *IEEE Trans. Med. Imag.*, vol. 29, no. 3, pp. 688–698, Mar. 2010
- [13] A. Moglia, A. Menciassi, P. Dario, and A. Cuschieri, "Capsule endoscopy: Progress update and challenges ahead," *Nature Rev. Gastroenterol. Hepatol.*, vol. 6, pp. 353–361, 2009
- [14] Y. Cao, D. Liu, W. Tavanapong, J. Wong, J.H. Oh, and P.C. De Groen, "Computer-aided detection of diagnostic and therapeutic operations in colonoscopy videos," *IEEE Trans. Biomed. Eng.*, vol. 54, no. 7, pp. 1268–1279, Jul. 2007.
- [15] Y. Cao, D. Liu, W. Tavanapong, J. Wong, J.H. Oh, and P.C. De Groen, "Computer-aided detection of diagnostic and therapeutic operations in colonoscopy videos," *IEEE Trans. Biomed. Eng.* vol. 54, no. 7, pp. 1268–1279, Jul. 2007.
- [16] Yuji Iwahori, Takayuki Shinohara, Akira Hattori Automatic, "Polyp Detection in Endoscope Images Using a Hessian Filter", 18th IEEE Symposium on Computer-Based Medical Systems, pp. 575–580, IEEE Computer Society, 2005
- [17] J. Yao, M. Miller, M. Franaszek, and R. M. Summers, "Colonic polyp segmentation in CT colonography -based on fuzzy clustering and deformable models," *IEEE Trans. Med. Imag.*, vol. 23, no. 11, pp. 1344–1352, Nov. 2004
- [18] R. M. Summers, C. D. Johnson, L. M. Pusanik, J. D. Malley, A. M. Youssef, and J. E. Reed, "Automated polyp detection at CT colonography: Feasibility assessment in a human population 1," *Radiology*, vol. 219, pp. 51–59, 2001
- [19] G. Kiss, J. Van Cleynenbreugel, S. Drisis, D. Bielen, G. Marchal, and P. Suetens, "Computer aided detection for low-dose CT colonography", *IEEE Journal*, pp. 859–867, Dec. 2000.
- [20] G. Iddan, G. Meron, A. Glukhovskiy, and P. Swain, "Wireless capsule endoscopy," *Nature*, vol. 405, p. 417, 2000.
- [21] T. K. Ho, "The random subspace method for constructing decision forests," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 20, no. 8, pp. 832–844, Aug. 1998.
- [22] Sonali Jain, Satyam Shrivastava, "A novel approach for image classification in Content based image retrieval using support vector machine", *International Journal of Computer Science & Engineering Technology* Vol. 4 No. 03 Mar 2013.
- [23] Hong-jie Xin, Ming-hu Ha, Bao-gang Hu, Da-zeng Tian, "Fuzzy Information and Engineering Branch of the Operations". Springer Research Society of China, 2009